

**Service
Service
Service****7638**

ServiceManual

| Contents | Page |
|--|-------------|
| Safety Notes | 2 |
| General Information..... | 10 |
| Disassembly..... | 17 |
| Service Modes, Error Codes, and Faultfinding | 26 |
| Adjustment Procedures | 55 |
| Circuit Description | 79 |
| Waveforms..... | 127 |
| Electrical Diagrams | 130 |
| Exploded View | 208 |
| Parts List..... | 209 |
| Service Bulletin | 640 |



IMPORTANT SAFETY NOTICE

Proper service and repair is important to the safe, reliable operation of all Philips Consumer Electronics Company** Equipment. The service procedures recommended by Philips and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various **CAUTIONS** and **NOTICES** which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It also is important to understand that these **CAUTIONS** and **NOTICES ARE NOT EXHAUSTIVE**. Philips could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done, or of the possible hazardous consequences of each way. Consequently, Philips has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by Philips must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.


** Hereafter throughout this manual, Philips Consumer Electronics Company will be referred to as Philips.

WARNING

Critical components having special safety characteristics are identified with a  or "S" by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol  on the schematics or exploded views. Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards. Under no circumstances should the original design be modified or altered without written permission from Philips. Philips assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

* Broken Line _____

FIRE AND SHOCK HAZARD

1. Be sure all components are positioned in such a way as to avoid the possibility of adjacent component shorts. This is especially important on those chassis which are transported to and from the service shop.
2. Never release a repaired unit unless all protective devices such as insulators, barriers, covers, strain reliefs, and other hardware have been installed in accordance with the original design.
3. Soldering and wiring must be inspected to locate possible cold solder joints, solder splashes, sharp solder points, frayed leads, pinched leads, or damaged insulation (including the ac cord). Be certain to remove loose solder balls and all other loose foreign particles.
4. Check across-the-line components and other components for physical evidence of damage or deterioration and replace if necessary. Follow original layout, lead length, and dress.
5. No lead or component should touch a receiving tube or a resistor rated at 1 watt or more. Lead tension around protruding metal surfaces or edges must be avoided.
6. Critical components having special safety characteristics are identified with an 'S' by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol  on the schematic diagrams and /or exploded views.
7. When servicing any unit, always use a separate isolation transformer for the chassis. Failure to use a separate isolation transformer may expose you to possible shock hazard, and may cause damage to servicing instruments.
8. Many electronic products use a polarized ac line cord (one wide pin on the plug). Defeating this safety feature may create a potential hazard to the servicer and the user. Extension cords which do not incorporate the polarizing feature should never be used.
9. After reassembly of the unit, always perform an ac leakage test or resistance test from the line cord to all exposed metal parts of the cabinet. Also, check all metal control shafts (with knobs removed), antenna terminals, handles, screws, etc., to be sure the unit may be safely operated without danger of electrical shock.

* **Broken line** ____ - ____ - ____ - ____

LEAKAGE CURRENT COLD CHECK


1. Unplug the ac line cord and connect a jumper between the two prongs of the plug.
2. Turn on the power switch.
3. Measure the resistance value between the jumpered ac plug and all exposed cabinet parts of the receiver, such as screw heads, antennas, and control shafts. When the exposed metallic part has a return path to the chassis, the reading should be between 1 megohm and 5.2 megohms. When the exposed metal does not have a return path to the chassis, the reading must be infinity. Remove the jumper from the ac line cord.

LEAKAGE CURRENT HOT CHECK

1. Do not use an isolation transformer for this test. Plug the completely reassembled receiver directly into the ac outlet.
2. Connect a 1.5k, 10W resistor paralleled by a 0.15uF. capacitor between each exposed metallic cabinet part and a good earth ground such as a water pipe, as shown below.
3. Use an ac voltmeter with at least 5000 ohms/volt sensitivity to measure the potential across the resistor.
4. The potential at any point should not exceed 0.75 volts. A leakage current tester may be used to make this test; leakage current must not exceed 0.5mA. If a measurement is outside of the specified limits, there is a possibility of shock hazard. The receiver should be repaired and rechecked before returning it to the customer.
5. Repeat the above procedure with the ac plug reversed. (Note: An ac adapter is necessary when a polarized plug is used. Do not defeat the polarizing feature of the plug.)

OR

With the instrument completely reassembled, plug the ac line cord directly into a 120Vac outlet. (Do not use an isolation transformer during this test.) Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI) C101.1 Leakage Current for Appliances and Underwriters Laboratories (UL) 1410, (50.7). With the instrument ac switch first in the on position and then in the off position, measure from a known earth ground (metal water pipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle brackets, metal cabinet, screw heads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis. Any current measured must not exceed 0.5mA. Reverse the instrument power cord plug in the outlet and repeat the test. See the graphic below.

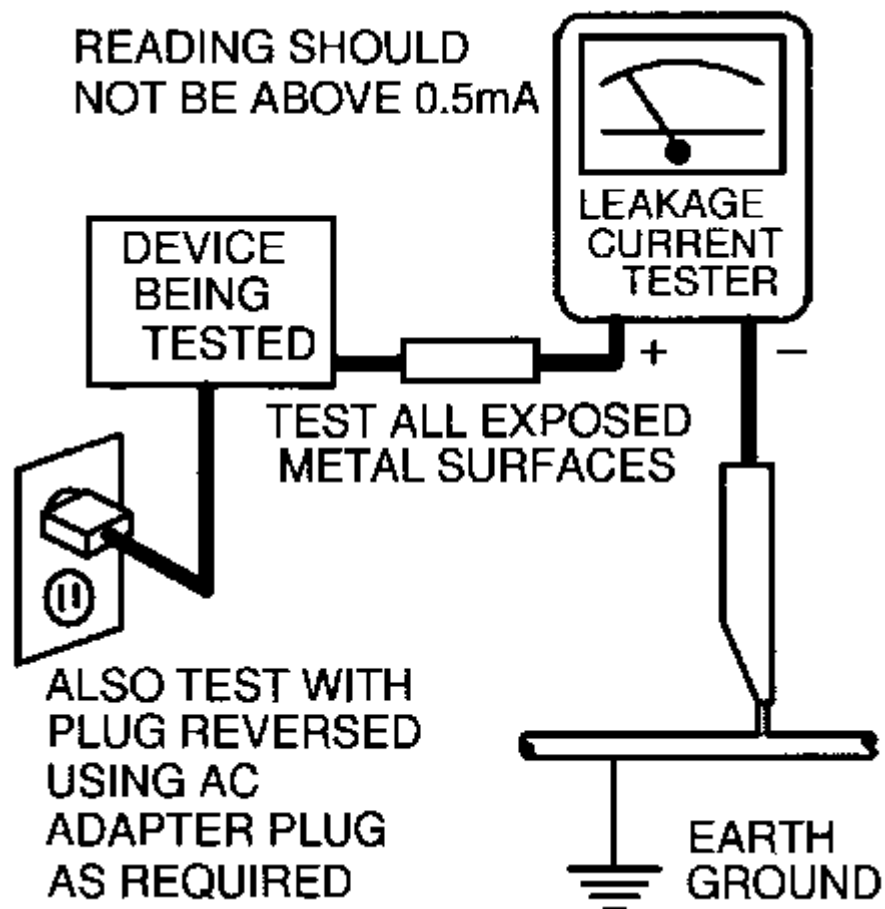

TV SAFETY NOTES

SAFETY CHECKS

After the original service problem has been corrected, a complete safety check should be made. Be sure to check over the entire set, not just the areas where you have worked. Some previous servicer may have left an unsafe condition, which could be unknowingly passed on to your customer. Be sure to check all of the following:

- Fire and Shock Hazard
- Implosion
- X-Radiation
- Leakage Current Cold Check
- Leakage Current Hot Check
- Picture Tube Replacement
- Parts Replacement

WARNING: Before removing the CRT anode cap, turn the unit OFF and short the HIGH VOLTAGE to the CRT DAG ground.

SERVICE NOTE: The CRT DAG is not at chassis ground.

IMPLOSION

1. All picture tubes used in current model receivers are equipped with an integral implosion system. Care should always be used, and safety glasses worn, whenever handling any picture tube. Avoid scratching or otherwise damaging the picture tube during installation.
2. Use only replacement tubes specified by the manufacturer.

X-RADIATION

1. Be sure procedures and instructions to all your service personnel cover the subject of X-radiation. Potential sources of X-rays in TV receivers are the picture tube and the high voltage circuits. The basic precaution which must be exercised is to keep the high voltage at the factory recommended level.
2. To avoid possible exposure to X-radiation and electrical shock, only the manufacturer's specified anode connectors must be used.
3. It is essential that the service technician has an accurate HV meter available at all times. The calibration of this meter should be checked periodically against a reference standard.
4. When the HV circuitry is operating properly there is no possibility of an X-radiation problem. High voltage should always be kept at the manufacturer's rated value - no higher - for optimum performance. Every time a color set is serviced, the brightness should be run up and down while monitoring the HV with a meter to be certain that the HV is regulated correctly and does not exceed the specified value. We suggest that you and your technicians review test procedures so that HV and HV regulation are always checked as a standard servicing procedure, and the reason for this prudent routine is clearly understood by everyone. It is important to use an accurate and reliable HV meter. It is recommended that the HV reading be recorded on each customer's invoice, which will demonstrate a proper concern for the customer's safety.

5. When troubleshooting and making test measurements in a receiver with a problem of excessive high voltage, reduce the line voltage by means of a Variac to bring the HV into acceptable limits while troubleshooting. Do not operate the chassis longer than necessary to locate the cause of the excessive HV.
6. New picture tubes are specifically designed to withstand higher operating voltages without creating undesirable X-radiation. It is strongly recommended that any shop test fixture which is to be used with the new higher voltage chassis be equipped with one of the new type tubes designed for this service. Addition of a permanently connected HV meter to the shop test fixture is advisable. The CRT types used in these new sets should never be replaced with any other types, as this may result in excessive X-radiation.
7. It is essential to use the specified picture tube to avoid a possible X-radiation problem.
8. Most TV receivers contain some type of emergency "Hold Down" circuit to prevent HV from rising to excessive levels in the presence of a failure mode. These various circuits should be understood by all technicians servicing them, especially since many hold down circuits are inoperative as long as the receiver performs normally.

PICTURE TUBE REPLACEMENT

The primary source of X-radiation in this television receiver is the picture tube. The picture tube utilized in this chassis is specially constructed to limit X-radiation emissions. For continued X-radiation protection, the replacement tube must be the same type as the original, including suffix letter, or a Philips approved type.

PARTS REPLACEMENT

Many electrical and mechanical parts in Philips television sets have special safety related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. The use of a substitute part which does not have the same safety characteristics as the Philips recommended replacement part shown in this service manual may create shock, fire, or other hazards.

PRODUCT SAFETY GUIDELINES FOR ALL PRODUCTS

CAUTION: Do not modify any circuit. Service work should be performed only after you are thoroughly familiar with all of the following safety checks. Risk of potential hazards and injury to the user increases if safety checks are not adhered to.

USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING.

PREVENTION OF ELECTROSTATIC DISCHARGE (ESD)

Some semiconductor solid state devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as "antistatic (ESD protected)" can generate an electrical charge sufficient to damage ES devices.
5. Do not use Freon propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it (most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

CAUTION: Be sure no power is applied to the chassis or circuit and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your feet from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device.)

NOTE to CATV system Installer:

This reminder is provided to call the CATV system installer's attention to article 820-22 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.

PRACTICAL SERVICE PRECAUTIONS

IT MAKES SENSE TO AVOID EXPOSURE TO ELECTRICAL SHOCK. While some sources are expected to have a possible dangerous impact, others of quite high potential are of limited current and are sometimes held in less regard.

ALWAYS RESPECT VOLTAGES. While some may not be dangerous in themselves, they can cause unexpected reactions – reactions that are best avoided. Before reaching into the powered color TV set, it is best to test the high voltage insulation. It is easy to do, and is just a good service precaution.

BEFORE POWERING UP THE TV WITH THE BACK OFF (or on a test fixture), attach a clip lead to the CRT DAG ground and to a screwdriver blade that has a well insulated handle. After the TV is powered on and high voltage has developed, probe the anode lead with the blade, starting at the bottom of the High Voltage Transformer (flyback – IFT). Move the blade to within two inches of the connector of the CRT. **IF THERE IS AN ARC, YOU FOUND IT THE EASY WAY, WITHOUT GETTING A SHOCK!** If there is an arc to the screwdriver blade, replace the High Voltage Transformer or the lead, (if removable) whichever is causing the problem.

PICTURE TUBE REPLACEMENT PROCEDURE

Note: a. Two (2) people are required to handle this picture tube.
b. Safety Glasses must be worn during this procedure or whenever directly handling a picture tube.
c. Take care in each step not to damage the CRT or the cabinet.

1. Remove the Chassis and the CRT Socket Board Module from the cabinet.
2. A furniture pad or blanket should be positioned on the floor to support only the CRT Face. This pad or blanket should be high enough to keep the CRT Face approximately 12 to 14 inches off the floor.
3. Using two people, place the cabinet in a front down position with the CRT Face on the pad or blanket.
4. Place padded blocks under each corner of the cabinet to keep it from rocking.
5. Remove the four screws, at the corners of the CRT.
6. With two people lowering the cabinet to the floor, leave the CRT elevated by the pad or blanket.

Note: Take care not to grasp the neck of the CRT during this procedure, as it is extremely fragile.

7. Two (2) people may then lift the CRT from the cabinet.
8. Remove the degaussing coil from the defective CRT and mount on the replacement. Take care to maintain the exact shape and fit.

To install the new CRT, reverse steps 1 to 7.

Technical Specifications and Connections

Note: Described specifications are valid for the *whole* product range.

Technical Specifications

Reception

| Feature | Data |
|--------------------|------------------------------|
| Tuning system | : PLL |
| Color systems | : NTSC M/N |
| Sound systems | : BTSC non-DBX : BTSC DBX |
| Channel selections | : 181, full cable |
| IF picture carrier | : 45.75 MHz |
| Aerial input | : 75 Ohm, F-type |
| A/V Connections | : NTSC M/N |

Miscellaneous

Audio output:

| Feature | Data |
|-----------------|------------|
| Stereo versions | : 2 x 1 W |
| | : 2 x 3 W |
| | : 2 x 5 W |
| | : 2 x 10 W |
| Mono versions | : 1 x 1 W |
| | : 1 x 3 W |
| | : 1 x 4 W |
| | : 2 x 2 W |

Power supply:

| Feature | Data |
|---------------------|----------------|
| Mains voltage range | : 90 - 140 VAC |
| Mains frequency | : 60 Hz |

Ambient conditions:

| Feature | Data |
|-------------------|--------------------|
| Temperature range | : +5 to +45 deg. C |
| Maximum humidity | : 90 % R.H. |


Power consumption:

| Feature | Data |
|------------------|---------------------------------------|
| Normal operation | : from 81 W (20") : to 145 W (32") |
| Standby | : < 3 W |


Connections

Front or Top Control / Front or Side Connections

FRONT CONTROL + FRONT I/O

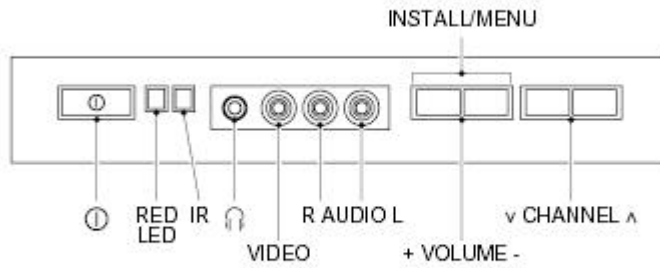

TOP CONTROL

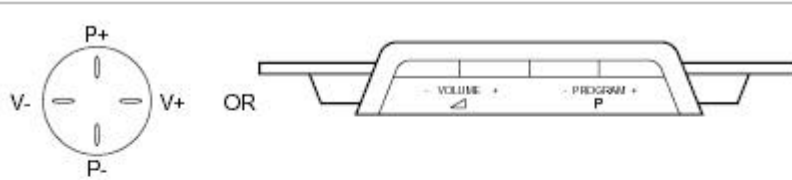

SIDE I/O








Figure: Front/Top control and Side I/O

Audio / Video In

| Connector | Kind | Value | Symbol |
|-----------|--------------------|--------------------|---|
| 1 | Video | 1 Vpp / 75 Ohm |  |
| 2 | Audio - L | 0.2 Vrms / 10 kOhm |  |
| 3 | Audio - R | 0.2 Vrms / 10 kOhm |  |
| 4 | Headphone (3.5 mm) | 8 - 600 Ohm / 4 mW |  |

Rear Connections

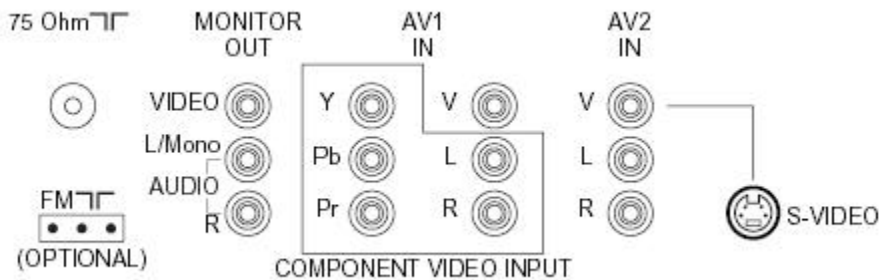








Figure: Rear connections




Monitor Out

| Connector | Kind | Value | Symbol |
|-----------|--------------|-------------------|---|
| 1 | Video (CVBS) | 1 Vpp / 75 Ohm |  |
| 2 | Audio - L | 0.5 Vrms / 1 kOhm |  |
| 3 | Audio - R | 0.5 Vrms / 1 kOhm |  |




YUV In

| Connector | Kind | Value | Symbol |
|-----------|------|------------------|---|
| 1 | Y | 0.7 Vpp / 75 Ohm |  |
| 2 | U | 0.7 Vpp / 75 Ohm |  |
| 3 | V | 0.7 Vpp / 75 Ohm |  |





AV1 In

| Connector | Kind | Value | Symbol |
|-----------|--------------|--------------------|---|
| 1 | Video (CVBS) | 1 Vpp / 75 Ohm |  |
| 2 | Audio - L | 0.5 Vrms / 10 kOhm |  |
| 3 | Audio - R | 0.5 Vrms / 10 kOhm |  |

AV2 In

| Connector | Kind | Value | Symbol |
|-----------|--------------|--------------------|---|
| 1 | Video (CVBS) | 1 Vpp / 75 Ohm |  |
| 2 | Audio - L | 0.5 Vrms / 10 kOhm |  |
| 3 | Audio - R | 0.5 Vrms / 10 kOhm |  |

AV2 In (SVHS)

| Connector | Kind | Value | Symbol |
|-----------|--------|------------------|---|
| 1 | Ground | GND |  |
| 2 | Ground | GND |  |
| 3 | Y | 1 Vpp / 75 Ohm |  |
| 4 | C | 0.3 Vpp / 75 Ohm |  |

Mechanical Instructions

Index of this chapter:

1. Set Disassembly
2. Service Positions
3. Assembly/Board Removal
4. Set Re-assembly

Note: Figures below may deviate slightly from the actual product, due to different set designs.

Set Disassembly

1. Remove all screws from the back cover (do not forget the screws that hold the rear connection panel).
2. Pull the back cover backward to remove it.

Service Positions

There are 2 service positions possible.

Family Board without bracket (with integrated 'control').

1. Disconnect the strain relief of the AC power cord.
2. Remove the mono carrier, by pushing the two center clips outward [1]. At the same time pull the panel away from the CRT [2].
3. Disconnect the degaussing coil by removing the cable from (red) connector 0212.
4. Turn the panel 90 degrees counter clockwise [3].
5. Flip the panel 90 degrees [4], with the components toward the CRT.
6. Turn the panel with its rear connections toward the CRT [5].
7. Slide the metal heatsink (near the mains transformer 5520) underneath the right chassis bracket. This secures the panel [6].

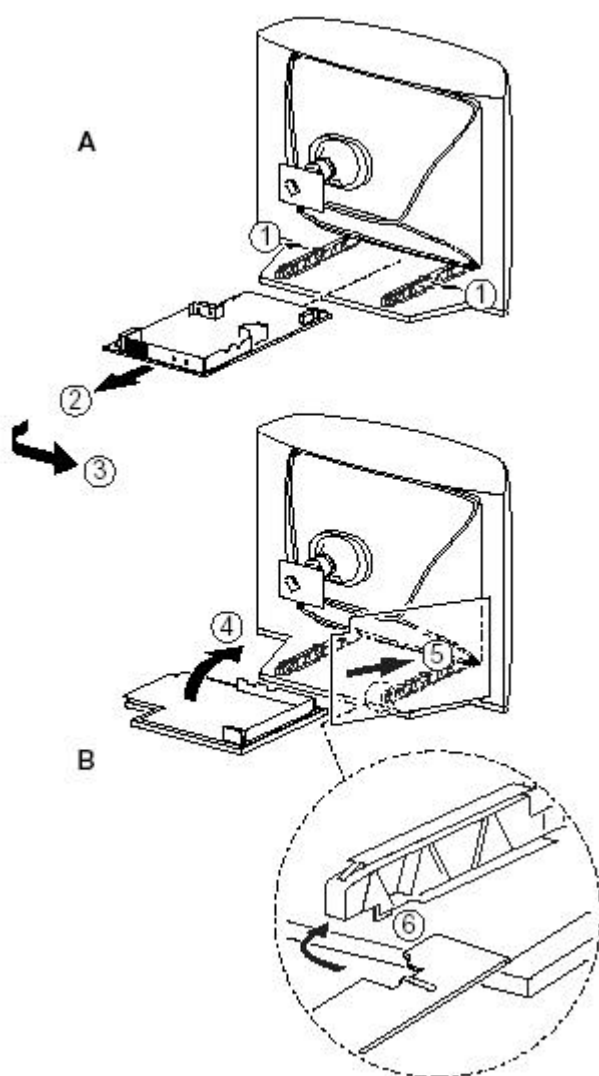


Figure: Service position (1)

Family Board with bracket (with separate 'control').

1. Disconnect the strain relief of the AC power cord.
2. Disconnect the degaussing coil by removing the cable from (red) connector 0212 [1].
3. Remove the panel bracket from the bottom tray, by pulling it backward [2].
4. Turn the chassis tray 90 degrees counter clockwise.
5. Move the panel to the left and flip it 90 degrees [3], with the components toward the CRT.
6. Turn the panel with the rear jack panel toward the CRT.
7. Place the hook of the tray in the hole in the cabinet bottom [4] and slide the panel backward to lock it in the service position.

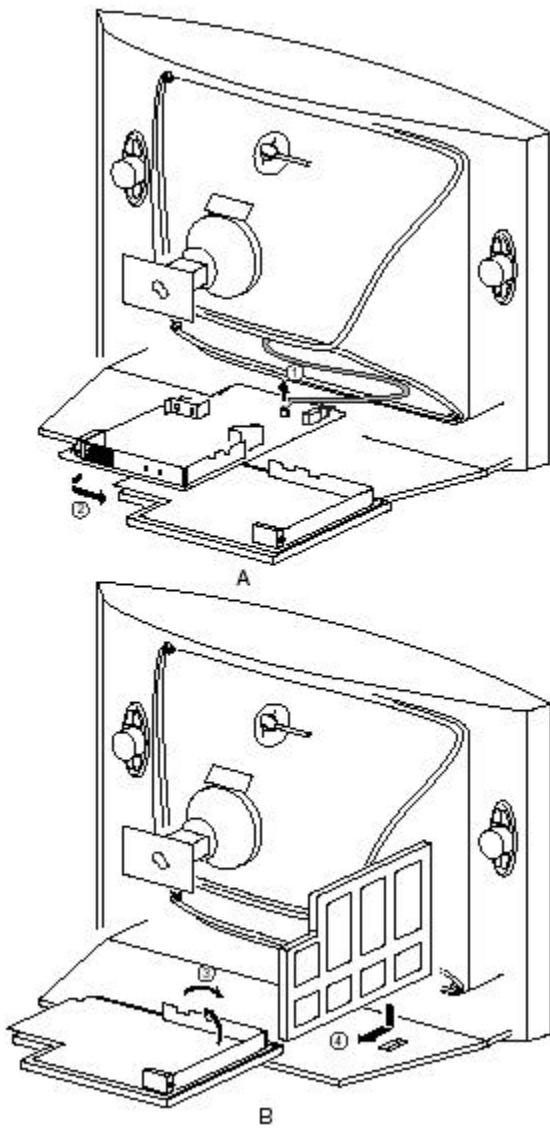


Figure: Service position (2)

Assembly/Board Removal

Comb Filter Assembly/Board (if present)

You can remove the Comb Filter panel from the family board by disconnecting it from connector 1810 (located at the top of the AC power transformer 5520).

Top Control Assembly/Board (if present)

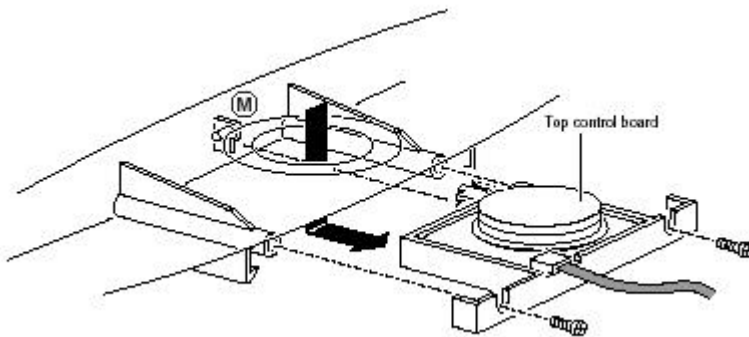


Figure: Top control removal

1. Remove the two screws (if present).
2. Pull the module down and backward (release it from the front hinge [M]).
3. Lift the board from its bracket while releasing the two fixation clamps. The board hinges on the other side.

Front Interface Assembly/Board (if present)

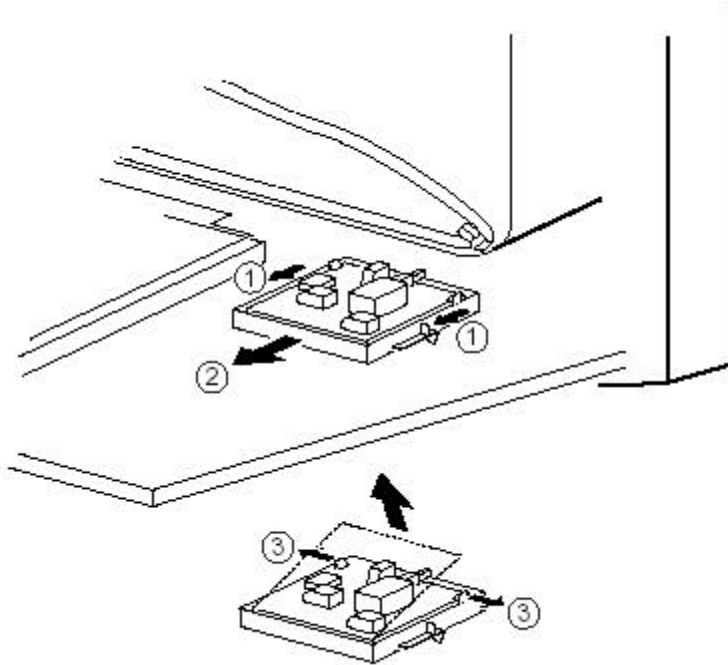


Figure: Front interface removal

1. You can remove the complete module from the bottom plate, by pulling the two clamps upward [1] while sliding the module away from the CRT [2].
2. Release the 2 clamps [3] at the side of the bracket, and lift the board out of the bracket (it hinges at one side).

DAF Assembly/Board (if present)

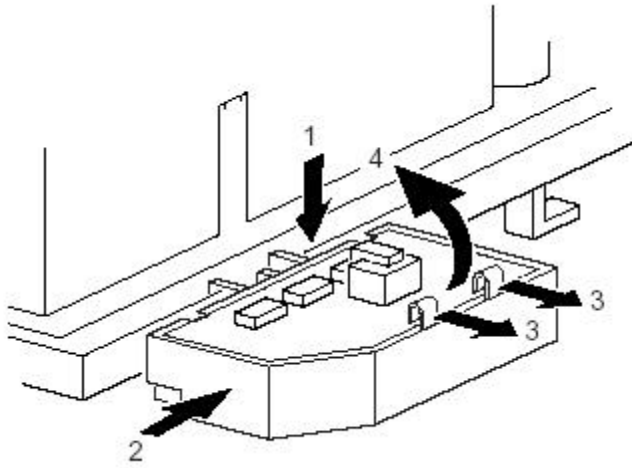


Figure: DAF panel removal

1. You can remove the complete module from the family board bracket, by pressing the clamp downward [1] while sliding the module toward the CRT [2].
2. Release the 2 clamps [3] to lift the board out of the bracket [4].

Side Jack Panel Assembly/Board (if present)

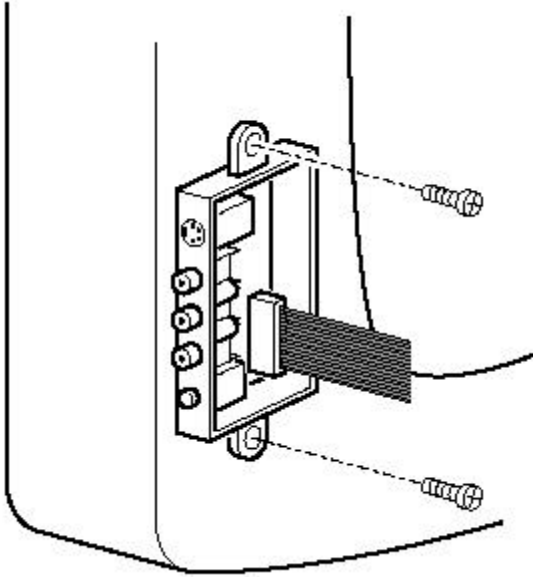


Figure: Side jack panel removal

1. You can remove the complete side jack panel assembly by removing the 2 screws.
2. Release the 2 clamps to lift the board out of the bracket.

Set Re-assembly

Before replacing the back cover, check the following:

1. Be sure the AC power cord is mounted correctly in its guiding brackets.
2. Re-place the strain relief for the AC power cord into the cabinet.
3. Be sure all cables are returned to their original positions.

Service Modes, Error Codes and Fault Finding

Index:

1. Supporting Overviews
2. Test Points.
3. Service Modes.
4. Problems and Solving Tips (related to CSM).
5. ComPair.
6. Error Codes.
7. The Blinking LED Procedure.
8. Protections.
9. Repair Tips.

Supporting Overviews

- [Block Diagram](#)
- [I2C and Supply Voltage Diagram](#)
- [Test point Overview Mono Carrier](#)
- [Test point Overview CRT panel](#)

Test Points

The chassis is equipped with test points printed on the circuit board assemblies. These test points refer to the functional blocks:

Table: Test point overview

| Test point | Circuit | Diagram |
|---------------|------------------------|--------------|
| A1-A2-A3-.... | Audio processing | A8, A9 / A11 |
| C1-C2-C3-.... | Control | A7 |
| F1-F2-F3-.... | Frame drive and output | A3 |
| I1-I2-I3-.... | Tuner & IF | A4 |
| L1-L2-L3-... | Line drive and output | A2 |
| P1-P2-P3-.... | Power supply | A1 |
| S1-S2-S3-.... | Synchronization | A6 |
| V1-V2-V3-.... | Video processing | A5, B1 |

The numbering is in a logical sequence for diagnostics. Always start diagnosing within a functional block in the sequence of the relevant test points for that block.

Perform measurements under the following conditions:

- Television set in Service Default Alignment Mode.
- Video input: Color bar signal.
- Audio input: 3 kHz left channel, 1 kHz right channel.

Service Modes

Service Default Alignment Mode (SDAM) offers several features for the service technician, while the Customer Service Mode (CSM) is used for communication between the servicer and the customer.

The L01.1U AC chassis also offers the option of using ComPair, a hardware interface between a computer and the TV chassis. It offers the abilities of structured troubleshooting, error code reading, and software version readout for all L01.1U AC chassis.

Minimum requirements for ComPair: a Pentium processor, a Windows OS, and a CD-ROM drive (see also "ComPair" section).

Table: Software cluster overview

| SW Cluster | SW name | UOC type | UOC Diversity | Special Features |
|---|-----------|----------|---------------|-------------------------|
| L3LUS1 | L01US2x.y | TDA9587 | 64K ROM Size | Stereo dBx, Comb Filter |
| L3LUN1 | L01UN4x.y | TDA9588 | 64K ROM Size | Stereo non-dBx |
| L3LUN2 | L01UN5x.y | TDA9577 | 55K ROM Size | Stereo non-dBx |
| Abbreviations in Software name: U = USA (NAFTA), M = Mono, N = Stereo non-dBx and S = Stereo dBx. | | | | |

Service Default Alignment Mode (SDAM)

Purpose

- To create a predefined setting for measurements to be made.
- To override software protections.
- To start the blinking LED procedure.
- To change option settings.
- To display / clear the error code buffer.
- To perform alignments.

Specifications

- Tuning frequency: 61.25 MHz (channel 3).
- Color system: NTSC M.
- All picture settings at 50% (brightness, color contrast, hue).
- Bass, treble and balance at 50 %; volume at 25 %.
- All service-unfriendly modes (if present) are disabled. The service unfriendly modes are:
 - Timer / Sleep timer.
 - Child / parental lock.
 - Blue mute.
 - Hotel / hospital mode.
 - Auto shut off (when no 'IDENT' video signal is received for 15 minutes).
 - Skipping of non-favorite presets / channels.
 - Auto-storage of personal presets.
 - Auto user menu time-out.
 - Auto Volume Leveling (AVL).
- Run timer (maximum four digits displayed)

- ### How to enter

- Press the following key sequence on the remote control transmitter: **'0 6 2 5 9 6'** directly followed by the **'MENU'** button (do not allow the display to time out between entries while keying the sequence).
- Short jumper wires 9631 and 9641 on the family board (see Fig. 8-1) and apply AC power. Then press the power button (remove the short after start-up).

- Or via ComPair (with the ComPair 'Tools' RC7150 Service Remote, it should be possible to enter SDAM via the ComPair interface).

```

LLLL   AAABCD   X.Y           S
ERR  XX XX XX XX XX XX
OP   XXX XXX XXX XXX XXX XXX XXX XXX

```

```

CLEAR
OPTIONS
AKB
TUNER
WHITE TONE
GEOMETRY
AUDIO

```

```

CLEAR ?
>
>
>
>
>
>

```

Figure: SDAM menu

Menu explanation

1. **LLLL**. This represents the run timer. The run timer counts normal operation hours, but does not count standby hours (maximum four digits displayed).
2. **AAABCD-X.Y**. This is the software identification of the main microprocessor:
 - **A** = the project name (L01).
 - **B** = the region: E= Europe, A= Asia Pacific, U= NAFTA, L= LATAM.
 - **C** = the software diversity:
 - **Europe**: T = 1 page TXT, F = Full TXT, V = Voice control
 - **LATAM and NAFTA**: N = Stereo non-dBx, S = Stereo dBx
 - **Asian Pacific**: T = TXT, N = non TXT, C = NTSC
 - **ALL regions**: M = mono, D = DVD, Q = Mk2
 - **D** = the language cluster number:
 - **X** = the main software version number (updated with a major change that is incompatible with previous versions)
 - **Y** = the sub software version number (updated with a minor change that is compatible with previous versions)
3. **S**. Indication of the service mode (S = SDAM = Service Default Alignment Mode).
4. **Error Buffer**. Shows all errors detected since the last time the buffer was erased. Five errors possible.
5. **Option Bytes**. Used to set the option bytes. See 'Options' in the Alignments section for a detailed description. Seven codes possible.
6. **Clear**. Erases the contents of the error buffer. Select the CLEAR menu item and press the MENU RIGHT key. The content of the error buffer is cleared.
7. **Options**. Used to set the option bits. See 'Options' in the Alignments section for a detailed description.
8. **AKB**. Used to disable (0) or enable (1) the 'black current loop' (AKB = Auto Kine Bias).
9. **Tuner**. Used to align the tuner. See 'Tuner' in the Alignments section for a detailed description.

10. **White Tone.** Used to align the white tone. See 'White Tone' in the Alignments section for a detailed description.
11. **Geometry.** Used to align the geometry settings of the television. See 'Geometry' in the Alignments section for a detailed description.
12. **Audio.** No audio alignment is necessary for this television set.

How to navigate

- In SDAM, select menu items with the MENU UP/DOWN keys on the remote control transmitter. The selected item will be highlighted. When not all menu items fit on the screen, use the MENU UP/DOWN keys to display the next / previous menu items.
- With the MENU LEFT/RIGHT keys, it is possible to:
 - Activate the selected menu item.
 - Change the value of the selected menu item.
 - Activate the selected submenu.
- In SDAM, when you press the MENU button, the set will switch to the normal user menus (with the SDAM mode still active in the background). To return to the SDAM menu press the STATUS/EXIT button.
- When you press the MENU key in while in an SDAM submenu, you will return to the previous menu.
- In SDAM, press the STATUS/EXIT button to toggle the OSD (except the S which indicates SDAM) on and off, to prevent the OSD from interfering with measurements.

How to store SDAM settings

To store settings changed in SDAM leave the top level SDAM menu by using the POWER button on the remote control transmitter or the television set.

How to exit

Switch the set to STANDBY by pressing the POWER button on the remote control transmitter or the television set.

If you turn the television set off by removing the AC power (i.e., unplugging the television) without using the POWER button, the television set will remain in SDAM when AC power is re-applied, and the error buffer is not cleared.

Customer Service Mode (CSM)

Purpose

The Customer Service Mode shows error codes and information on the TV operation settings. The servicer can instruct the customer to enter CSM by telephone and read off the information displayed. This helps the servicer to diagnose problems and failures in the TV set before making a service call.

The CSM is a read-only mode; therefore, modifications are not possible in this mode.

How to enter

To enter CSM, press the following key sequence on the remote control transmitter: '**1 2 3 6 5 4**' (do not allow the display to time out between entries while keying the sequence).

Upon entering the Customer Service Mode, the following screen will appear:

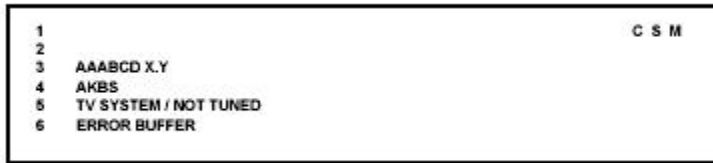


Figure: CSM menu

Menu explanation

1. Indication of the service mode (CSM = Customer Service Mode).
2. Reserved item.
3. Software identification of the main microprocessor (see 'Service Default Alignment Mode' for an explanation)
4. Reserved item for P3C call centers (**AKBS** stands for **A** dvanced **K** nowledge **B** ase **S** ystems).
5. Indicates the type of TV system or whether or not the television is receiving an 'IDENT' signal on the selected source. If no 'IDENT' signal is detected, the display will read 'NOT TUNED'
6. Displays the last five errors detected in the error code buffer.

How to exit

To exit CSM, use one of the following methods:

- Press the MENU, STATUS/EXIT, or POWER button on the remote control transmitter.
- Press the POWER button on the television set.

iTV/Commercial Model Service Modes

Unlike mainstream L01.1U AC models, commercial L01.1U AC models do not use the Service Default Alignment Mode. Commercial Models use the Service Default Mode (SDM) and Service Alignment Mode (SAM).

Service Alignment Mode (SAM) and Service Default Mode (SDM) offer several features for the service technician.

To enter the SAM and SDM modes in iTV/commercial models, you must use a Philips ITV commercial setup transmitter, such as the RC2573GR or the RG4172BK). Part numbers for two common Philips ITV setup remotes are:

RC2573GR : part number 4835 310 57554

RG4172BK : part number 3121 247 91041

Service Alignment Mode (SAM)

Purpose

- To perform (software) alignments.

Specifications

- Software alignments

How to enter

To enter SAM, you must use a Philips ITV commercial setup transmitter (such as the RC2573GR or the RG4172BK). Use the following method to enter SAM:

- First, place the setup remote in setup mode. To place the RG4172BK in setup mode, press TV SETUP; to place the RC2573GR in setup mode, set the switch

to the TV SETUP position. Then press the following key sequence on the remote control transmitter: '0 6 2 5 9 6' directly followed by the '**RECALL**' button (do not allow the display to time out between entries while keying the sequence).

After entering SAM, a special menu screen is visible, with SAM in the upper right corner of the screen to indicate that the television is in Service Alignment Mode.

SAM mode allows the servicer to perform all of the software alignments performed in the SDAM mode in mainstream models.

How to navigate in SAM

- In SAM, select menu items with the MENU UP/DOWN keys on the remote control transmitter. The selected item will be highlighted. When not all menu items fit on the screen, use the MENU UP/DOWN keys to display the next / previous menu items.
- With the MENU LEFT/RIGHT keys, it is possible to:
 - Activate the selected menu item.
 - Change the value of the selected menu item.
 - Activate the selected submenu.
- In SAM, when you press the MENU button, the set will switch to the normal user menus (with the SAM mode still active in the background). To return to the SAM menu press the RECALL button.
- When you press the MENU key in while in an SAM submenu, you will return to the previous menu.

How to store SAM settings

To store settings changed in SAM leave the top level SAM menu by using the POWER button on the remote control transmitter or the television set.

How to exit SAM

Switch the set to STANDBY by pressing the POWER button on the remote control transmitter or the television set.

If you turn the television set off by removing the AC power (i.e., unplugging the television) without using the POWER button, the television set will remain in SAM when AC power is reapplied.

Service Default Mode (SDM)

Purpose

- To create a predefined setting for measurements to be made.
- To override software protections.
- To start the blinking LED procedure.
- To change option settings.
- To display the error code buffer.

Specifications

- Tuning frequency: 61.25 MHz (channel 3).
- Color system: NTSC M.
- All picture settings at 50% (brightness, color contrast, hue).
- Bass, treble and balance at 50 %; volume at 25 %.

- All service-unfriendly modes (if present) are disabled. The service unfriendly modes are:
 - Timer / Sleep timer.
 - Child / parental lock.
 - Blue mute.
 - Auto shut off (when no 'IDENT' video signal is received for 15 minutes).
 - Skipping of non-favorite presets / channels.
 - Auto-storage of personal presets.
 - Auto user menu time-out.
 - Auto Volume Leveling (AVL).
- Run timer (maximum four digits displayed)
- Software version
- Option settings
- Error buffer reading

How to enter

To enter SDM, you must use a Philips ITV commercial setup transmitter (such as the RC2573GR or the RG4172BK). Use the following method to enter SDM:

- First, place the setup remote in setup mode. To place the the RG4172BK in setup mode, press TV SETUP; to place the the RC2573GR in setup mode, set the switch to the TV SETUP position. Then press the following key sequence on the remote control transmitter: **'0 6 2 5 9 6'** directly followed by the **'MENU'** button (do not allow the display to time out between entries while keying the sequence).

After entering SDM, a special menu screen is visible, with SDM in the upper right corner of the screen to indicate that the television is in Service Default Mode.

SDM mode allows the servicer to perform all of the alignments, except software alignments, which are performed in the SDAM mode in mainstream models. In commercial models, software alignments are performed in SAM mode.

How to navigate

- In SDM, select menu items with the MENU UP/DOWN keys on the remote control transmitter. The selected item will be highlighted. When not all menu items fit on the screen, use the MENU UP/DOWN keys to display the next / previous menu items.
- With the MENU LEFT/RIGHT keys, it is possible to:
 - Activate the selected menu item or option.
 - Change the value of the selected menu item or option byte.
- In SDM, when you press the MENU button, the set will switch to the normal user menus (with the SDM mode still active in the background). To return to the SDM menu press the RECALL button.
- In SDM, press the RECALL button to toggle the OSD (except the SDM which indicates the set is in SDM mode) on and off, to prevent the OSD from interfering with measurements.

How to store SDM settings

To store settings changed in SDM leave the top level SDM menu by using the POWER button on the remote control transmitter or the television set.

How to exit

Switch the set to STANDBY by pressing the POWER button on the remote control transmitter or the television set.

If you turn the television set off by removing the AC power (i.e., unplugging the television) without using the POWER button, the television set will remain in SDM when AC power is reapplied, and the error buffer is not cleared.

Problems and Solving Tips Related to CSM

Picture Problems

Note : The problems described below are all related to the TV settings. The procedures used to change the value (or status) of the different settings are described.

Picture too dark or too bright

If:

- The picture improves when you have press the AUTO PICTURE button on the remote control transmitter, or
- The picture improves when you enter the Customer Service Mode

Then:

3. Press the AUTO PICTURE button on the remote control transmitter repeatedly (if necessary) to choose PERSONAL picture mode.

4. Press the MENU button on the remote control transmitter. This brings up the normal user menu.
5. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
6. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
7. Use the MENU UP/DOWN keys (if necessary) to select BRIGHTNESS.
8. Press the MENU LEFT/RIGHT keys to increase or decrease the BRIGHTNESS value.
9. Use the MENU UP/DOWN keys to select PICTURE.
10. Press the MENU LEFT/RIGHT keys to increase or decrease the PICTURE value.
11. Press the MENU button on the remote control transmitter twice to exit the user menu.
12. The new PERSONAL preference values are automatically stored.

White line around picture elements and text

If:

The picture improves after you have pressed the AUTO PICTURE button on the remote control transmitter

Then:

13. Press the AUTO PICTURE button on the remote control transmitter repeatedly (if necessary) to choose PERSONAL picture mode.
14. Press the MENU button on the remote control transmitter. This brings up the normal user menu.
15. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
16. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.

17. Use the MENU UP/DOWN keys to select SHARPNESS.
18. Press the MENU LEFT key to decrease the SHARPNESS value.
19. Press the MENU button on the remote control transmitter twice to exit the user menu.
20. The new PERSONAL preference value is automatically stored.

Snowy picture

To enter CSM, press the following key sequence on the remote control transmitter: '**123654**' (do not allow the display to time out between entries while keying the sequence).

Check CSM line 5. If this line reads 'Not Tuned,' check the following:

- Antenna not connected. Connect the antenna.
- No antenna signal or bad antenna signal. Connect a proper antenna signal.
- The tuner is faulty (in this case line 6, the Error Buffer line, will contain error number 10). Check the tuner and replace/repair the tuner if necessary.

Black and white picture

If:

- The picture improves after you have pressed the AUTO PICTURE button on the remote control transmitter

Then:

25. Press the AUTO PICTURE button on the remote control transmitter repeatedly (if necessary) to choose PERSONAL picture mode.
26. Press the MENU button on the remote control transmitter. This brings up the normal user menu.
27. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
28. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
29. Use the MENU UP/DOWN keys to select COLOR.
30. Press the MENU RIGHT key to increase the COLOR value.
31. Press the MENU button on the remote control transmitter twice to exit the user menu.
32. The new PERSONAL preference value is automatically stored.

Menu text not sharp enough

If:

- The picture improves after you have pressed the AUTO PICTURE button on the remote control transmitter.

Then:

34. Press the AUTO PICTURE button on the remote control transmitter repeatedly (if necessary) to choose PERSONAL picture mode.
35. Press the MENU button on the remote control transmitter. This brings up the normal user menu.
36. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).

37. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
38. Use the MENU UP/DOWN keys to select PICTURE.
39. Press the MENU LEFT key to decrease the PICTURE value.
40. Press the MENU button on the remote control transmitter twice to exit the user menu.
41. The new PERSONAL preference value is automatically stored.

ComPair

Introduction

ComPair (Computer Aided Repair) is a service tool for Philips Consumer Electronics products. ComPair is a further development of the European DST (special remote control transmitter for Service), which allows faster and more accurate diagnostics. ComPair has three big advantages:

- ComPair helps you to get an understanding on how to repair the chassis in a short time, by guiding you systematically through the repair procedures.
- ComPair allows very detailed diagnostics (on I² C level) and is therefore capable of accurately indicating problem areas. You do not have to know anything about I² C commands yourself because ComPair takes care of this.
- ComPair speeds up the repair time since it can automatically communicate with the chassis (when the microprocessor is working) and all repair information is directly available. When ComPair is installed together with the Force electronic manual of the L01.1U AC chassis, schematics and CBAs are only a mouse-click away.

Specifications

ComPair consists of a Windows based faultfinding program and an interface box between PC and the product. The ComPair interface box is connected to the PC via a serial or RS232 cable.

In case of the L01 chassis, the ComPair interface box and the TV communicate via a bi-directional service cable via the service connector (connector 0267).

The ComPair faultfinding program is able to determine the problem of the television set. ComPair can gather diagnostic information in two ways:

- **Automatic** (by communication with the television): ComPair can automatically read the contents of the entire error buffer. Diagnosis is done on I² C level. ComPair can access the I² C bus of the television. ComPair can send and receive I² C commands to the microprocessor of the television. In this way, it is possible for ComPair to communicate (read and write) to devices on the I² C busses of the television set.
- **Manually** (by asking questions to the servicer): Automatic diagnosis is only possible if the microprocessor of the television is working correctly, and only to a certain extent. When this is not the case, ComPair will guide you through the faultfinding tree by asking you questions (for example; Does the screen give a picture? Click on the correct answer: YES / NO) and showing you examples (for example; Measure test-point I7 and click on the correct oscillogram you see on the oscilloscope). You can answer by clicking on a link (for example, text or a waveform picture) that will bring you to the next step in the faultfinding process.

By a combination of automatic diagnostics and an interactive question and answer procedure, ComPair will enable you to find most problems in a fast and effective way.

Beside fault finding, ComPair provides some **additional features** like:

- Uploading or downloading of presets.
- Management of preset lists.
- If both ComPair and the Force electronic service manual are installed, all the schematics and CBAs of the television set are available by clicking on the appropriate hyperlink.
- **Example:** *Measure the DC-voltage on capacitor C2568 (Schematic/Panel) at the family board.*
 - Click on the 'Panel' hyperlink to automatically show the CBA with a highlighted capacitor C2568.
 - Click on the 'Schematic' hyperlink to automatically show the electronic position of the highlighted capacitor.

How To Connect ComPair

51. First, install the ComPair Browser software on your PC (see the Quick Reference Card for installation instructions).
52. Connect the RS232 interface cable between a free serial (COM) port of your PC and the PC connector (marked with 'PC') of the ComPair interface.
53. Connect the AC power adapter to the supply connector (marked 'POWER 9V DC') on the ComPair interface.
54. Switch the ComPair interface 'off'.
55. Switch the television set 'off' (and remove the AC power).
56. Connect the ComPair interface cable between the connector on the rear side of the ComPair interface (marked 'I² C') and the ComPair connector on the family board (connector 0267).

57. Plug the AC power adapter in the AC power outlet and switch the ComPair interface 'on'. The green and red LEDs light up together. The red LED turns off after approximately 1 second, while the green LED remains lit.
58. Start the ComPair program and read the 'introduction' chapter.

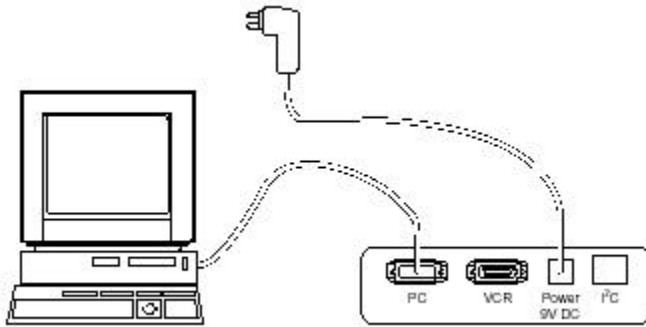


Figure: ComPair connection

How To Order

ComPair order codes **for NAFTA** :

- ComPair Software: ST4191.
- ComPair Interface Box: 4822 727 21631.
- AC Adapter: T405-ND.
- ComPair Quick Start Guide: ST4190.
- ComPair interface cable: 3122 785 90004.

Error Codes

The error code buffer contains all errors detected since the last time the buffer was erased. The buffer is written from left to right. When an error occurs that is not yet in the error code buffer, it is displayed at the left side and all other errors shift one position to the right.

How To Read The Error Buffer

You can read the error buffer in 3 ways:

- On screen via the SDAM (if you have a picture). **Examples:**
 - ERROR: 0 0 0 0 0 : No errors detected
 - ERROR: 6 0 0 0 0 : Error code 6 is the last and only detected error
 - ERROR: 9 6 0 0 0 : Error code 6 was detected first and error code 9 is the last detected (newest) error
- Via the blinking LED procedure (when you have no picture). See 'The Blinking LED Procedure'.
- Via ComPair.

How To Clear The Error Buffer

The error code buffer is cleared in the following cases:

- By using the CLEAR command in the SDAM menu:
 - To enter SDAM, press the following key sequence on the remote control transmitter: '062596' directly followed by the 'MENU' button (do not allow the display to time out between entries while keying the sequence).

- Make sure the menu item CLEAR is highlighted. Use the MENU UP/DOWN buttons, if necessary.
- Press the MENU RIGHT button to clear the error buffer. The text on the right side of the 'CLEAR' line will change from 'CLEAR?' to 'CLEARED'
- If the contents of the error buffer have not changed for 50 hours, the error buffer resets automatically.

Note: If you exit SDAM by disconnecting the AC power from the television set, the error buffer is not reset.

Error Codes

In case of non-intermittent faults, write down the errors present in the error buffer and clear the error buffer before you begin the repair. This ensures that old error codes are no longer present.

If possible, check the entire contents of the error buffer. In some situations, an error code is only the result of another error and not the actual cause of the problem (for example, a fault in the protection detection circuitry can also lead to a protection).

Table: Error code overview

| Error | Device | Error description | Check item | Diagram |
|-------|----------------|---------------------------------|---------------------------------------|--------------------------|
| 0 | - | No Error | | |
| 1 | - | X-Ray Protection (USA) | 2465, 7460 | A2 |
| 2 | - | Horizontal Protection | 7460, 7461, 7462, 7463, 6467 | A2 |
| 3 | TDA8359TDA9302 | Vertical Protection | 7861, VlotAux +13v | A2, A3 |
| 4 | MSP34X5TDA9853 | MAP I 2 C identification error | 7831, 7861 | A9 or A11 |
| 5 | TDA95XX | POR 3.3V / 8V Protection | 7200, 7560, 7480 | A1, A2. A5, A6, A7 |
| 6 | I 2 C bus | General I 2 C bus error | 7200, 3624, 3625 | A7 |
| 7 | - | Power Down (over current) prot. | - | - |
| 8 | - | E/W Protection (Large Screen) | 7400, 3405, 3406, 3400 | A2 |

| Error | Device | Error description | Check item | Diagram |
|-------|------------|--------------------------------------|------------------------|------------|
| 9 | M24C08 | NVM I 2 C identification error | 7602, 3611, 3603, 3604 | A7 |
| 10 | Tuner | Tuner I 2 C identification error | 1000, 7482 | A2, A4 |
| 11 | TDA6107/8 | Black current loop protection | 7330, RGB amps, CRT | B1, B2 |
| 12 | M65669 | MAP I 2 C identification error (USA) | 7803 | P |
| 14 | DVD Loader | DVD I 2 C identification error | DVD Interface module | DVD Loader |

Note: Error 7 is not applicable.

The Blinking LED Procedure

Using this procedure, you can make the contents of the error buffer visible via the front LED. This is especially useful when there is no picture.

When the SDAM is entered, the LED will blink the contents of the error-buffer:

- 1-14 short blinks (indicates error number 1-14),
- When all the error-codes are displayed, the sequence finishes with an 'on' LED blink of 1.5 seconds,
- The sequence starts again.

Example of error buffer: **12 9 6 0 0**

After entering SDAM, the following occurs:

- 1 long 'on' blink of 5 seconds to start the sequence,
- 12 short blinks followed by a pause of 1.5 seconds,
- 9 short blinks followed by a pause of 1.5 seconds,
- 6 short blinks followed by a pause of 1.5 seconds,
- 1 long 'on' blink of 1.5 seconds to finish the sequence,
- The sequence starts again at 12 short blinks.

Protections

If a fault situation is detected, an error code will be generated; and, if necessary, the television set will go into protection mode. Blinking of the red LED at a frequency of 3 Hz indicates the protection mode. In some error cases, the microprocessor does not put the set in protection mode. The error codes of the error buffer and the blinking LED procedure can be read via the Service Default Alignment Menu (SDAM), or via ComPair.

To get a quick diagnosis the chassis has two service modes implemented:

- The Customer Service Mode (CSM).
- The Service Default Alignment Mode (SDAM).

For a detailed description, see the "Customer Service Mode" and "Service Default Alignment Mode" sections.

Repair Tips

Below some failure symptoms are given, followed by a repair tip.

- **Set is dead and makes hiccupping sound.** 'Main Power Supply' is available. Hiccupping stops when L5561 is de-soldered, meaning that problem is in the 'Main Power Supply' line. No output voltages at LOT, no horizontal deflection. Reason: line transistor 7460 is defective.
- **Set is dead, and makes no sound.** Check power supply IC 7520. Result: voltage at pins 1, 3, 4, 5 and 6 are about 180 V and pin 8 is 0 V. The reason why the voltage on these pins is so high is that the output driver (pin 6) has an open load. That is why MOSFET 7521 is not able to switch. Reason: feedback resistor 3523 is defective. **Caution** : Be careful measuring the gate of 7521: circuitry is very high ohmic and can easily be damaged!
- **Set is in hiccup mode and shuts down after 8 seconds.** The blinking LED (set is in SDAM mode) indicates error 5. As it is unlikely that the microprocessor 'POR' and '+8V protection' happen at the same time, measure the '+8V' supply. If this voltage is missing, check transistor 7480.
- **Set is in non-stop hiccup mode.** Set is in over-current mode; check the secondary sensing (opto coupler 7515) and the 'Main Power Supply' voltage. Signal 'Stdbby_con' must be logic low under normal operation conditions and goes to high (3.3 V) under standby and fault conditions.
- **Set turns on, but without picture and sound.** The screen shows snow, but OSD and other menus are okay. Blinking LED procedure indicates error 11, so problem is expected in the tuner (part reference number 1000). Check presence of supply voltages. 'Vlotaux+5V' voltages at pin 5 and 7 are okay; 'VT_supply' at pin 9 is missing. Conclusion: resistor 3460 is defective.

- **Set turns on, but with a half screen at the bottom. Sound is okay.** Blinking LED (set is in SDAM mode) indicates error 3. Check 'Vlotaux+11V' and '+50V'. If they are okay, problem is expected in the vertical amplifier IC 7471. Use an oscilloscope to measure the waveform on pin 17 of the UOC. Also, measure the waveform at pin 1 of IC 7471. If the signal there is missing, a defective resistor R3244 caused the problem.

Alignments

Index of this chapter:

1. General Alignment Conditions
2. Hardware Alignments
3. Software Alignments and Settings

Note: The Service Default Alignment Mode (SDAM) is described in the "Service Modes, Error Codes and Fault Finding" section. SDAM menu navigation is performed by using the MENU UP, MENU DOWN, MENU LEFT, and MENU RIGHT keys of the remote control transmitter.

General Alignment Conditions

Perform all electrical adjustments under the following conditions:

- AC voltage and frequency: 110 V ($\pm 10\%$), 60 Hz ($\pm 5\%$).
- Connect the television set to the AC power via an isolation transformer.
- Allow the television set to warm up for approximately 20 minutes.
- Measure the voltages and waveforms in relation to chassis ground (with the exception of the voltages on the primary side of the power supply). Never use heatsinks as ground.
- Test probe: $R_i > 10\text{ M}\Omega$; $C_i < 2.5\text{ pF}$.
- Use an isolated trimmer/screwdriver to perform the alignments.

Hardware Alignments

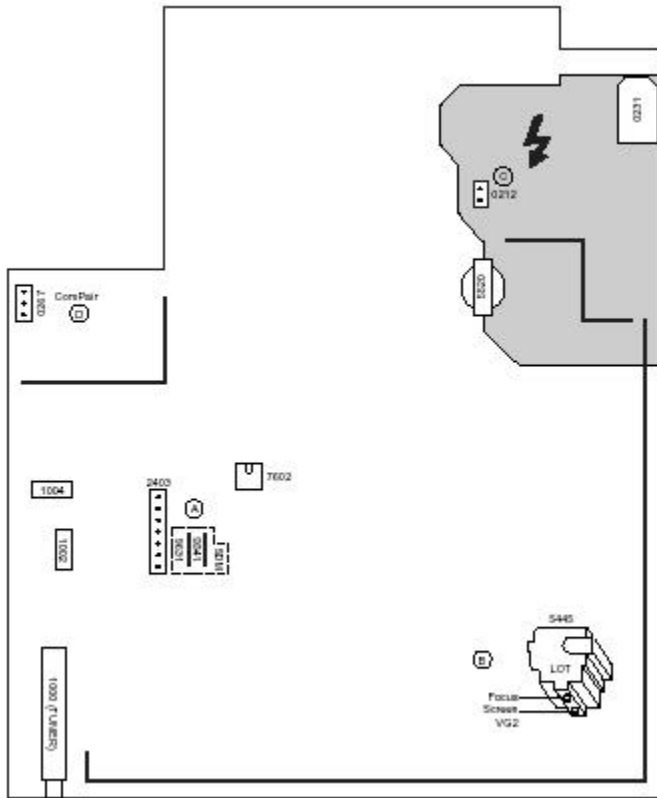


Figure: Family board (top view)

Vg2 Adjustment

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the WHITE TONE sub menu.
3. Press the MENU LEFT or MENU RIGHT key to enter the WHITE TONE sub menu.
4. In the WHITE TONE sub menu, press the MENU UP/DOWN keys to select NORMAL RED, NORMAL GREEN, or NORMAL BLUE.

5. Use the MENU LEFT/RIGHT keys to set the values of NORMAL RED, NORMAL GREEN and NORMAL BLUE to '40'.
6. Press the MENU button twice to enter the normal user menu.
7. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
8. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
9. Use the MENU UP/DOWN keys to select PICTURE. Be sure to record the current value of PICTURE.
10. Use the MENU LEFT/RIGHT keys to set the value of PICTURE to '0'.
11. Use the MENU UP/DOWN keys to select BRIGHTNESS. Be sure to record the current value of BRIGHTNESS.
12. Use the MENU LEFT/RIGHT keys to set the value of BRIGHTNESS to minimum (OSD just visible in a dark room).
13. Press the MENU button twice to return to the top level SDAM menu.
14. Press the STATUS/EXIT button to hide the SDAM onscreen display.
15. Connect the RF output of a video pattern generator to the antenna input.
16. Input a 'black picture' test pattern to the television set.
17. Set the oscilloscope to 50 V/div and the time base to 0.2 milliseconds (external triggering on the vertical pulse).
18. Ground the scope at the CRT panel and connect a 10:1 probe to one of the cathodes of the picture tube socket (see schematic diagram B).
19. Measure the 'cut off pulse' during the first full line after the frame blanking (see Fig. 8-2). You will see two pulses, one being the 'cut off pulse' and the other being the 'white drive pulse'. Choose the one with the lowest value; this is the 'cut off pulse'.
20. Select the cathode with the highest VDC value for the alignment. Adjust the Vcutoff of this gun with the SCREEN potentiometer (see Fig. 8-1) on the LOT to the correct value (see table 8-1).
21. Press the STATUS/EXIT button to display the SDAM onscreen display.
22. Press the MENU button to enter the normal user menu.

23. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
24. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
25. Use the MENU UP/DOWN keys to select PICTURE.
26. Use the MENU LEFT/RIGHT keys to reset the value of PICTURE to the original value.
27. Use the MENU UP/DOWN keys to select BRIGHTNESS.
28. Use the MENU LEFT/RIGHT keys to reset the value of BRIGHTNESS to the original value.
29. Press the MENU button twice to return to the top level SDAM menu.
30. Use the POWER button on the remote control transmitter or the POWER button on the television set to turn off the television set. This will save the changes made in SDAM.

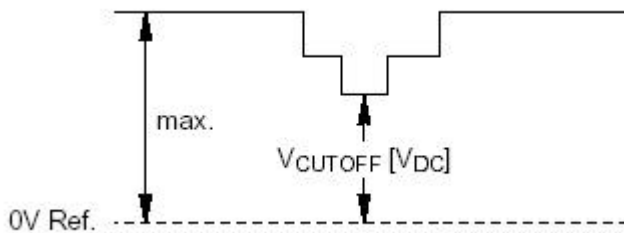


Figure: Vcutoff

Table: Vg2 cut-off point (Large Screen)

| Screen Size (RF= Real Flat) | Cut-off point (V) |
|--|-------------------|
| 20RF Matsushita 20RF Samsung 20RF LG Philips 25V Curved Face 27V Curved Face | +145 V +/- 4 V |
| 27RF 29RF LG Philips | +155 V +/- 4 V |
| 20RF Philips 27RF Samsung 32RF 26 Wide Screen RF 30 Wide Screen RF | +160 V +/- 4 V |

RF = Real Flat

V = (Visible) Diagonal Screen Measurement of Phosphor

Focusing

1. Connect the RF output of a video pattern generator to the antenna input.
2. Input a circle or crosshatch test pattern to the television set.
3. Press the AUTO PICTURE button on the remote control transmitter repeatedly to choose PERSONAL or MOVIES picture mode.
4. Adjust the FOCUS potentiometer (see Fig. 8-1) until the vertical lines near the left and right sides of the screen, and near the horizontal center of the screen, are at minimum width without visible haze.

Software Alignments and Settings

The following options are performed in the Service Default Alignment Mode (SDAM).

SDAM is described in the 'Service Modes, Error Codes and Fault Finding' section.

The following alignments are explained:

1. OPTIONS
2. TUNER
3. WHITE TONE
4. GEOMETRY
5. AUDIO

Options

Options are used to control the presence or absence of certain features and hardware.

How to change an Option Byte

An Option Byte represents a number of different options. Changing these bytes directly makes it possible to set all options very quickly. All options are controlled via seven option bytes.

Note: Each option byte controls several features of the television set; therefore, before changing option byte information, it is important to record the current option byte values. This ensures that the television features can be restored to the original settings, if necessary.

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the MENU button (do not allow the display to time out between entries while keying the sequence).

2. Use the MENU UP/DOWN keys to highlight the OPTIONS sub menu.
3. Press the MENU LEFT or MENU RIGHT key to enter the OPTIONS sub menu.
4. In the OPTIONS sub menu, press the MENU UP/DOWN keys to select 'OP 1' through 'OP 7'.
5. Use the number keys on the remote control transmitter to enter a new value for the selected option byte. The value must be entered as a three-digit value (for example, '4' would be entered as '0 0 4').
6. The selected value must be between '0' and '255'.
7. When all desired changes to the option bytes are made, press the MENU button to return to the top level SDAM menu. This will save changes to the option byte settings.
8. To ensure the option byte changes take effect: Turn the television set OFF by using the POWER button on the remote control transmitter or the local keyboard. Disconnect the television set from AC power for at least ten seconds. Reconnect the television set to AC power. Turn the television set ON by using the POWER button on the remote control transmitter or the local keyboard.

| | |
|------|-------|
| | S |
| OP 1 | X X X |
| OP 2 | X X X |
| OP 3 | X X X |
| OP 4 | X X X |
| OP 5 | X X X |
| OP 6 | X X X |
| OP 7 | X X X |

Figure: Options menu

How to change iTV Option Bytes

An Option Byte represents a number of different options. Changing these bytes directly makes it possible to set all options very quickly. All options are controlled via five option bytes.

Note: Each option byte controls several features of the television set; therefore, before changing option byte information, it is important to record the current option byte values. This ensures that the television features can be restored to the original settings, if necessary.

1. To enter SDM, you must use a Philips ITV commercial setup transmitter (such as the RC2573GR or the RG4172BK). Use the following method to enter SDM:

First, place the setup remote in setup mode. To place the RG4172BK in setup mode, press TV SETUP; to place the RC2573GR in setup mode, set the switch to the TV SETUP position. Then press the following key sequence on the remote control transmitter: **'0 6 2 5 9 6'** directly followed by the **'MENU'** button (do not allow the display to time out between entries while keying the sequence).

2. Use the MENU UP/DOWN keys to scroll through the OPTIONS until you reach OB1 through OB5.
3. Use the number keys on the remote control transmitter to enter a new value for the selected option byte. The value must be entered as a three-digit value (for example, '4' would be entered as '0 0 4').
4. The selected value must be between '0' and '255'.
5. When all desired changes to the option bytes are made, press the MENU button to return to the top level SDM menu. This will save changes to the option byte settings.
6. To ensure the option byte changes take effect: Turn the television set OFF by using the POWER button on the remote control transmitter or the local keyboard. Disconnect the television set from AC power for at least ten seconds. Reconnect the television set to AC power. Turn the television set ON by using the POWER button on the remote control transmitter or the local keyboard.

Option Code Tables

Table: Option code settings

| Model Number | OP1 | OP2 | OP3 | OP4 | OP5 | OP6 | OP7 |
|--------------|-----|-----|-----|-----|-----|-----|-----|
| 20DV693R01 | 0 | 23 | 65 | 162 | 252 | 153 | 64 |
| 20DV693R02 | 0 | 23 | 65 | 162 | 252 | 153 | 80 |
| 20MS334R37 | 0 | 23 | 65 | 1 | 144 | 88 | 0 |
| 20PT633R/37 | 0 | 23 | 1 | 1 | 144 | 152 | 0 |
| 20PT643F/35R | 64 | 23 | 65 | 1 | 236 | 152 | 0 |
| 20PT643R01 | 0 | 23 | 1 | 1 | 236 | 152 | 0 |
| 20PT653R/37 | 0 | 23 | 1 | 1 | 252 | 152 | 0 |
| 21PT6331/44R | 16 | 23 | 65 | 1 | 144 | 152 | 0 |
| 21PT633R/85C | 0 | 23 | 1 | 1 | 144 | 152 | 0 |
| 21PT6431/44R | 16 | 23 | 65 | 1 | 236 | 152 | 0 |
| 21PT643R/85C | 0 | 23 | 1 | 1 | 236 | 152 | 0 |
| 24PT633F/35R | 64 | 23 | 193 | 1 | 252 | 152 | 0 |
| 24PT633R/37 | 0 | 23 | 129 | 1 | 252 | 152 | 0 |
| 25PT533S/37C | 0 | 23 | 1 | 1 | 252 | 152 | 0 |
| 25PT633R/85C | 0 | 23 | 129 | 1 | 252 | 152 | 0 |
| 27DV693R37A | 0 | 23 | 209 | 162 | 252 | 153 | 64 |
| 27MS3404/17 | 0 | 23 | 65 | 1 | 252 | 152 | 0 |
| 27MS4504/17 | 0 | 23 | 193 | 1 | 252 | 152 | 0 |
| 27PT541S37A | 0 | 23 | 65 | 1 | 252 | 152 | 0 |
| 27PT543F35A | 64 | 23 | 65 | 1 | 252 | 152 | 0 |
| 27PT543S/37A | 0 | 23 | 1 | 1 | 252 | 152 | 0 |

| Model Number | OP1 | OP2 | OP3 | OP4 | OP5 | OP6 | OP7 |
|--------------|-----|-----|-----|-----|-----|-----|-----|
| 27PT563S37A | 0 | 23 | 65 | 162 | 252 | 153 | 80 |
| 27PT633R/37C | 0 | 23 | 145 | 162 | 252 | 153 | 80 |
| 27PT643F35A | 64 | 23 | 193 | 1 | 252 | 152 | 0 |
| 27PT643R/37C | 0 | 23 | 193 | 1 | 252 | 152 | 0 |
| 27PT643R/37A | 0 | 23 | 193 | 1 | 252 | 152 | 0 |
| 27PT643R/97A | 0 | 23 | 193 | 1 | 252 | 152 | 0 |
| 27PT663R/37A | 0 | 23 | 145 | 162 | 252 | 153 | 80 |
| 27PT663R/37C | 0 | 23 | 145 | 162 | 252 | 153 | 80 |
| 29DV6931/85R | 16 | 23 | 209 | 162 | 252 | 153 | 64 |
| 29PT543S/44A | 0 | 23 | 1 | 1 | 252 | 152 | 0 |
| 29PT543S/85A | 0 | 23 | 1 | 1 | 252 | 152 | 0 |
| 29PT563S/85A | 0 | 23 | 1 | 162 | 252 | 153 | 80 |
| 29PT633R/85A | 0 | 23 | 129 | 1 | 252 | 152 | 0 |
| 29PT633R/85C | 0 | 23 | 129 | 1 | 252 | 152 | 0 |
| 29PT643R85A | 16 | 23 | 193 | 1 | 252 | 152 | 0 |
| 29PT6631/44R | 16 | 23 | 209 | 162 | 252 | 153 | 80 |
| 29PT663R/85A | 0 | 23 | 145 | 162 | 252 | 153 | 80 |
| 29PT663R/85C | 0 | 23 | 145 | 162 | 252 | 153 | 80 |
| 29PT663S85A | 16 | 23 | 209 | 162 | 252 | 153 | 80 |
| 30DV693R37A | 0 | 31 | 149 | 162 | 252 | 153 | 64 |
| 30DV693R37C | 0 | 31 | 149 | 162 | 252 | 153 | 64 |
| 30PW633F35A | 0 | 31 | 149 | 162 | 252 | 153 | 80 |
| 30PW633R37A | 0 | 31 | 149 | 162 | 252 | 153 | 80 |
| 30PW633R37C | 0 | 31 | 149 | 162 | 252 | 153 | 80 |

| Model Number | OP1 | OP2 | OP3 | OP4 | OP5 | OP6 | OP7 |
|--------------|-----|-----|-----|-----|-----|-----|-----|
| 32PT541S37G | 0 | 23 | 193 | 1 | 252 | 152 | 0 |
| 32PT543S/37A | 0 | 23 | 129 | 1 | 252 | 152 | 0 |
| 32PT543S/37G | 0 | 23 | 129 | 1 | 252 | 152 | 0 |
| 32PT553S/37A | 0 | 23 | 129 | 1 | 252 | 152 | 64 |
| 32PT553S/37G | 0 | 23 | 129 | 1 | 252 | 152 | 64 |
| 32PT563S37A | 0 | 23 | 193 | 162 | 252 | 153 | 80 |
| 32PT563S37G | 0 | 23 | 193 | 162 | 252 | 153 | 80 |
| 32PT633R/37D | 0 | 31 | 145 | 162 | 252 | 153 | 80 |
| 32PT663R/37A | 0 | 31 | 145 | 162 | 252 | 153 | 80 |
| MS3252S431 | 0 | 23 | 129 | 1 | 189 | 88 | 0 |
| MS3652S427 | 0 | 23 | 129 | 1 | 189 | 88 | 0 |

Table: Option code settings for iTV/Commercial models

| Model Number | OP1 | OP2 | OP3 | OP4 | OP5 |
|--------------|-----|-----|-----|-----|-----|
| 25LT220L/17 | 212 | 16 | 2 | 65 | 168 |
| 25LT421L/17 | 196 | 252 | 3 | 33 | 172 |
| 25ST220L/17 | 212 | 16 | 2 | 67 | 8 |
| 27LT220L/17 | 212 | 16 | 2 | 65 | 168 |
| 27LT621L/17 | 198 | 252 | 3 | 33 | 172 |
| 27ST110P/35 | 212 | 16 | 2 | 67 | 8 |
| 27ST220L/17 | 212 | 16 | 2 | 67 | 8 |
| 27ST230P/35 | 212 | 16 | 2 | 67 | 8 |
| 27ST240P/35 | 212 | 16 | 2 | 67 | 8 |
| 27ST420L/17 | 196 | 220 | 3 | 35 | 12 |

| Model Number | OP1 | OP2 | OP3 | OP4 | OP5 |
|--------------|-----|-----|-----|-----|-----|
| 27ST421L/17 | 196 | 220 | 3 | 35 | 12 |
| 32LT621L/17 | 198 | 252 | 11 | 41 | 252 |
| 32ST220P/17 | 198 | 220 | 11 | 43 | 12 |
| 32ST230P/35 | 198 | 220 | 11 | 43 | 12 |
| 36ST220P/35 | 198 | 220 | 11 | 43 | 12 |
| 36ST230P/35 | 198 | 220 | 11 | 43 | 12 |
| | | | | | |

Tuner

Note: Described alignments are only necessary when the NVM (part reference number 7602) is replaced.

IF-PLL

This adjustment is auto-aligned. Therefore, no action is required.

AGC (AGC take over point)

1. Connect the RF output of a video pattern generator to the antenna input.
2. Input a color bar test pattern to the television set.
3. Set the amplitude of the video pattern generator to 10 mV and set the frequency to 61.25 MHz (channel 3).
4. Connect a DC multimeter to pin 1 of the tuner (item 1000 on the main chassis).
5. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).

6. Use the MENU UP/DOWN keys to highlight the TUNER sub menu.
7. Press the MENU LEFT/RIGHT keys to enter the TUNER sub menu.
8. Use the MENU UP/DOWN keys to select AGC.
9. Use the MENU LEFT/RIGHT keys to adjust the AGC value (default value is 27) until the DC-voltage at pin 1 of the tuner lies between 3.8 V and 2.3 V.
10. Press the MENU button to return to the top level SDAM menu.
11. To ensure the AGC change takes effect:
 - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
 - Disconnect the television set from AC power for at least ten seconds.
 - Reconnect the television set to AC power.
 - Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

SL (Slicing Level)

This adjustment sets the sync slicing level for non-standard signals. You must turn it 'on' to help correct picture instability in premium decoded cable channels.

- OFF: slicing level dependent on noise detector.
- ON: fixed slicing level of 70 %.

To adjust SL:

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the TUNER sub menu.
3. Press the MENU LEFT/RIGHT keys to enter the TUNER sub menu.

4. Use the MENU UP/DOWN keys to select SL.
5. Use the MENU LEFT/RIGHT keys to toggle SL 'Off' and 'On'.
6. Press the MENU button to return to the top level SDAM menu.
7. To ensure the SL setting is saved:
 - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
 - Disconnect the television set from AC power for at least ten seconds.
 - Reconnect the television set to AC power.
 - Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

White Tone

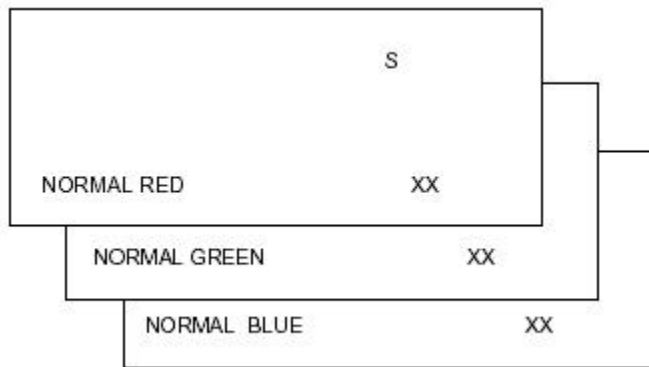


Figure: White tone alignment menu

The values of the 'black cut off level' can be adjusted in the 'WHITE TONE' sub menu. Normally, no alignment is needed for 'WHITE TONE', and the given default values are used.

Default settings:

NORMAL (color temperature = 9600 K):

- NORMAL RED = 40
- NORMAL GREEN = 40
- NORMAL BLUE = 40

To adjust NORMAL RED, NORMAL GREEN, and NORMAL BLUE:

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the WHITE TONE sub menu.
3. Press the MENU LEFT/RIGHT keys to enter the WHITE TONE sub menu.
4. Use the MENU UP/DOWN keys to select NORMAL RED, NORMAL GREEN, or NORMAL BLUE.
5. Use the MENU LEFT/RIGHT keys to adjust the value of NORMAL RED, NORMAL GREEN, or NORMAL BLUE.
6. When all desired changes to the WHITE TONE sub menu values are made, press the MENU button to return to the top level SDAM menu.
7. To ensure the WHITE TONE settings are saved:
 - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
 - Disconnect the television set from AC power for at least ten seconds.
 - Reconnect the television set to AC power.
 - Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

Geometry

The geometry alignments menu contains several items for correct picture geometry alignment.

1. Connect the RF output of a video pattern generator to the antenna input.
2. Input a crosshatch test pattern to the television set.
3. Set the amplitude of the video pattern generator to at least 1 mV and set the frequency to 61.25 MHz (channel 3).
4. Press the AUTO PICTURE button on the remote control transmitter repeatedly to choose PERSONAL or MOVIES picture mode.
5. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the MENU button (do not allow the display to time out between entries while keying the sequence).
6. Use the MENU UP/DOWN keys to highlight the GEOMETRY sub menu.
7. Press the MENU LEFT/RIGHT keys to enter the GEOMETRY sub menu.
8. Use the MENU UP/DOWN keys to highlight either the HORIZONTAL sub menu or the VERTICAL sub menu.
9. Press the MENU LEFT/RIGHT keys to enter either the HORIZONTAL sub menu or the VERTICAL sub menu.
10. Use the MENU UP/DOWN keys to select items in the HORIZONTAL sub menu or the VERTICAL sub menu.
11. Use the MENU LEFT/RIGHT keys to adjust the values of items in the HORIZONTAL and VERTICAL sub menus.
12. When all desired changes to the HORIZONTAL and VERTICAL sub menu values are made, press the MENU button twice to return to the top level SDAM menu.
13. To ensure the GEOMETRY settings are saved:
 - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.

- Disconnect the television set from AC power for at least ten seconds.
- Reconnect the television set to AC power.
- Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

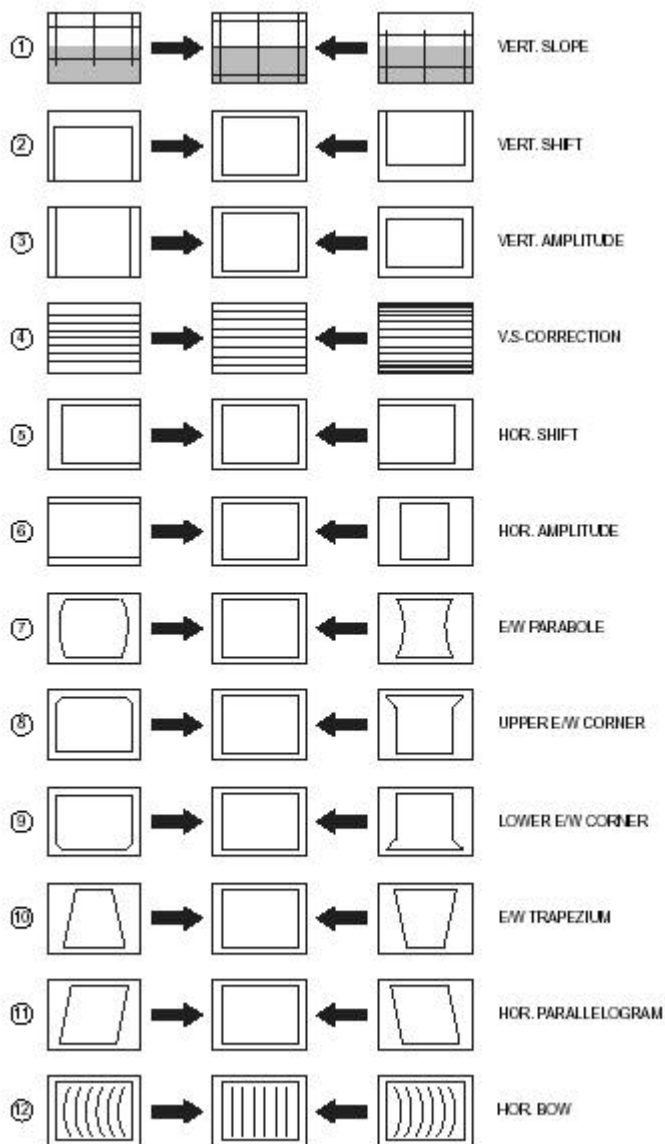


Figure: Geometry alignments

The following alignments can be performed in the GEOMETRY sub menu:

Horizontal Amplitude and Phase:

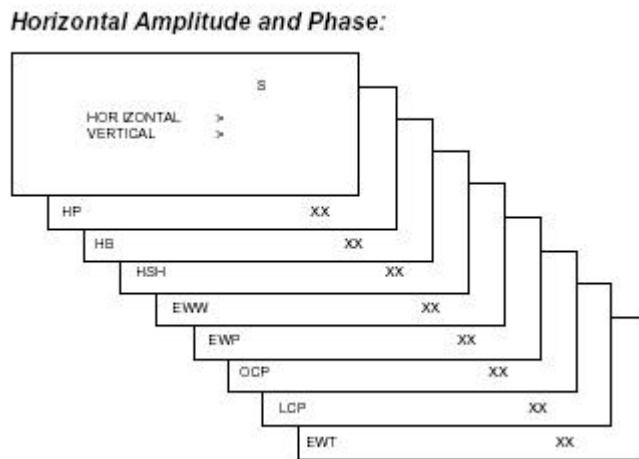


Figure: Horizontal alignment menu

- **Horizontal Shift (HSH).** Select Horizontal Shift to center the picture on the screen.
- **Horizontal Parallelogram (HP).** Set Horizontal Parallelogram to prevent the picture from slanting to one side.
- **Horizontal Bow (HB).** Set Horizontal Bow to prevent the top and bottom of picture from bending to the sides.
- **East West Width (EWW).** Select East-West Width and align the picture width until the complete test pattern is visible.
- **East West Parabola (EWP).** Select East-West Parabola and align the vertical sides until the sides are straightened.
- **Upper Corner Parabola (UCP).** Select Upper Corner Parabola to straighten the top of the vertical lines at the sides.
- **Lower Corner Parabola (LCP).** Select Lower Corner Parabola to straighten the bottom of the vertical lines at the sides.
- **East West Trapezium (EWT).** Align straight vertical lines in the middle of the screen.

Vertical Amplitude and Position:

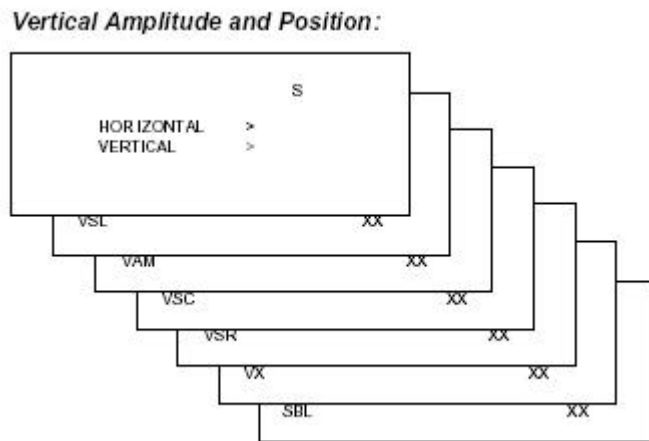


Figure: Vertical alignment menu

- **Vertical Amplitude (VAM).** Aligns the height of the picture (other vertical alignments are NOT compensated).
- **Vertical slope (VSL).** Aligns the picture so the proportions are the same at the top and bottom of the screen. This alignment must be performed first, before all other vertical alignments. Turning SBL 'on' will assist in performing this alignment.
- **Service blanking (SBL).** Turns the blanking of the lower half of the screen 'on' or 'off' (to be used in combination with the vertical slope alignment).
- **Vertical S-Correction (VSC).** Aligns the vertical linearity, so that the vertical intervals of the grid-patterns are the same over the entire height of the screen.
- **Vertical Shift (VSH).** Aligns the vertical center of the picture to the vertical center of the CRT. After performing this alignment, it may be necessary to perform the VAM alignment again.
- **Vertical Zoom (VX).** Adjusts the picture height.
- **Delta Horizontal Shift 60 Hz (H60).**
- **Delta Vertical Amplitude 60 Hz (V60).**

Methods of adjustment

1. Select Service Blanking (SBL) and set it to 1. The lower half of the picture will be blanked.
2. Press the MENU UP/DOWN buttons to select Vertical Slope (VSL).
3. Align VSL to start the blanking exactly at the horizontal white line at the center of the test circle (align the bottom of the screen so that castellations just disappear).
4. Press the MENU UP/DOWN buttons to select SBL and set it back to 0. The full picture reappears.
5. Select Vertical Amplitude (VAM) and align the picture height to approximately 13.0 - 13.1 blocks (align the top of the screen so that castellations just disappear).
6. Select Vertical Shift (VSH) and align for vertical centering of the picture on the screen.

Repeat the last two steps if necessary.

The table below lists the default GEOMETRY values for the different television sets.

Table: Default geometry values (Large Screen)

| Parameter | 20RF, 21RF, 25RF, 27RF, 29RF, 25", 28", 29"SF, 32V, 33" | 25V | 27V/29" | 35V | 28WS | 32WS | 28WSRF | 32WSRF |
|------------------------------------|--|-----|---------|-----|------|------|--------|--------|
| HP Horizontal- Parallelogram | 31 | 31 | 31 | 45 | 47 | 32 | 36 | 45 |
| HB Horizontal- Bow | 31 | 31 | 31 | 25 | 32 | 32 | 40 | 30 |
| HSH Horizontal Shift | 35 | 35 | 35 | 23 | 27 | 24 | 31 | 29 |
| EWV East- West Width | 34 | - | - | 45 | 36 | 39 | 40 | 33 |
| EWP East- West Parabola | 33 | - | - | 23 | 21 | 21 | 37 | 16 |
| UCP Upper Corner Parabola | 35 | - | - | 25 | 26 | 23 | 14 | 16 |

| | | | | | | | | |
|---------------------------------|--|-----|---------|-----|------|------|--------|--------|
| Parameter | 20RF, 21RF, 25RF, 27RF, 29RF, 25", 28", 29"Sf, 32V, 33" | 25V | 27V/29" | 35V | 28WS | 32WS | 28WSRF | 32WSRF |
| LCP Lower Corner Parabola | 35 | - | - | 31 | 30 | 30 | 25 | 23 |
| EWT East- West Trapezium | 35 | - | - | 24 | 28 | 26 | 18 | 27 |
| VSL Vertical Slope | 33 | 25 | 25 | 19 | 42 | 35 | 31 | 25 |
| VAM Vertical Amplitude | 26 | 32 | 32 | 31 | 30 | 23 | 23 | 30 |
| VSC Vertical S-Correction | 23 | 23 | 23 | 27 | 24 | 24 | 12 | 20 |
| VSH Vertical Shift | 31 | 28 | 28 | 26 | 18 | 23 | 36 | 34 |
| VX Vertical Zoom | 25 | - | - | 25 | 25 | 25 | 25 | 25 |

Audio



Figure: Audio alignment menu

No alignments are necessary for the AUDIO sub menu. Use the default values.

AF-M (NICAM threshold)

Default value is 300.

To adjust AF-M:

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the AUDIO sub menu.
3. Press the MENU LEFT/RIGHT keys to enter the AUDIO sub menu.
4. Use the MENU UP/DOWN keys to select AF-M.
5. Use the MENU LEFT/RIGHT keys to adjust the value of AF-M to 300.
6. Press the MENU button to return to the top level SDAM menu.
7. To ensure the AF-M setting is saved:

- Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
- Disconnect the television set from AC power for at least ten seconds.
- Reconnect the television set to AC power.
- Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

A2T (TV A2 Threshold)

Default value is 250.

To adjust A2T:

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the AUDIO sub menu.
3. Press the MENU LEFT/RIGHT keys to enter the AUDIO sub menu.
4. Use the MENU UP/DOWN keys to select A2T.
5. Use the MENU LEFT/RIGHT keys to adjust the value of A2T to 250.
6. Press the MENU button to return to the top level SDAM menu.
7. To ensure the A2T setting is saved:
 - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
 - Disconnect the television set from AC power for at least ten seconds.
 - Reconnect the television set to AC power.
 - Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

Circuit Description

Index of this chapter:

1. Introduction
2. Audio Signal Processing
3. Video Signal Processing
4. Synchronization
5. Deflection
6. Power Supply
7. Control
8. Abbreviations
9. IC Data Sheets

Notes:

- For a good understanding of the following circuit descriptions, please use the [Block diagram](#) . Where necessary, you will find a separate drawing for clarification.
- Figures below can deviate slightly from the actual situation, due to different set executions.

Introduction

The 'L01.1U AC' chassis is a global TV chassis for the model year 2003 and is used for TV sets with screen sizes from 20" - 32" (large screen), in Super Flat, Real Flat, and Wide Screen executions. In comparison to its predecessor (the 'L01.1U AB'), the chassis has enhanced features like a 2D 3-line Comb-filter and 'Active Control'.

The standard architecture consists of a Mono Carrier, a Picture Tube panel, a Side I/O panel, and a Top Control panel.

The Mono Carrier consists primarily of conventional components with hardly any surface mounted devices.



Figure: Mono Carrier component side

The functions for video processing, microprocessor (P), and teletext (TXT) decoder are combined in one IC (TDA958xH), the so-called Ultimate One Chip (UOC). This chip is (surface) mounted on the copper side of the LSP.

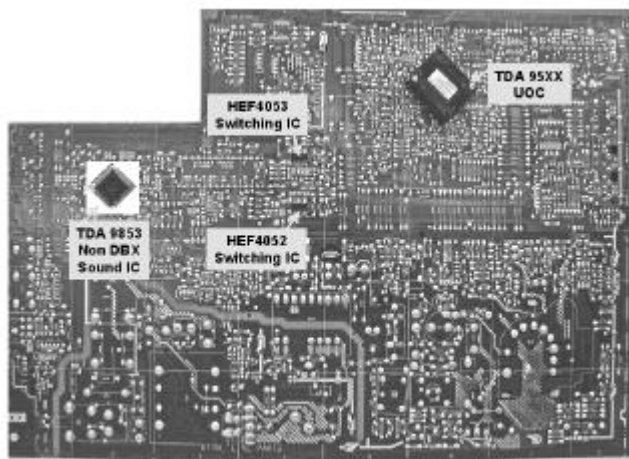


Figure: Mono Carrier solder side

The 'L01.1U AC' is divided into 2 basic systems, i.e. mono and stereo sound. While the audio processing for the mono sound is done in the audio block of the UOC, an external audio processing IC is used for stereo sets.

The tuning system features 181 channels with on-screen display. The main tuning system uses a tuner, a microcomputer, and a memory IC mounted on the Mono Carrier. The microcomputer communicates with the memory IC, the customer keyboard, remote receiver, tuner, signal processor IC and the audio output IC via the I²C bus. The memory IC retains the settings for favorite stations, customer-preferred settings, and service / factory data.

The on-screen graphics and closed caption decoding are done within the microprocessor, and then sent to the signal processor IC to be added to the main signal.

The chassis utilizes a Switching Mode Power Supply (SMPS) for the main voltage source. The chassis has a 'hot' ground reference on the primary side and a cold ground reference on the secondary side of the power supply and the rest of the chassis.

Audio Signal Processing

Stereo


In stereo sets, the signal goes via the SAW filter (position 1002/1003), to the audio demodulator part of the UOC IC 7200. The audio output on pin 33 goes to the stereo decoder 7831/ 7861. The switch inside this IC selects either the internal decoder or an external source.

There are two stereo decoders versions used:

1. A BTSC DBX stereo/SAP decoder (MSP34X5 at position 7831) for the highest specified sets, and
2. A BTSC non-DBX stereo decoder (TDA9853 at position 7861) for BTSC Economic.

The output is fed to the to the audio amplifier (AN7522 at position 7901). The volume level is controlled at this IC (pin 9) by a control line (Volume|Mute) from the microprocessor. The audio signal from 7901 is then send to the speaker and headphone output panel.

Stereo audio signal processing

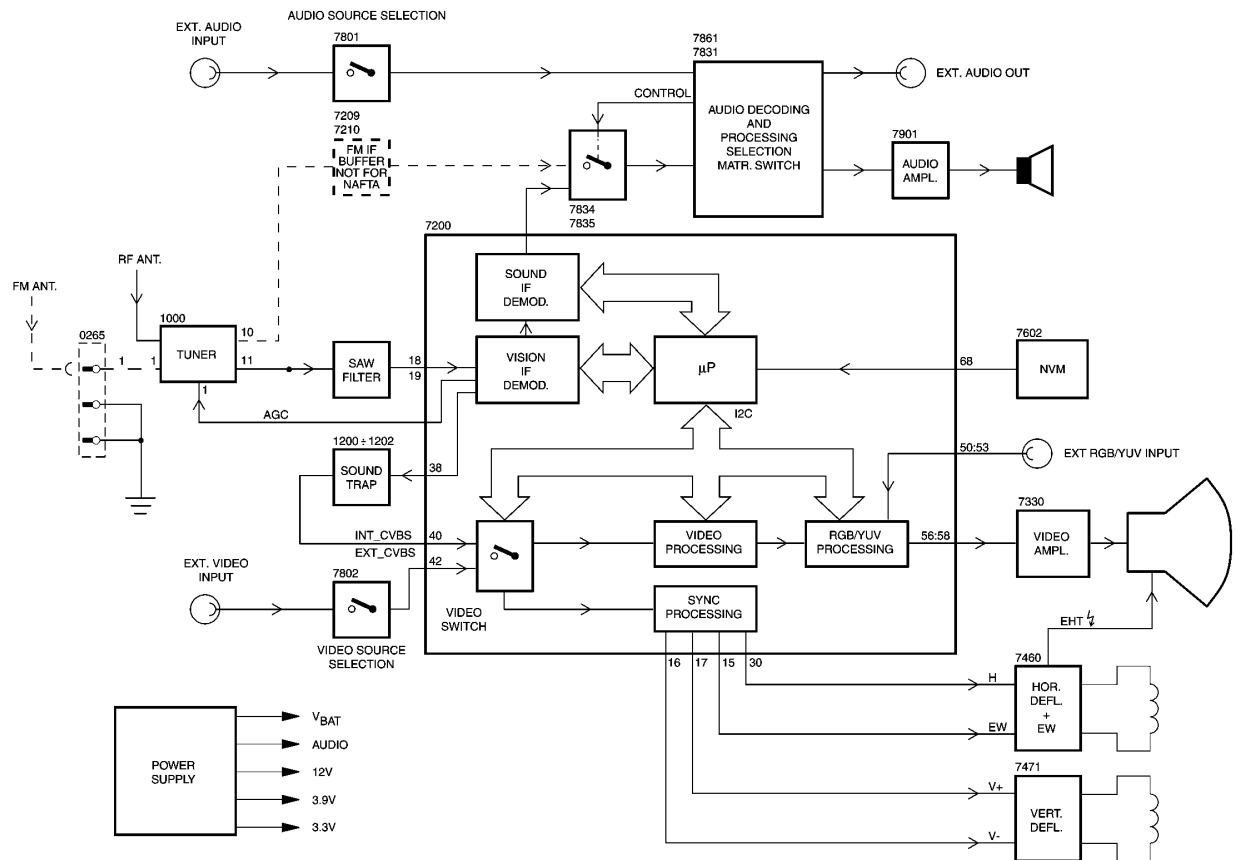


Mono

In mono sets, the signal goes via the SAW filter (position 1002/1003), to the audio demodulator part of the UOC IC 7200. The audio output on pin 48 goes to the audio amplifier (AN7523 at position 7902).

The volume level is controlled at this IC (pin 9) by a 'VolumeMute' control line from the microprocessor.

The audio signal from IC 7902 is then send to the speaker and headphone output panel.

Mono audio signal processing

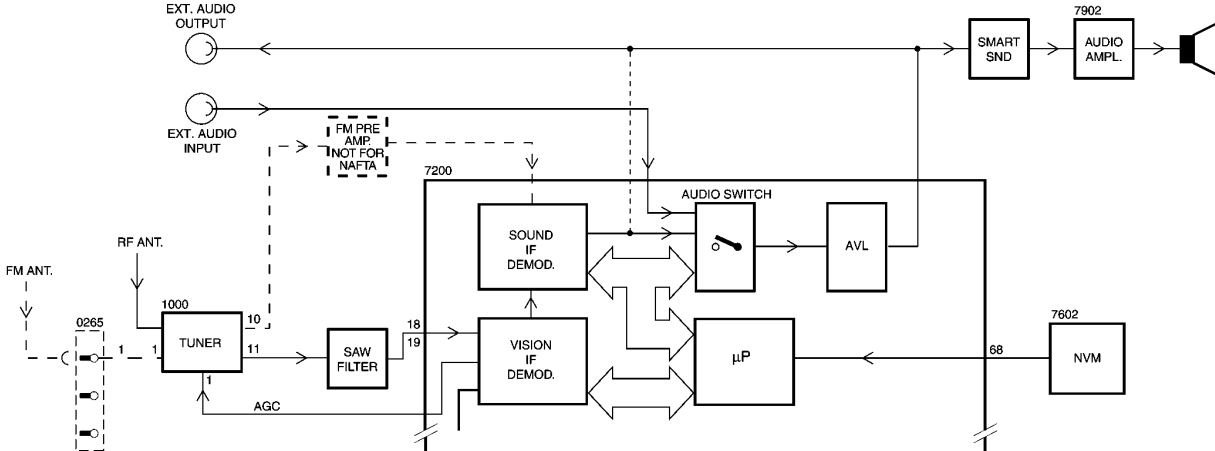

Video Signal Processing

Introduction

The video signal-processing path consists of the following parts:

- RF signal processing.
- Video source selection.
- Video demodulation.
- Luminance / Chrominance signal processing.
- RGB control.
- RGB amplifier

The processing circuits listed above are all integrated in the UOC TV processor. The surrounding components are for the adaptation of the selected application. The I²C bus is for defining and controlling the signals.

RF Signal Processing

The incoming RF signal goes to the tuner (pos. 1000), where the 45.75 MHz IF signal is developed and amplified. The IF signals then exits the tuner from pin 11 to pass through the SAW filter (pos. 1002/1003). The shaped signal is then applied to the IF processor part of the UOC (pos. 7200).

Tuner AGC (Automatic Gain Control) will reduce the tuner gain and thus the tuner output voltage when receiving strong RF signals. Adjust the AGC takeover point via the Service Alignment Mode (SAM). The tuner AGC starts working when the video-IF input reaches a certain input level and will adjust this level via the I²C bus. The tuner AGC signal goes to the tuner (pin 1) via the open collector output (pin 22) of the UOC.

The IC also generates an Automatic Frequency Control (AFC) signal that goes to the tuning system via the I²C bus, to provide frequency correction when needed.

The demodulated composite video signal is available at pin 38 and then buffered by transistor 7201.

Video Source Selection

The Composite Video Blanking Signal (CVBS) from buffer 7201 goes to the audio carrier trap filters 1200, 1201, or 1202 (depending on the system used), to remove the audio signal. The signal then goes to pin 40 of IC 7200. The internal input switch selects the following input signals:

- Pin 40: terrestrial CVBS input
- Pin 42: external AV1 CVBS input
- Pin 44: external Side I/O CVBS or AV2 (or comb filter) luminance (Y) input
- Pin 45: external AV2 (or comb filter) chrominance (C) input

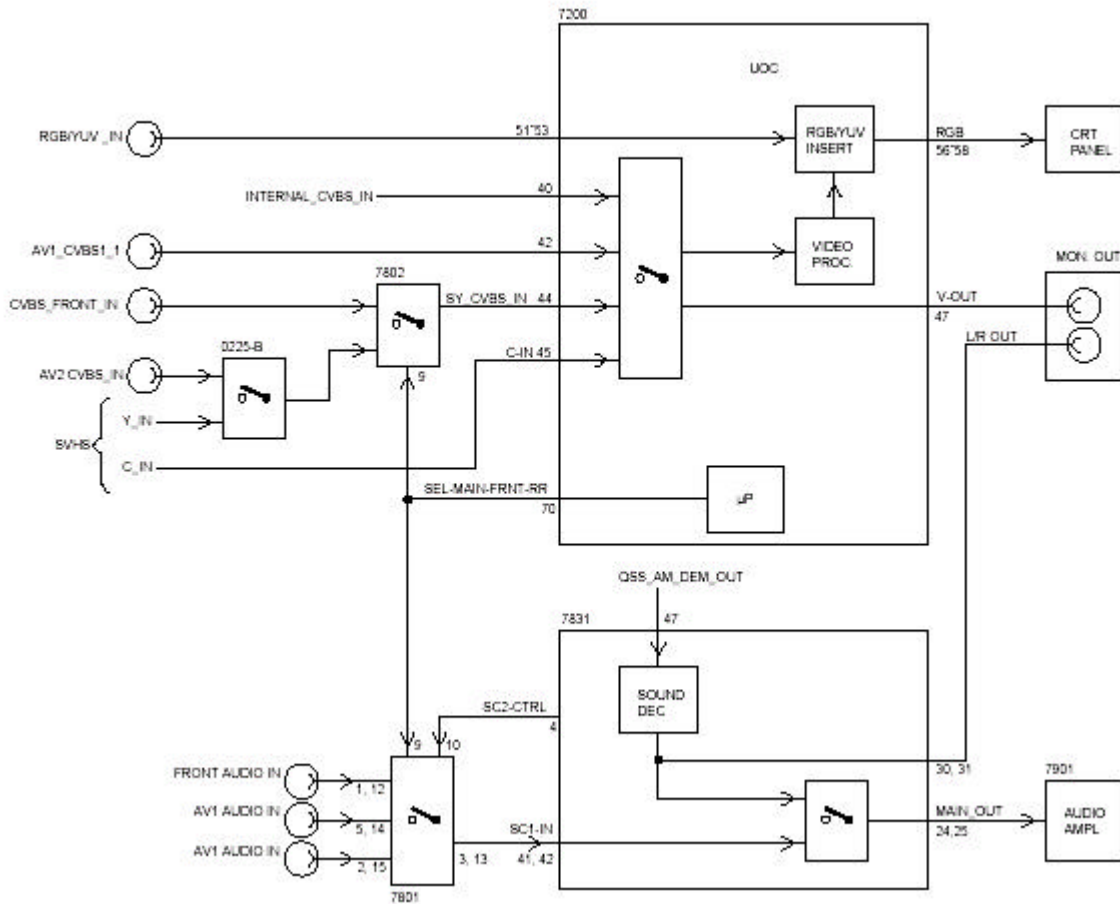


Figure: Video source selection

Once the signal source is selected, a chroma filter calibration is performed. The received color burst sub-carrier frequency is used for this. Correspondingly, the chroma band pass filter for PAL/NTSC processing or the cloche filter for SECAM processing is switched on. The selected luminance (Y) signal is supplied to the horizontal and vertical synchronization circuit and to the luminance processing circuit. In the luminance-processing block, the luminance signal goes to the chroma trap filter. This trap is switched 'on' or 'off' depending on the color burst detection of the chroma calibration circuit.

The group delay correction part can be switched between the BG and a flat group delay characteristic. This has the advantage that in multi-standard receivers no compromise has to be made for the choice of the SAW filter.

Comb Filter

Introduction

The video signal prepared for broadcast contains two major parts commingled, the luminance (makes a black and white picture in full detail) and chrominance (coloration with not quite all the detail). This method is used instead of red, green, and blue sub-signals in order to get the best looking picture that can be transmitted in the limited bandwidth of the broadcast channel.

Every TV receiver and VCR must contain a filter to separate the luminance and color (Y and C) again. Less than perfect Y/C separators lose resolution -- horizontal, vertical, or both. Also there are artifacts such as *rainbow swirls* where thin stripes should be, and *crawling dots* where patches of different colors meet. The perfect Y/C separator does not exist yet, although some 3D comb filters come close.

There are several methods for filtering:

- **No comb filter.** The cheapest solution is to use simple filters (notch, low pass, bandpass filters) that pass only the coarse and medium horizontal detail (lower 3 MHz or so) to the luminance circuits and pass the bulk of the color information still commingled with the fine luminance detail (3 to 4.2 MHz) to the color circuits.
- **Two line ordinary filter.** The improvements over 'no' comb filter are: revealing of finer horizontal detail overall, and some reduction of rainbow swirls. Improvement of fine detail is most prominent where details consist of upright dark and light lines.
- **Three line ordinary filter.** Improvement over the two-line filter consists of sharper transition from one color to another at sharp horizontal color boundaries, and less dot crawl.
- **Three line adaptive (a.k.a. 2D; dynamic) filter.** This method adapts the mixing according the line content of two fields. The big improvement that the 2D comb filter brings, is the elimination (or near elimination) of dot crawl. This type of filter

is used in the 'L01.1U AC' chassis. When present, the filter CBA is plugged-in on connector 1810B of the Mono Carrier.

- **Motion adaptive (3D) filter.** The difference with the 2D method is that this method uses three fields, so it also uses 'time' dimension. The 3D comb filter can achieve essentially perfect Y/C separation, eliminating all dot crawl and rainbow swirls for 'stationary' subject material, and perform at least as well as the 2D filter for the rest of the picture.

Implementation

The input (CVBS) signal comes from pin 47 of the UOC. On the comb filter panel, it first enters a low-pass filter (items 2409, 5408, 2408, 5407, and 2407) and an amplifier circuit (items 7401 and 7402). The LPF is used to eliminate the noise and the amplifier circuit to get a video input of $1 V_{PP}$.

The 'REF0' subcarrier reference (f_{SC}) is fed to pin 11 and internally multiplied by four ($4 \times 3.58 \text{ MHz} = 14.32 \text{ MHz}$) for the system clock.

After processing, the Y/C outputs (pins 25 and 23) are both filtered by a low-pass filter, in order to eliminate the high frequency harmonics of this system clock.

After filtering, the Y and C signals are fed to the source inputs of the UOC (pins 44 and 45).

Specification

If the comb filter is 'on', and the signal level drops below a specified value, then the filter is set to 'off'. Once the filter is set to 'off' it will remain 'off' until a channel change is performed.

When an S-Video (Y/C) or component video signal is offered to the TV, the filter is bypassed via the 'COMB_BYPASS' signal from the microprocessor.

Video Demodulation

The color decoder circuit detects whether the signal is a PAL, NTSC, or SECAM signal. The result is made known to the auto system manager. The PAL/NTSC decoder has an internal clock generator, which is stabilized to the required frequency by using the 12 MHz clock signal from the reference oscillator of the microcontroller / teletext decoder. The base-band delay line is used to obtain a good suppression of cross color effects. The Y signal and the delay line outputs U and V are applied to the luminance / chroma signal processing part of the TV processor.

Luminance / Chrominance signal Processing

The output of the YUV separator is fed to the internal YUV switch, which switches between the output of the YUV separator or the external YUV (for DVD or PIP) on pins 51-53. Pin 50 is the input for the insertion control signal called 'FBL-1'. When this signal level becomes higher than 0.9 V (but less than 3 V), the RGB signals at pins 51, 52, and 53 are inserted into the picture by using the internal switches.

Also, some picture improvement features are implemented in this part:

- **Black stretch.** This function corrects the black level of incoming signals, which have a difference between the black level and the blanking level. The amount of extension depends upon the difference between actual black level and the darkest part of the incoming video signal level. It is detected by means of an internal capacitor.
- **White stretch.** This function adapts the transfer characteristic of the luminance amplifier in a non-linear way depending on the average picture content of the luminance signal. It operates in such a way that maximum stretching is obtained when signals with a low video level are received. For bright pictures, stretching is not active.
- **Dynamic skin tone correction.** This circuit corrects (instantaneously and locally) the hue of those colors, which are located in the area in the UV plane that

matches the skin tone. The correction is dependent on the luminance, saturation, and distance to the preferred axis.

The YUV signal is then fed to the color matrix circuit, which converts it to R, G, and B signals.

The OSD/TXT signal from the microprocessor is mixed with the main signal at this point, before being output to the CRT board (pins 56, 57, and 58).

RGB Control

The RGB control circuit enables the picture parameters contrast, brightness, and saturation to be adjusted, by using a combination of the user menus and the remote control. Additionally automatic gain control for the RGB signals via cut-off stabilization is achieved in this functional block to obtain an accurate biasing of the picture tube.

Therefore, this block inserts the cut-off point measuring pulses into the RGB signals during the vertical retrace period.

The following additional controls are used:

- **Black current calibration loop.** Because of the 2-point black current stabilization circuit, both the black level and the amplitude of the RGB output signals depend on the drive characteristics of the picture tube. The system checks whether the returning measuring currents meet the requirements, and adapt the output level and gain of the circuit when necessary. After stabilization of the loop, the RGB drive signals are switched on. The 2-point black level system adapts the drive voltage for each cathode in such a way that the two measuring currents have the right value. This is done with the measurement pulses during the frame flyback. During the first frame, three pulses with a current of 8 μA are generated to adjust the cut off voltage. During the second frame, three pulses with a current of 20 μA are generated to adjust the 'white drive'. This has as a consequence, that a

change in the gain of the output stage will be compensated by a gain change of the RGB control circuit. Pin 55 (BLKIN) of the UOC is used as the feedback input from the CRT base panel.

- **Blue stretch.** This function increases the color temperature of the bright scenes (amplitudes which exceed a value of 80% of the nominal amplitude). This effect is obtained by decreasing the small signal gain of the red and green channel signals, which exceed this 80% level.
- **Beam current limiting.** A beam current limiting circuit inside the UOC handles the contrast and brightness control for the RGB signals. This prevents the CRT from being overdriven, which could otherwise cause serious damage in the line output stage. The reference used for this purpose is the DC voltage on pin 54 (BLCIN) of the TV processor. Contrast and brightness reduction of the RGB output signals is therefore proportional to the voltage present on this pin. Contrast reduction starts when the voltage on pin 54 is lower than 2.8 V. Brightness reduction starts when the voltage on pin 54 is less than 1.7 V. The voltage on pin 54 is normally 3.3 V (limiter not active). During set switch-off, the black current control circuit generates a fixed beam current of 1 mA. This current ensures that the picture tube capacitance is discharged. During the switch-off period, the vertical deflection is placed in an over-scan position, so that the discharge is not visible on the screen.

RGB Amplifier

From outputs 56, 57, and 58 of IC 7200 the RGB signals are applied to the integrated output amplifier (7330) on the CRT panel. Via the outputs 7, 8, and 9, the picture tube cathodes are driven.

The supply voltage for the amplifier is +200 V and is derived from the line output stage.

SCAVEM (if present)

The SCAn VElocity Modulation (SCAVEM) circuitry is implemented in the layout of the picture tube panel. It is thus not an extra module. This circuit influences the horizontal deflection as a function of the picture content. In an ideal square wave, the sides are limited in slope due to a limited bandwidth (5 MHz). SCAVEM will improve the slope as follows:

- **At a positive slope** , a SCAVEM current is generated which supports the deflection current. At the first half of the slope, the spot is accelerated and the picture is darker. At the second half of the slope, the spot is delayed and the slope becomes steeper.
- **At the end of the slope** , the SCAVEM-current decays to zero and the spot is at the original position. An overshoot occurs which improves the impression of sharpness.
- **At the negative slope** , the SCAVEM-current counteracts the deflection. During the first half of the slope, the spot is delayed and the slope becomes steeper. During the second half the spot accelerates, the SCAVEM-current is zero at the end of the slope.

The R/G/B signals are fed into the SCAVEM circuit and differentiated by C2364/2365/2366 and the input impedance of 7360 stage. Diode 6364 (Schottky diode) is the coring component, which blocks all the signals below 0.3 V so that the noise is not amplified and all the signals larger than 0.3V are differentiated and amplified. After differentiation, the signal is amplified by Q7360 with 3369 as the collector resistor. The biasing of the 7360 stage is done by 3369, 3361, 3360, 3362, and 3363.

Items 6367, 2367, 3367, 3361, and 2360 work as the clipping components that limit the SCAVEM current at a certain level, to prevent SCAVEM over correction.

After being buffered by 7369, the differentiated signals are coupled through 2375 and 2380 to the output stage. The output stage is configured into cascode stage and push-pull operation. The biasing is done by 3373, 3375, 3376, 3380, 3381, 3383, 3374, and 3384. The working voltage of the transistors is settled at half the supply voltage.

At the rising portion of the R/G/B signals, cascode 7380 and 7382 will be operating and will pull the current through the SCAVEM coil. Contrarily, at the falling portion of the R/G/B signals, cascode 7373 and 7366 will be operating and will push the current through the SCAVEM coil.

The capacitors 2362, 2373, and 2381 ground the high frequencies, to prevent high frequency amplification. The ferrite bead 5376 is for EMC purpose. Resistors 3374 and 3384 determine the output SCAVEM current.

Items 2378 and 3378 are for the fine-tuning for different SCAVEM coil impedances.

They also help to suppress high frequency oscillation. Capacitor 2369 helps to suppress the high frequency components and also controls the SCAVEM delay.

Synchronization

Inside IC 7200 part D, the vertical and horizontal sync pulses are separated. These 'H' and 'V' signals are synchronized with the incoming CVBS signal. They are then fed to the H- and V-drive circuits and to the OSD/TXT circuit for synchronization of the On Screen Display and Teletext (CC) information.

Deflection

Horizontal Drive

The horizontal drive signal is obtained from an internal VCO, which is running at twice the line frequency. This frequency is divided by two, to lock the first control loop to the incoming signal.

When the IC is switched 'on', the 'Hdrive' signal is suppressed until the frequency is correct.

The 'Hdrive' signal is available at pin 30. The 'Hflybk' signal is fed to pin 31 to phase lock the horizontal oscillator, so that Q7462 cannot switch 'on' during the flyback time.

The 'EWdrive' signal for the E/W circuit (if present) is available on pin 15, where it drives transistor 7400 to make linearity corrections in the horizontal drive.

When the set is switched on, the '+8V' voltage goes to pin 9 of IC 7200. The horizontal drive starts up in a soft start mode. It starts with a very short TON time of the horizontal output transistor. The TOFF of the transistor is identical to the time in normal operation. The starting frequency during switch on is therefore about 2 times higher than the normal value. The 'on' time is slowly increased to the nominal value in 1175 ms. When the nominal value is reached, the PLL is closed in such a way that only very small phase corrections are necessary.

The 'EHTinformation' line on pin 11 is intended to be used as a 'X-ray' protection. When this protection is activated (when the voltage exceeds 6 V), the horizontal drive (pin 30) is switched 'off' immediately. If the 'H-drive' is stopped, pin 11 will become low again.

Now the horizontal drive is again switched on via the slow start procedure.

The 'EHTinformation' line (Aquadag) is also fed back to the UOC IC 7200 pin 54, to adjust the picture level in order to compensate for changes in the beam current.

The filament voltage is monitored for 'no' or 'excessive' voltage. This voltage is rectified by diode 6447 and fed to the emitter of transistor 7443. If this voltage goes above 6.8 V, transistor 7443 will conduct, making the 'EHT0' line 'high'. This will immediately switch off the horizontal drive (pin 30) via the slow stop procedure.

The horizontal drive signal exits IC 7200 at pin 30 and goes to 7462, the horizontal driver transistor. The signal is amplified and coupled to the base circuit of 7460, the horizontal output transistor. This will drive the line output transformer (LOT) and associated circuit. The LOT provides the extra high voltage (EHT), the VG2 voltage and the focus and filament voltages for the CRT, while the line output circuit drives the horizontal deflection coil.

Vertical Drive

A divider circuit performs the vertical synchronization. The vertical ramp generator needs an external resistor (R3245, pin 20) and capacitor (C2244, pin 21). A differential output is available at pins 16 and 17, which are DC-coupled with the vertical output stage.

During the insertion of RGB signals, the maximum vertical frequency is increased to 72 Hz so that the circuit can also synchronize on signals with a higher vertical frequency like VGA.

To avoid damage of the picture tube when the vertical deflection fails, the guard output is fed to the beam current limiting input. When a failure is detected, the RGB-outputs are blanked. When no vertical deflection output stage is connected, this guard circuit will also blank the output signals.

These 'V_DRIVE+' and 'V_DRIVE-' signals are applied to the input pins 1 and 2 of IC 7471 (full bridge vertical deflection amplifier). These are voltage driven differential inputs. As the driver device (IC 7200) delivers output currents, R3474 and R3475 convert them to voltage. The differential input voltage is compared with the voltage

across measuring resistor R3471 that provides internal feedback information. The voltage across this measuring resistor is proportional to the output current, which is available at pins 4 and 7 where they drive the vertical deflection coil (connector 0222) in phase opposition.

IC 7471 is supplied by +13 V. The vertical flyback voltage is determined by an external supply voltage at pin 6 (VlotAux+50V). This voltage is almost totally available as flyback voltage across the coil, this being possible due to the absence of a coupling capacitor (which is not necessary, due to the 'bridge' configuration).

Deflection Corrections

The Linearity Correction

A constant voltage on the horizontal deflection coil should result in a sawtooth current. This however is not the case as the resistance of the coil is not negligible. In order to compensate for this resistance, a pre-magnetized coil L5457 is used. R3485 and C2459 ensure that L5457 does not excite, because of its own parasite capacitance. This L5457 is called the 'linearity coil'.

The Mannheim Effect

When clear white lines are displayed, the high-voltage circuit is heavily loaded. During the first half of the flyback, the high voltage capacitors are considerable charged. At that point in time, the deflection coil excites through C2465. This current peak, through the high-voltage capacitor, distorts the flyback pulse. This causes synchronization errors, causing an oscillation under the white line.

During $t_3 - t_5$, C2490//2458 is charged via R3459. At the moment of the flyback, C2490//2458 is subjected to the negative voltage pulses of the parabola as a result of which D6465 and D6466 are conducting and C2490//2458 is switched in parallel with C2456//2457. The high-voltage diodes are conducting this moment. Now extra energy is

available for excitation through C2465 and the line deflection. Consequently, the flyback pulse is less distorted.

The S-Correction

Since the sides of the picture are further away from the point of deflection than from the center, a linear sawtooth current would result in a non-linear image being scanned (the center would be scanned slower than the sides). For the center-horizontal line, the difference in relation of the distances is larger than those for the top and bottom lines. An S-shaped current will have to be superimposed onto the sawtooth current. This correction is called finger-length correction or S-correction.

C2456//2457 is relatively small, as a result of which the sawtooth current will generate a parabolic voltage with negative voltage peaks. Left and right, the voltage across the deflection coil decreases, and the deflection will slow down; in the center, the voltage increases and deflection is faster. The larger the picture width, the higher the deflection current through C2456//2457. The current also results in a parabolic voltage across C2484//2469, resulting in the finger length correction proportionally increasing with the picture width. The east/west drive signal will ensure the largest picture width in the center of the frame. Here the largest correction is applied.

East/West Correction

In this chassis, there are three types of CRTs, namely the 100°, 110° and wide screen CRTs. The 100° CRT is raster-correction-free and does not need East/West correction. The 110° 4:3 CRT comes with East/West correction and East/West protection. The wide screen TV sets have all the correction of the 110 4:3 CRT and also have additional picture format like the 4:3 format, 16:9, 14:9, 16:9 zoom, subtitle zoom and the Super-Wide picture format

A line, written at the upper- or lower side of the screen, will be larger at the screen center when a fixed deflection current is used. Therefore, the amplitude of the deflection current must be increased when the spot approaches the center of the screen. This is called the East/West or pincushion correction.

The 'Ewdrive' signal from pin 15 of IC 7200 takes care for the correct correction. It drives FET 7400. It also corrects breathing of the picture, due to beam current variations (the EHT varies dependent of the beam current). This correction is derived from the 'EHTinformation' line.

Two protections are built-in for the E/W circuit: over-current and over-voltage protection. See paragraph 9.7.6.

Panorama

The panorama function is only used in 16:9 sets. This is a function to enable the 4:3 and Super-Wide feature. It drives the 'Bass_panorama' line, to activate relay 1400. When this relay is switched on, the capacitors 2453//2454 are added in parallel to the default S-correction capacitors 2456//2457. This results in an increased capacitance, a lower resonance frequency of the line deflection coil and the S-correction capacitors and therefore a less steep S-corrected line deflection current.

Power Supply

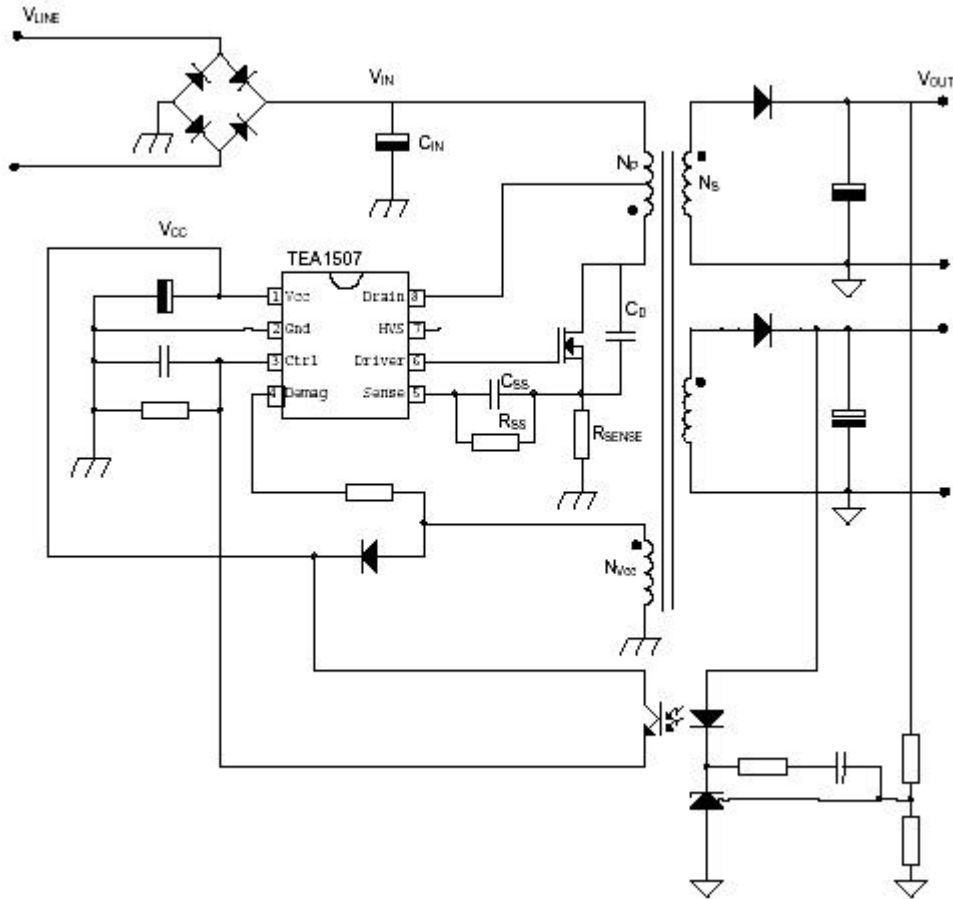


Figure: Switched Mode Power Supply standard circuit

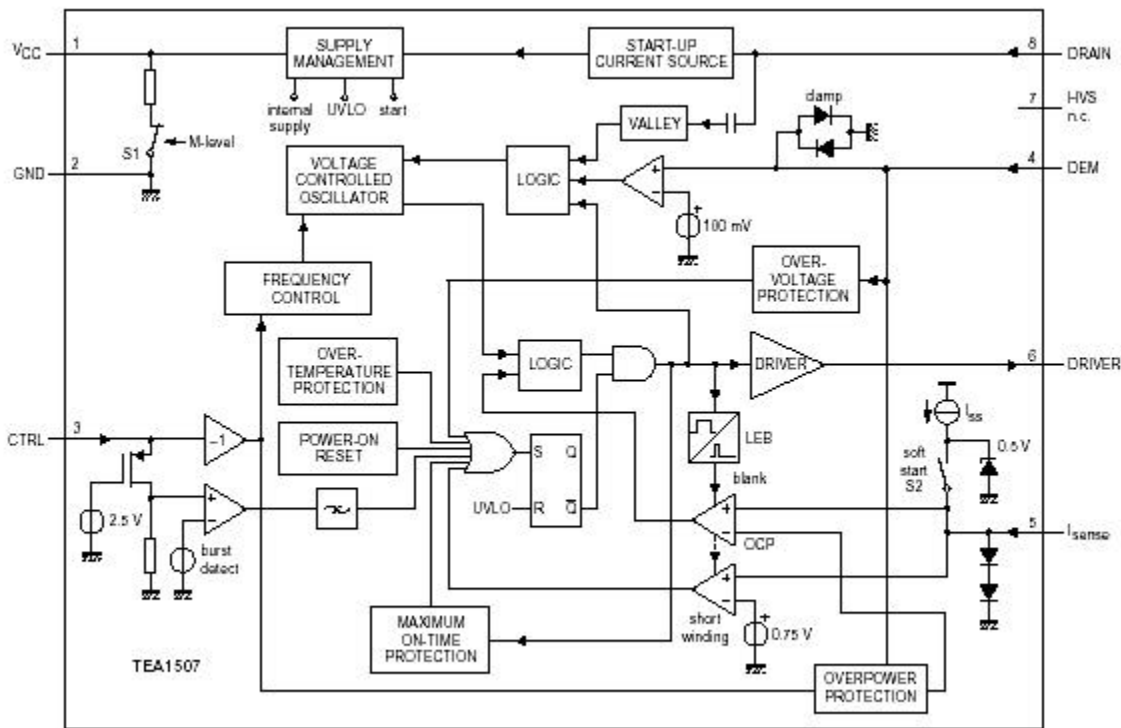


Figure: Internal block diagram of the driver IC (TEA1507)

Introduction

The supply is a Switching Mode Power Supply (SMPS). The frequency of operation varies with the circuit load. This 'Quasi-Resonant Flyback' behavior has some important benefits compared to a 'hard switching' fixed frequency Flyback converter. The efficiency can be improved up to 90%, which results in lower power consumption. Moreover, the supply runs cooler and safety is enhanced.

The power supply starts operating when a DC voltage goes from the rectifier bridge via T5520, R3532 to pin 8. The operating voltage for the driver circuit is also taken from the 'hot' side of this transformer.

The switching regulator IC 7520 starts switching the FET 'on' and 'off', to control the current flow through the primary winding of transformer 5520. The energy stored in the primary winding during the 'on' time is delivered to the secondary windings during the 'off' time.

The 'MainSupply' line is the reference voltage for the power supply. It is sampled by resistors 3543 and 3544 and fed to the input of the regulator 7540 / 6540. This regulator drives the feedback optocoupler 7515 to set the feedback control voltage on pin 3 of 7520.

The power supply in the set is 'on' any time AC power goes to the set.

Derived Voltages

The voltages supplied by the secondary windings of T5520 are:

- 'MainAux' for the audio circuit (voltage depends on set execution, see table below),
- 3.3 V and 3.9 V for the microprocessor and
- 'MainSupply' for the horizontal output (voltage depends on set execution, see table below).

Other supply voltages are provided by the LOT. It supplies +50 V (only for large screen sets), +13 V, +8 V, +5 V, and a +200 V source for the video drive. The secondary voltages of the LOT are monitored by the 'EHTinformation' lines. These lines are fed to the video processor part of the UOC IC 7200 on pins 11 and 34.

This circuit will shut 'off' the horizontal drive in case of over-voltage or excessive beam current.

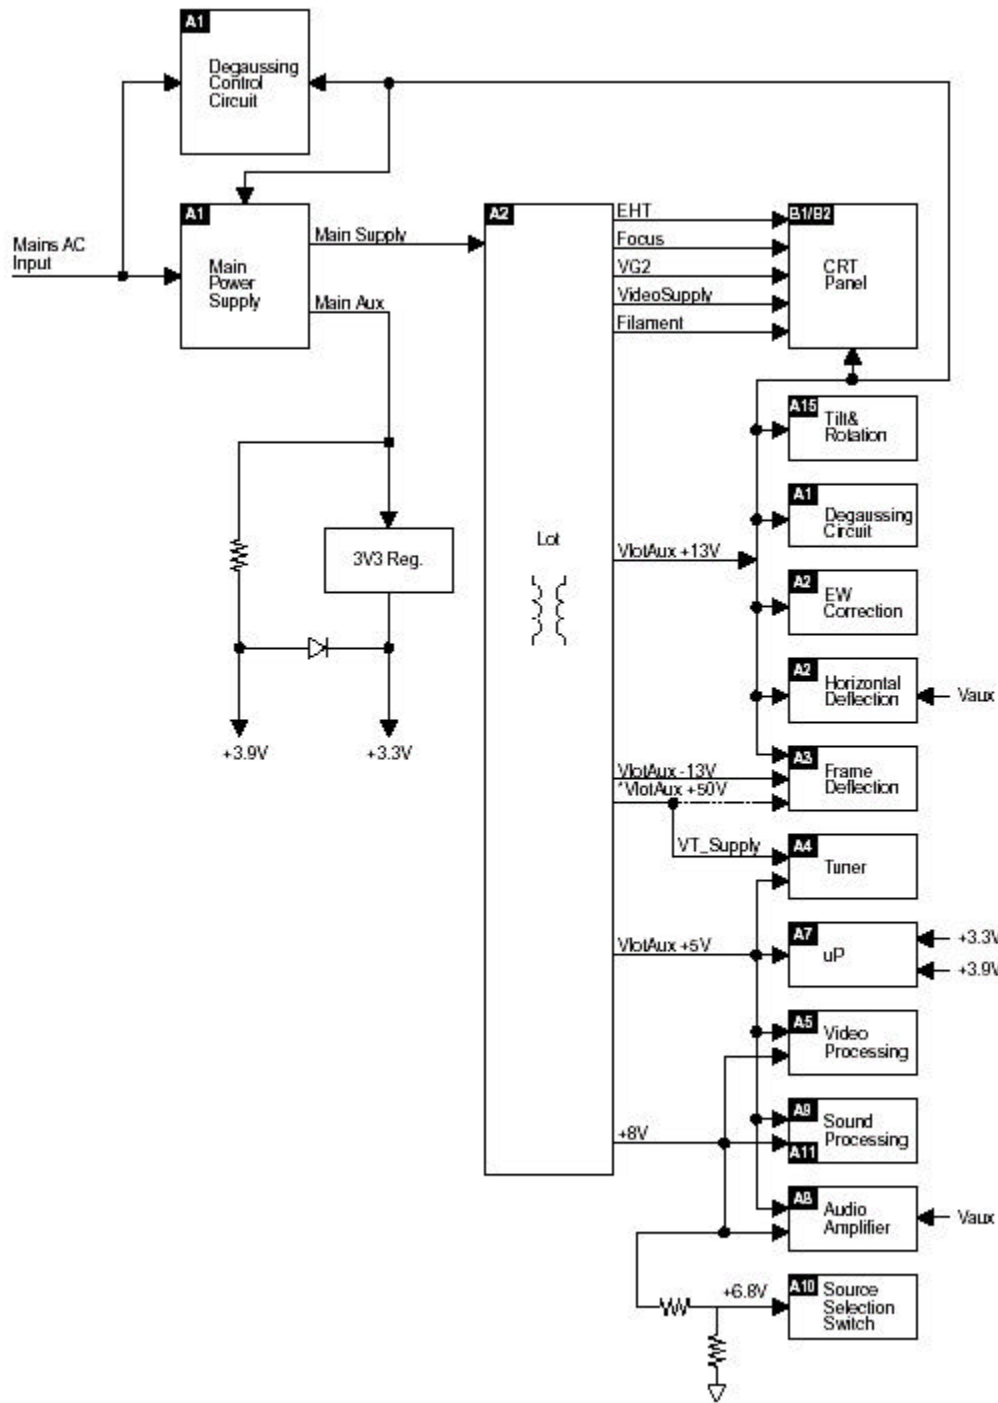


Figure: Derived voltages

Degaussing

When the set is switched on, the degaussing relay 1515 is immediately activated as transistor 7580 is conducting. Due to the RC-time of R3580 and C2580, it will last about 3 to 4 seconds before transistor 7580 is switched off.

Basic IC Functionality

For a clear understanding of the Quasi-Resonant behavior, it is possible to explain it by a simplified circuit diagram (see Figure below). In this circuit diagram, the secondary side is transferred to the primary side and the transformer is replaced by an inductance LP. CD is the total drain capacitance including the resonance capacitor CR, parasitic output capacitor COSS of the MOSFET and the winding capacitance CW of the transformer. The turn ratio of the transformer is represented by n (N_P/N_S).

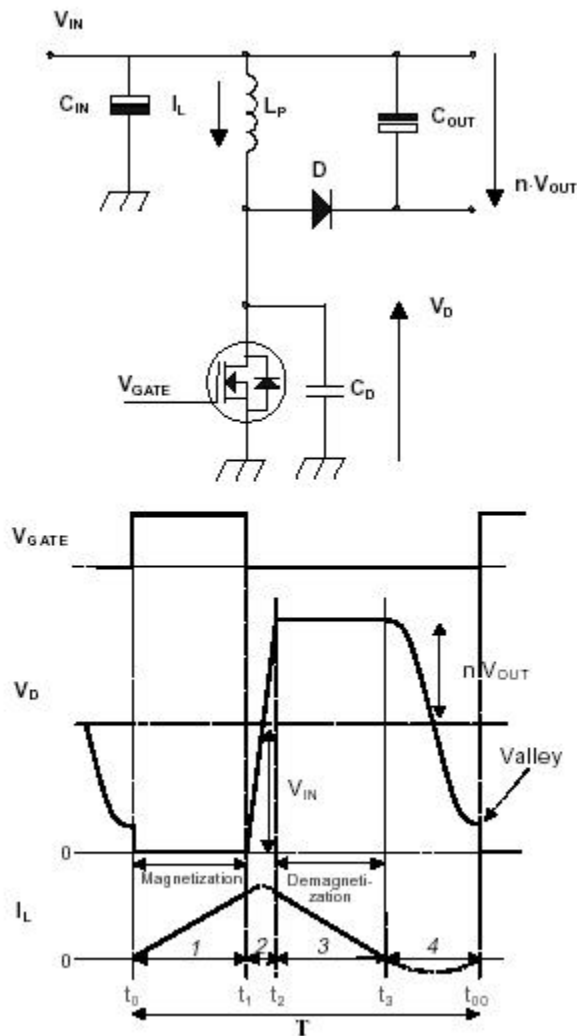


Figure: QR-mode time intervals

In the Quasi-Resonant mode each period can be divided into four different time intervals, in chronological order:

- **Interval 1: $t_0 < t < t_1$ primary stroke.** At the beginning of the first interval, the MOSFET is switched 'on' and energy is stored in the primary inductance (magnetization). At the end, the MOSFET is switched 'off' and the second interval starts.
- **Interval 2: $t_1 < t < t_2$ commutation time.** In the second interval, the drain voltage will rise from almost zero to $V_{IN} + n \cdot (V_{OUT} + V_F)$. V_F is the forward voltage drop of

the diode that will be omitted from the equations from now on. The current will change its positive derivative, corresponding to V_{IN}/L_P , to a negative derivative, corresponding to $-n \cdot V_{OUT}/L_P$.

- **Interval 3: $t_2 < t < t_3$ secondary stroke.** In the third interval, the stored energy is transferred to the output, so the diode starts to conduct and the inductive current I_L will decrease. In other words, the transformer will be demagnetized. When the inductive current has become zero the next interval begins.
- **Interval 4: $t_3 < t < t_{00}$ resonance time.** In the fourth interval, the energy stored in the drain capacitor C_D will start to resonate with the inductance L_P . The voltage and current waveforms are sinusoidal waveforms. The drain voltage will drop from $V_{IN} + n \cdot V_{OUT}$ to $V_{IN} - n \cdot V_{OUT}$.

Frequency Behavior

The frequency in the QR-mode is determined by the power stage and is not influenced by the controller (important parameters are L_P and C_D). The frequency varies with the input voltage V_{IN} and the output power P_{OUT} . If the required output power increases, more energy has to be stored in the transformer. This leads to longer magnetizing t_{PRIM} and demagnetizing t_{SEC} times, which will decrease the frequency. See the frequency versus output power characteristics below. The frequency characteristic is not only output power-, but also input voltage dependent. The higher the input voltage, the smaller t_{PRIM} , so the higher the frequency will be.

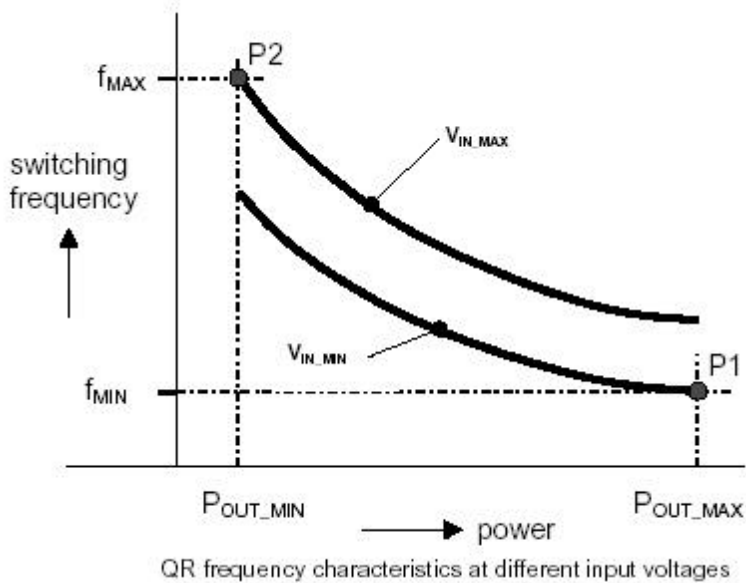


Figure: QR frequency behavior

Point P1 is the minimum frequency f_{MIN} that occurs at the specified minimum input voltage and maximum output power required by the application. Of course the minimum frequency has to be chosen above the audible limit (>20 kHz).

Start-Up Sequence

When the rectified AC voltage V_{IN} (via the center tap connected to pin 8) reaches the Mains dependent operation level (Mlevel: between 60 and 100 V), the internal 'Mlevel switch' will be opened and the start-up current source is enabled to charge capacitor C2521 at the V_{CC} pin as shown below.

The 'soft start' switch is closed when the V_{CC} reaches a level of 7 V and the 'soft start' capacitor C_{SS} (C2522, between pin 5 and the sense resistor R3526), is charged to 0.5 V.

Once the V_{CC} capacitor is charged to the start-up voltage $V_{\text{CC}}\text{-start}$ (11 V), the IC starts driving the MOSFET. Both internal current sources are switched 'off' after reaching this

start-up voltage. Resistor R_{SS} (3524) will discharge the 'soft start' capacitor, such that the peak current will slowly increase. This to prevent 'transformer rattle'.

During start-up, the V_{CC} capacitor will be discharged until the moment that the primary auxiliary winding takes over this voltage.

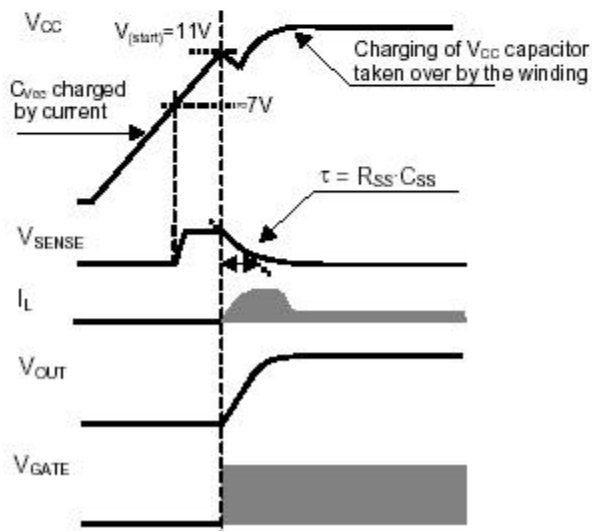
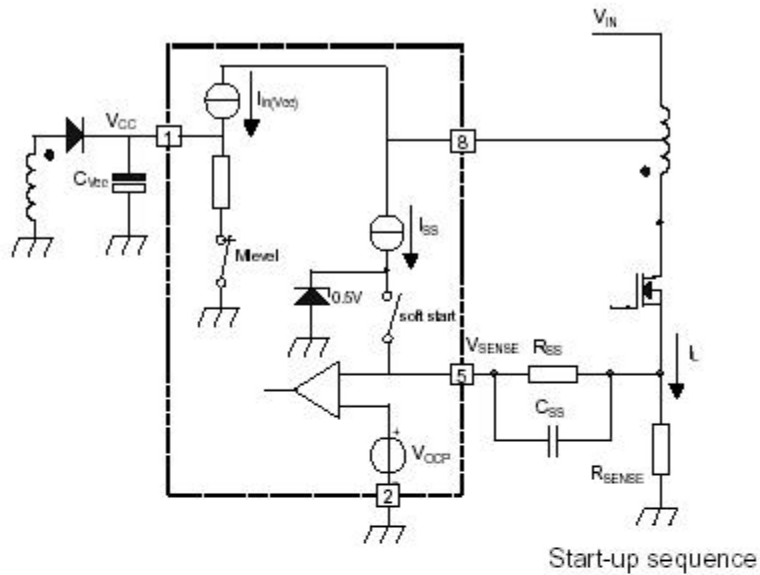


Figure: Start-up behavior

The moment that the voltage on pin 1 drops below the 'under voltage lock out' level ($UVLO = \pm 9\text{ V}$), the IC will stop switching and will enter a safe restart from the rectified mains voltage.

Operation

The supply can run in three different modes depending on the output power:

- **Quasi-Resonant mode (QR).** The 'QR' mode, described above, is used during normal operation. This will give a high efficiency.
- **Frequency Reduction mode (FR).** The 'FR' mode (also called 'VCO' mode) is implemented to decrease the switching losses at low output loads. In this way, the efficiency at low output powers is increased, which enables power consumption smaller than 3 W during stand-by. The voltage at the pin 3 (Ctrl) determines where the frequency reduction starts. An external Ctrl voltage of 1.425 V corresponds with an internal VCO level of 75 mV. This fixed VCO level is called $V_{VCO,start}$. The frequency will be reduced in relation to the VCO voltage between 75 mV and 50 mV (at levels larger than 75 mV, Ctrl voltage < 1.425V, the oscillator will run on maximum frequency $f_{oscH} = 175\text{ kHz}$ typically). At 50 mV ($V_{VCO,max}$), the frequency is reduced to the minimum level of 6 kHz. Valley switching is still active in this mode.
- **Minimum Frequency mode (MinF).** At VCO levels below 50 mV, the minimum frequency will remain on 6 kHz, which is called the 'MinF' mode. Because of this low frequency, it is possible to run at very low loads without having any output regulation problems.

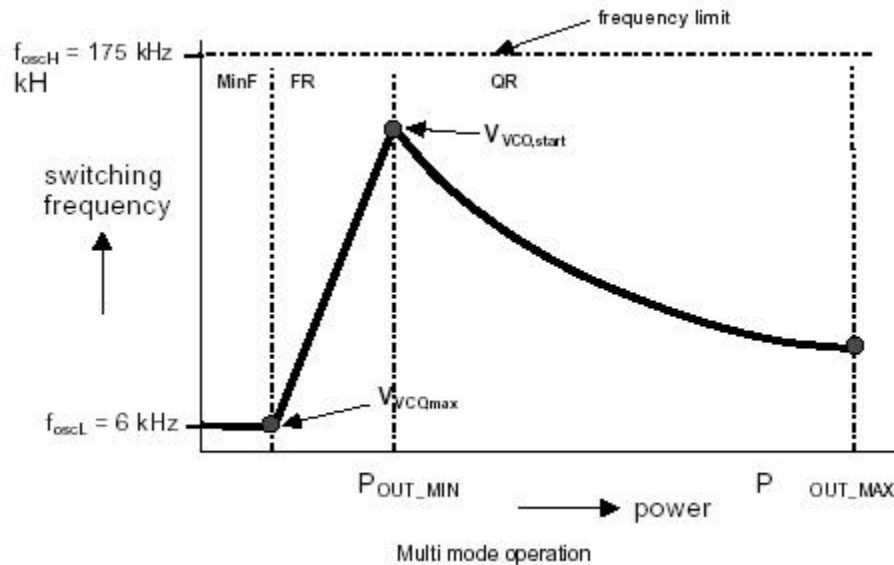


Figure: Different supply modes

Safe-Restart Mode

This mode is introduced to prevent the components from being destroyed during eventual system fault conditions. It is also used for the Burst mode. The Safe-Restart mode will be entered if it is triggered by one of the following functions:

- Over voltage protection,
- Short winding protection,
- Maximum 'on time' protection,
- V_{CC} reaching UVLO level (fold back during overload),
- Detecting a pulse for Burst mode,
- Over temperature protection.

When entering the Safe-Restart mode, the output driver is immediately disabled and latched. The V_{CC} winding will not charge the VCC capacitor anymore and the V_{CC} voltage will drop until UVLO is reached. To recharge the V_{CC} capacitor, the internal current source ($I_{(restart)(VCC)}$) will be switched 'on' to initiate a new start-up sequence as described before. This Safe-Restart mode will persist until the controller detects no faults or burst triggers.

Standby

The set goes to Standby in the following cases:

- After pressing the 'standby' key on the remote control.
- When the set is in protection mode.

In Standby, the power supply works in 'burst mode'. Burst mode can be used to reduce the power consumption below 1 W at stand-by. During this mode, the controller is active (generating gate pulses) for only a short time and for a longer time inactive waiting for the next burst cycle.

In the active period, the energy is transferred to the secondary and stored in the buffer capacitor C_{STAB} in front of the linear stabilizer (see Figure below). During the inactive period, the load (e.g. microprocessor) discharges this capacitor. In this mode, the controller makes use of the Safe-Restart mode.

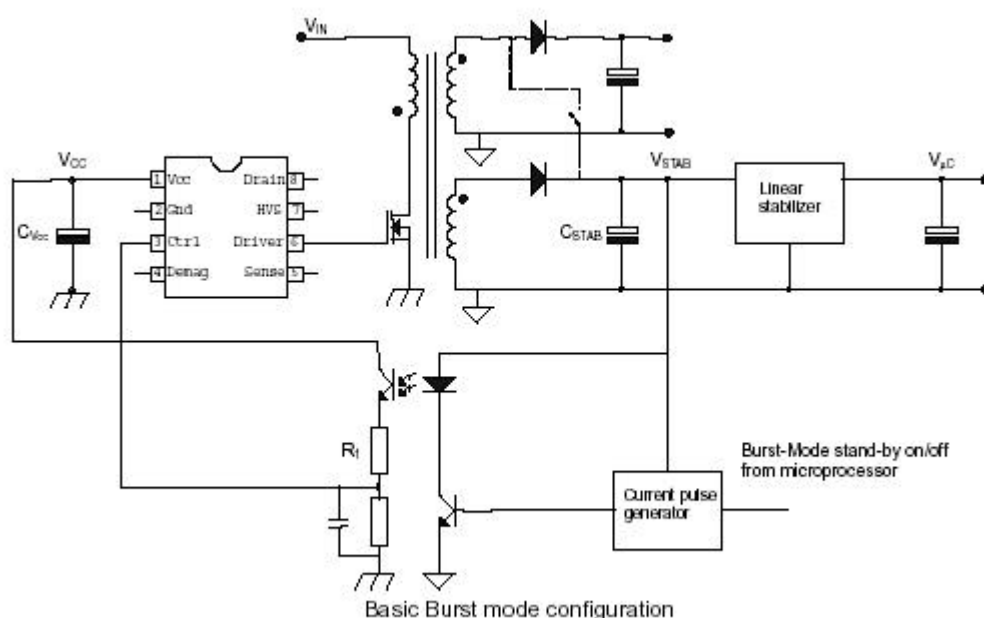


Figure: Supply standby mode (burst mode)

The system enters burst mode standby when the microprocessor activates the 'Stdby_con' line. When this line is pulled high, the base of Q7541 is allowed to go high. This is triggered by the current from collector Q7542. When Q7541 turns 'on', the opto-coupler (7515) is activated, sending a large current signal to pin 3 (Ctrl). In response to this signal, the IC stops switching and enters a 'hiccup' mode. This burst activation signal should be present for longer than the 'burst blank' period (typically 30 s): the blanking time prevents false burst triggering due to spikes.

Burst mode standby operation continues until the microcontroller pulls the 'Stdby_con' signal low again. The base of Q7541 is unable to go high, thus cannot turn 'on'. This will disable the burst mode. The system then enters the start-up sequence and begins normal switching behavior.

For a more detailed description of one burst cycle, three time intervals are defined:

t1: Discharge of V_{CC} when gate drive is active. During the first interval, energy is transferred, which result in a ramp-up of the output voltage (V_{STAB}) in front of the stabilizer. When enough energy is stored in the capacitor, the IC will be switched 'off' by a current pulse generated at the secondary side. This pulse is transferred to the primary side via the opto coupler. The controller will disable the output driver (safe restart mode) when the current pulse reaches a threshold level of 16 mA into the Ctrl pin. A resistor R1 (R3519) is placed in series with the opto coupler, to limit the current going into the Ctrl pin. Meanwhile the V_{CC} capacitor is discharged but has to stay above V_{UVLO} .

t2: Discharge of V_{CC} when gate drive is inactive. During the second interval, the V_{CC} is discharged to V_{UVLO} . The output voltage will decrease depending on the load.

t3: Charge of V_{CC} when gate drive is inactive. The third interval starts when the UVLO is reached. The internal current source charges the V_{CC} capacitor (also the soft start capacitor is recharged). Once the V_{CC} capacitor is charged to the start-up voltage, the driver is activated and a new burst cycle is started.

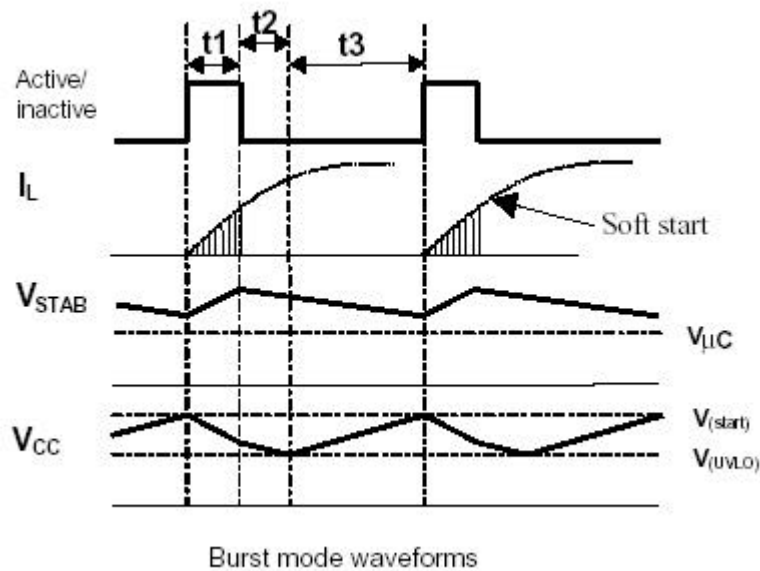


Figure: Burst mode waveforms

Protection Events

The SMPS IC 7520 has the following protection features:

Demagnetization sense

This feature guarantees discontinuous conduction mode operation in every situation. The oscillator will not start a new primary stroke until the secondary stroke has ended. This is to ensure that FET 7521 will not turn on until the demagnetization of transformer 5520 is complete. The function is an additional protection feature against:

- saturation of the transformer,
- damage of the components during initial start-up,
- an overload of the output.

The demagnetization sense is realized by an internal circuit that guards the voltage (V_{demag}) at pin 4 that is connected to V_{CC} winding by resistor R1 (R3522).

The Figure below shows the circuit and the idealized waveforms across this winding.

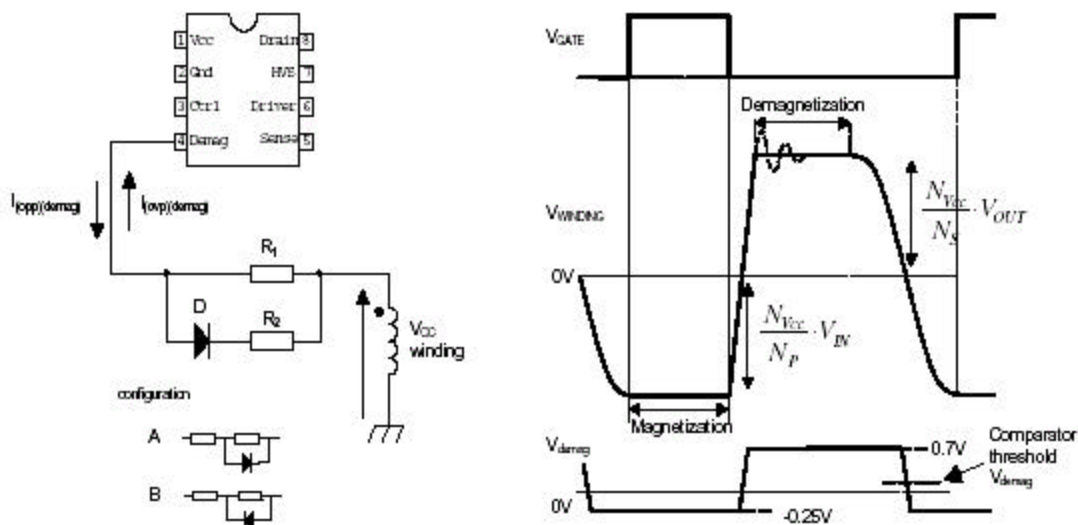


Figure: Demagnetization protection

Over Voltage Protection

The Over Voltage Protection ensures that the output voltage will remain below an adjustable level. This works by sensing the auxiliary voltage via the current flowing into pin 4 (DEM) during the secondary stroke. This voltage is a well-defined replica of the output voltage. Any voltage spikes are averaged by an internal filter.

If the output voltage exceeds the OVP trip level, the OVP circuit switches the power MOSFET 'off'.

Next, the controller waits until the 'under voltage lock out' level ($UVLO = \pm 9 \text{ V}$) is reached on pin 1 (V_{CC}). This is followed by a safe restart cycle, after which switching starts again. This process is repeated as long as the OVP condition exists. The output voltage at which the OVP function trips, is set by the demagnetization resistor R3522.

Over Current Protection

The internal OCP protection circuit limits the 'sense' voltage on pin 5 to an internal level.

Over Power Protection

During the primary stroke, the rectified AC input voltage is measured by sensing the current drawn from pin 4 (DEM). This current is dependent on the voltage on pin 9 of transformer 5520 and the value of R3522. The current information is used to adjust the peak drain current, which is measured via pin I_{SENSE} .

Short Winding Protection

If the 'sense' voltage on pin 5 exceeds the short winding protection voltage (0.75 V), the converter will stop switching. Once V_{CC} drops below the UVLO level, capacitor C2521 will be recharged and the supply will start again. This cycle will be repeated until the short circuit is removed (safe restart mode).

The short winding protection will also protect in case of a secondary diode short circuit. This protection circuit is activated after the leading edge blanking time (LEB).

LEB time

The LEB (Leading Edge Blanking) time is an internally fixed delay, preventing false triggering of the comparator due to current spikes. This delay determines the minimum 'on' time of the controller.

Over Temperature protection

When the junction temperature exceeds the thermal shutdown temperature (typ. 140° C), the IC will disable the driver. When the V_{CC} voltage drops to UVLO, the V_{CC} capacitor will be recharged to the V(start) level. If the temperature is still too high, the V_{CC} voltage will drop again to the UVLO level (Safe-Restart mode). This mode will persist until the junction temperature drops 8 degrees typically below the shutdown temperature.

Mains dependent operation enabling level

To prevent the supply from starting at a low input voltage, which could cause audible noise, a mains detection is implemented (Mlevel). This detection is provided via pin 8, which detects the minimum start-up voltage between 60 and 100 V. As previous mentioned, the controller is enabled between 60 and 100 V.

An additional advantage of this function is the protection against a disconnected buffer capacitor (C_{IN}). In this case, the supply will not be able to start-up because the V_{CC} capacitor will not be charged to the start-up voltage.

Control

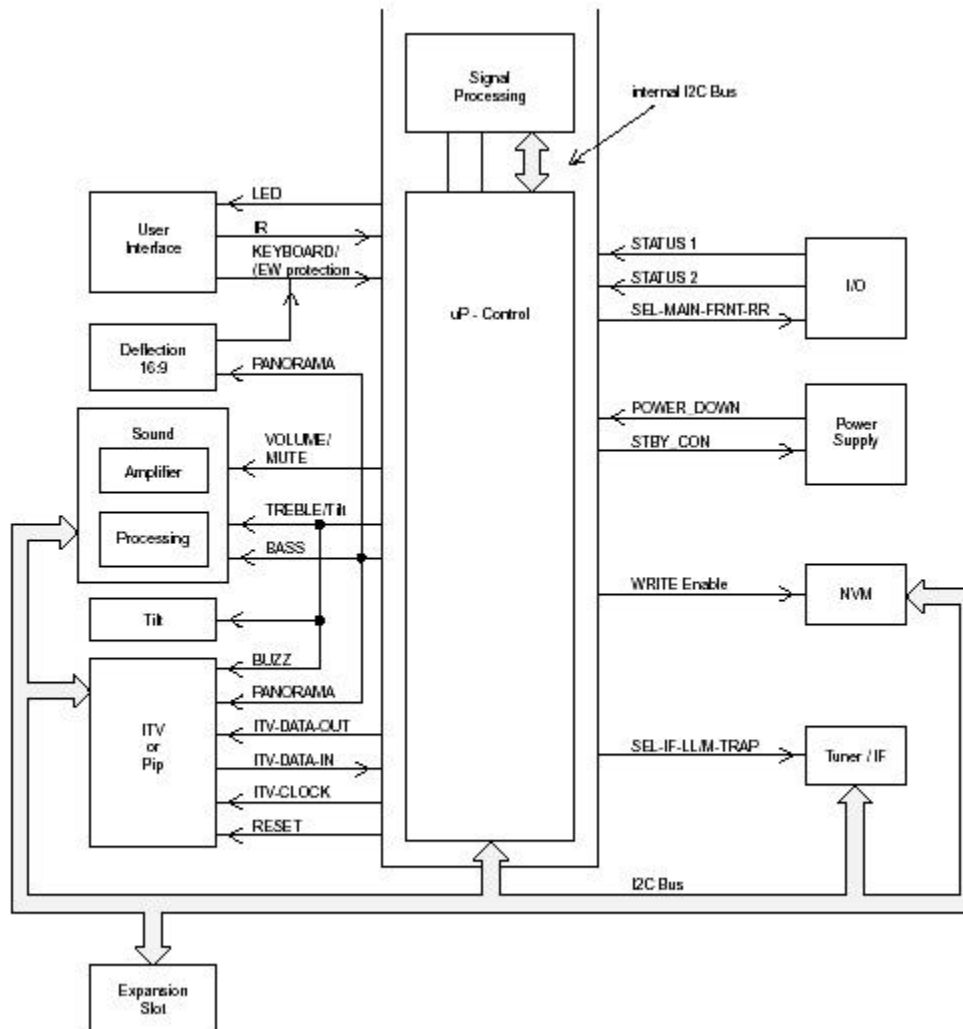


Figure: Block diagram set control

Introduction

The microprocessor part of the UOC, has the complete control and teletext on board. User menu, Service Default Mode, Service Alignment Mode and Customer Service Mode are generated by the uP. Communication to other ICs is done via the I² C-bus.

I² C-Bus

The main control system, which consists of the microprocessor part of the UOC (7200), is linked to the external devices (tuner, NVM, MSP, etc) by means of the I² C-bus. An internal I² C-bus is used to control other signal processing functions, like video processing, sound IF, vision IF, synchronization, etc.

User Interface

The 'L01.1U AC' uses a remote control with RC5 protocol. The incoming signal is connected to pin 67 of the UOC.

The 'Top Control' keyboard, connected to UOC pin 80, can also control the set. Button recognition is done via a voltage divider.

The front LED (6691) is connected to an output control line of the microprocessor (pin 5). It is activated to provide the user information about whether or not the set is working correctly (e.g., responding to the remote control, normal operation (USA only) or fault condition)

In- and Output Selection

For the control of the input and output selections, there are three lines:

- **STATUS1.** This signal provides information to the microprocessor on whether a video signal is available on the SCART1 AV input and output port (only for Europe). This signal is not connected in NAFTA sets.
- **STATUS2.** This signal provides information to the microprocessor on whether a video signal is available on the SCART2 AV input and output port (only for Europe). For sets with an SVHS input it provides the additional information if a

Y/C or CVBS source is present. The presence of an external Y/C source makes this line 'high' while a CVBS source makes the line 'low'.

- **SEL-MAIN-FRNT-RR.** This is the source select control signal from the microprocessor. This control line is under user control or can be activated by the other two control lines.

Power Supply Control

The microprocessor part is supplied with 3.3 V and 3.9 V both derived from the 'MainAux' voltage via a 3V3 stabilizer (7560) and a diode.

Two signals are used to control the power supply:

- **Stdbby_con.** This signal is generated by the microprocessor when over-current takes place at the 'MainAux' line. This is done to enable the power supply into standby burst mode, and to enable this mode during a protection. This signal is 'low' under normal operation conditions and goes to 'high' (3.3 V) under 'standby' and 'fault' conditions.
- **POWER_DOWN.** This signal is generated by the power supply. Under normal operating conditions, this signal is 'high' (3.3 V). During 'standby' mode, this signal is a pulse train of approx. 10 Hz and a 'high' duration of 5 ms. It is used to give information to the UOC about the fault condition in the Audio amplifier supply circuit. This information is generated by sensing the current on the 'MainAux' line (using voltage drop across R3564 to trigger Q7562). This signal goes 'low' when the DC-current on the 'MainAux' line exceeds 1.6 - 2.0 A. It is also used to give an early warning to the UOC about a power failure. Then the information is used to mute the sound amplifier to prevent a switch off noise and to solve the switch-off spot.

Protection Events

Several protection events are controlled by the UOC:

- **BC protection** , to protect the picture tube from a too high beam current. The UOC has the capability of measuring the normal back level current during the vertical flyback. So if for some reason the CRT circuit is malfunctioning (i.e. high beam current), the normal black current will be out of the 75 A range, and the UOC will trigger the power supply to shut down. However, this is a high beam-current situation, the TV screen will be bright white before the set is shut down.
- **E/W protection** , two protection mechanisms are built in, over-current and over-voltage.
 - In case of over-current due to defective parts in the line deflection output stage, a high current will flow through resistors 3405//3406. If this current is large enough to create a voltage drop of 0.7 V across 3405//3406, transistor Q7606 (in A7 diagram) will conduct and pin 80 of the UOC will be pulled down. Thereafter, the UOC will shut down the power supply. In case of further current increase, the fused resistor 3411 is built-in for double protection.
 - In case of a high voltage appearing across capacitor 2401 (dependent of the tube size), which is high enough to trigger zener diode 6401 into conduction, transistor Q7606 (in A7 diagram) will conduct and UOC is triggered to shut down the power supply.
- **I²C protection** , to check whether all I²C ICs are functioning.

In case one of these protections is activated, the set will go into 'standby'.

The 'on' and 'standby' LEDs are controlled via the UOC.

Abbreviation list

| Abbreviation | Description |
|--------------|---|
| 2CS | 2 Carrier (or Channel) Stereo |
| ACI | Automatic Channel Installation: algorithm that installs TV sets directly from cable network by means of a predefined TXT page |
| ADC | Analogue to Digital Converter |
| AFC | Automatic Frequency Control: control signal used to tune to the correct frequency |
| AFT | Automatic Fine Tuning |
| AGC | Automatic Gain Control: algorithm that controls the video input of the feature box |
| AM | Amplitude Modulation |
| AP | Asia Pacific |
| AR | Aspect Ratio: 4 by 3 or 16 by 9 |
| ATS | Automatic Tuning System |
| AV | External Audio Video |
| AVL | Automatic Volume Level |
| BC-PROT | Beam Current Protection |
| BCL | Beam Current Limitation |
| B/G | Monochrome TV system. Sound carrier distance is 5.5 MHz |

| | |
|-----------------|--|
| BLC-INFORMATION | Black current information |
| BTSC | Broadcast Television Standard Committee. Multiplex FM stereo sound system, originating from the USA and used e.g. in LATAM and AP-NTSC countries |
| B-TXT | Blue teletext |
| CBA | Circuit Board Assembly |
| CC | Closed Caption |
| ComPair | Computer aided rePair |
| CRT | Cathode Ray Tube or picture tube |
| CSM | Customer Service Mode |
| CTI | Color Transient Improvement: manipulates steepness of chroma transients |
| CVBS | Composite Video Blanking and Synchronization |
| DAC | Digital to Analogue Converter |
| DBE | Dynamic Bass Enhancement: extra low frequency amplification |
| DBX | Dynamic Bass Expander |
| D/K | Monochrome TV system. Sound carrier distance is 6.5 MHz |
| DFU | Direction For Use: description for the end user |
| DNR | Dynamic Noise Reduction |
| DSP | Digital Signal Processing |

| | |
|-----------------|---|
| DST | Dealer Service Tool: special remote control designed for dealers to enter e.g. service mode |
| DVD | Digital Versatile Disc |
| EEPROM | Electrically Erasable and Programmable Read Only Memory |
| EHT | Extra High Tension |
| EHT-INFORMATION | Extra High Tension information |
| EU | Europe |
| EW | East West, related to horizontal deflection of the set |
| EXT | External (source), entering the set via SCART or Cinch |
| FBL | Fast Blanking: DC signal accompanying RGB signals |
| FILAMENT | Filament of CRT |
| FLASH | Flash memory |
| FM | Field Memory |
| FM | Frequency Modulation |
| HA | Horizontal Acquisition: horizontal sync pulse coming out of the HIP |
| HFB | Horizontal Flyback Pulse: horizontal sync pulse from large signal deflection |
| HP | Headphone |
| Hue | Color phase control for NTSC (not the same as 'Tint') |

| | |
|------------|---|
| I | Monochrome TV system. Sound carrier distance is 6.0 MHz |
| I2C | Integrated IC bus |
| IF | Intermediate Frequency |
| IIC | Integrated IC bus |
| Interlaced | Scan mode where two fields are used to form one frame. Each field contains half the number of the total amount of lines. The fields are written in 'pairs', causing line flicker. |
| ITV | Institutional TV |
| LATAM | Latin America |
| LED | Light Emitting Diode |
| L/L' | Monochrome TV system. Sound carrier distance is 6.5 MHz. L' is Band I, L is all bands except for Band I |
| LNA | Low Noise Amplifier |
| LS | Large Screen |
| LS | Loudspeaker |
| LSP | Large signal panel |
| M/N | Monochrome TV system. Sound carrier distance is 4.5 MHz |
| MSP | Multistandard Sound Processor: ITT sound decoder |
| MUTE | Mute-Line |

| | |
|------------------|---|
| NC | Not Connected |
| NICAM | Near Instantaneous Compounded Audio Multiplexing. This is a digital sound system, mainly used in Europe. |
| NTSC | National Television Standard Committee. Color system mainly used in North America and Japan. Color carrier NTSC M/N = 3.579545 MHz, NTSC 4.43 = 4.433619 MHz (this is a VCR norm, it is not transmitted off-air) |
| NVM | Non Volatile Memory: IC containing TV related data e.g. alignments |
| OB | Option Byte |
| OC | Open Circuit |
| OSD | On Screen Display |
| PAL | Phase Alternating Line. Color system mainly used in West Europe (color carrier = 4.433619 MHz) and South America (color carrier PAL M = 3.575612 MHz and PAL N = 3.582056 MHz) |
| PCB | Printed Circuit board |
| PIP | Picture In Picture |
| PLL | Phase Locked Loop. Used for e.g. FST tuning systems. The customer can give directly the desired frequency |
| POR | Power-On Reset |
| Progressive Scan | Scan mode where all scan lines are displayed in one frame at the same time, creating a double vertical resolution. |

| | |
|--------|---|
| PTP | Picture Tube Panel (or CRT-panel) |
| RAM | Random Access Memory |
| RC | Remote Control handset |
| RC5 | Remote Control system 5, signal from the remote control receiver |
| RGB | Red Green Blue |
| ROM | Read Only Memory |
| SAM | Service Alignment Mode |
| SAP | Second Audio Program |
| SC | Sandcastle: pulse derived from sync signals |
| S/C | Short Circuit |
| SCAVEM | Scan Velocity Modulation |
| SCL | Serial Clock |
| SDA | Serial Data |
| SDM | Service Default Mode |
| SECAM | SEquence Couleur Avec Memoire. Color system mainly used in France and East Europe. Color carriers = 4.406250 MHz and 4.250000 MHz |
| SIF | Sound Intermediate Frequency |
| SS | Small Screen |
| STBY | Standby |


| | |
|---------|---|
| SVHS | Super Video Home System |
| SW | Software |
| THD | Total Harmonic Distortion |
| TXT | Teletext |
| uP | Microprocessor |
| UOC | Ultimate One Chip |
| VA | Vertical Acquisition |
| VBAT | Main supply voltage for the deflection stage (mostly 141 V) |
| V-chip | Violence Chip |
| VCR | Video Cassette Recorder |
| WYSIWYR | What You See Is What You Record: record selection that follows main picture and sound |
| XTAL | Quartz crystal |
| YC | Luminance (Y) and Chrominance (C) signal |

IC Data Sheets


In this paragraph, the internal block diagrams and pinning are given of ICs that are drawn as a 'black box' in the electrical diagrams (with the exception of 'memory' and 'logic' ICs).

This is not applicable for this manual (all ICs are drawn with internal block diagrams)


P2




L1




L2




L3




L4




F1




F2




F3




F4




I1




I2




I4




V4




V5




V6




V7




V8




V9




V10



S1




S2




10V / div DC
20 μ s / div

S3




500mV / div DC
5ms / div

S4




500mV / div DC
5ms / div

S5




500mV / div DC
5ms / div

C1




500mV / div DC
1ms / div

C2




500mV / div DC
1ms / div

C3




200mV / div DC
1ms / div

C4




10V / div DC
100 μ s / div

C5




10V / div DC
100 μ s / div

A1




200mV / div AC
1ms / div

A2




200mV / div AC
1ms / div

A3




200mV / div AC
1ms / div

A4




200mV / div AC
1ms / div

A5




200mV / div AC
1ms / div

A6




200mV / div AC
1ms / div

A7




200mV / div AC
1ms / div

A8




200mV / div AC
1ms / div

A8a




200mV / div AC
1ms / div

A9




200mV / div AC
1ms / div

A10




200mV / div AC
1ms / div

A11




200mV / div AC
1ms / div

A11a




200mV / div AC
1ms / div

A12




200mV / div AC
1ms / div

A13




10V / div DC
20μs / div

A14




10V / div DC
20μs / div

A15




10V / div DC
1ms / div

A16



10V / div DC
1ms / div

C6




10V / div DC
2ms / div

V11




10V / div DC
20μs / div

V12




10V / div DC
20μs / div

V13




10V / div DC
20μs / div

V14




50V / div DC
20μs / div

V15





50V / div DC
20μs / div


V16



50V / div DC
20μs / div

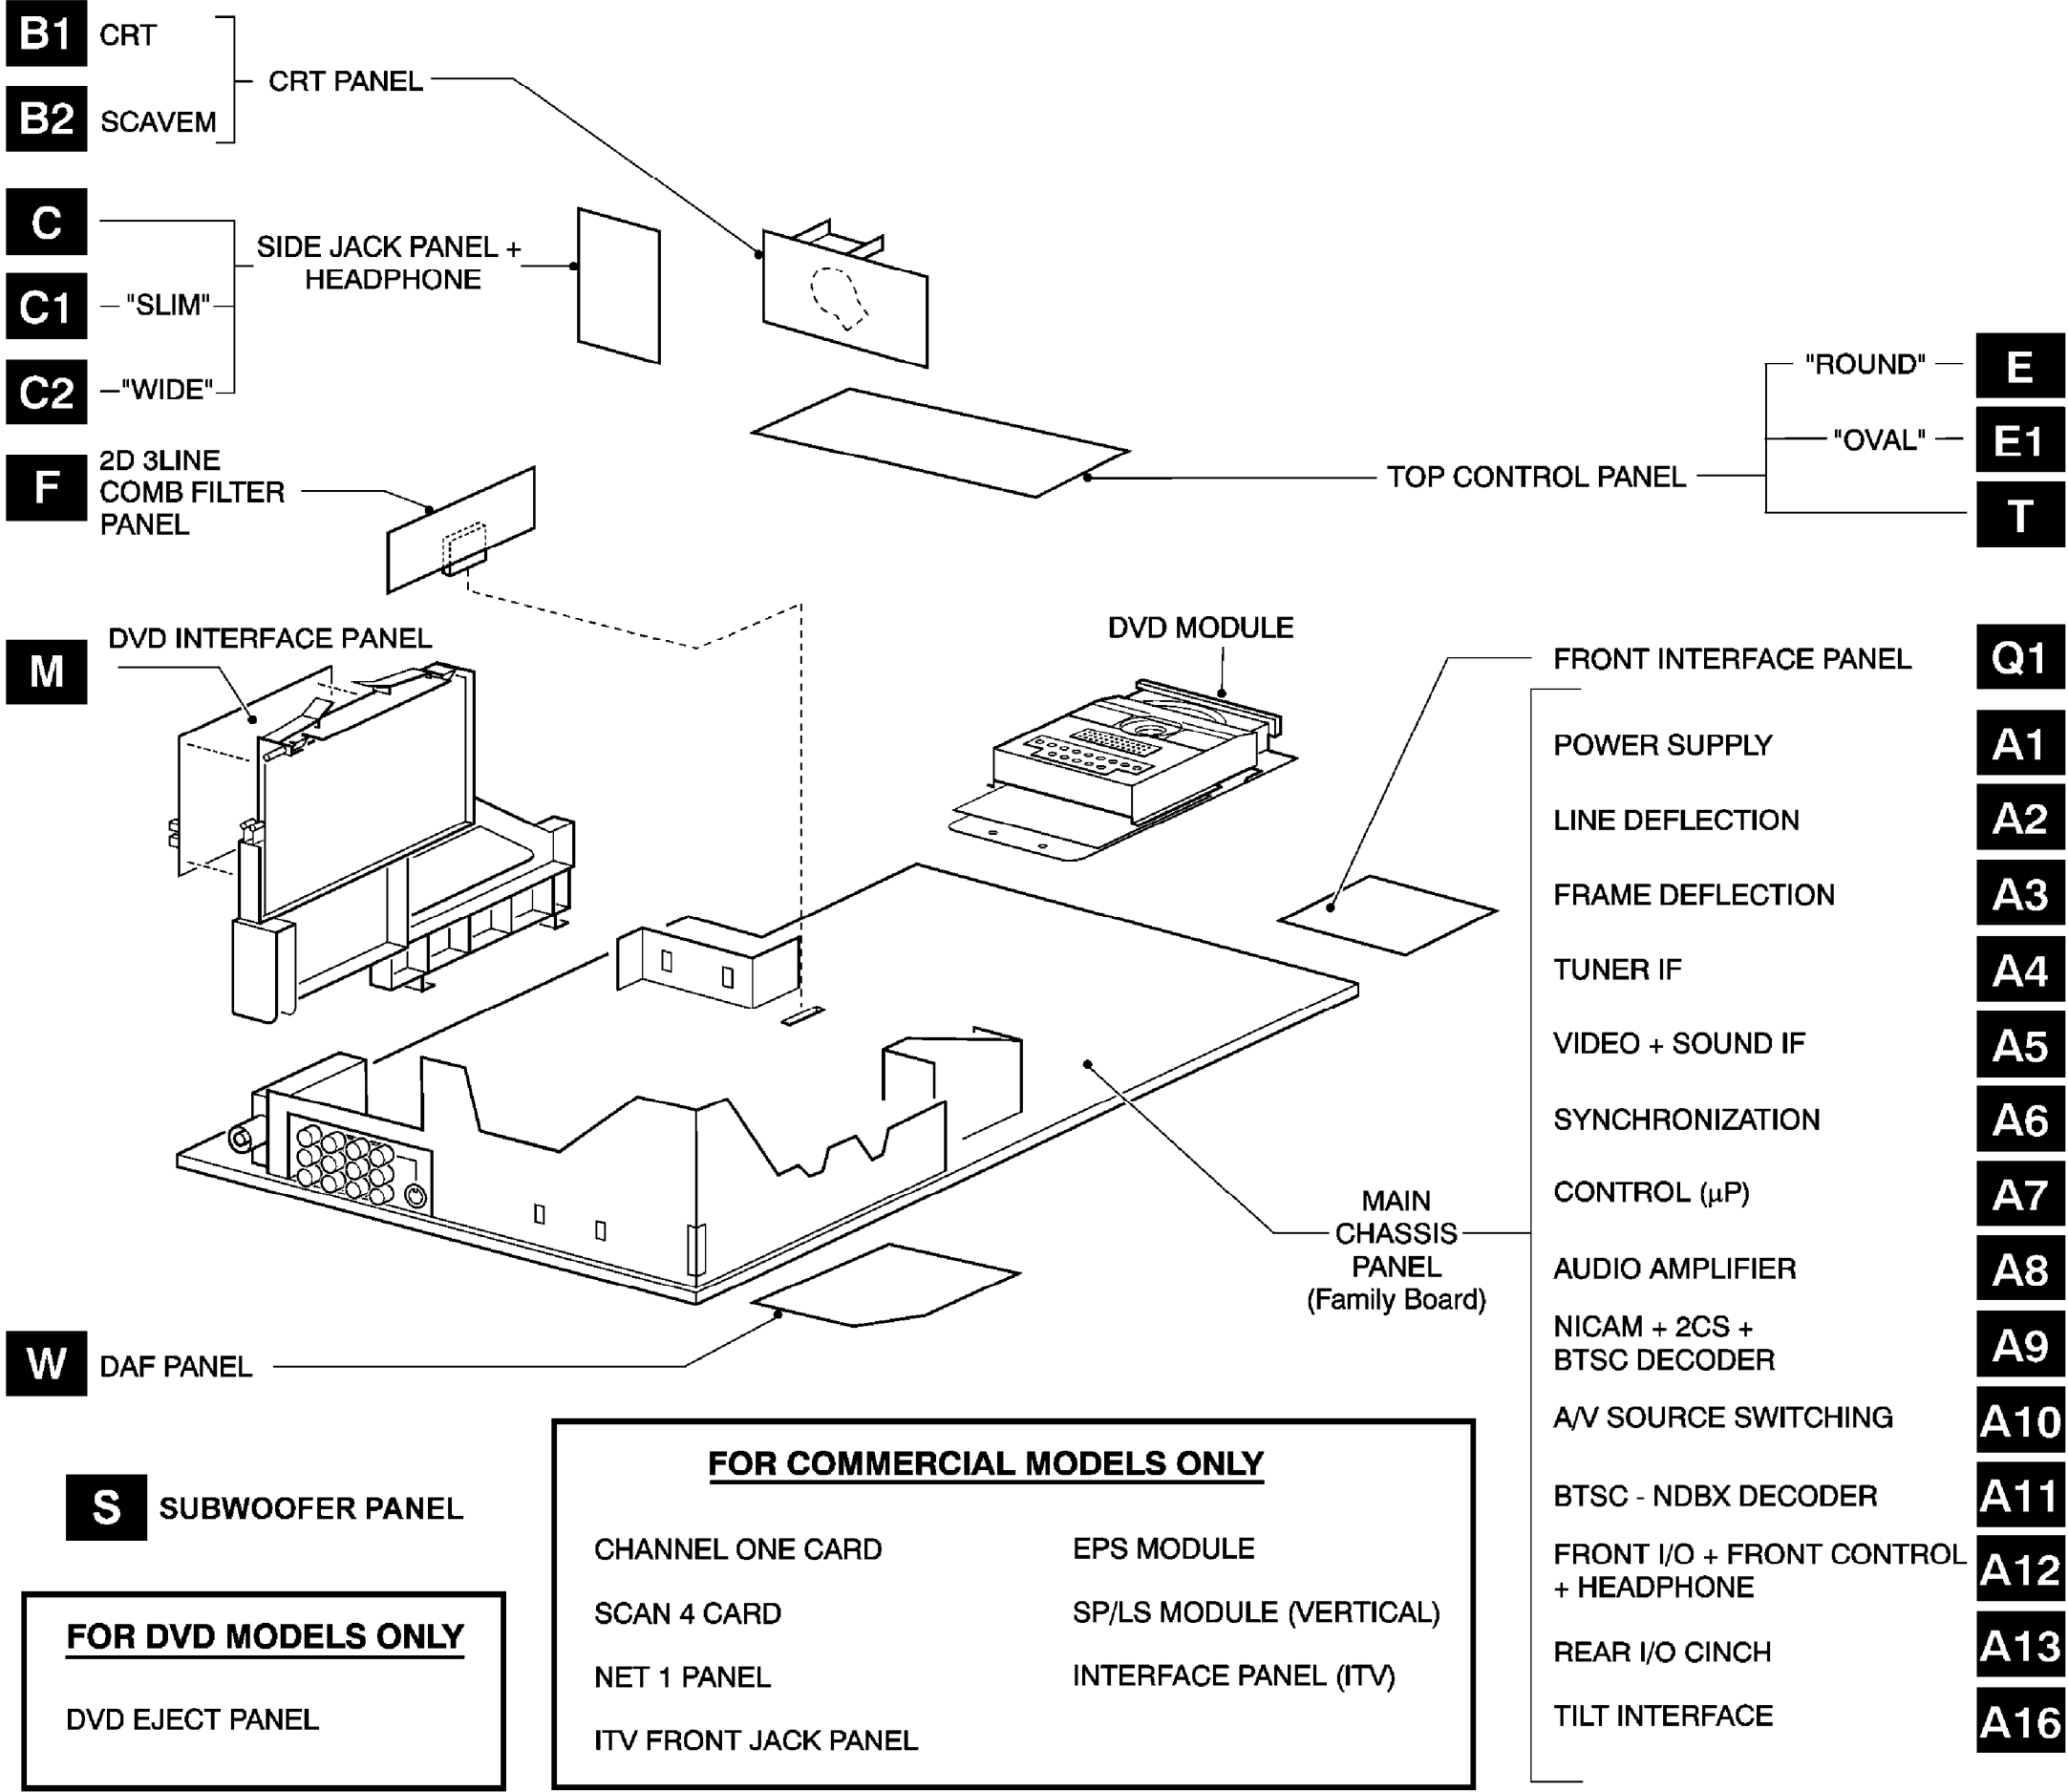




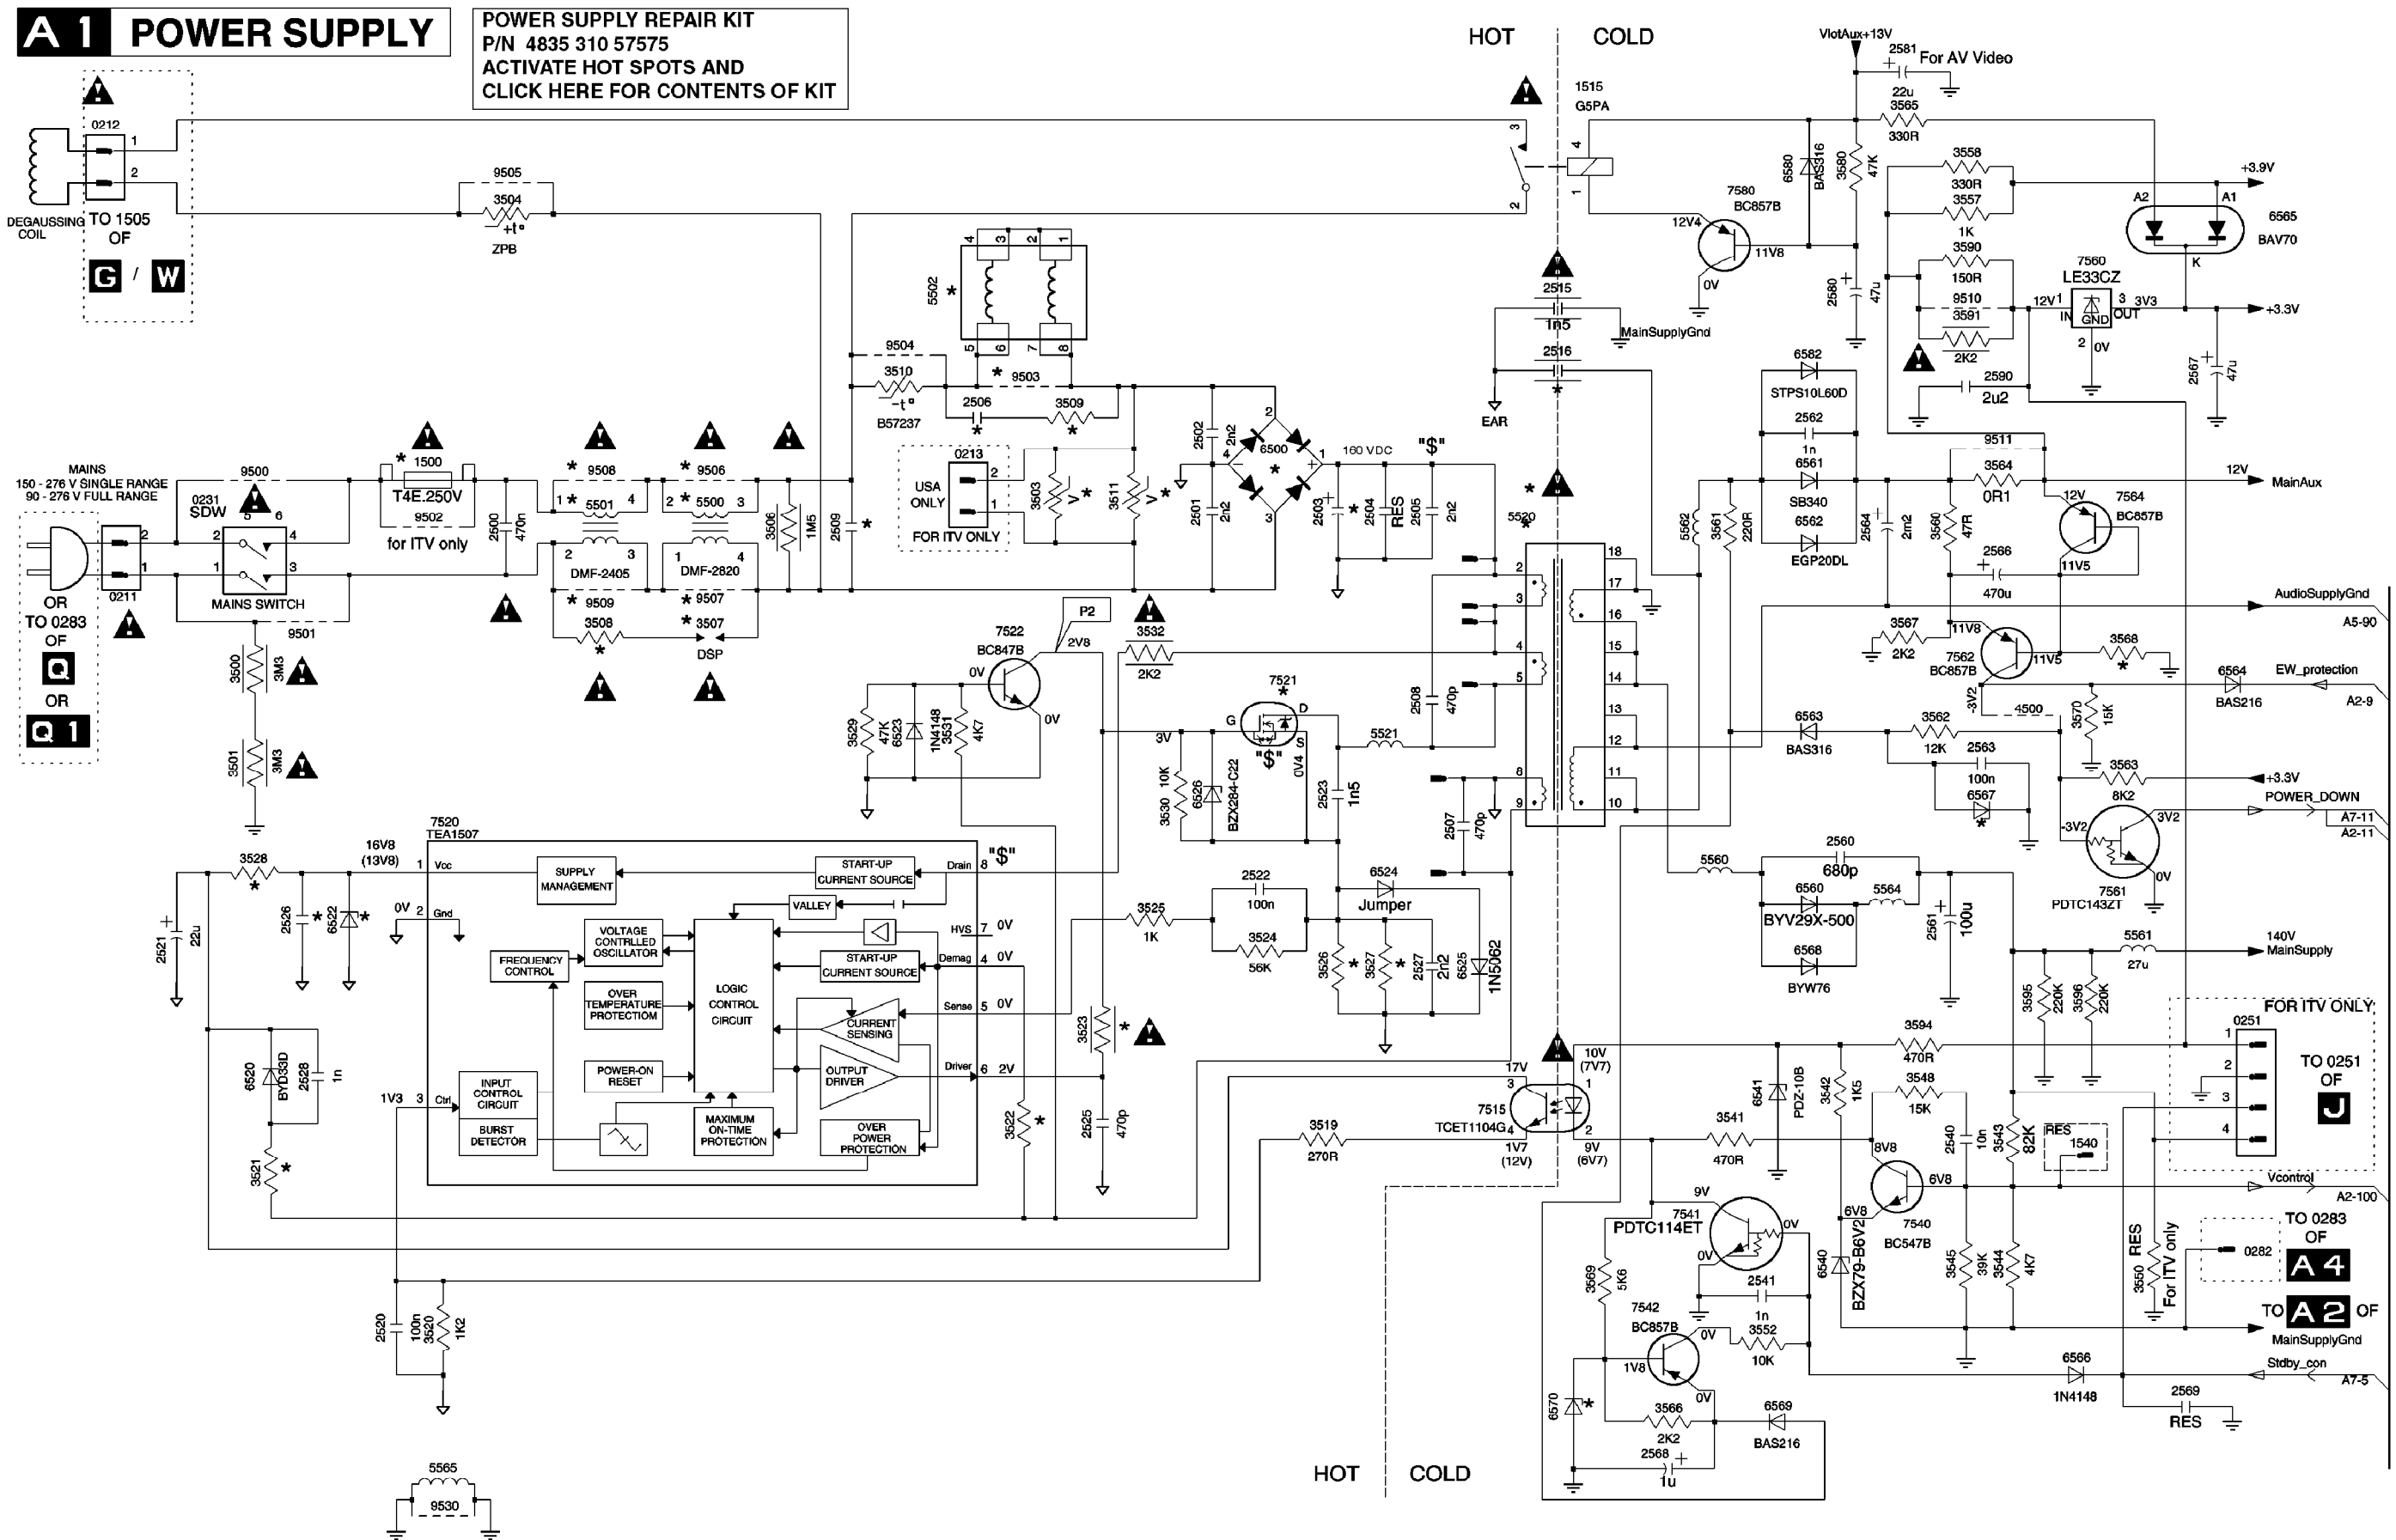



[illegible]

A 3 FRAME DEFLECTION


VERTICAL REPAIR KIT
P/N 4835 310 57582
ACTIVATE HOT SPOTS AND
CLICK HERE FOR CONTENTS OF KIT

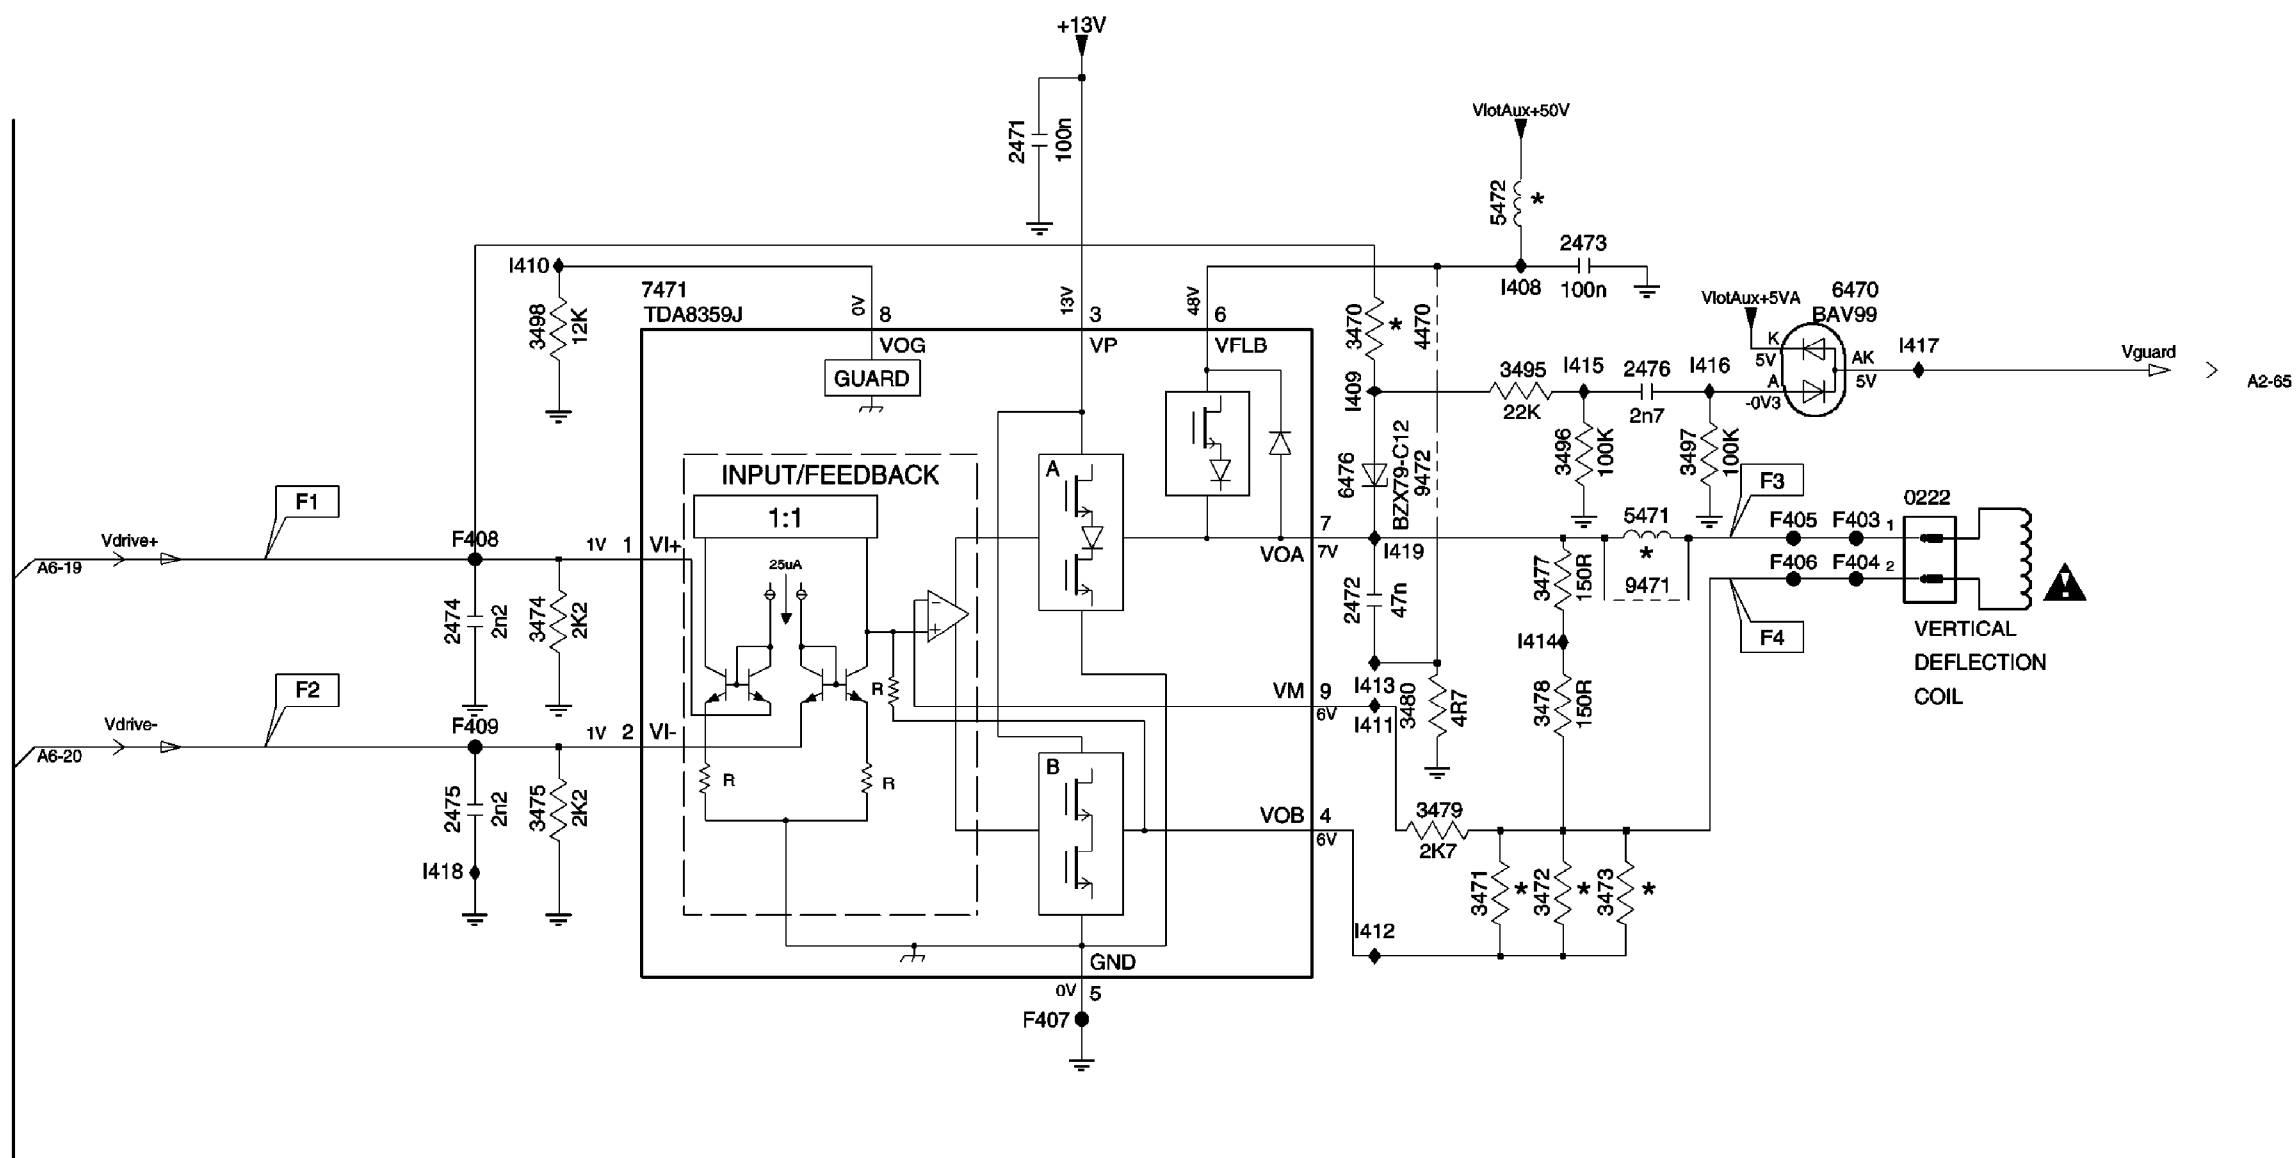

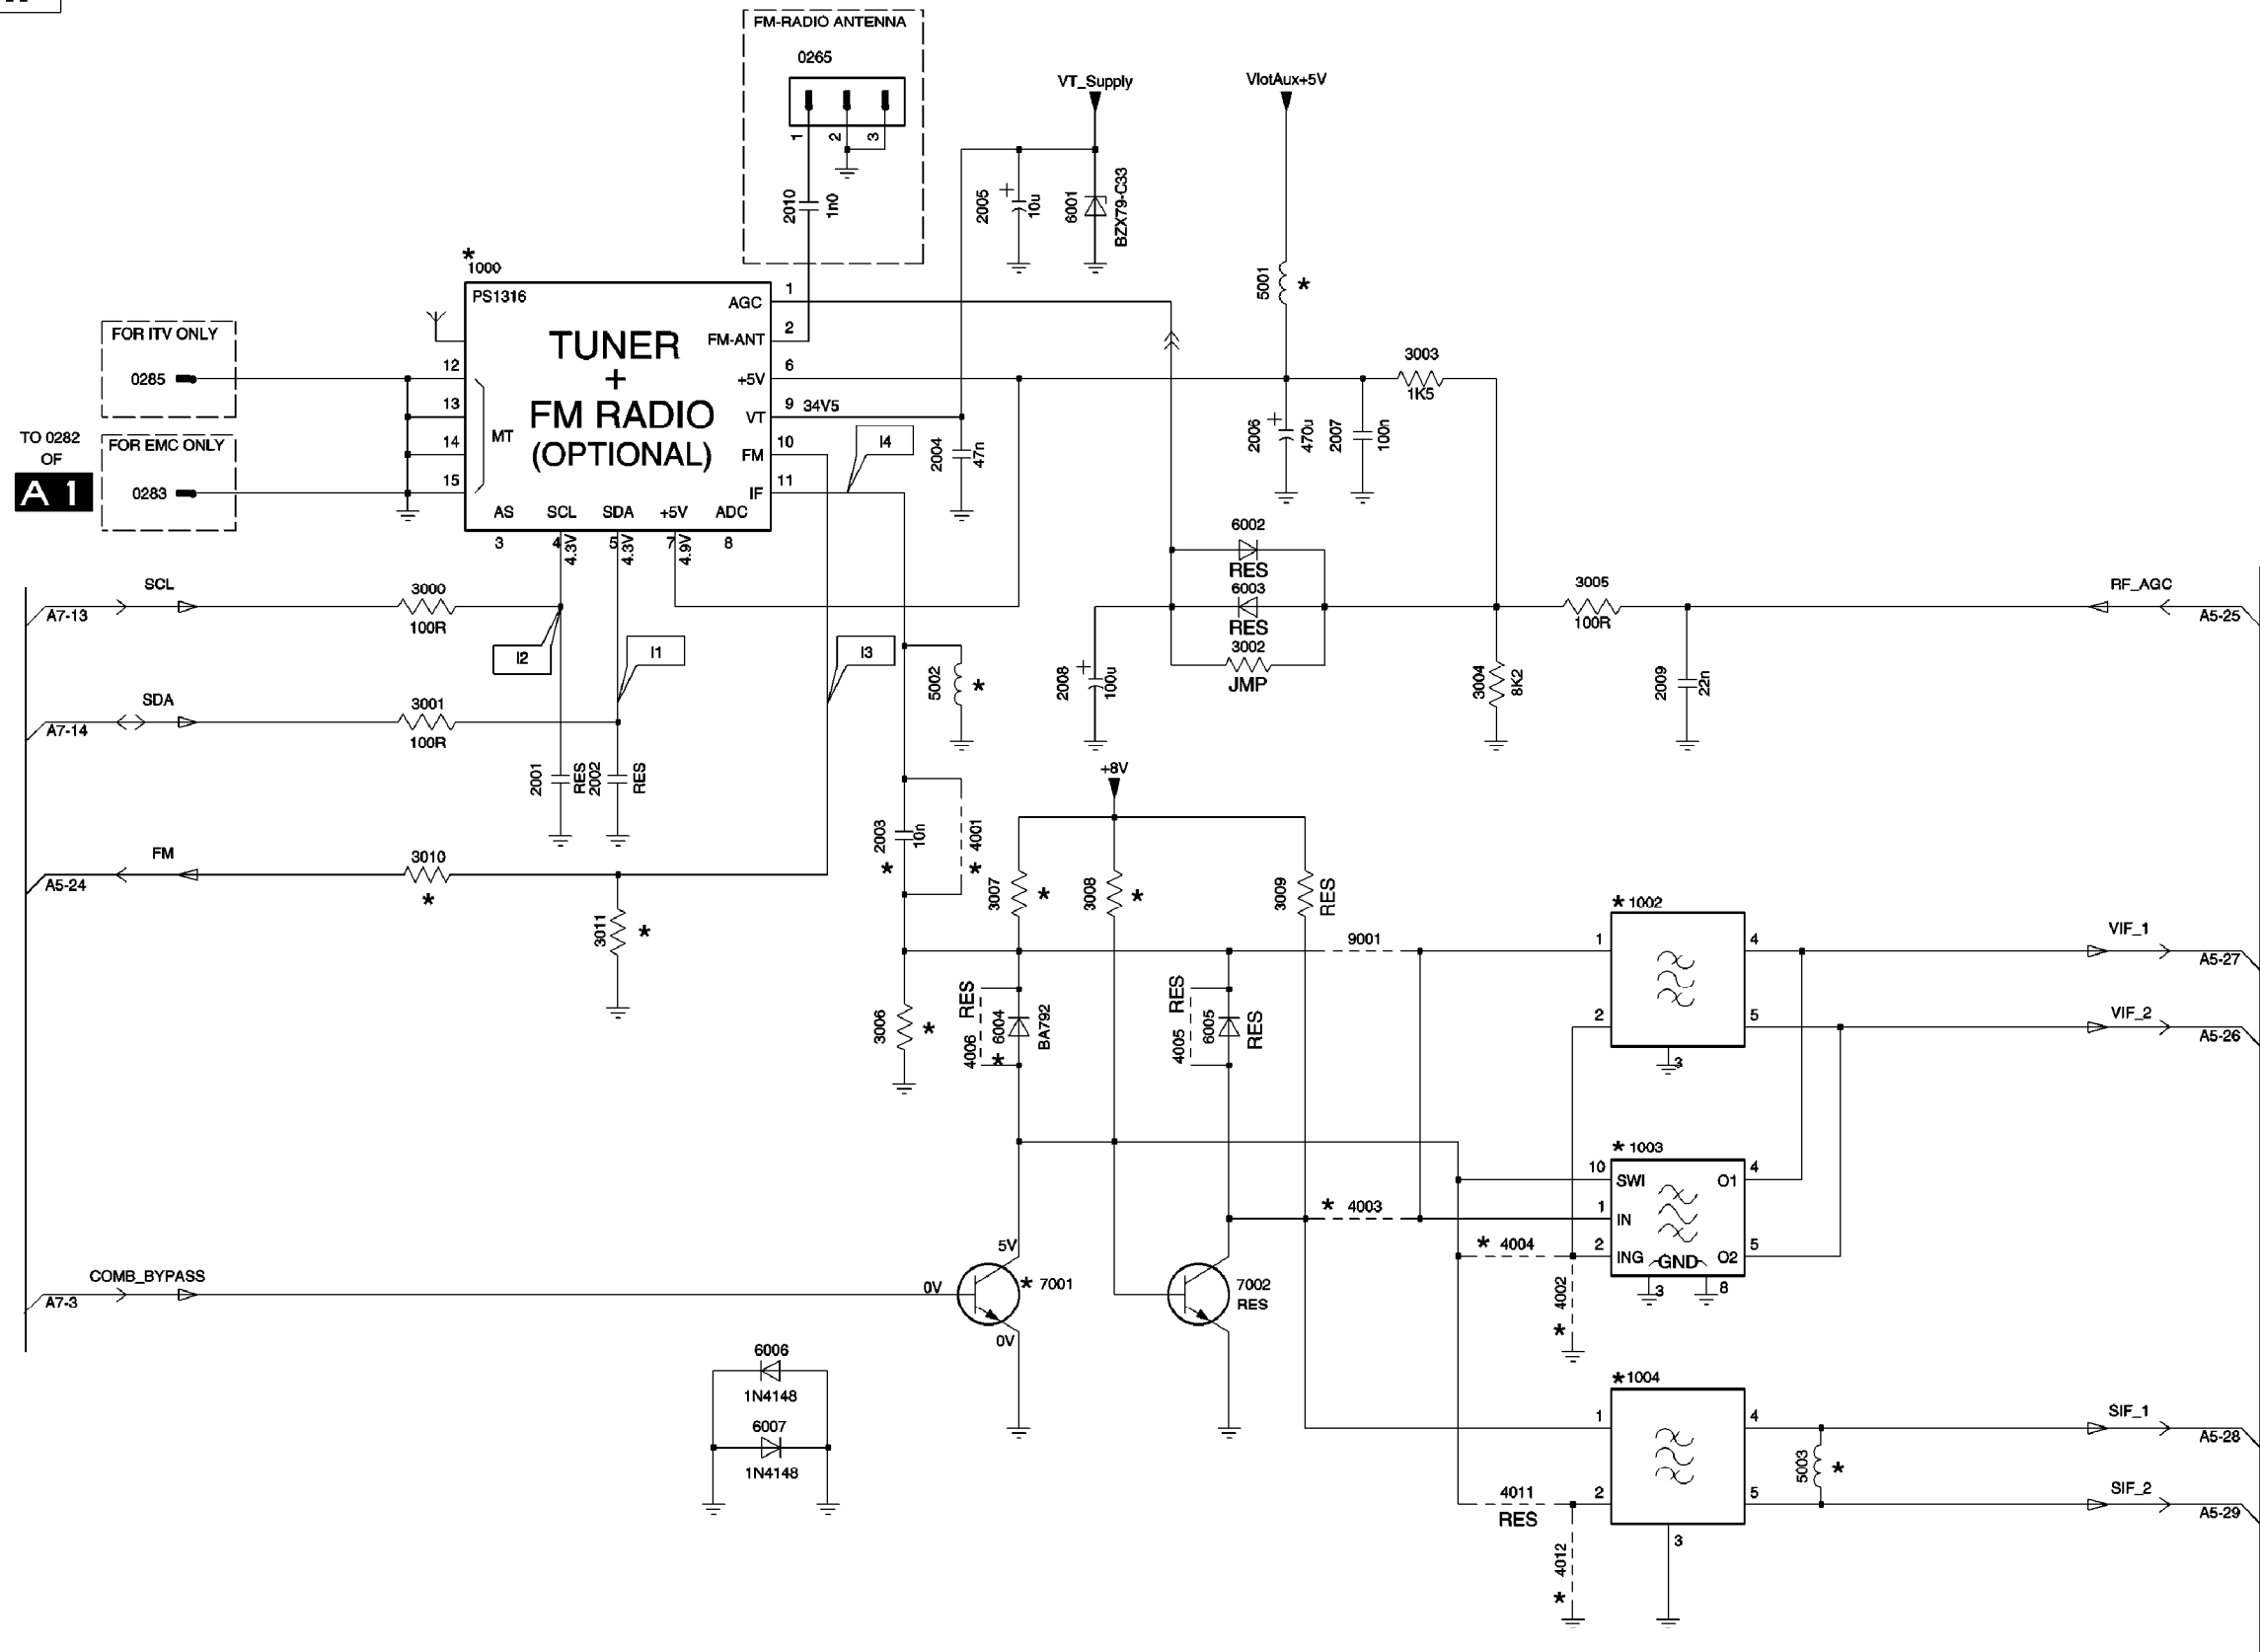


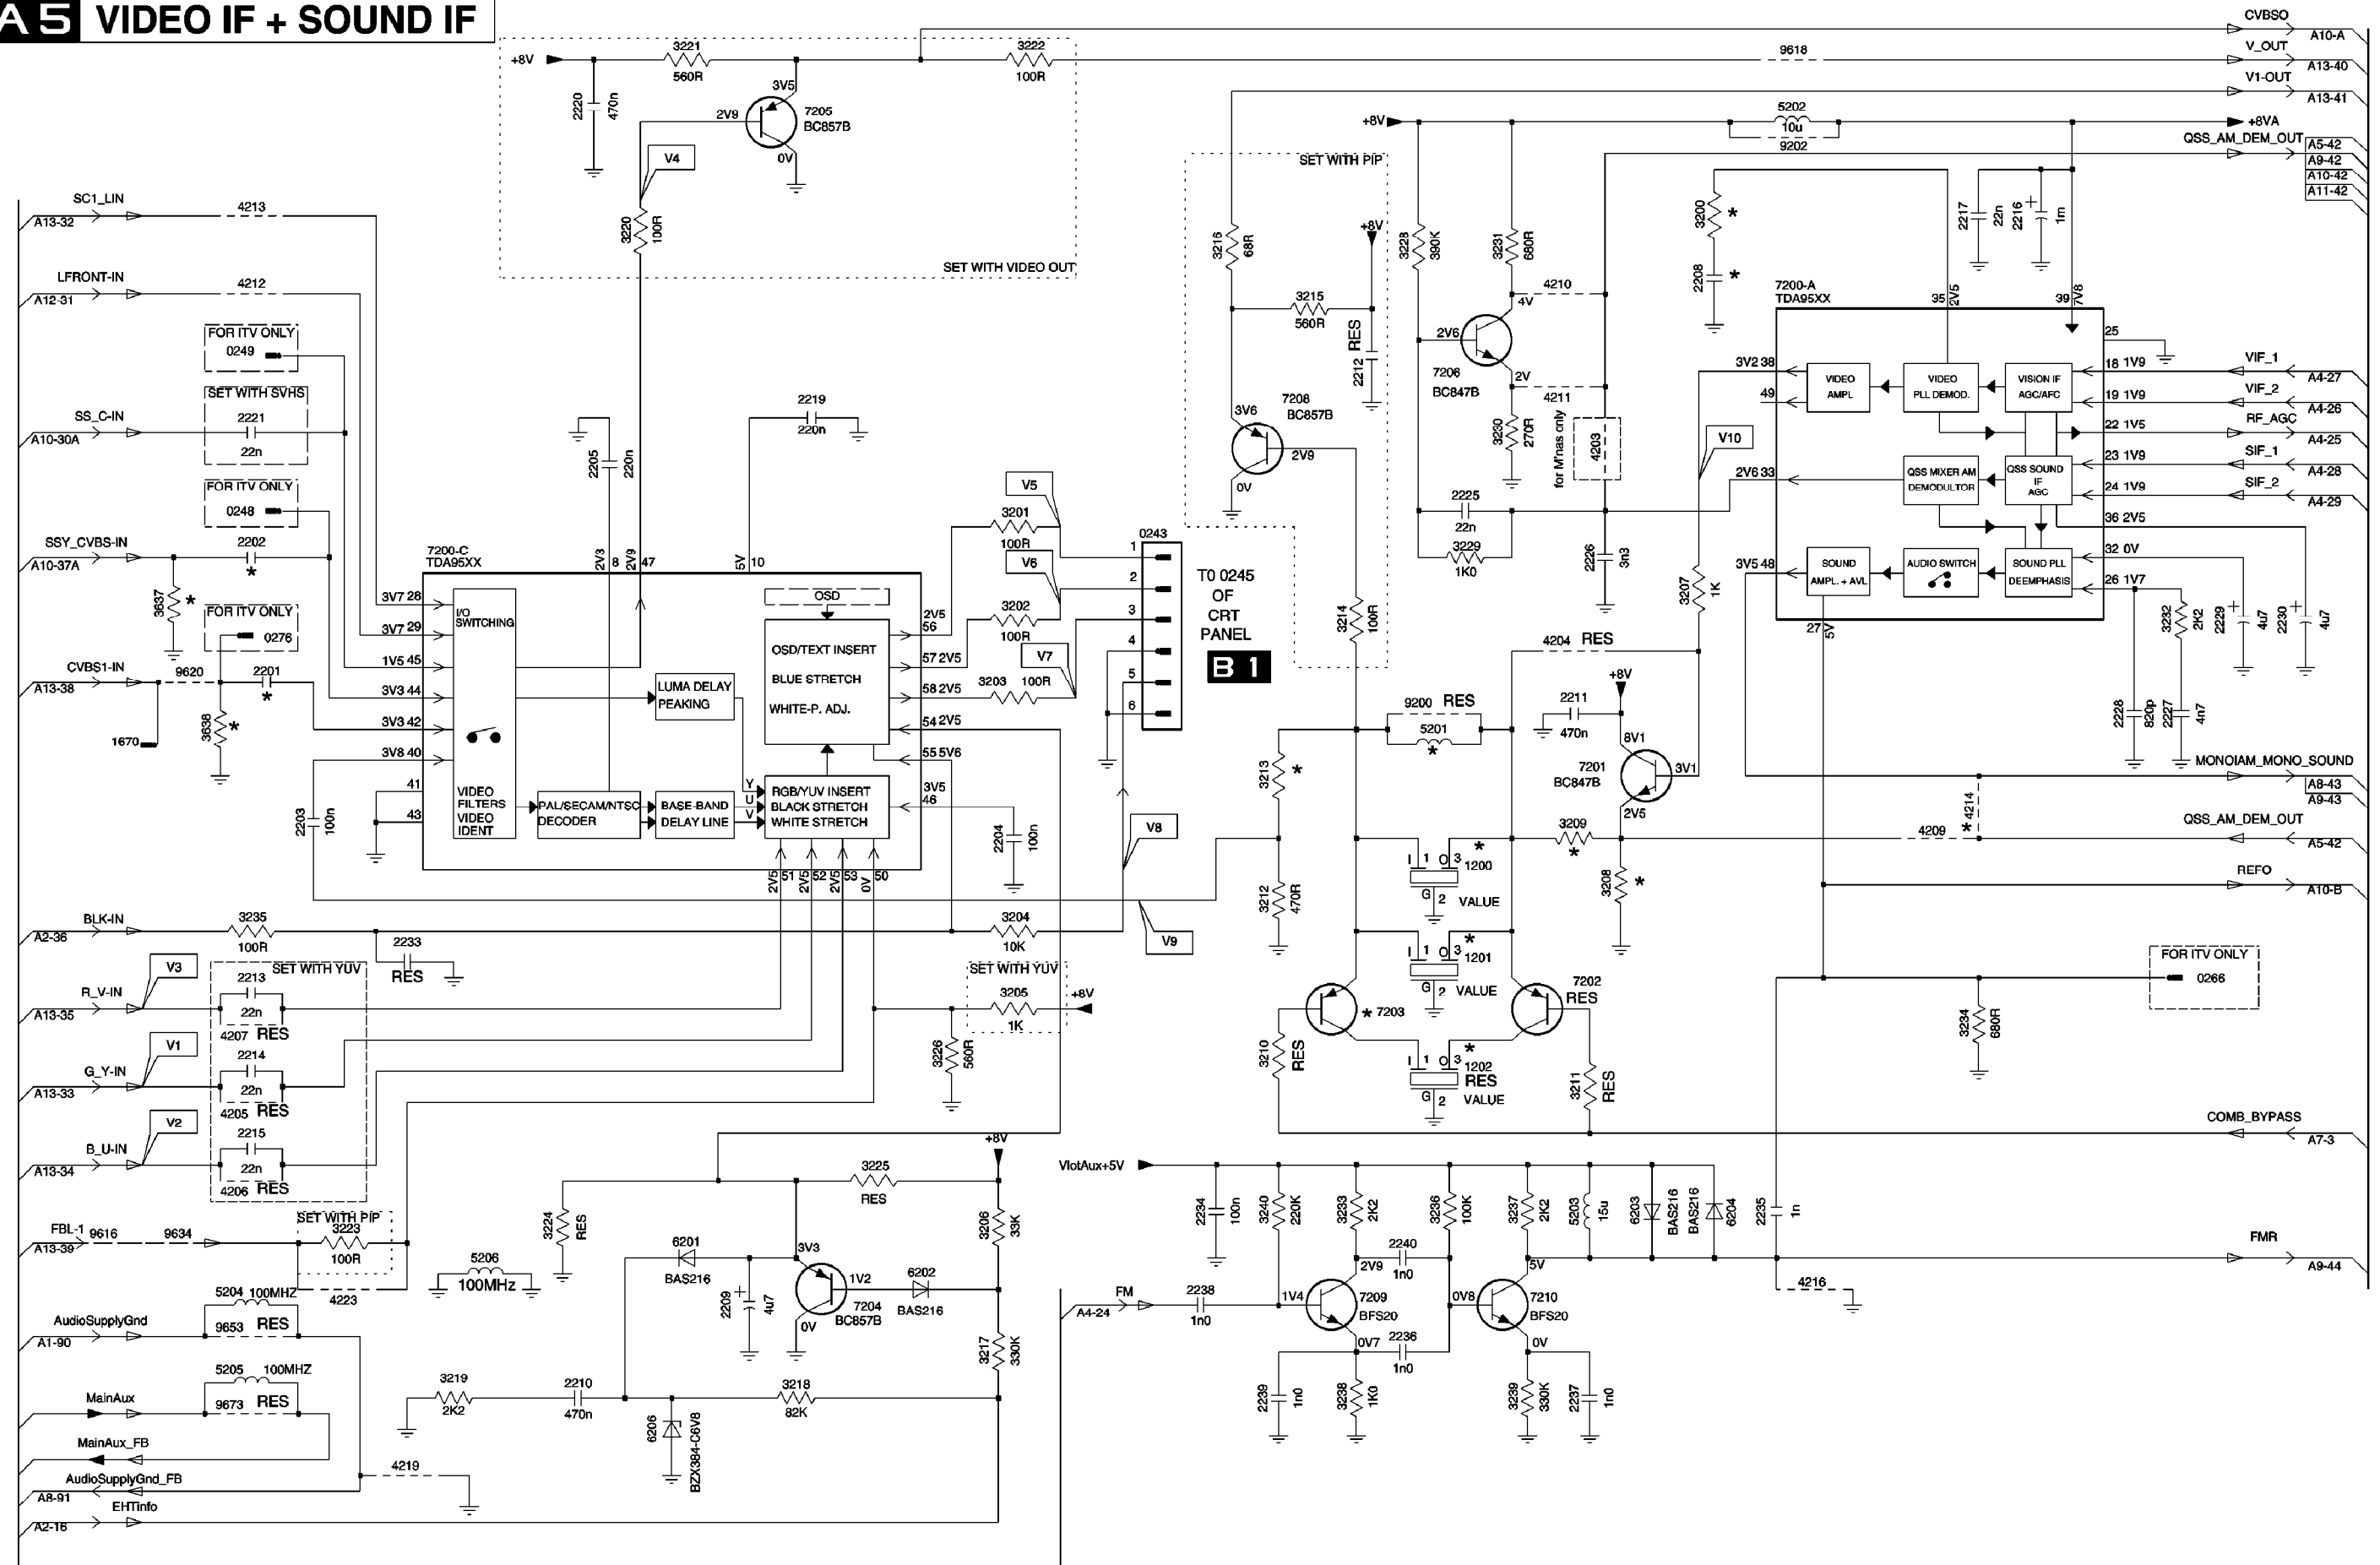


A 6 SYNCHRONISATION

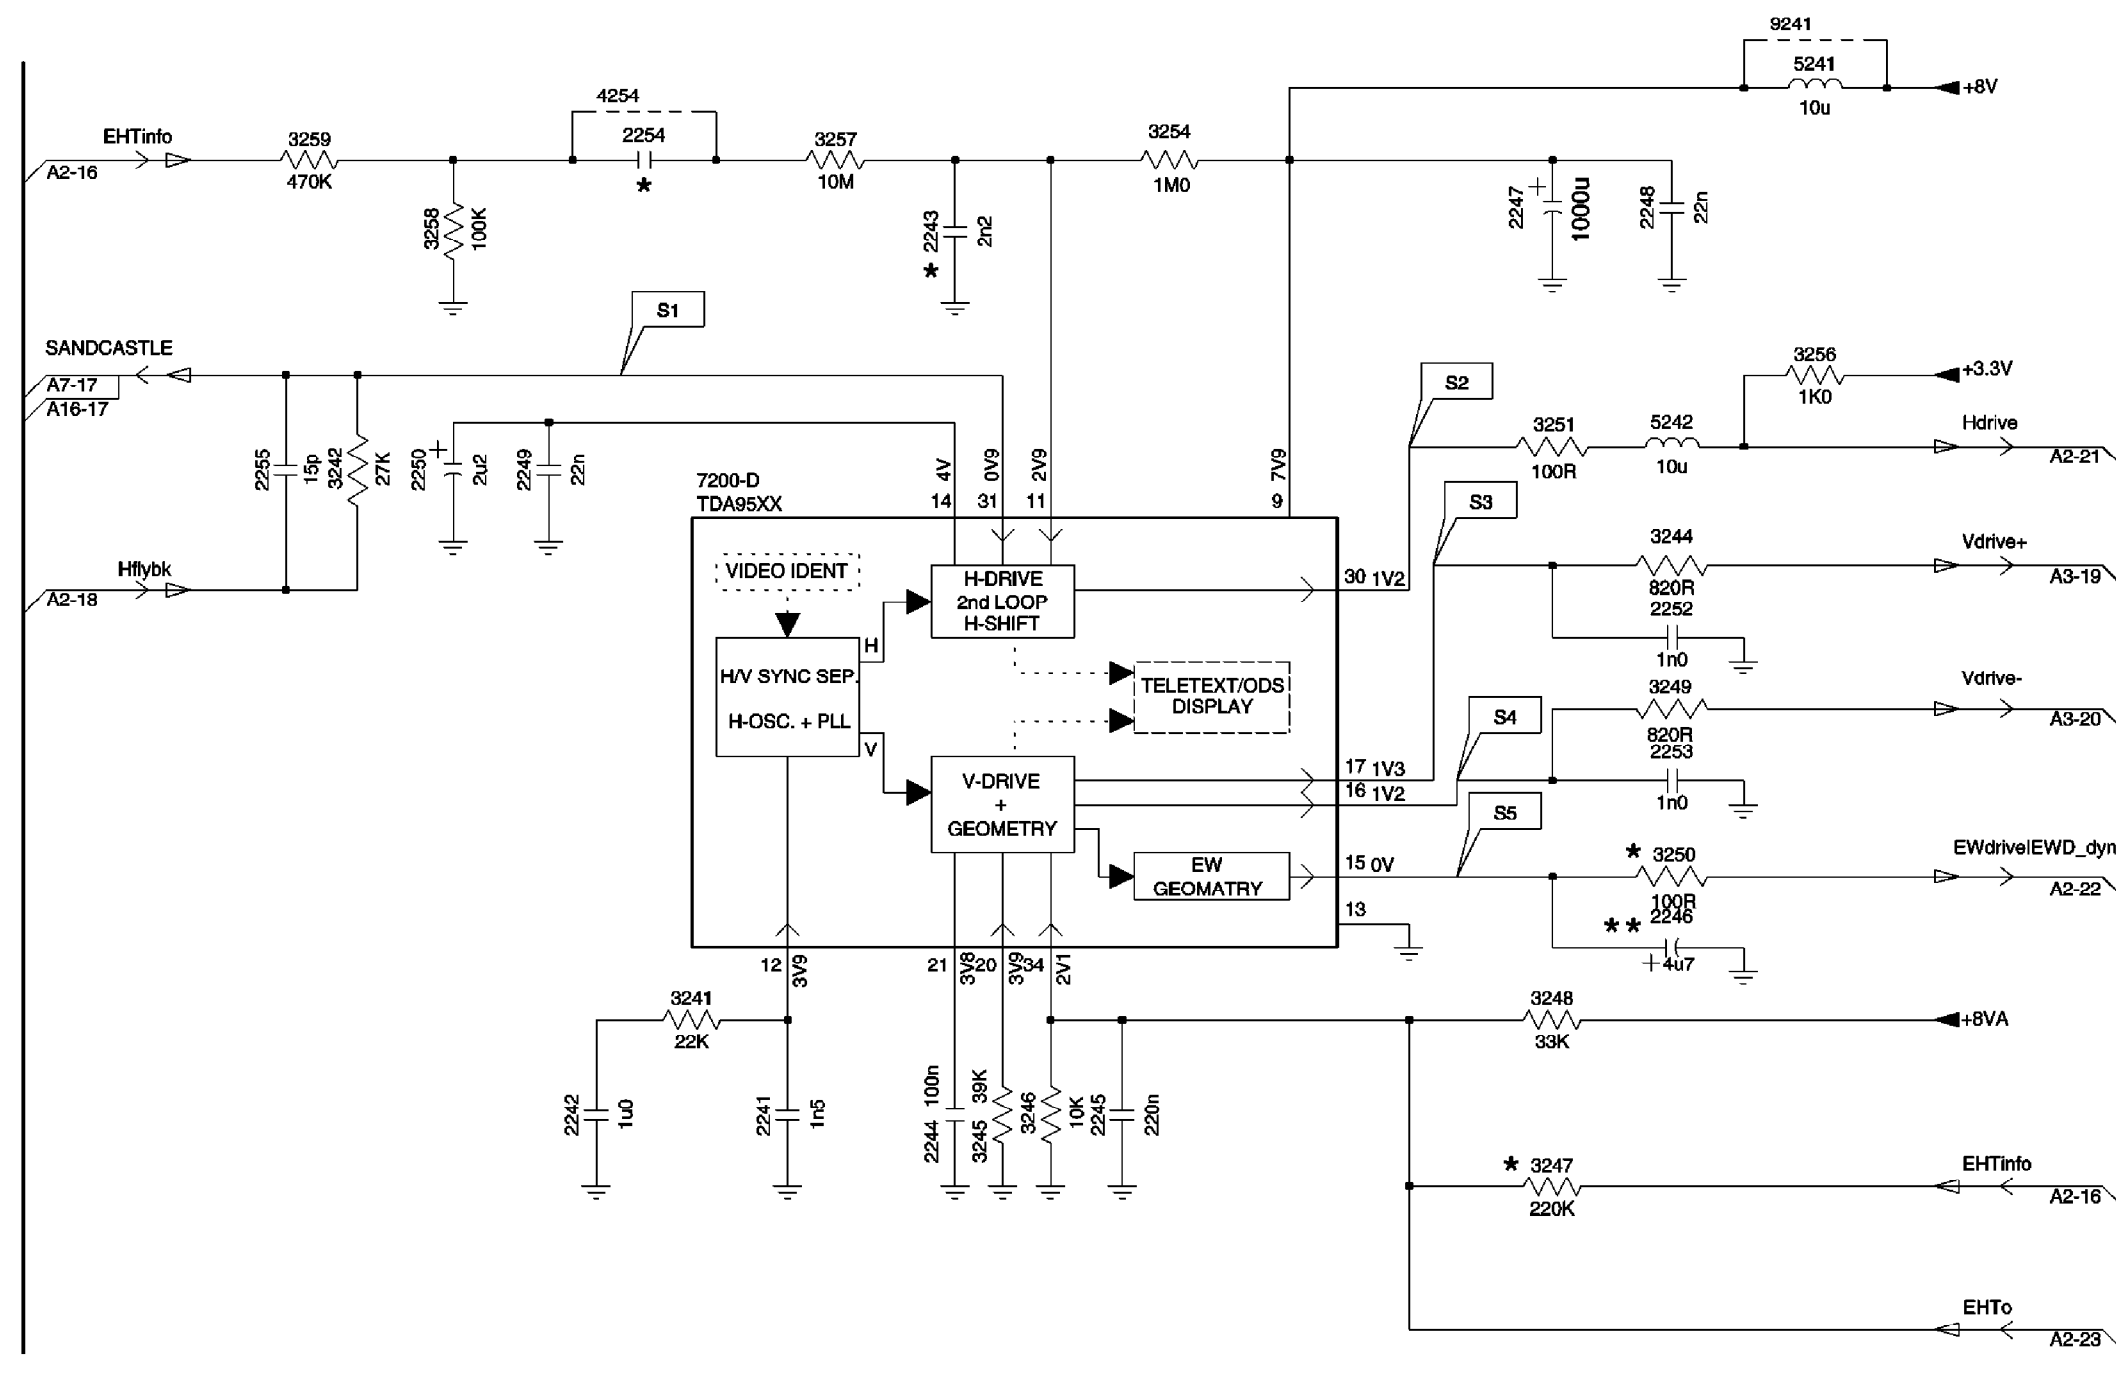

A 7 CONTROL

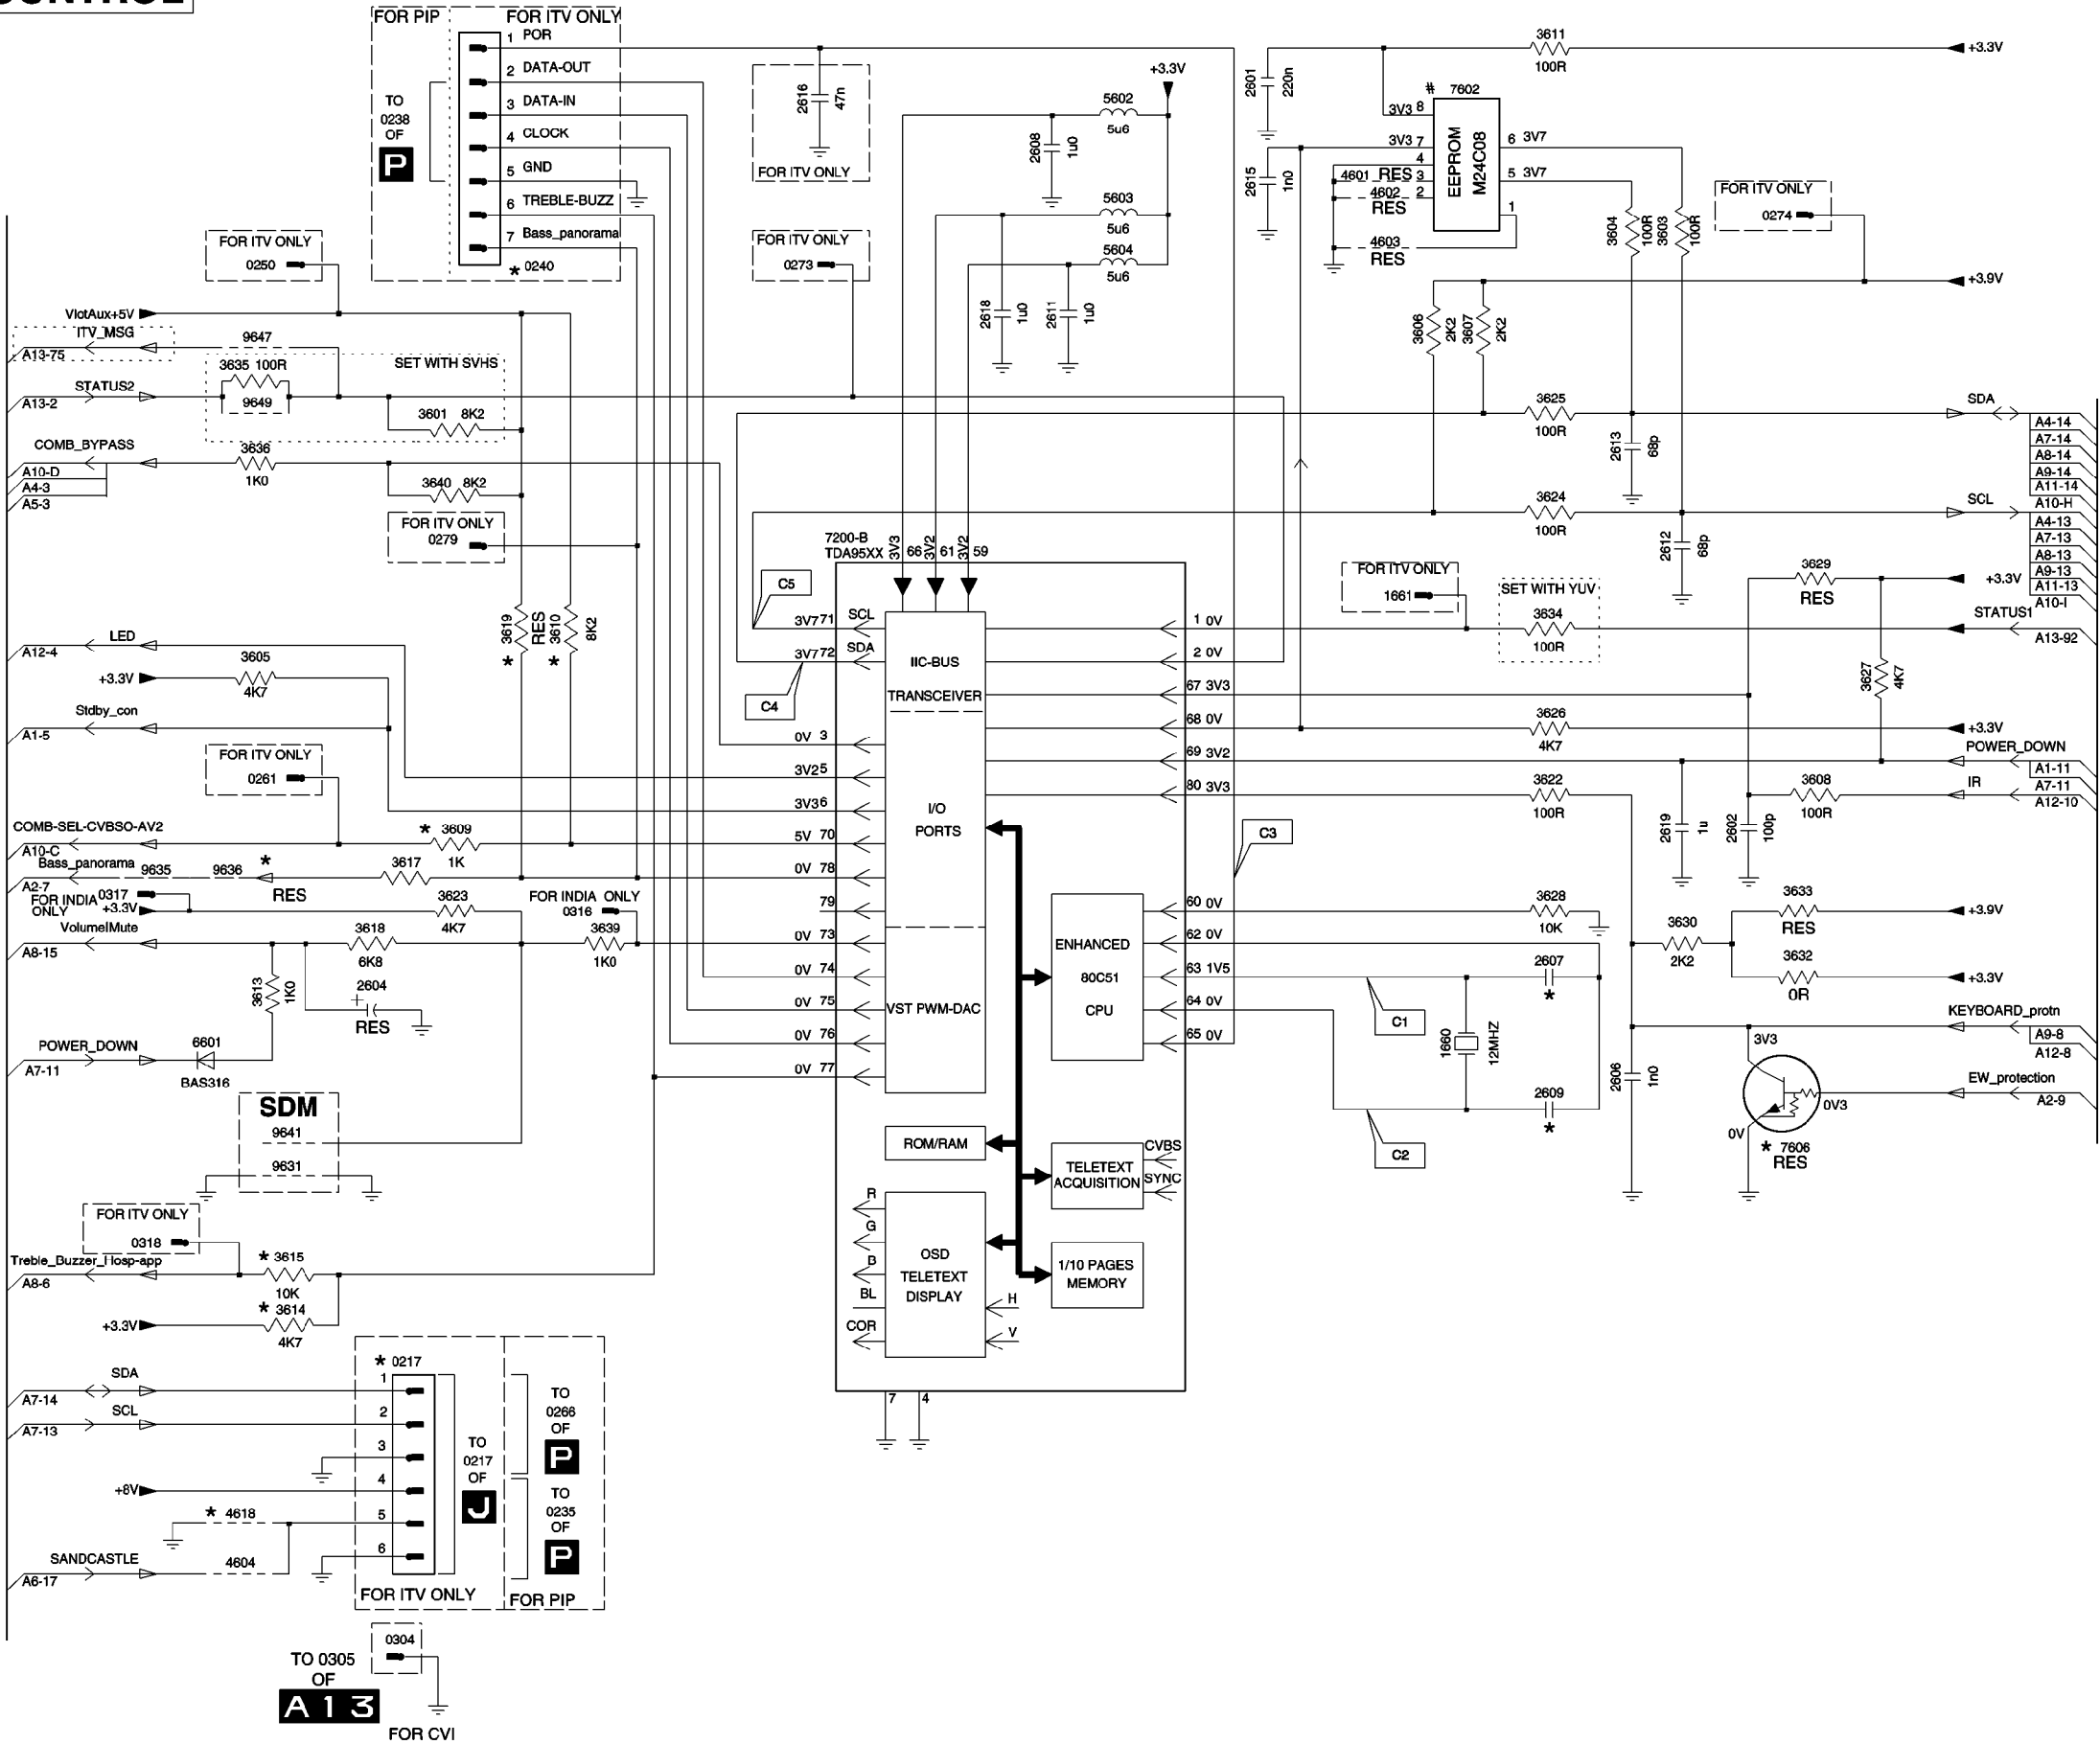


A 8 AUDIO_AMPLIFIER

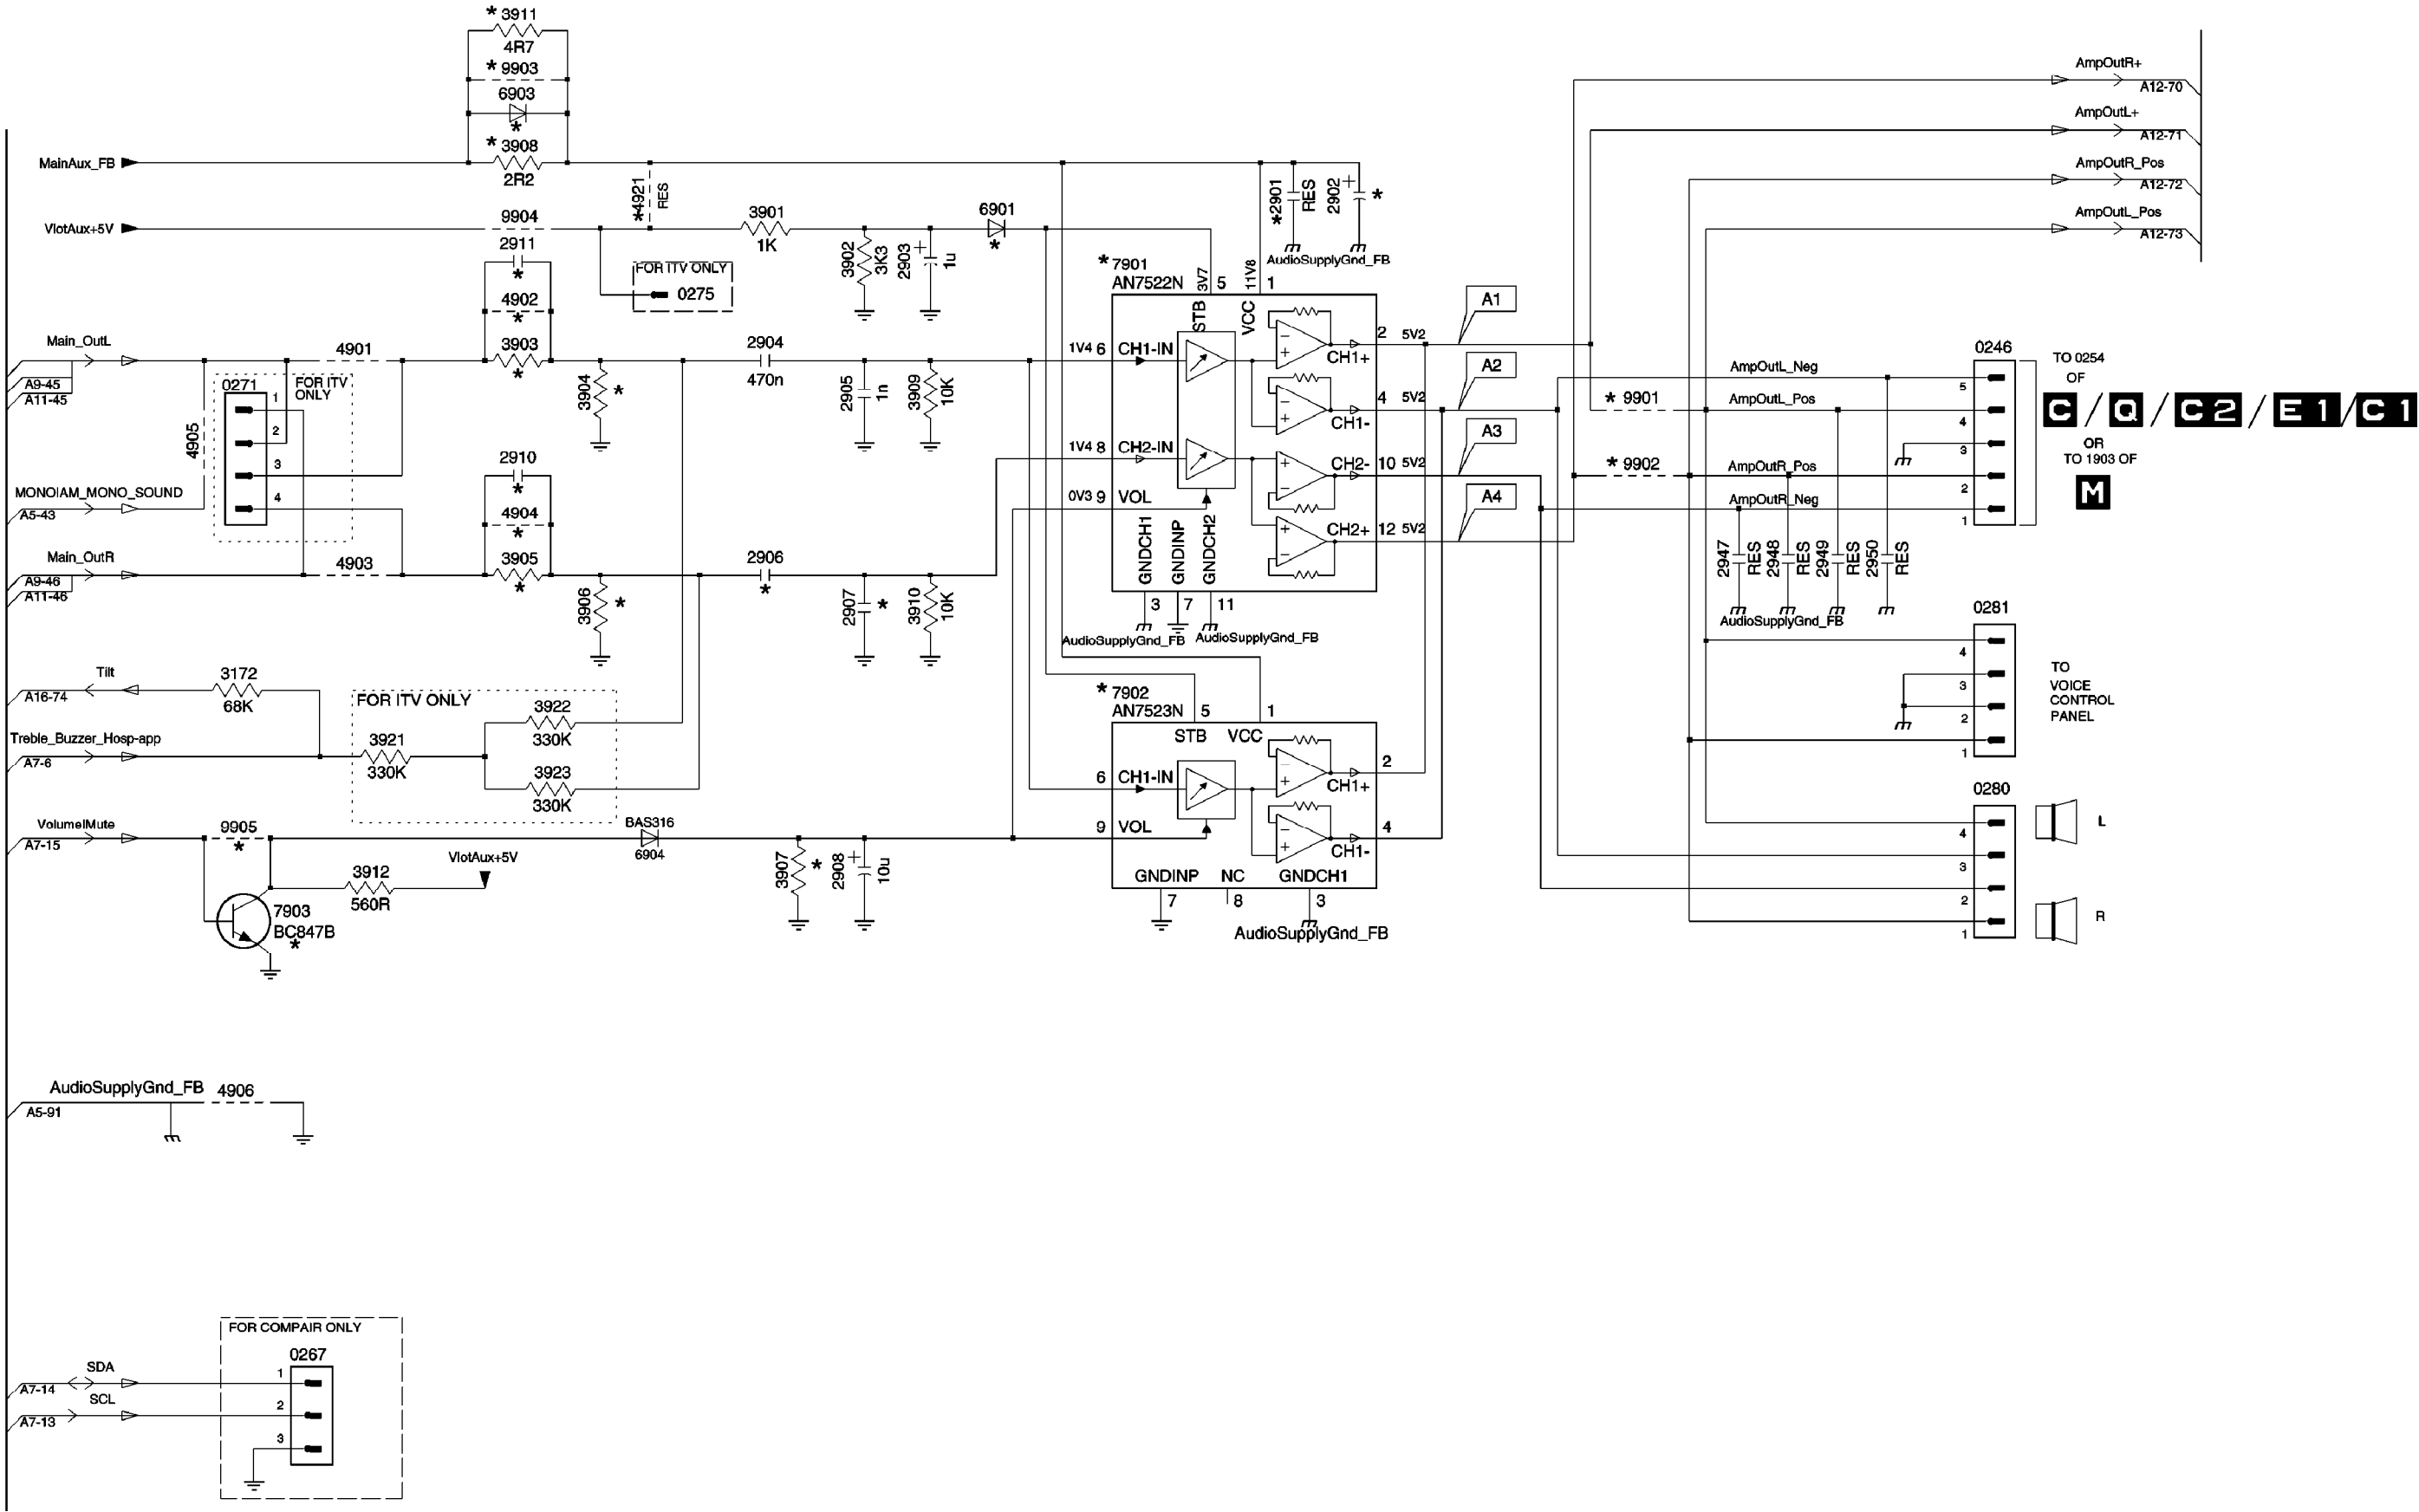


A9 NICAM + 2CS + BTSC (STEREO/SAP) DECODER


[FBAN60 - AUDPROC]

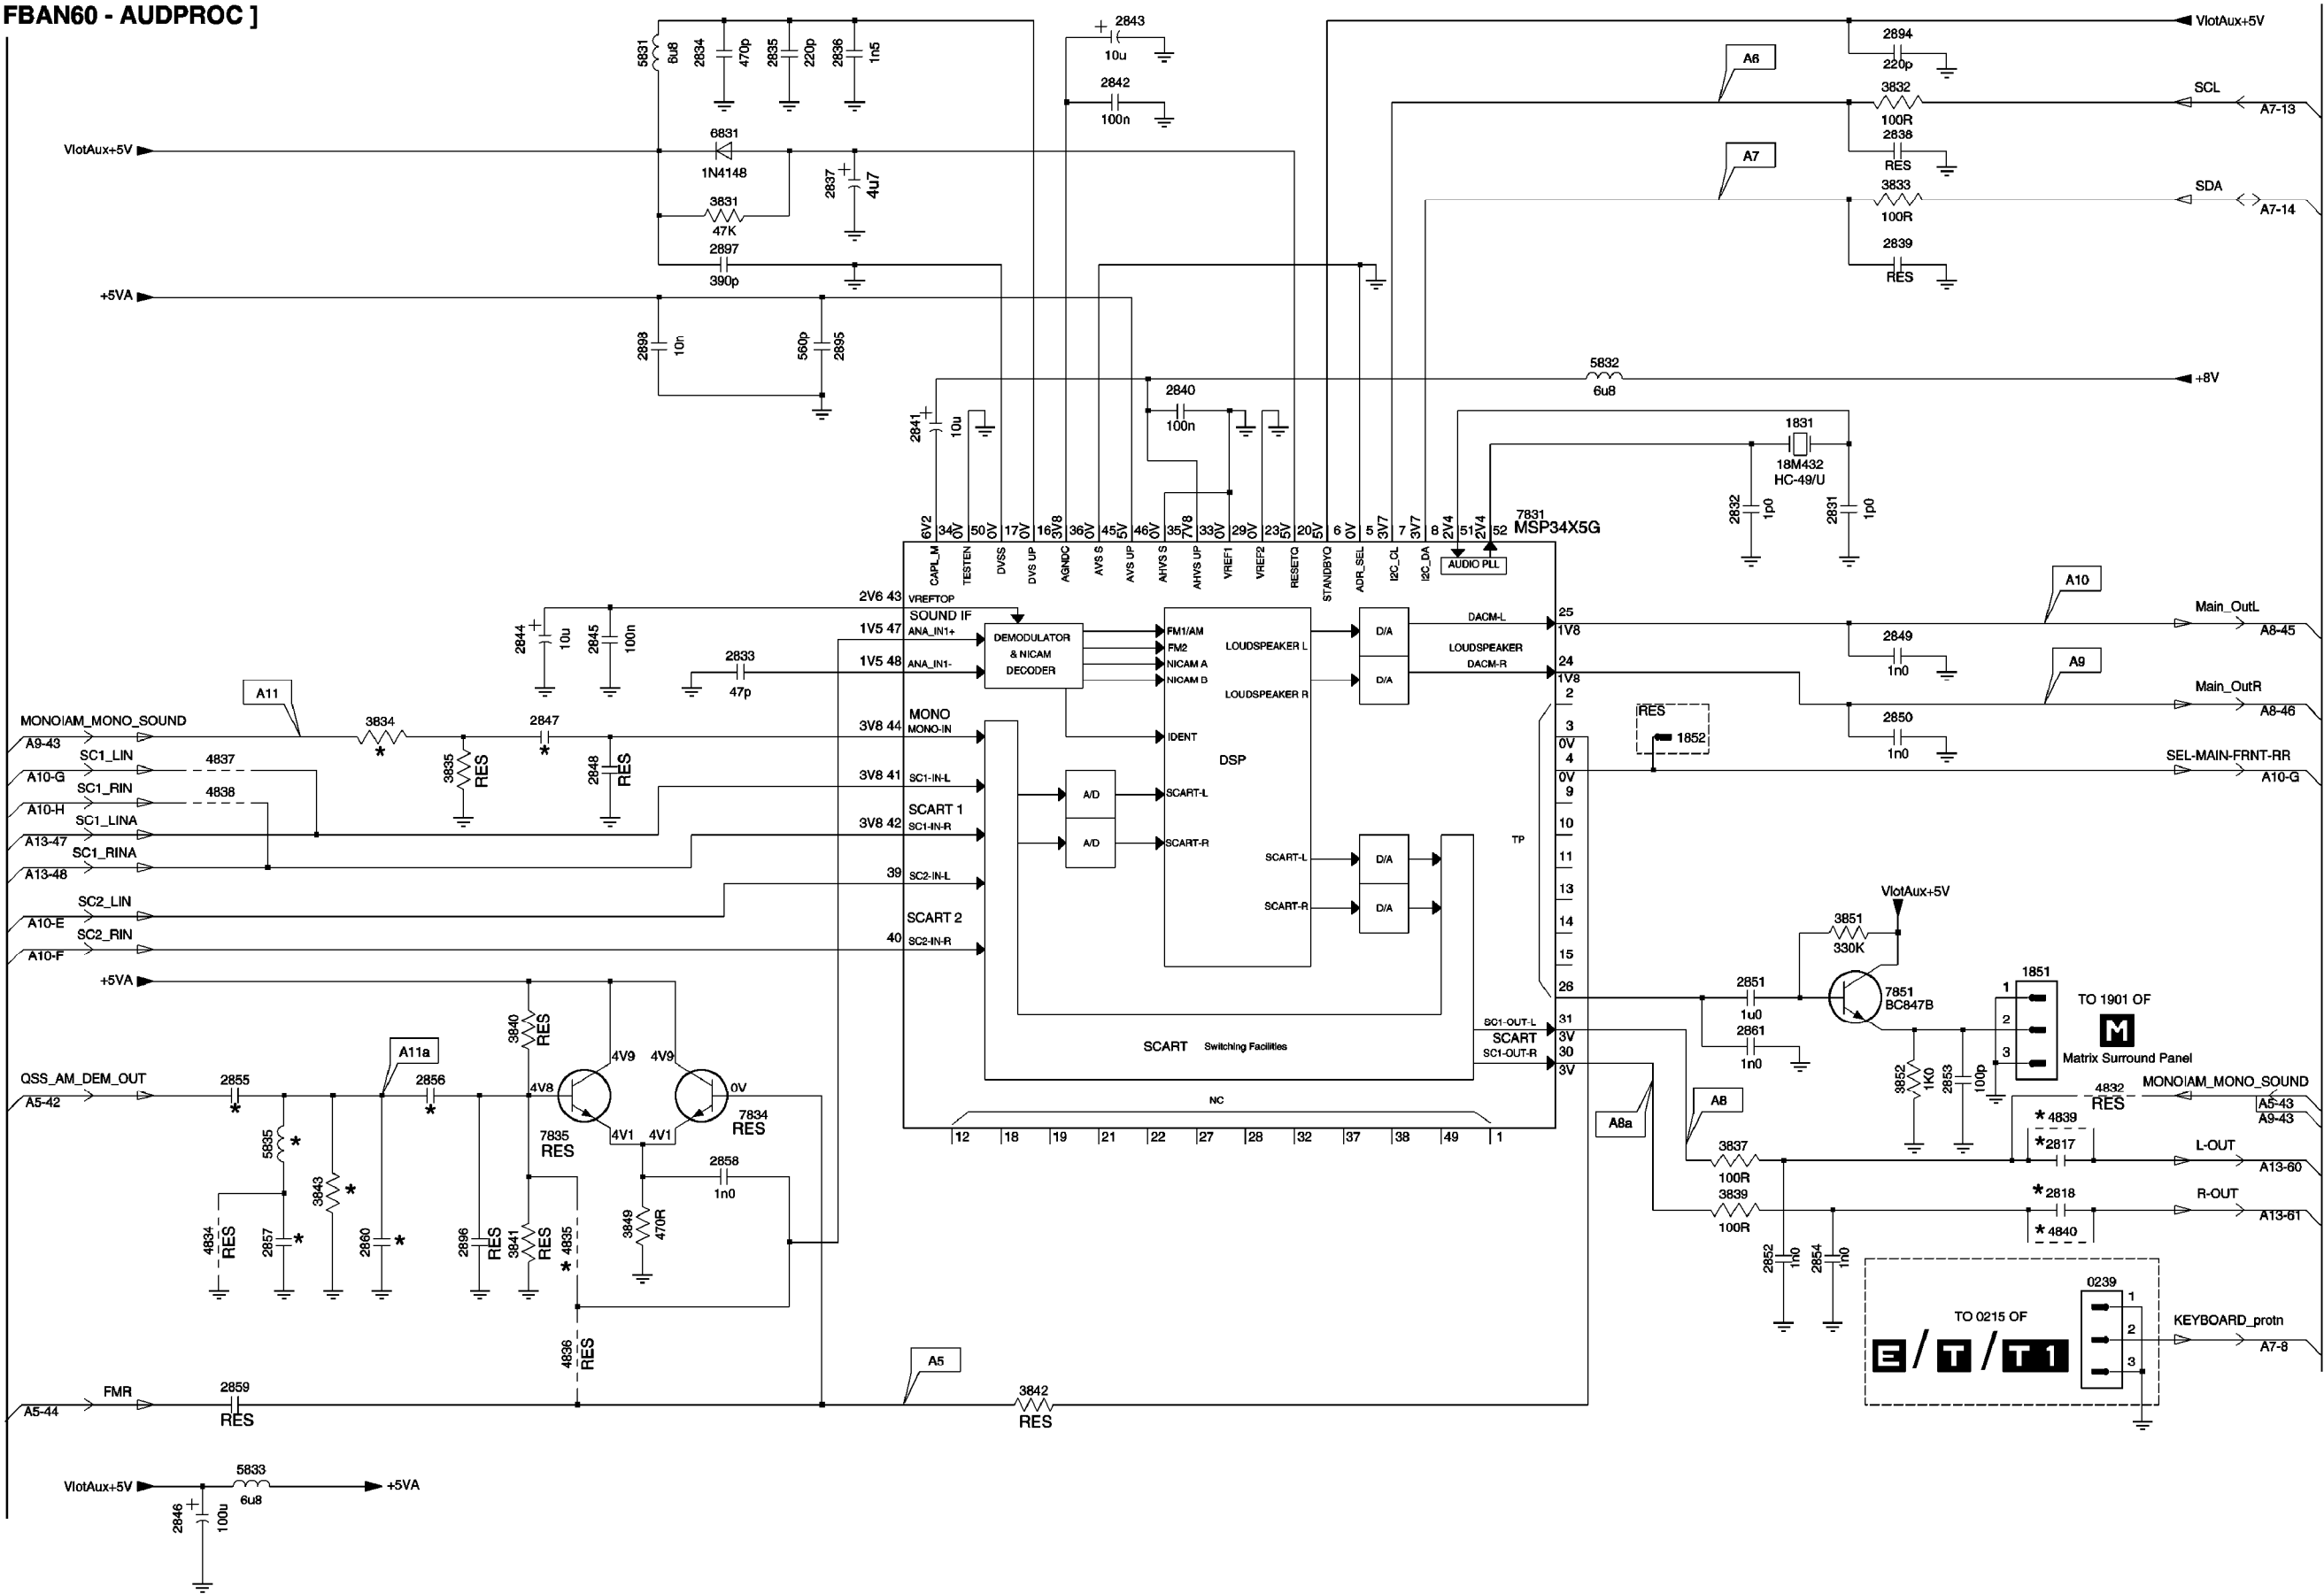



A 1 Ø AUDIO/VIDEO SOURCE SWITCHING

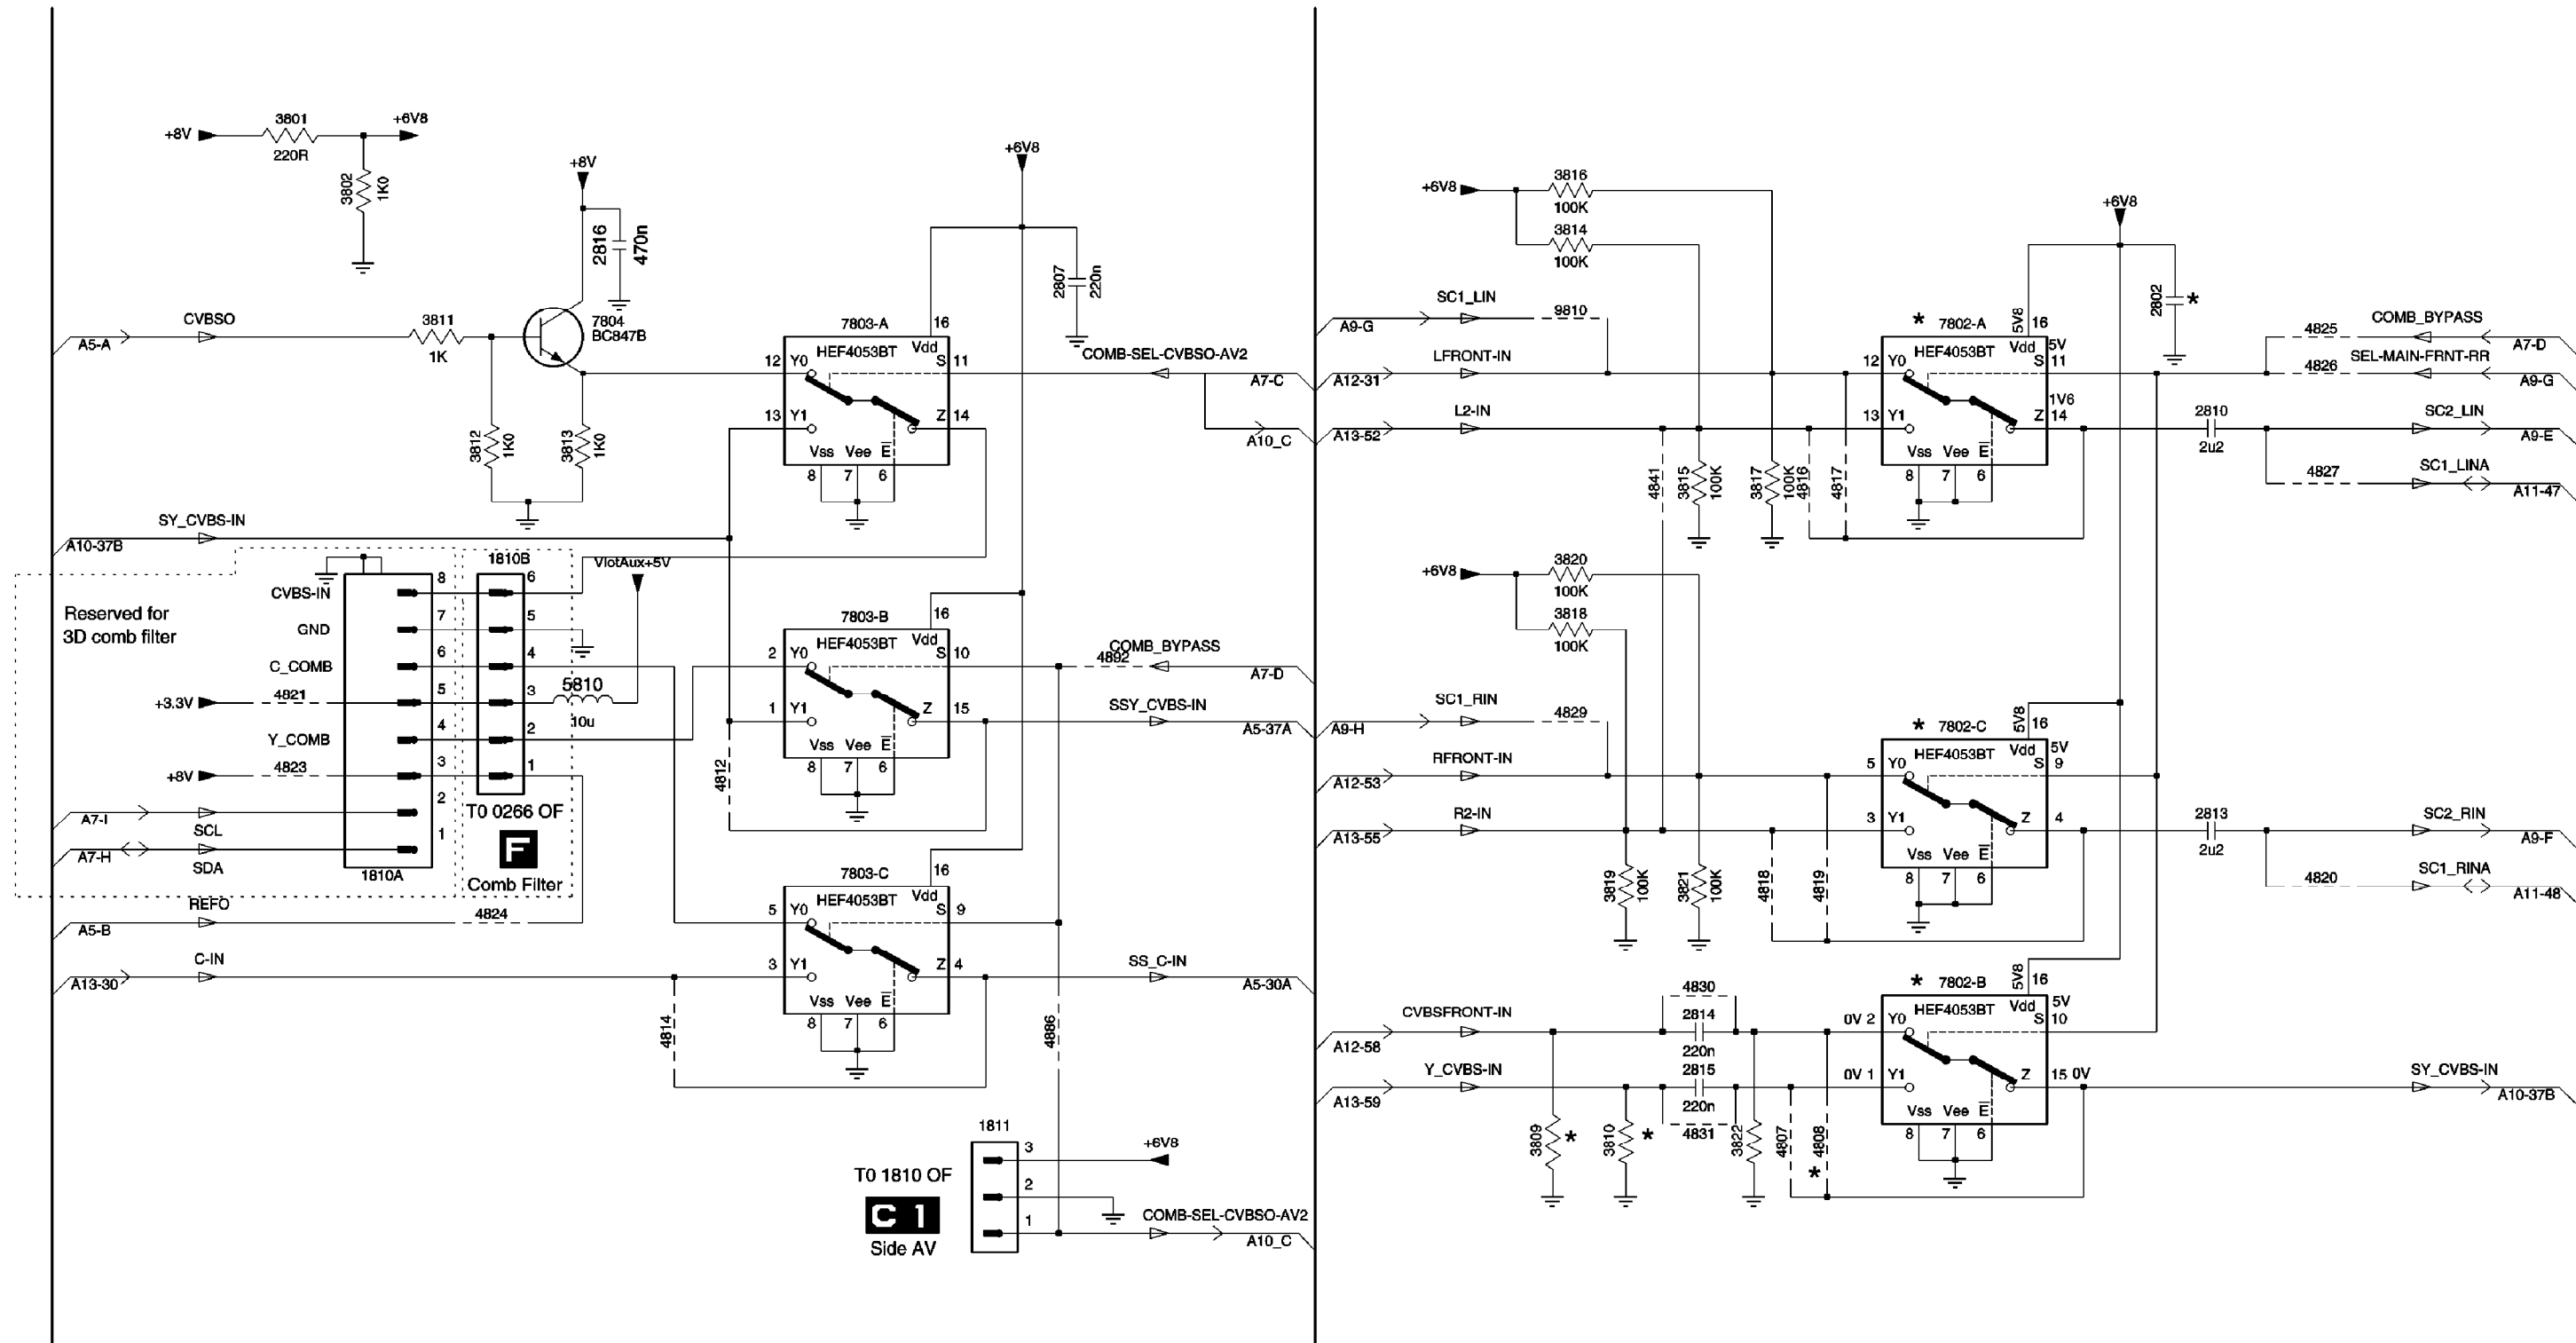

A 1 1 BTSC - NDBX STEREO DECODER

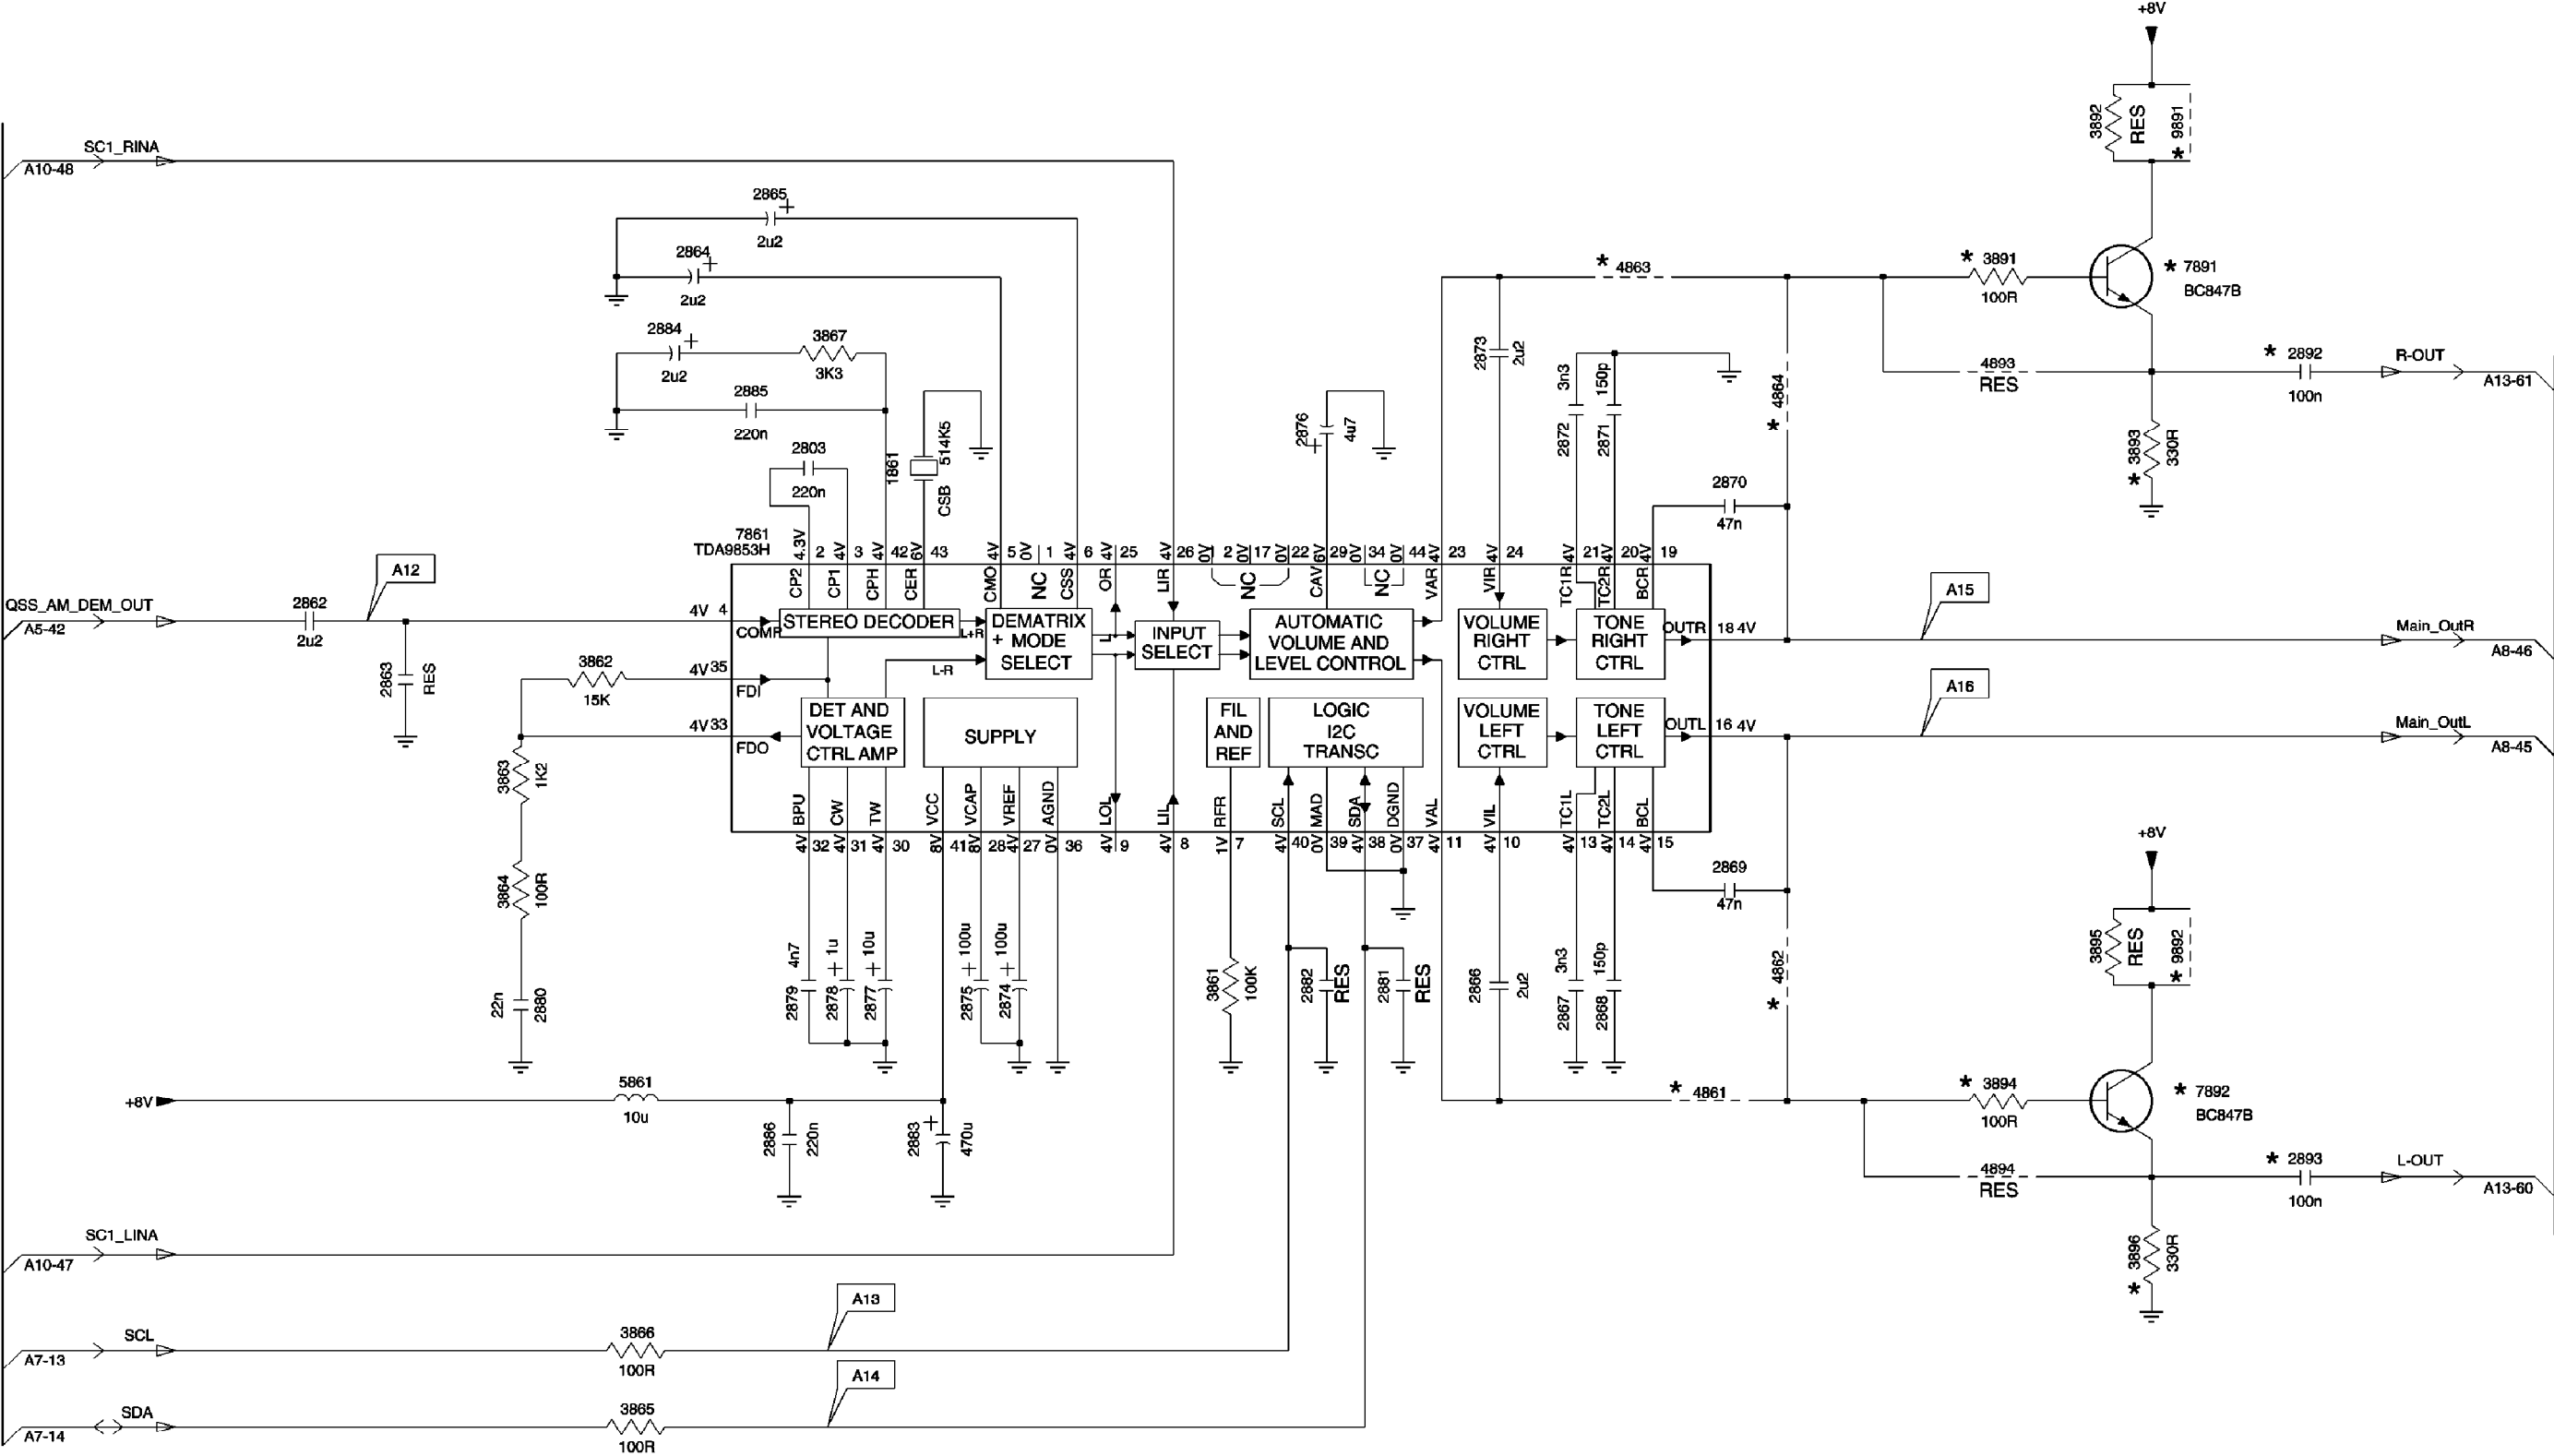



A 1 2 FRONT IO + FRONT CONTROL + HEADPHONE

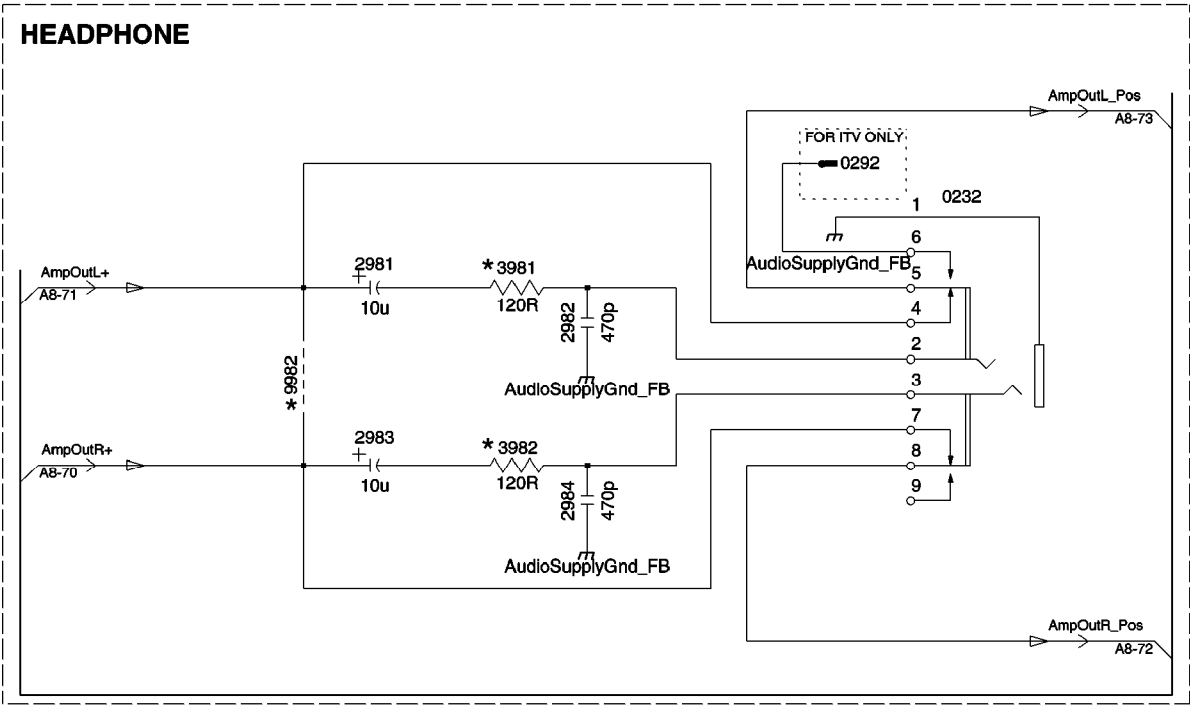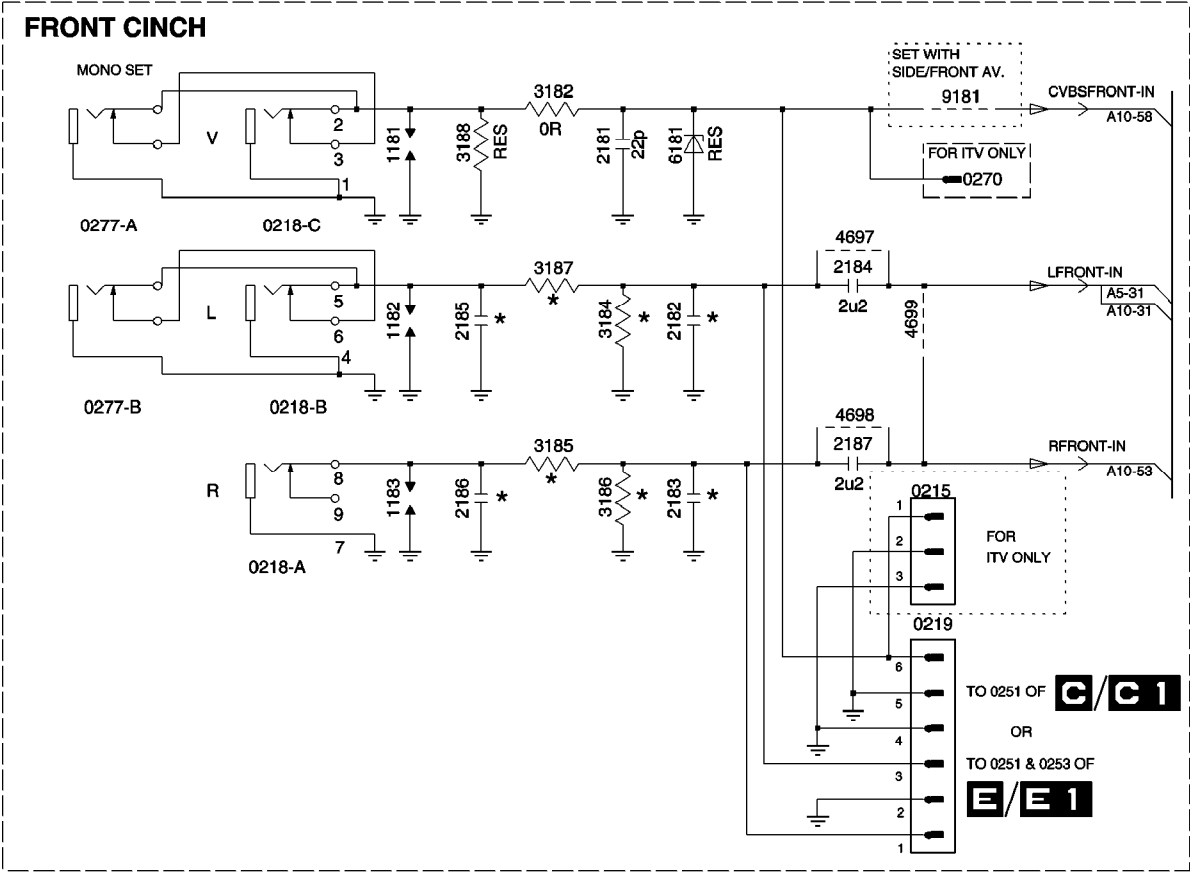


For Engg Purpose Only


4694

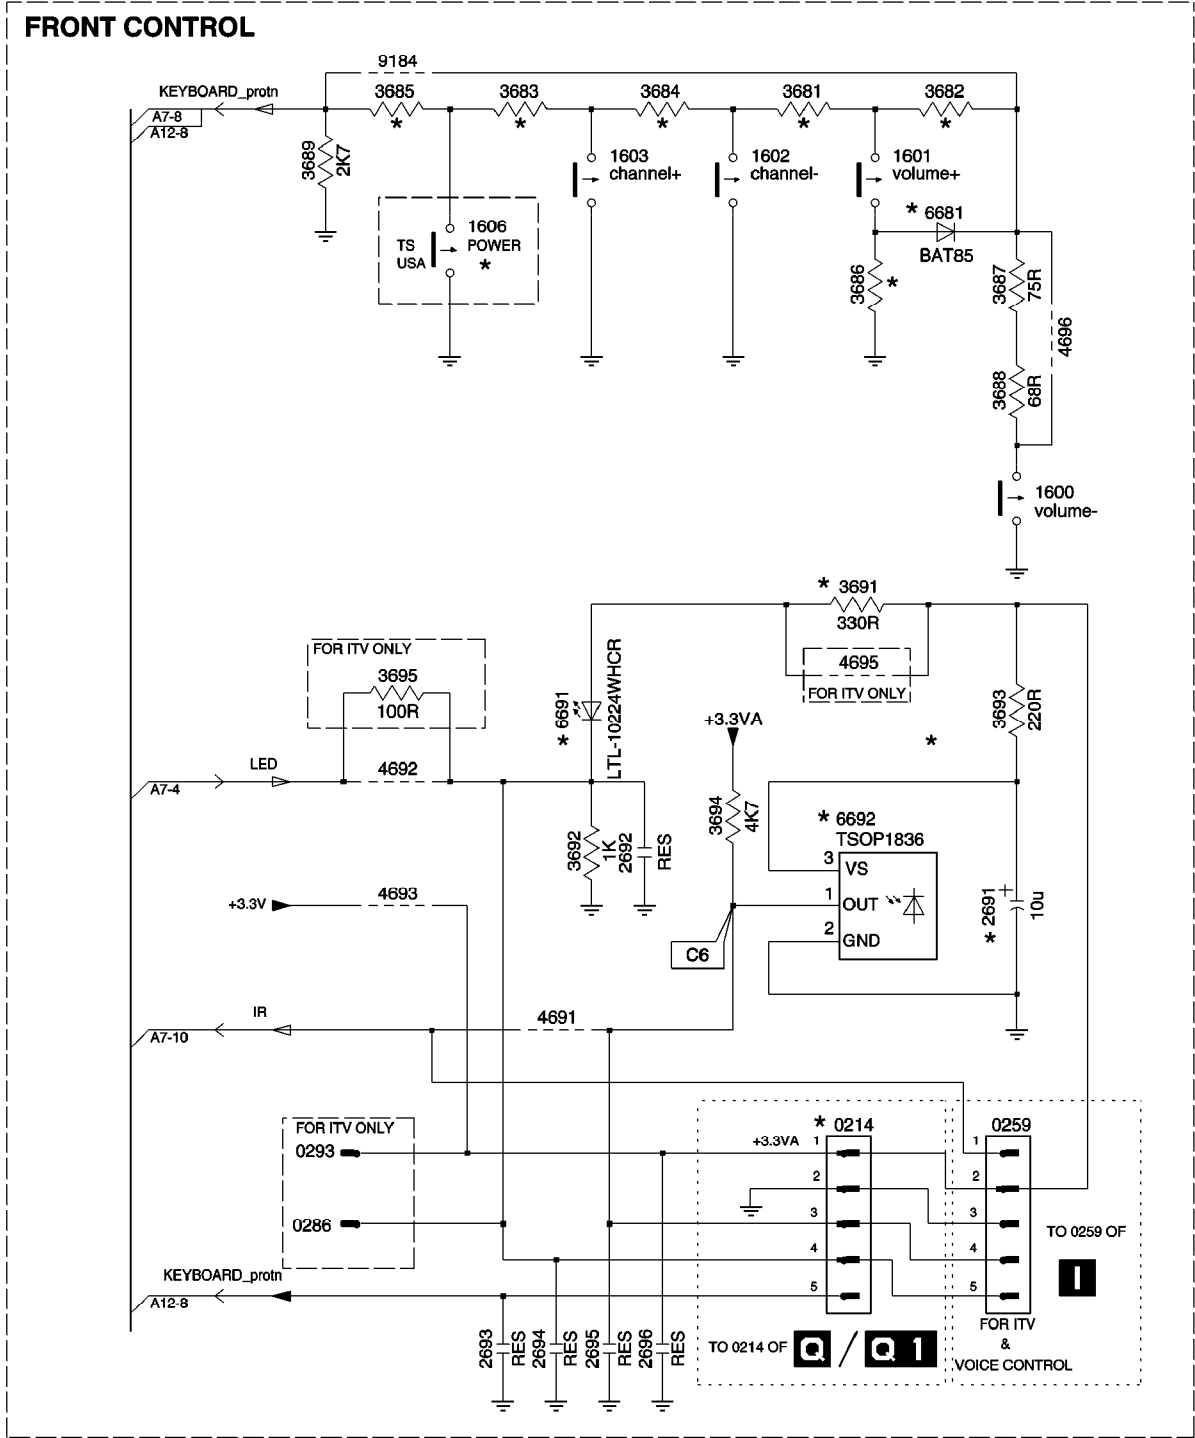

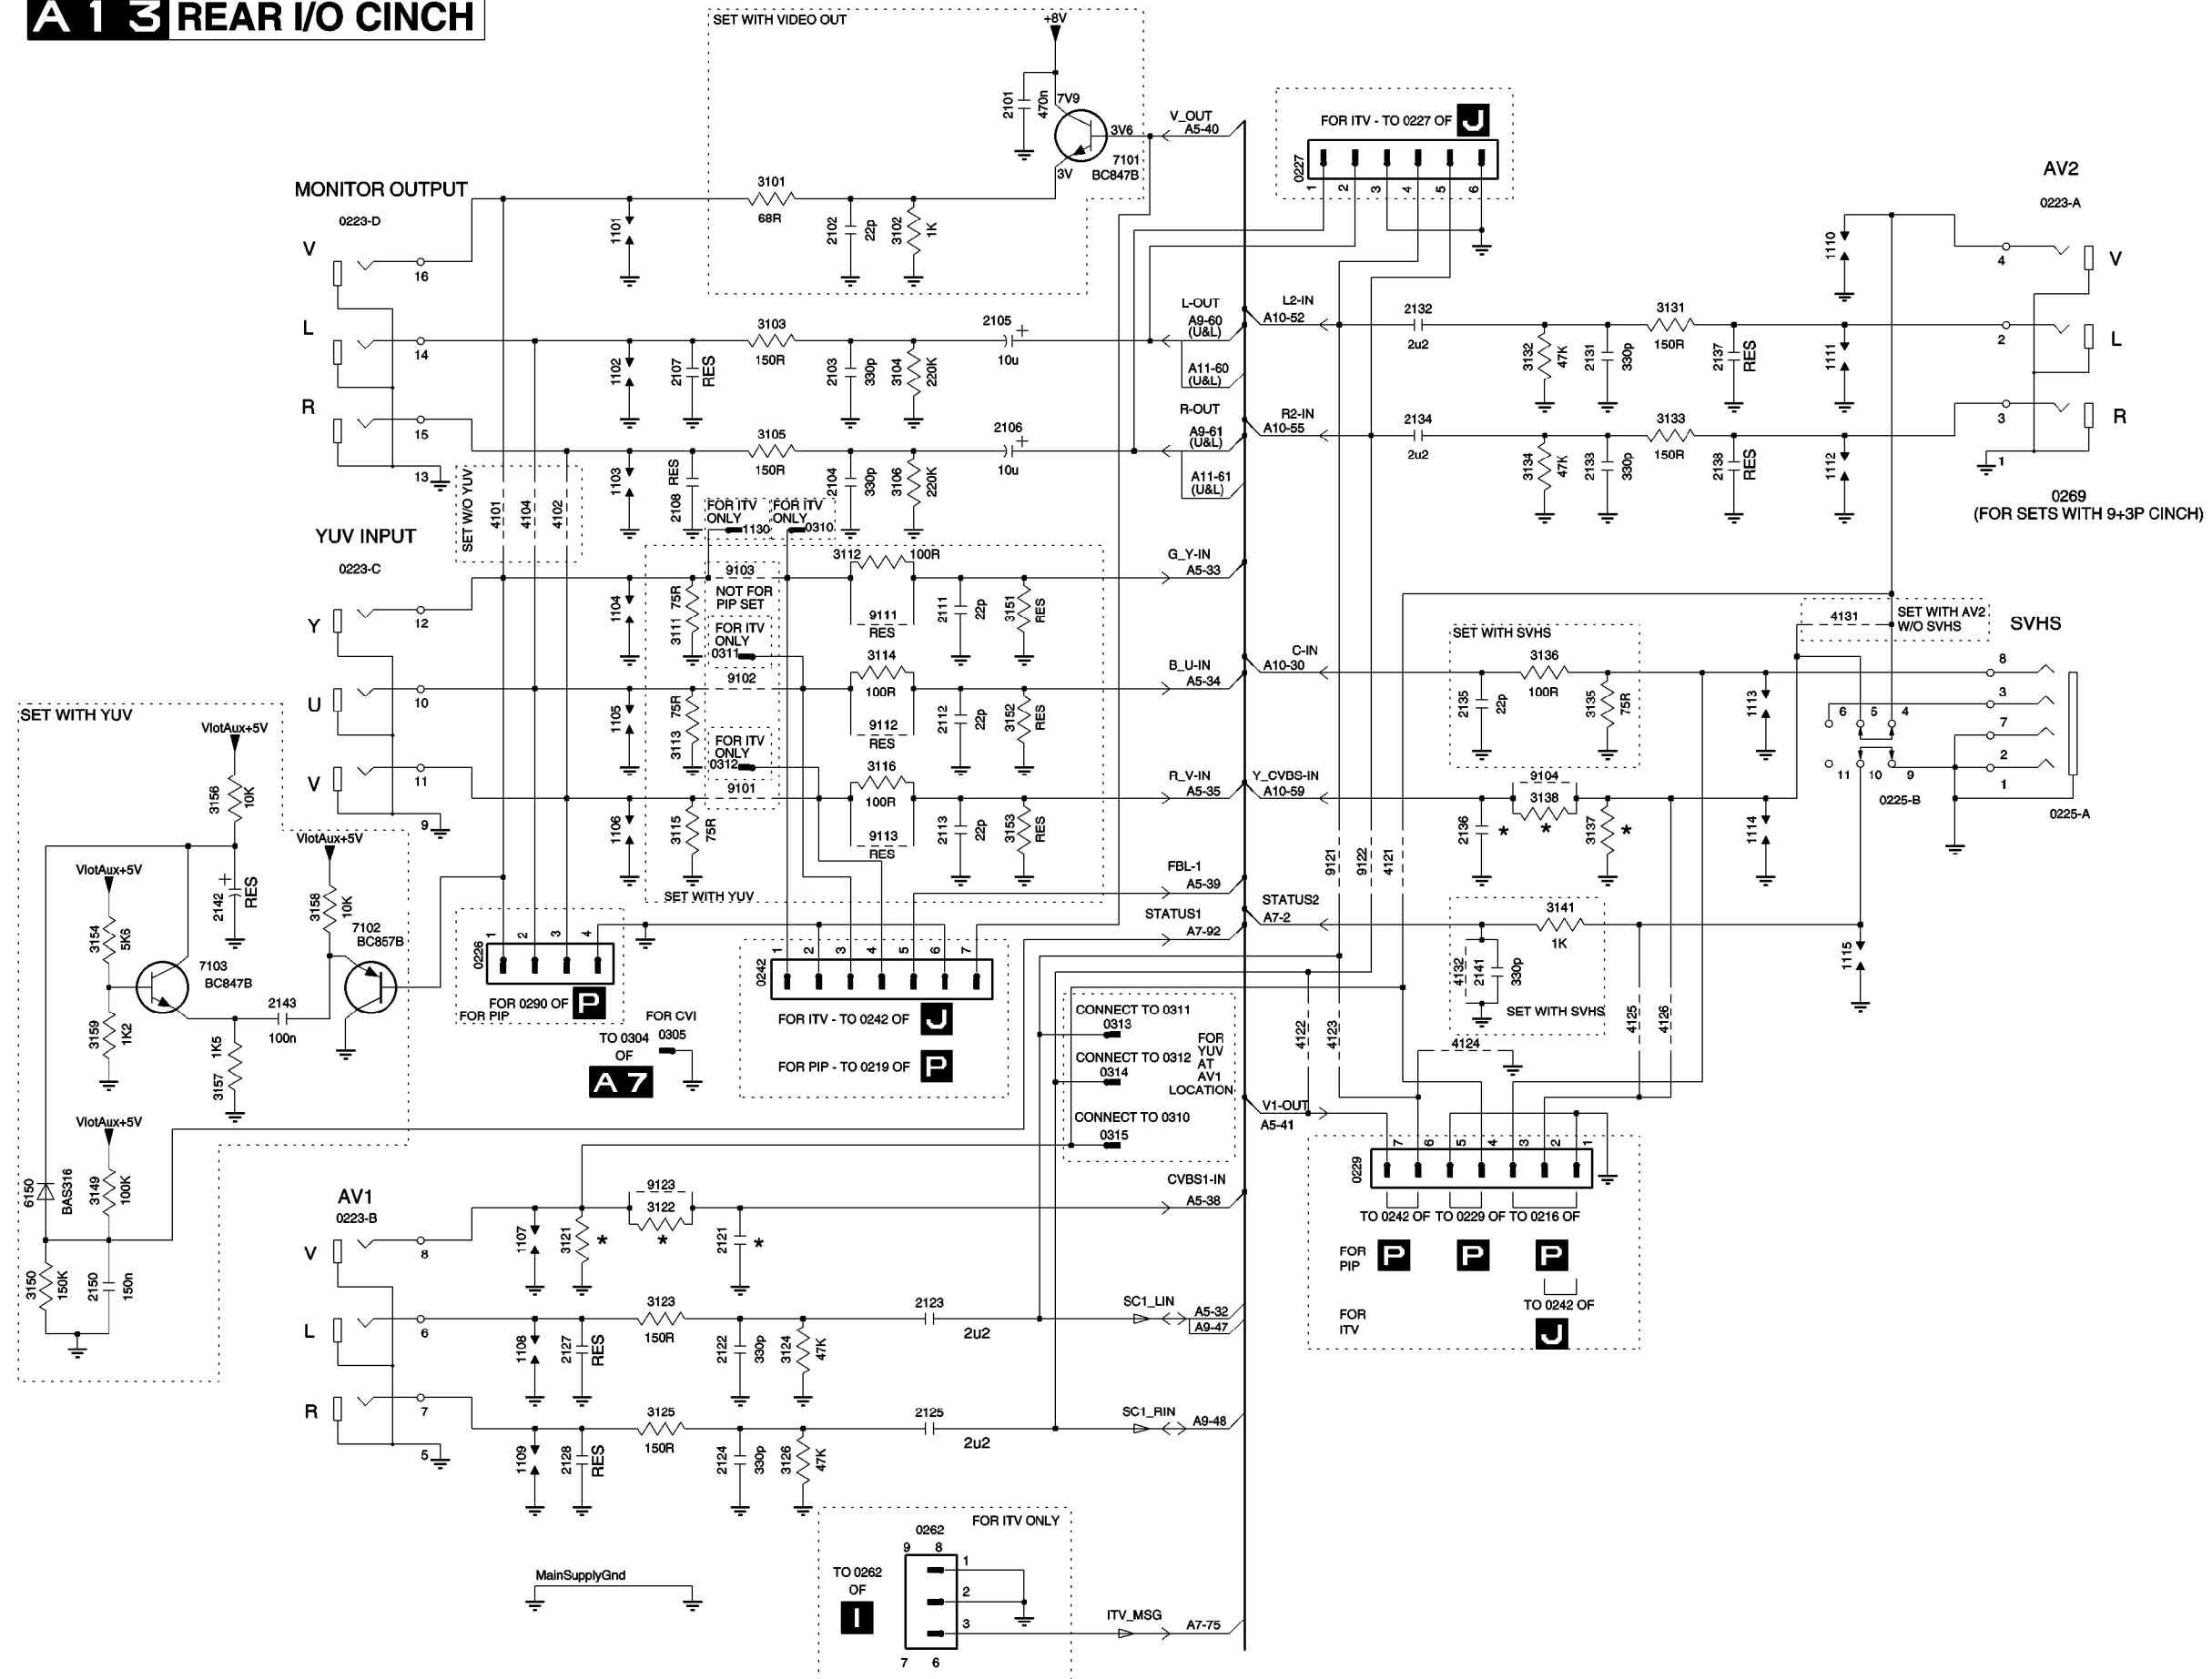


A 1 6 PIP INTERFACE CIRCUIT & TILT INTERFACE

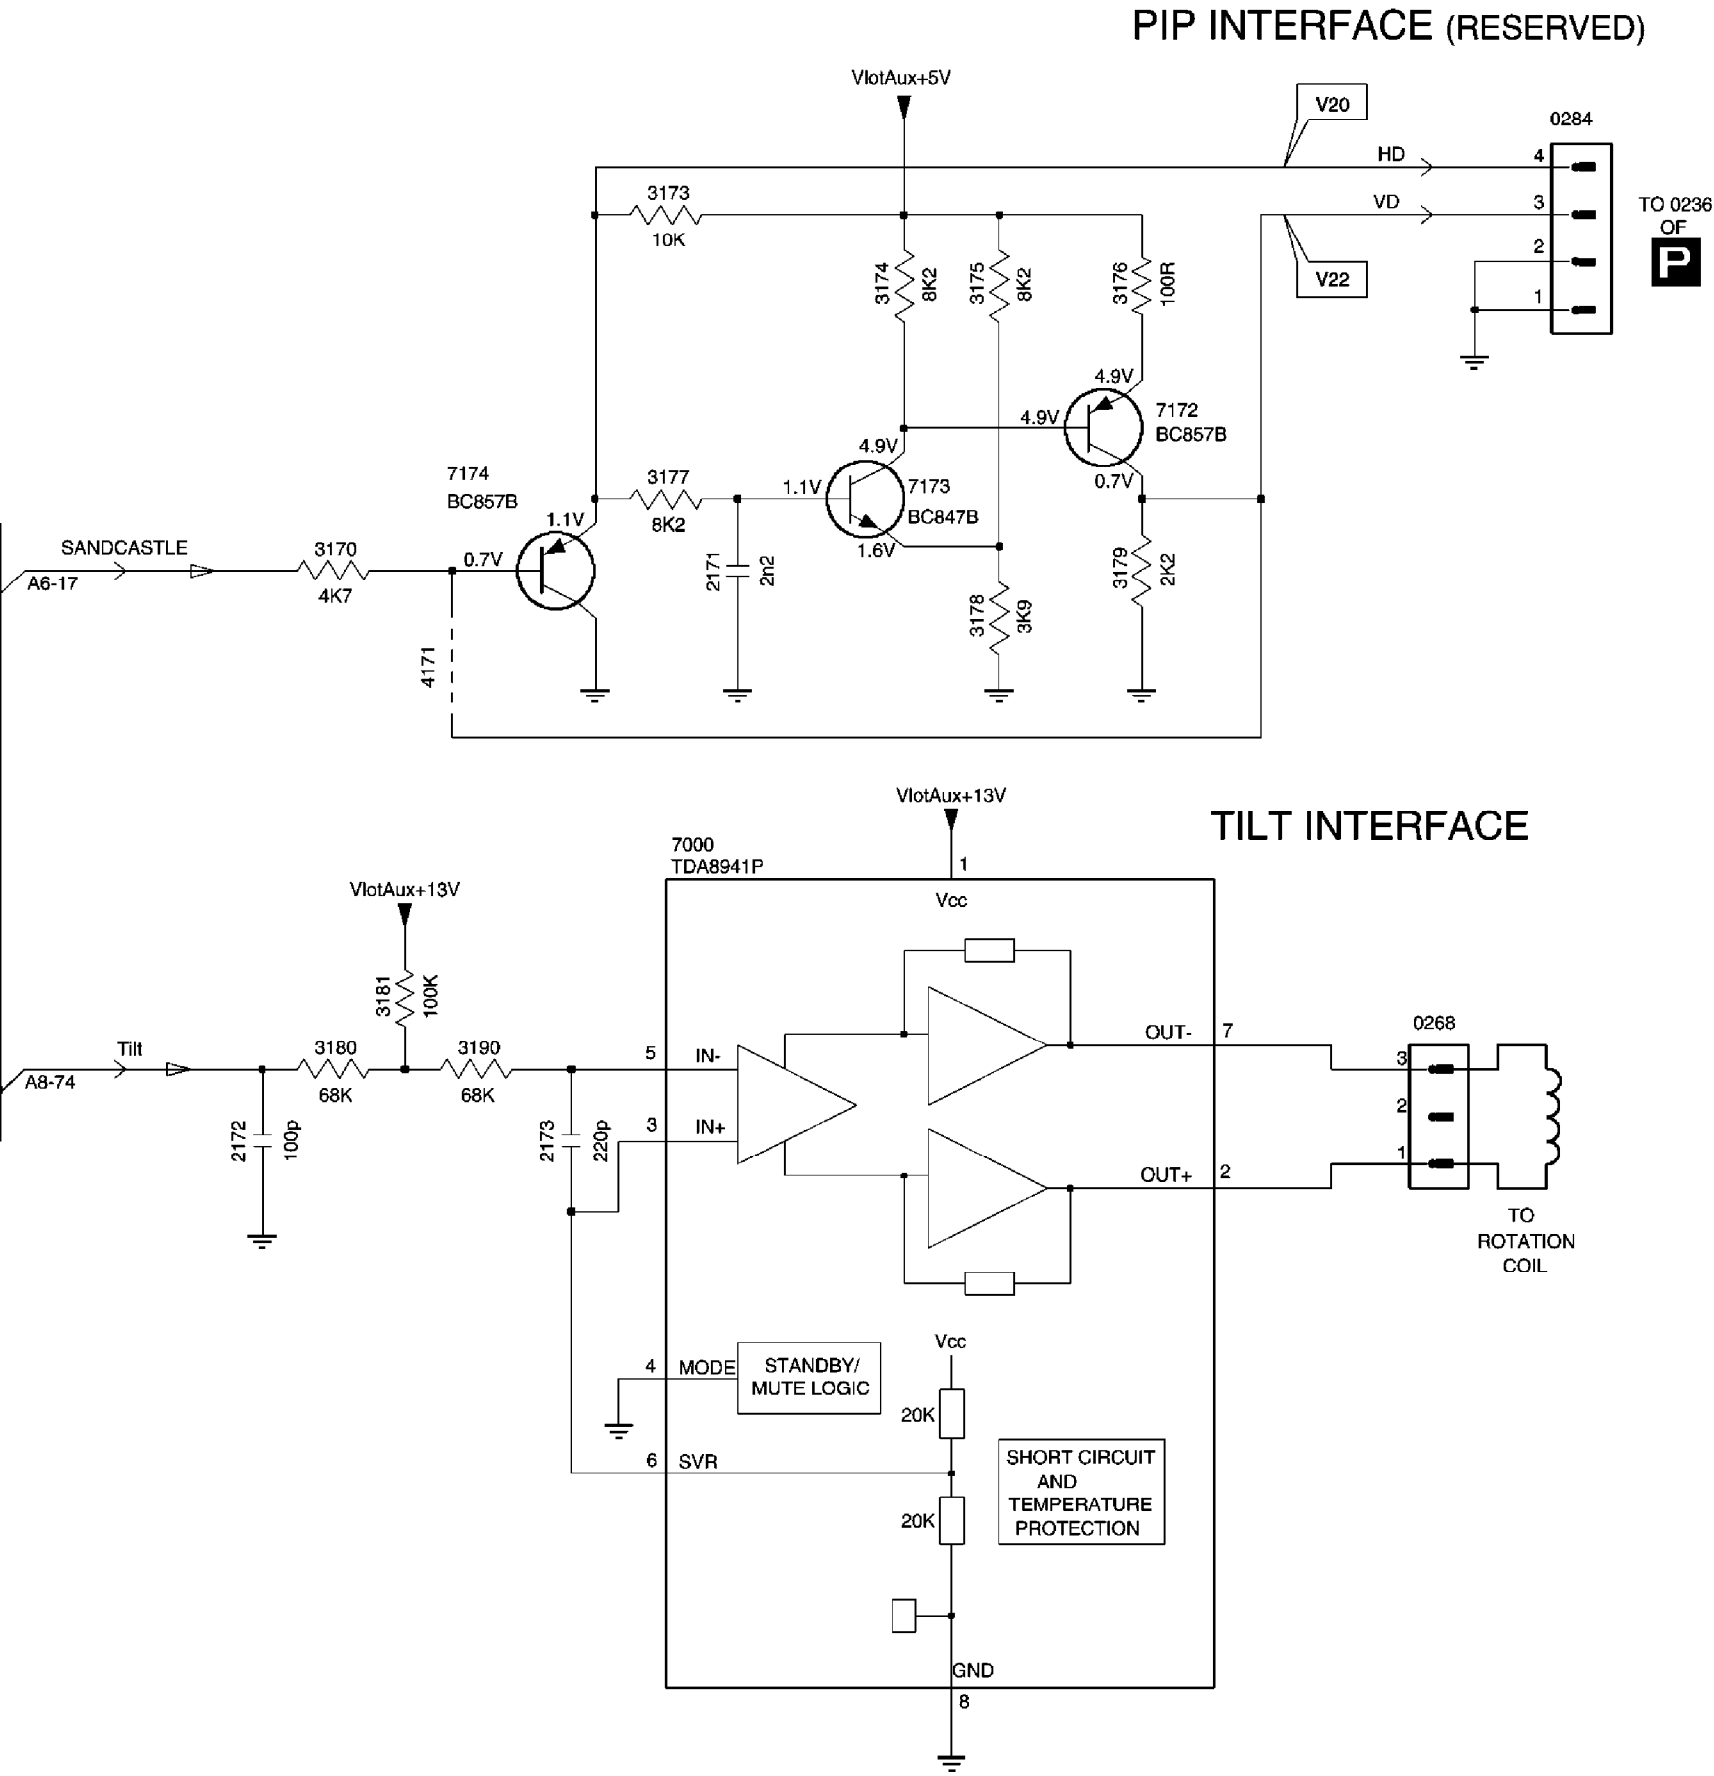


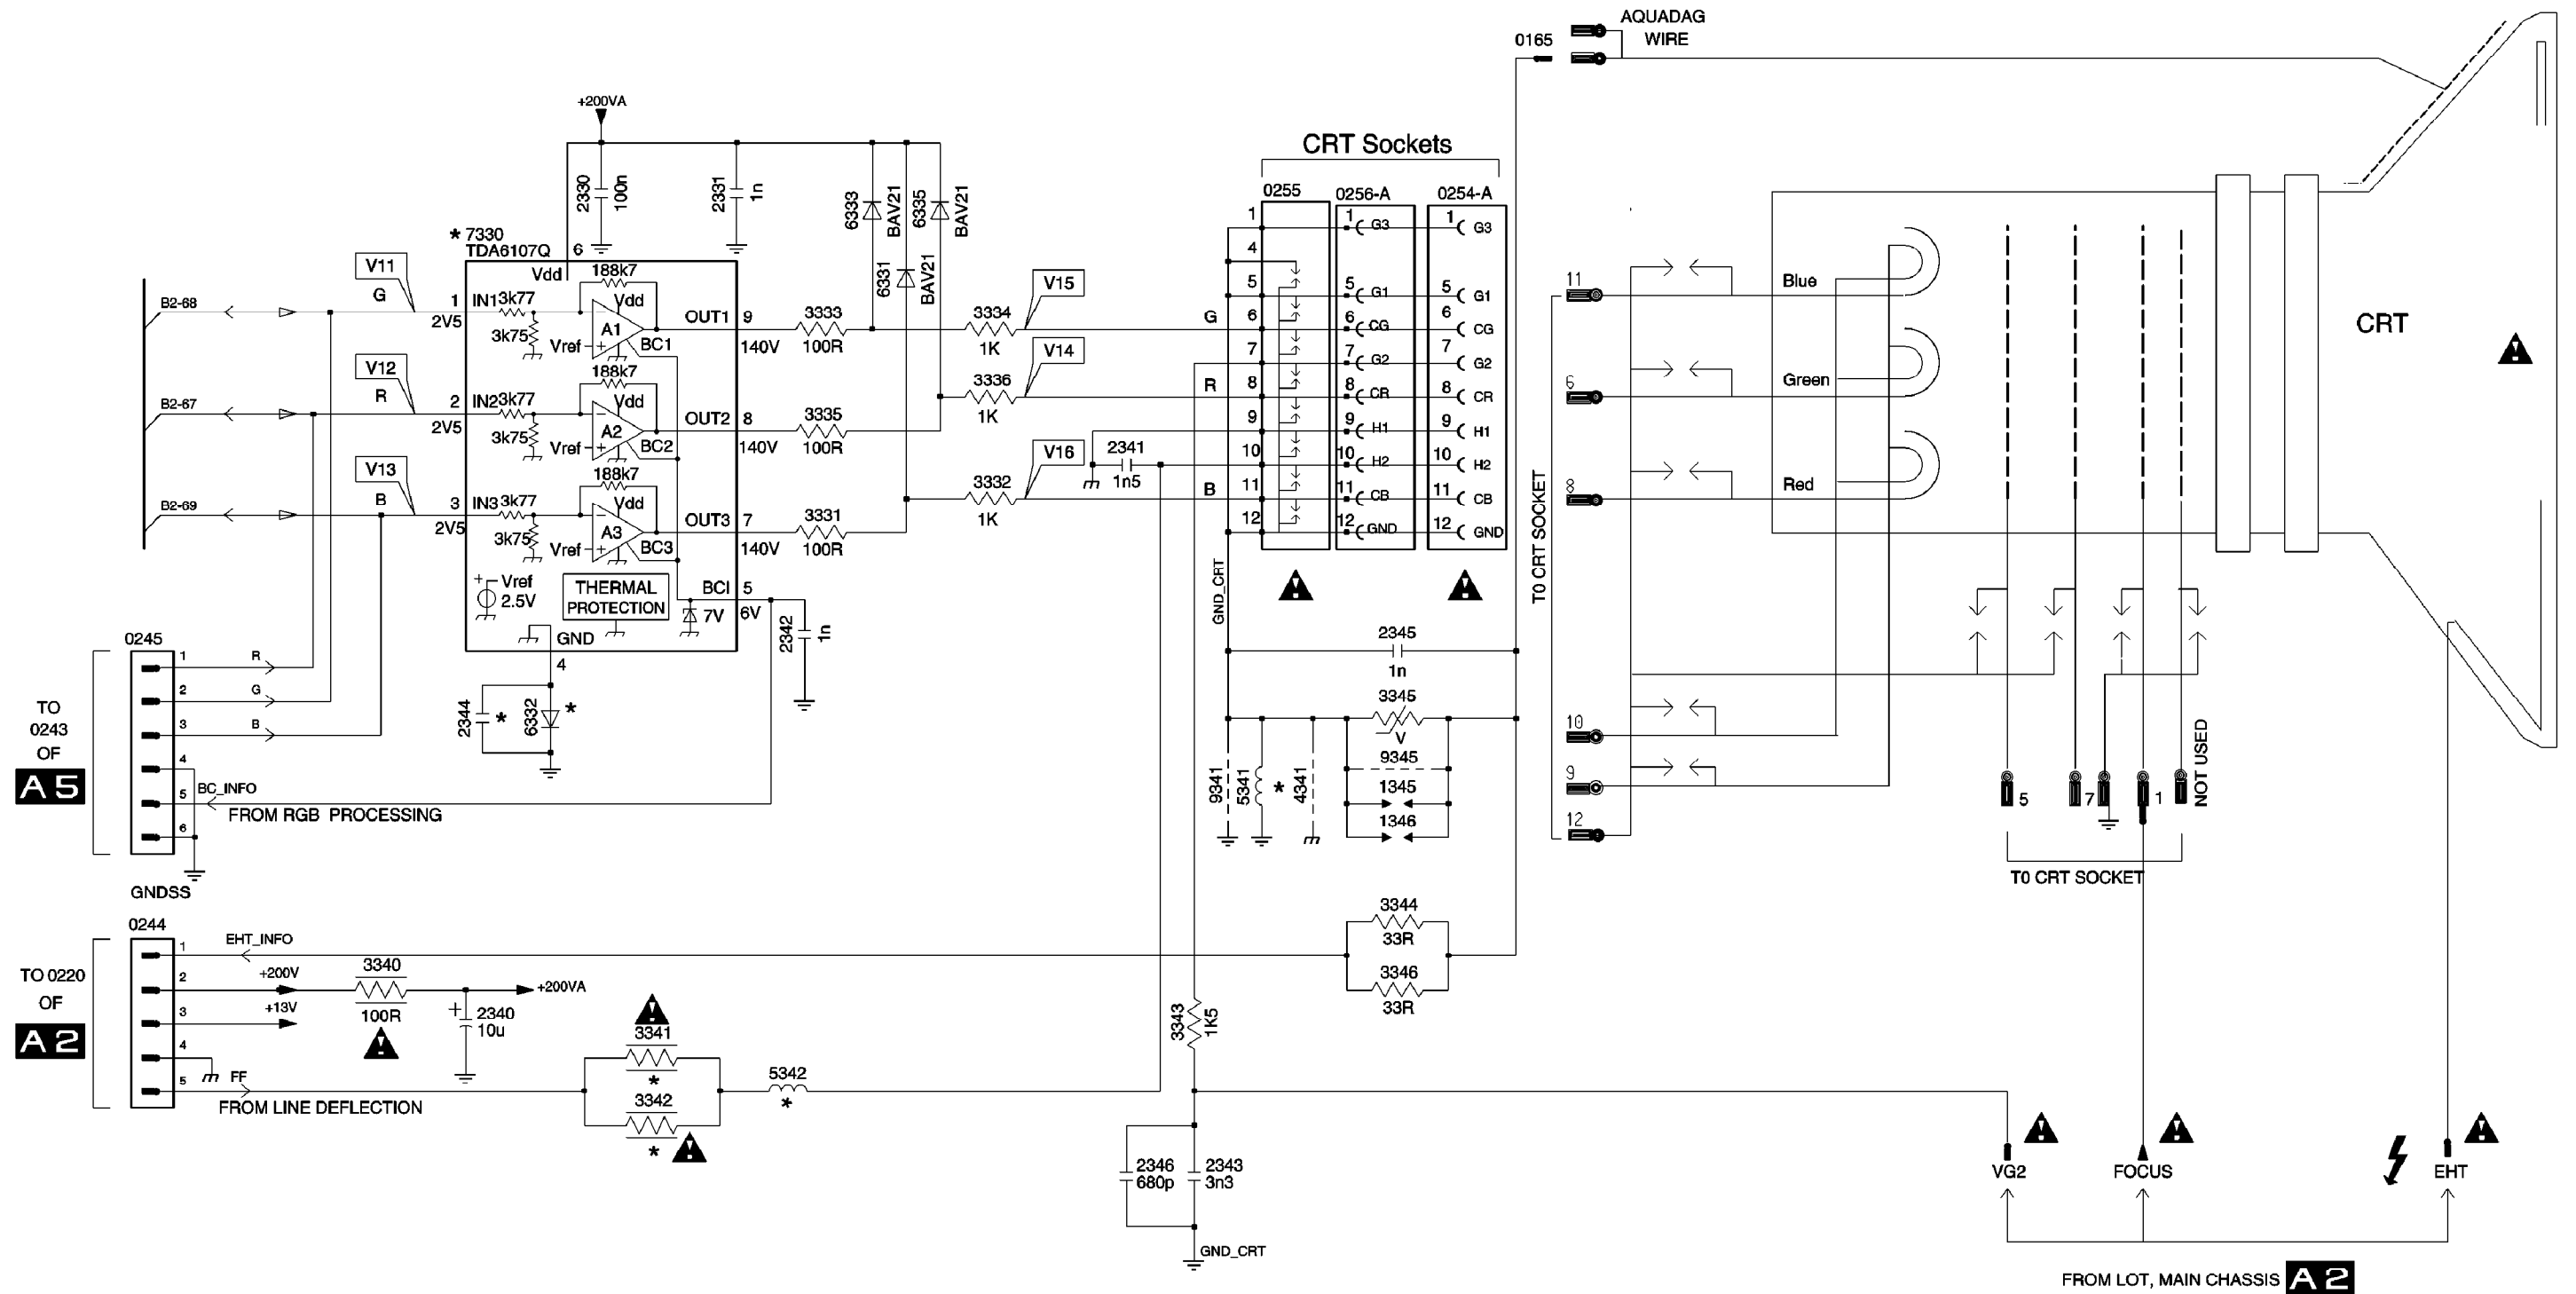


B2 ECO SCAVEM

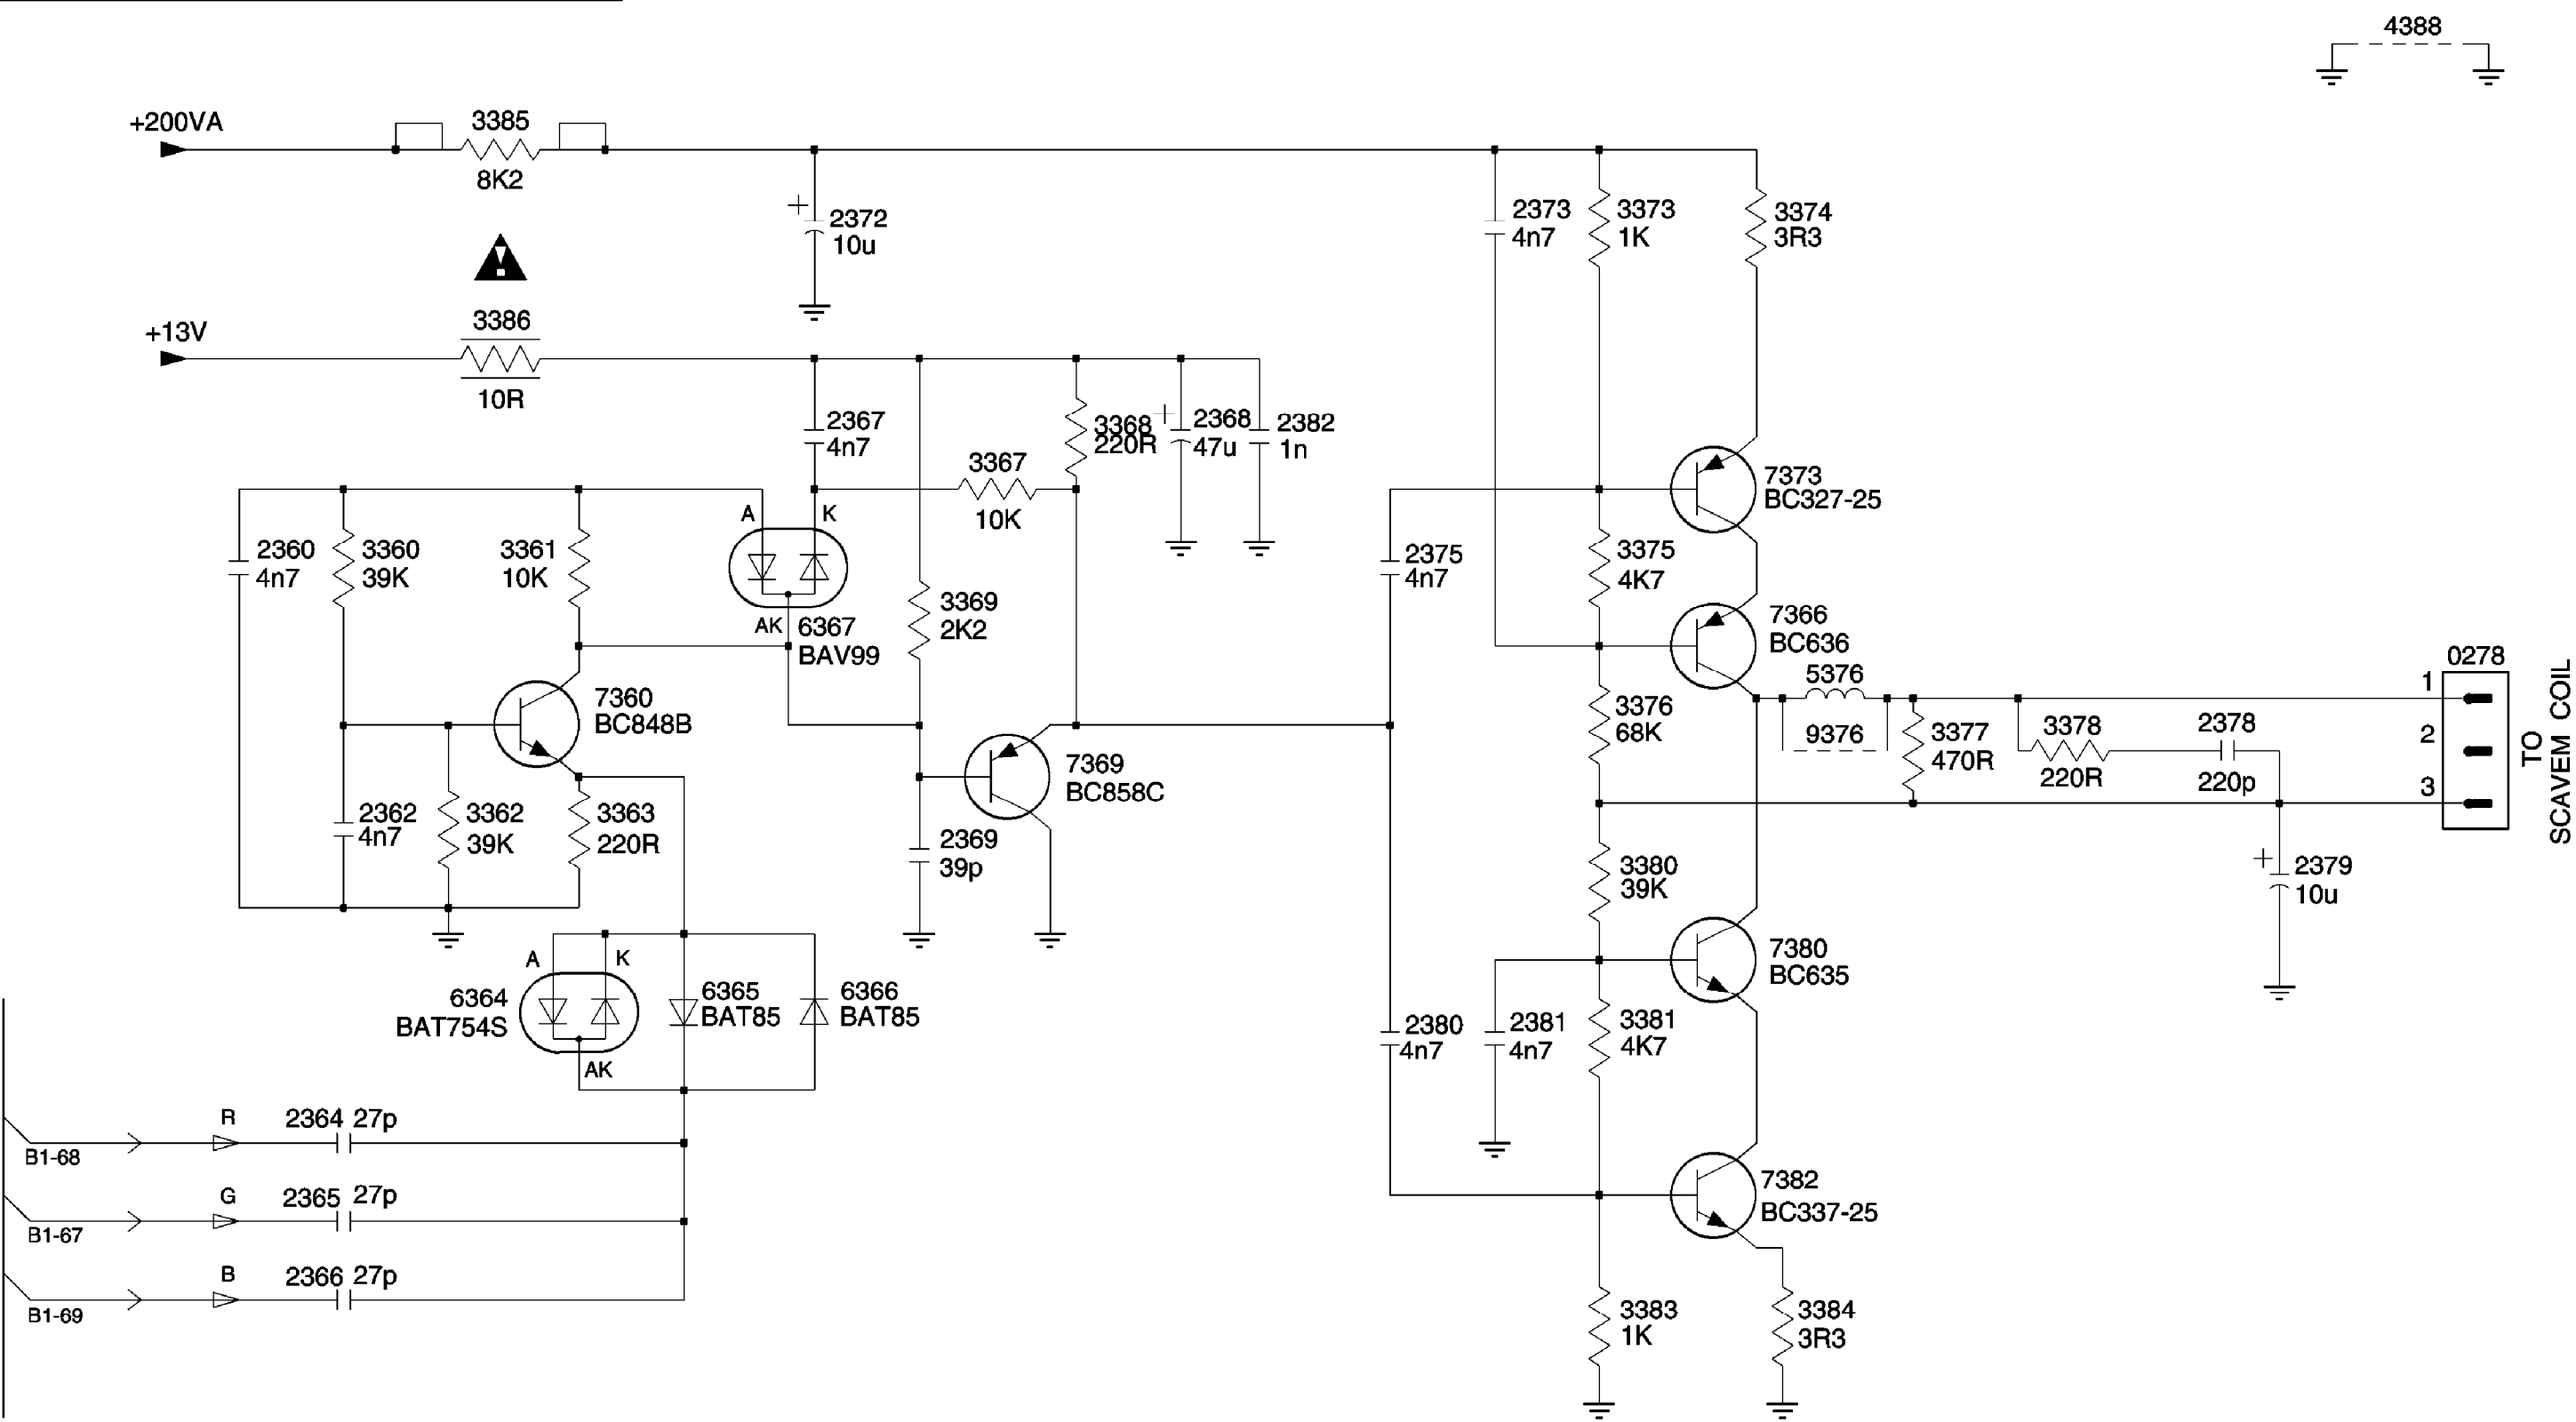


C 1 SIDE AV PANEL + HP PANEL (SLIM)

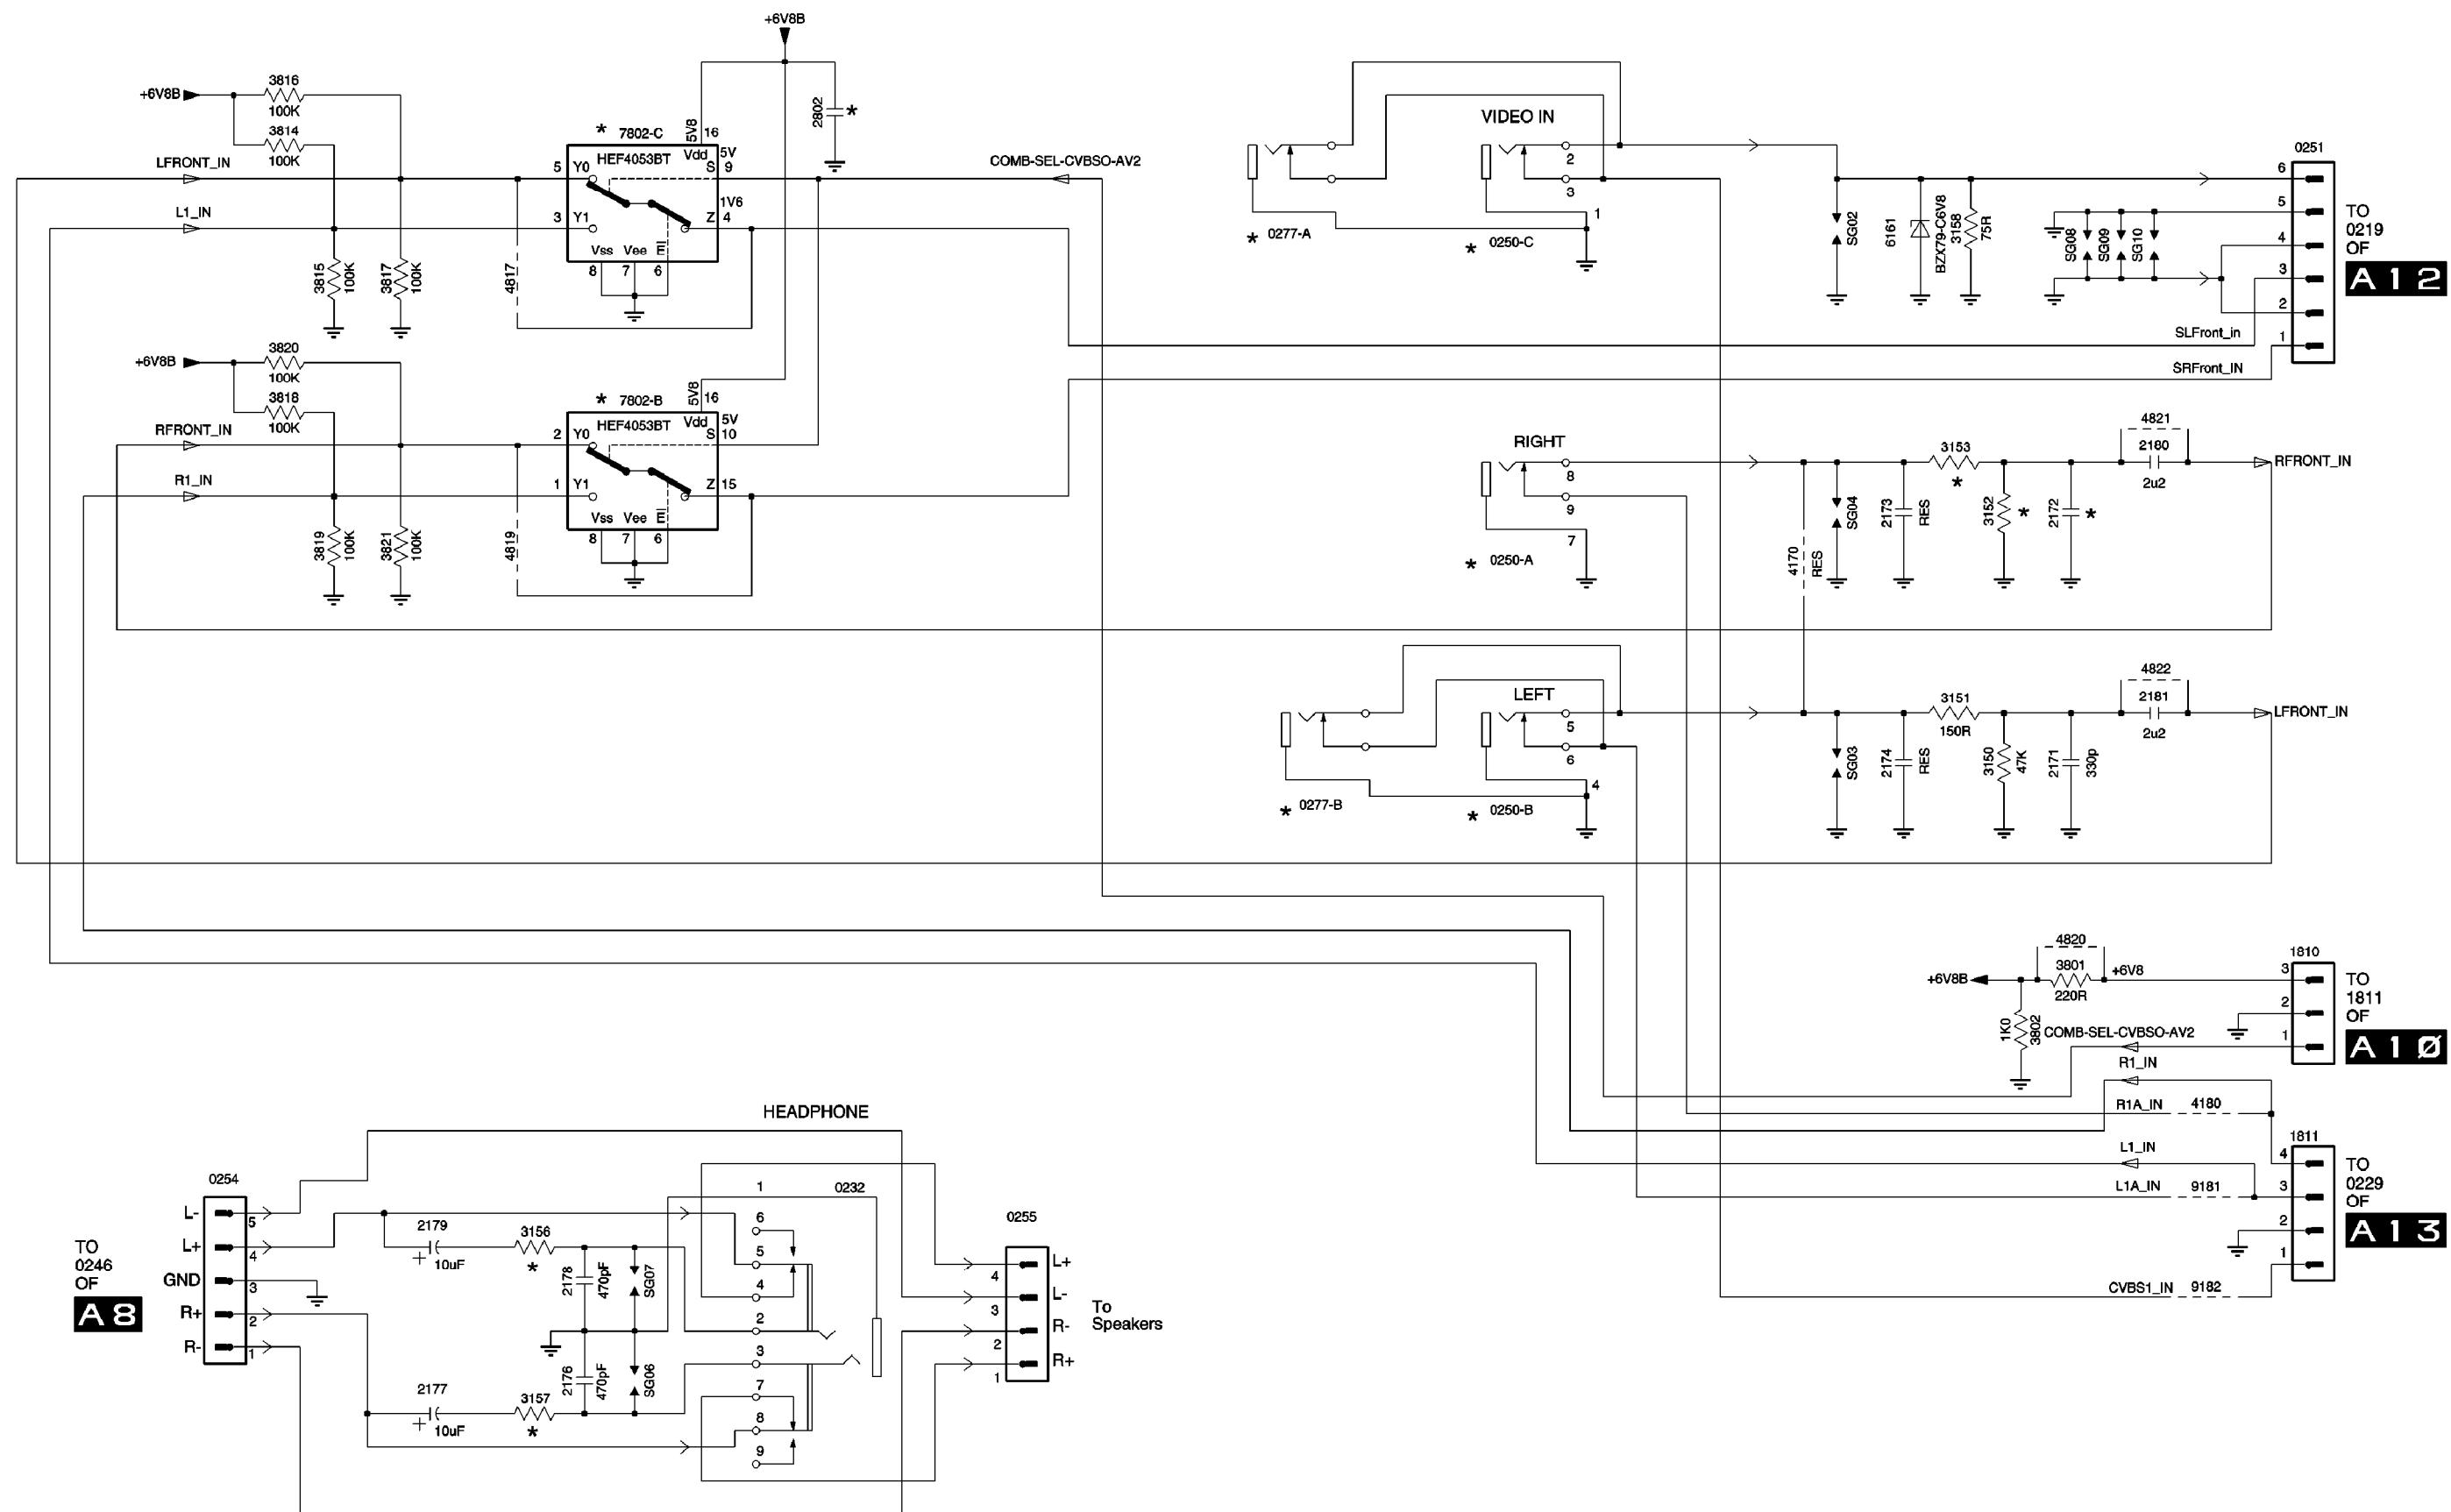


C2 SIDE AV PANEL + HP PANEL (WIDE)

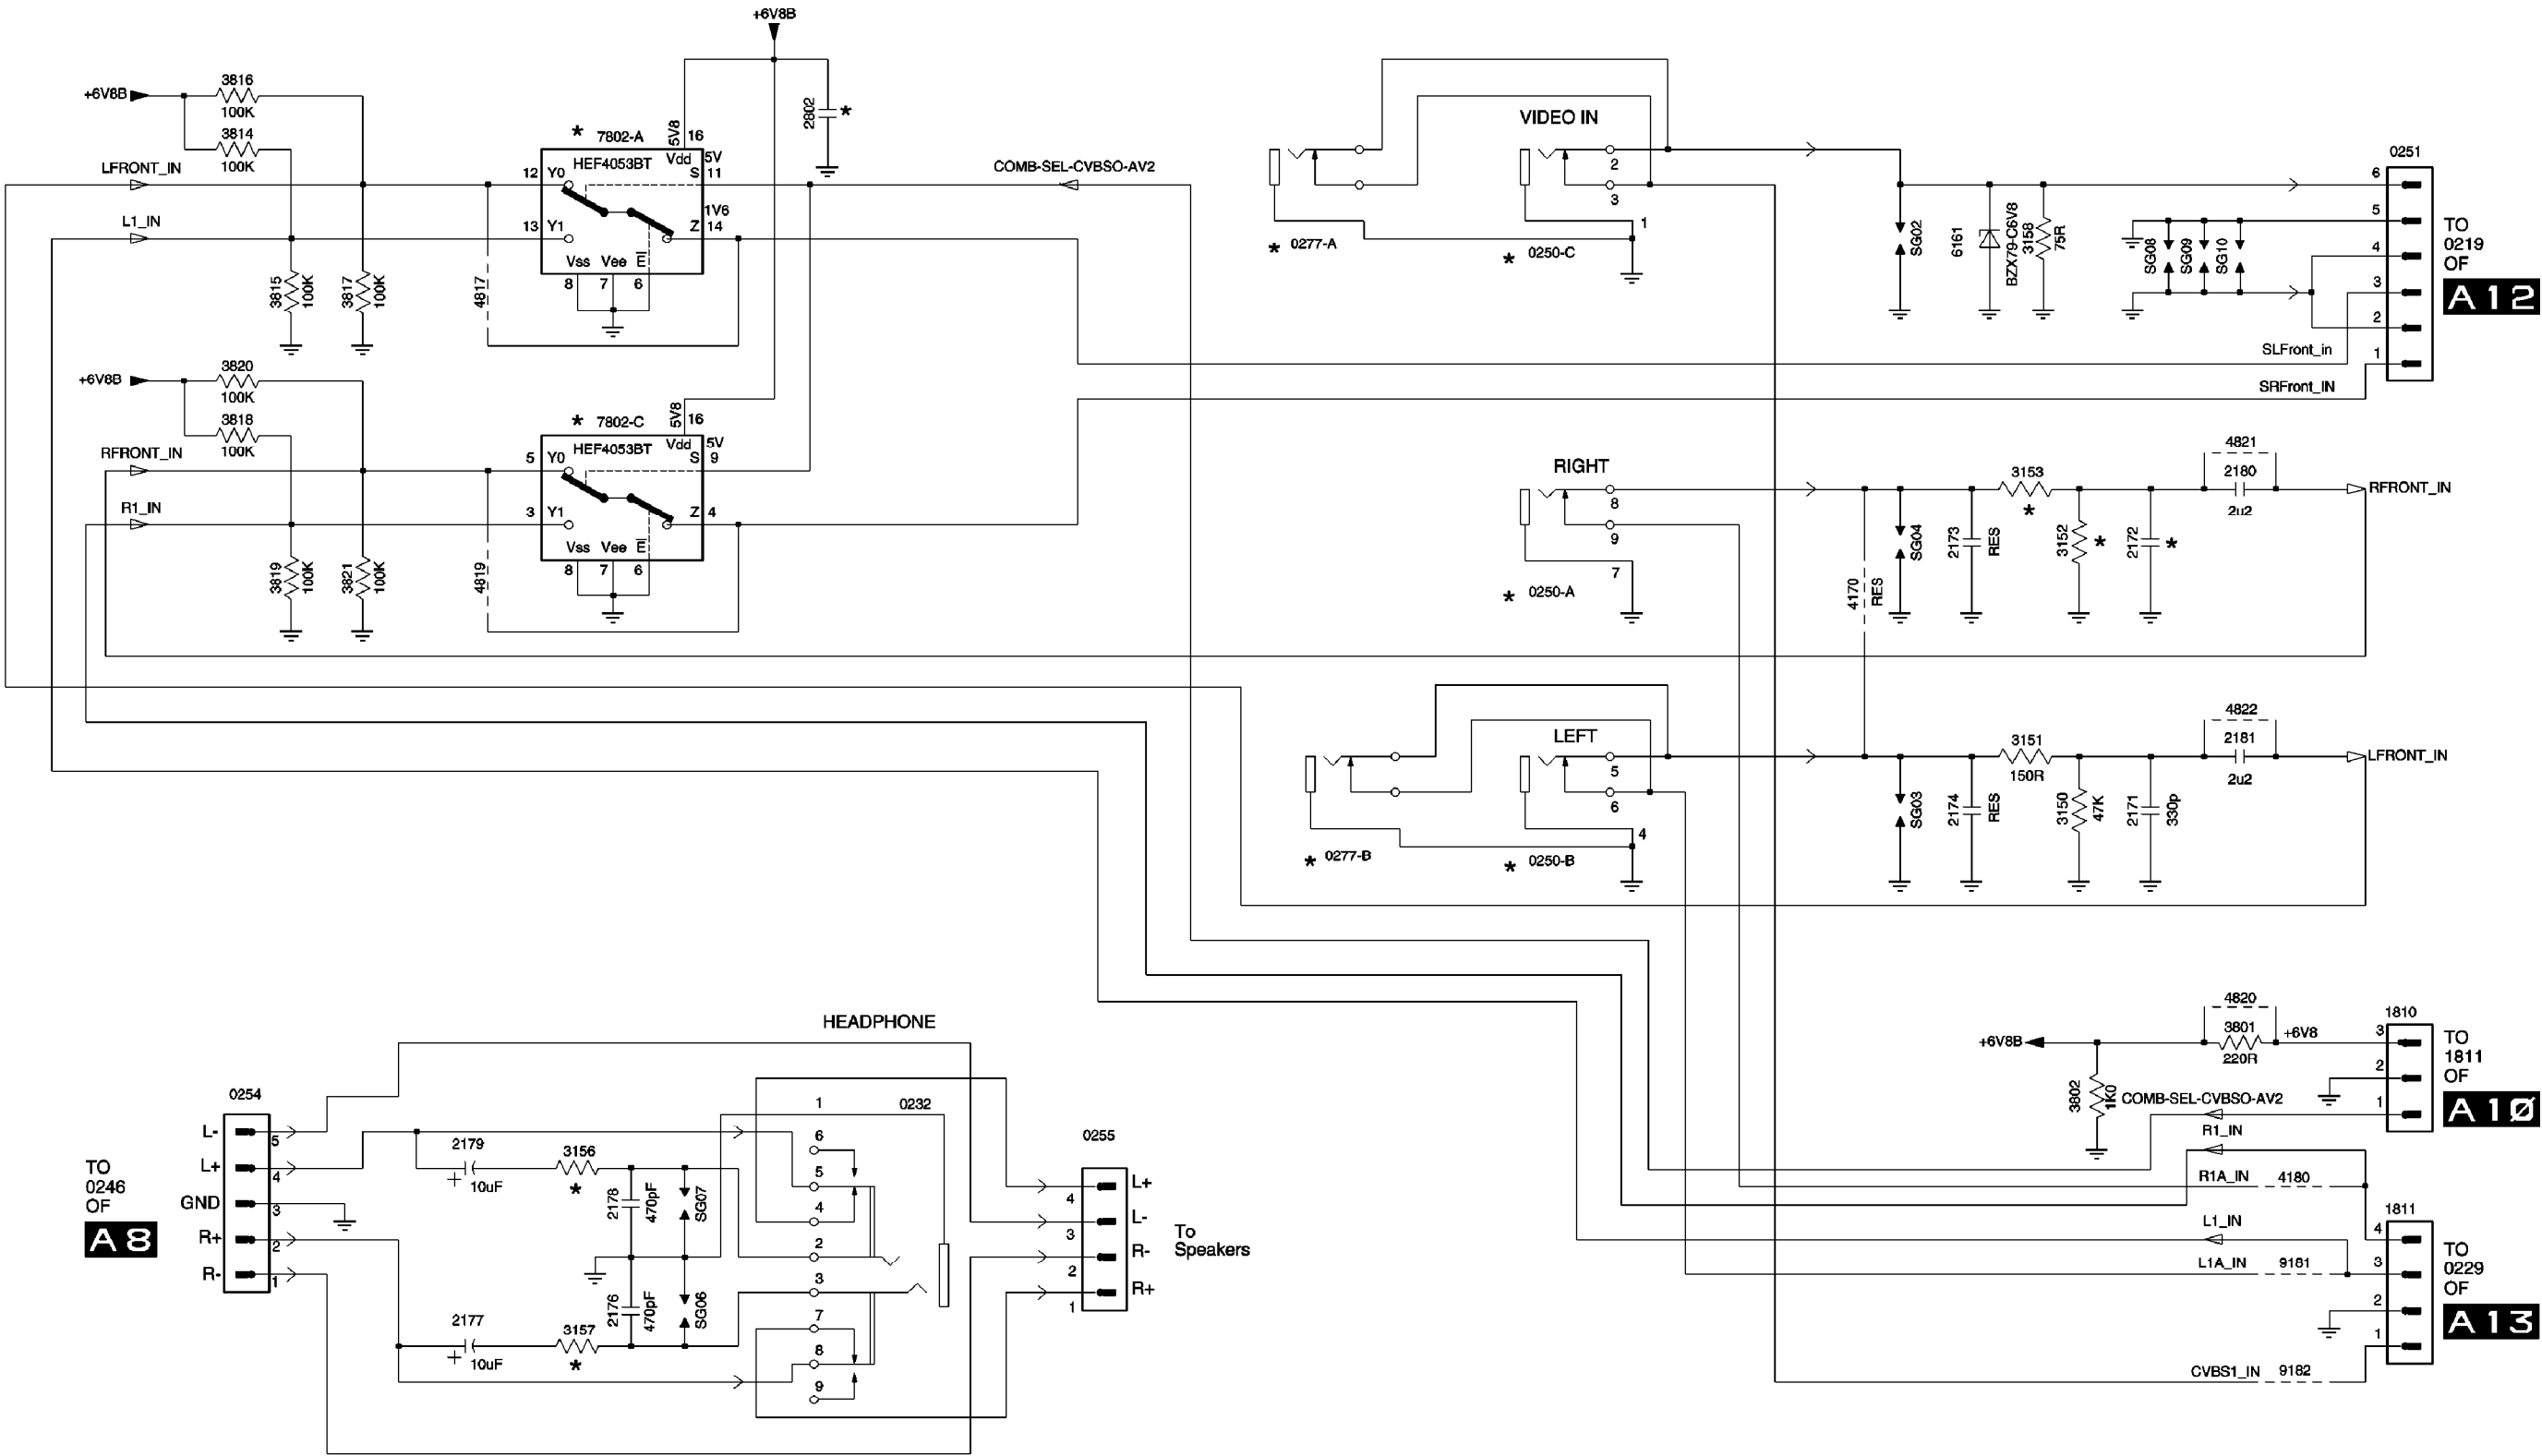


TOP CONTROL PANEL

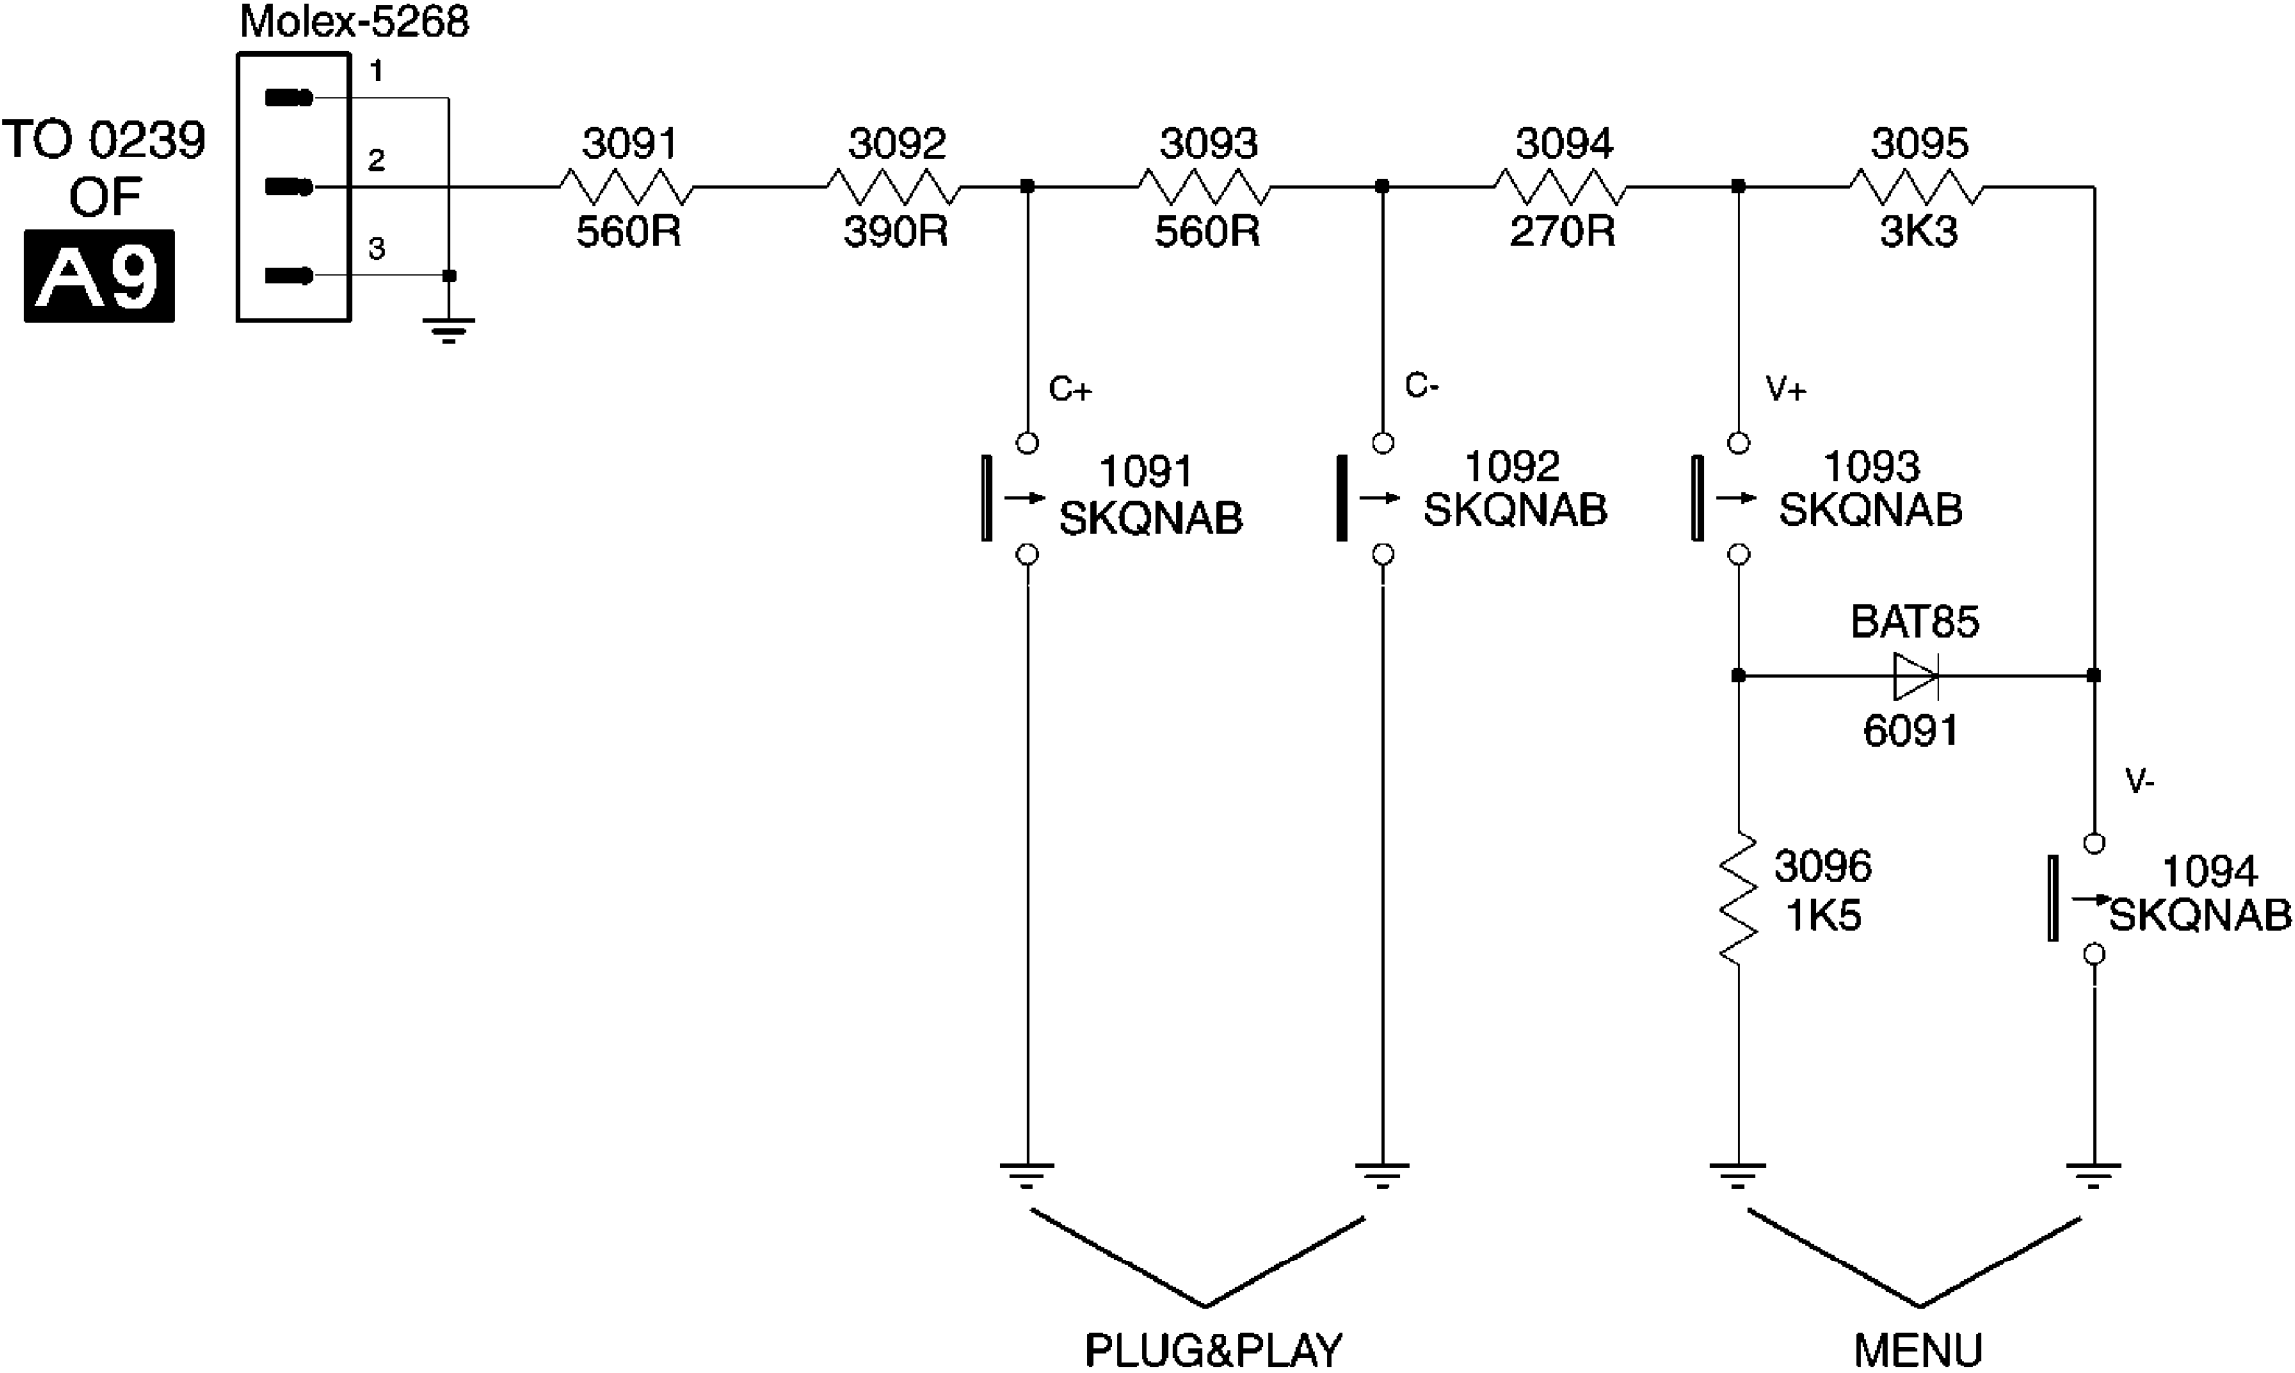

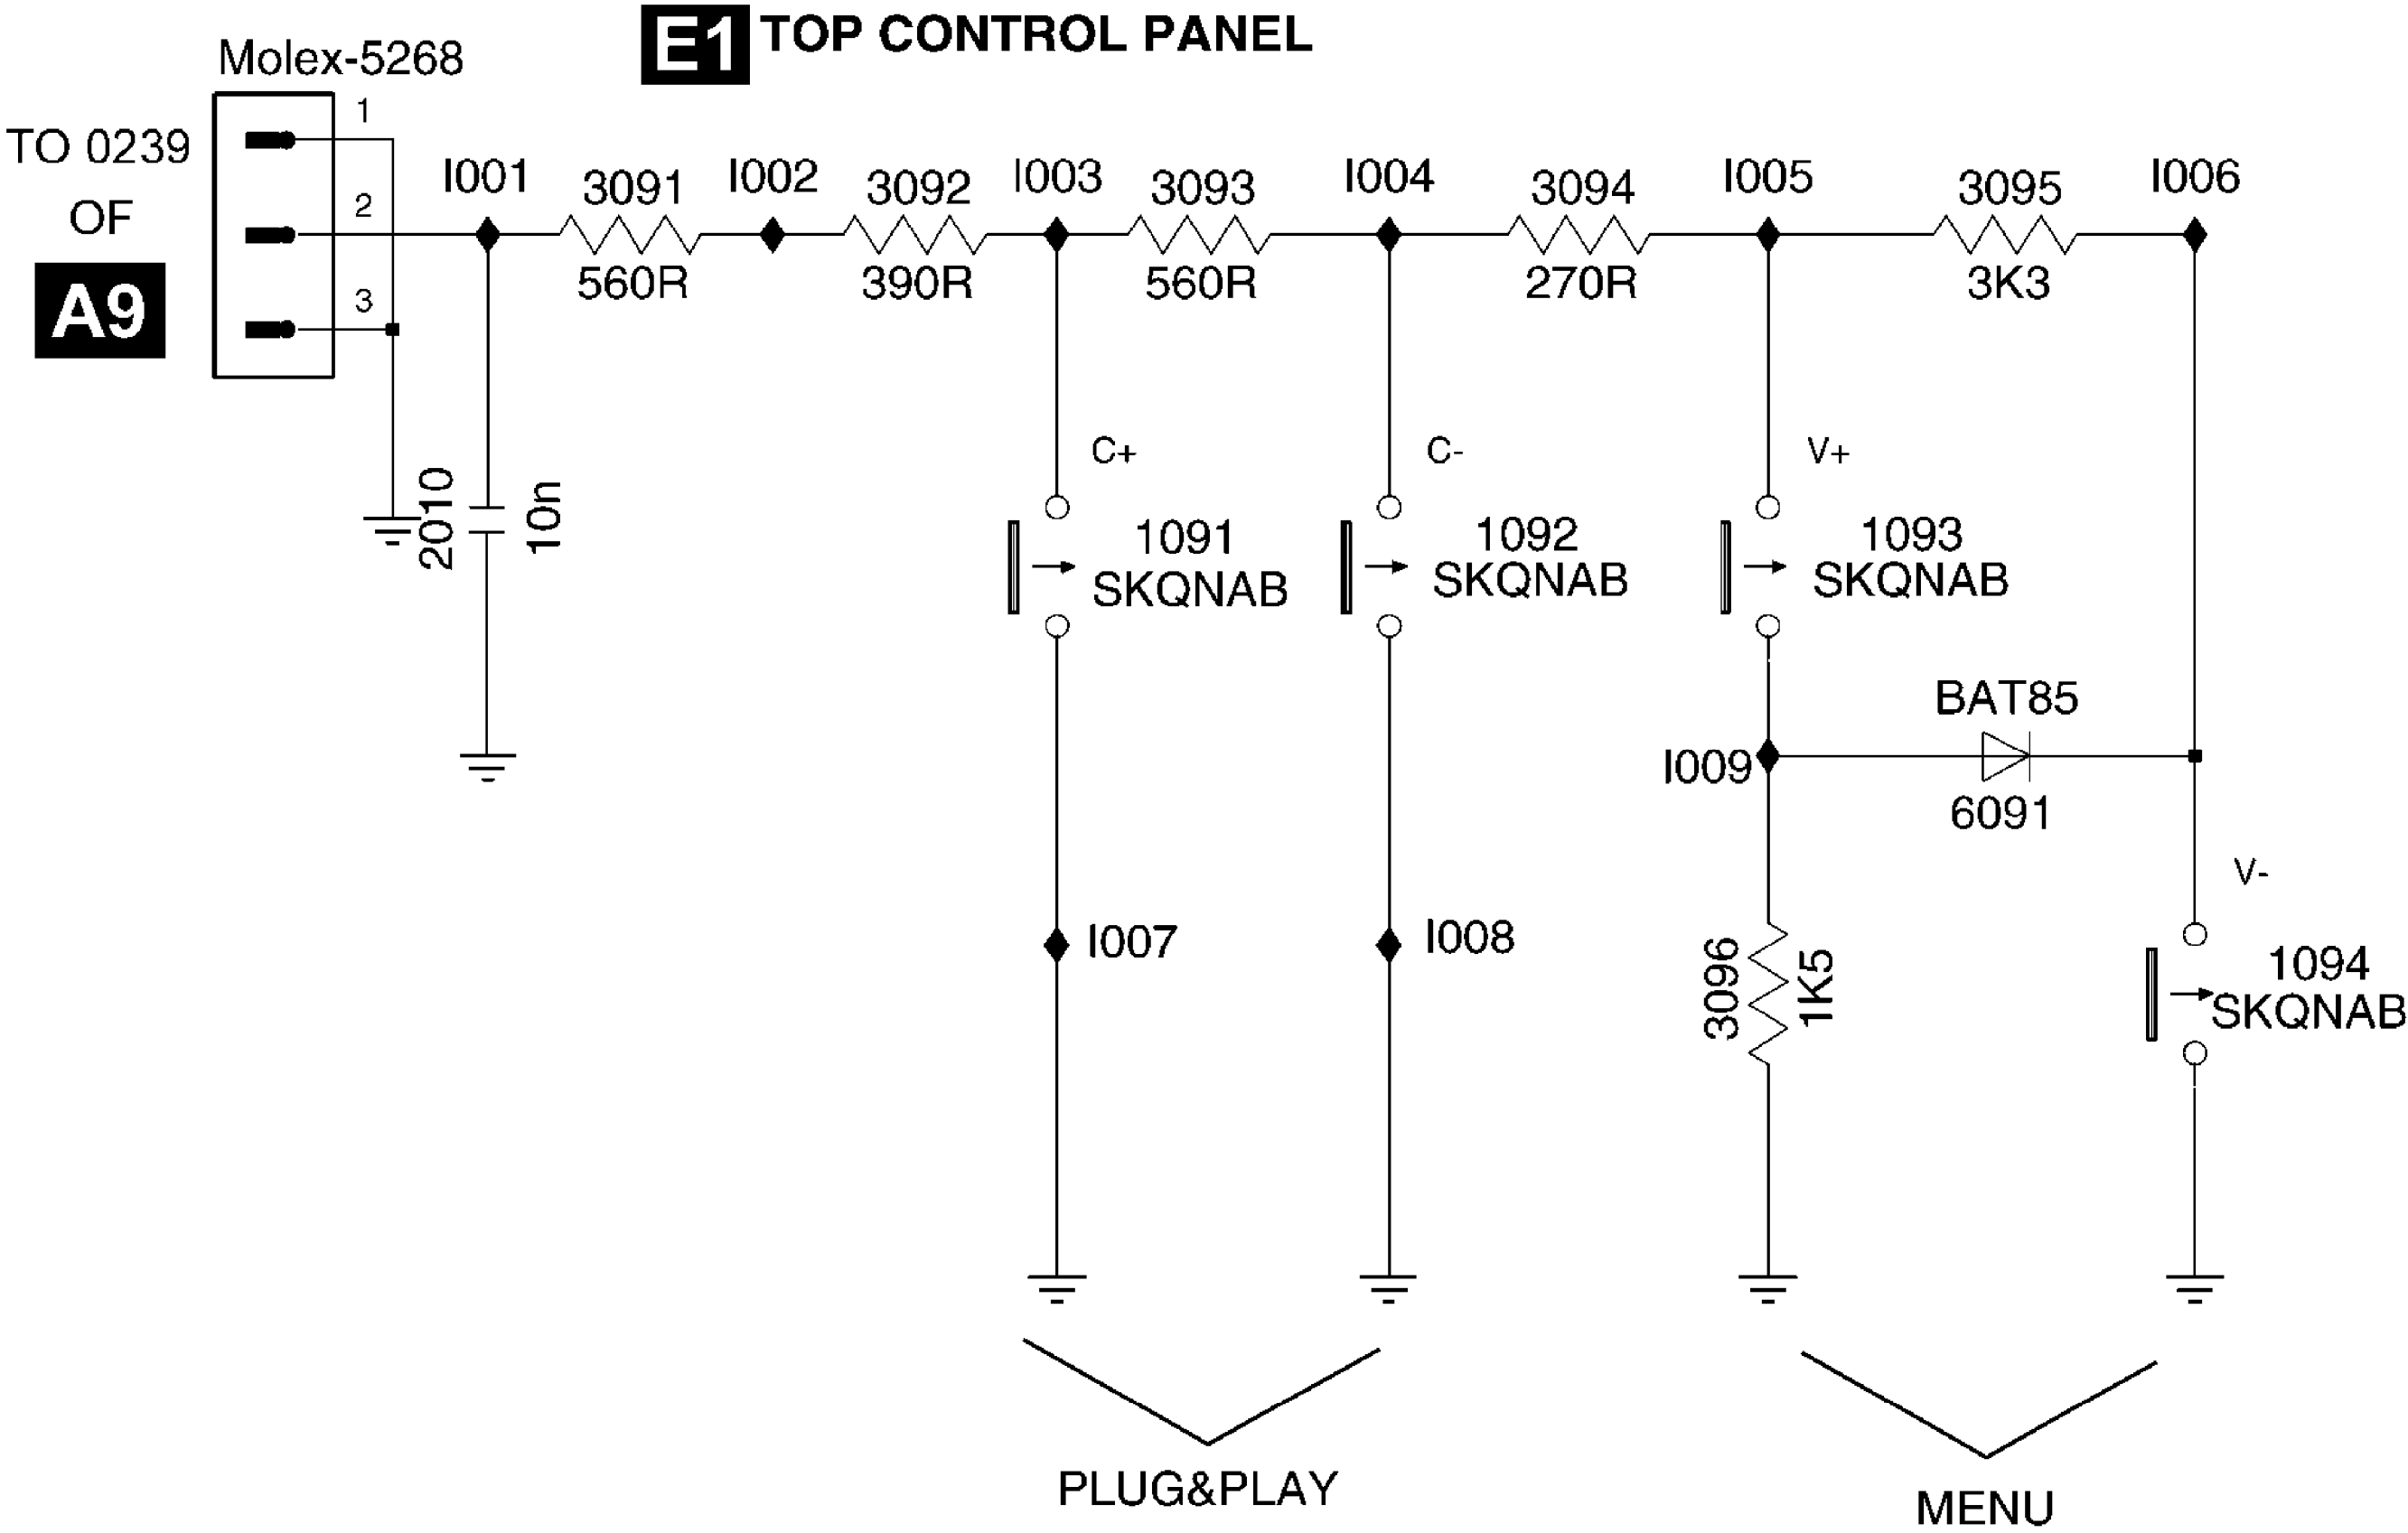


T

TOP CONTROL PANEL

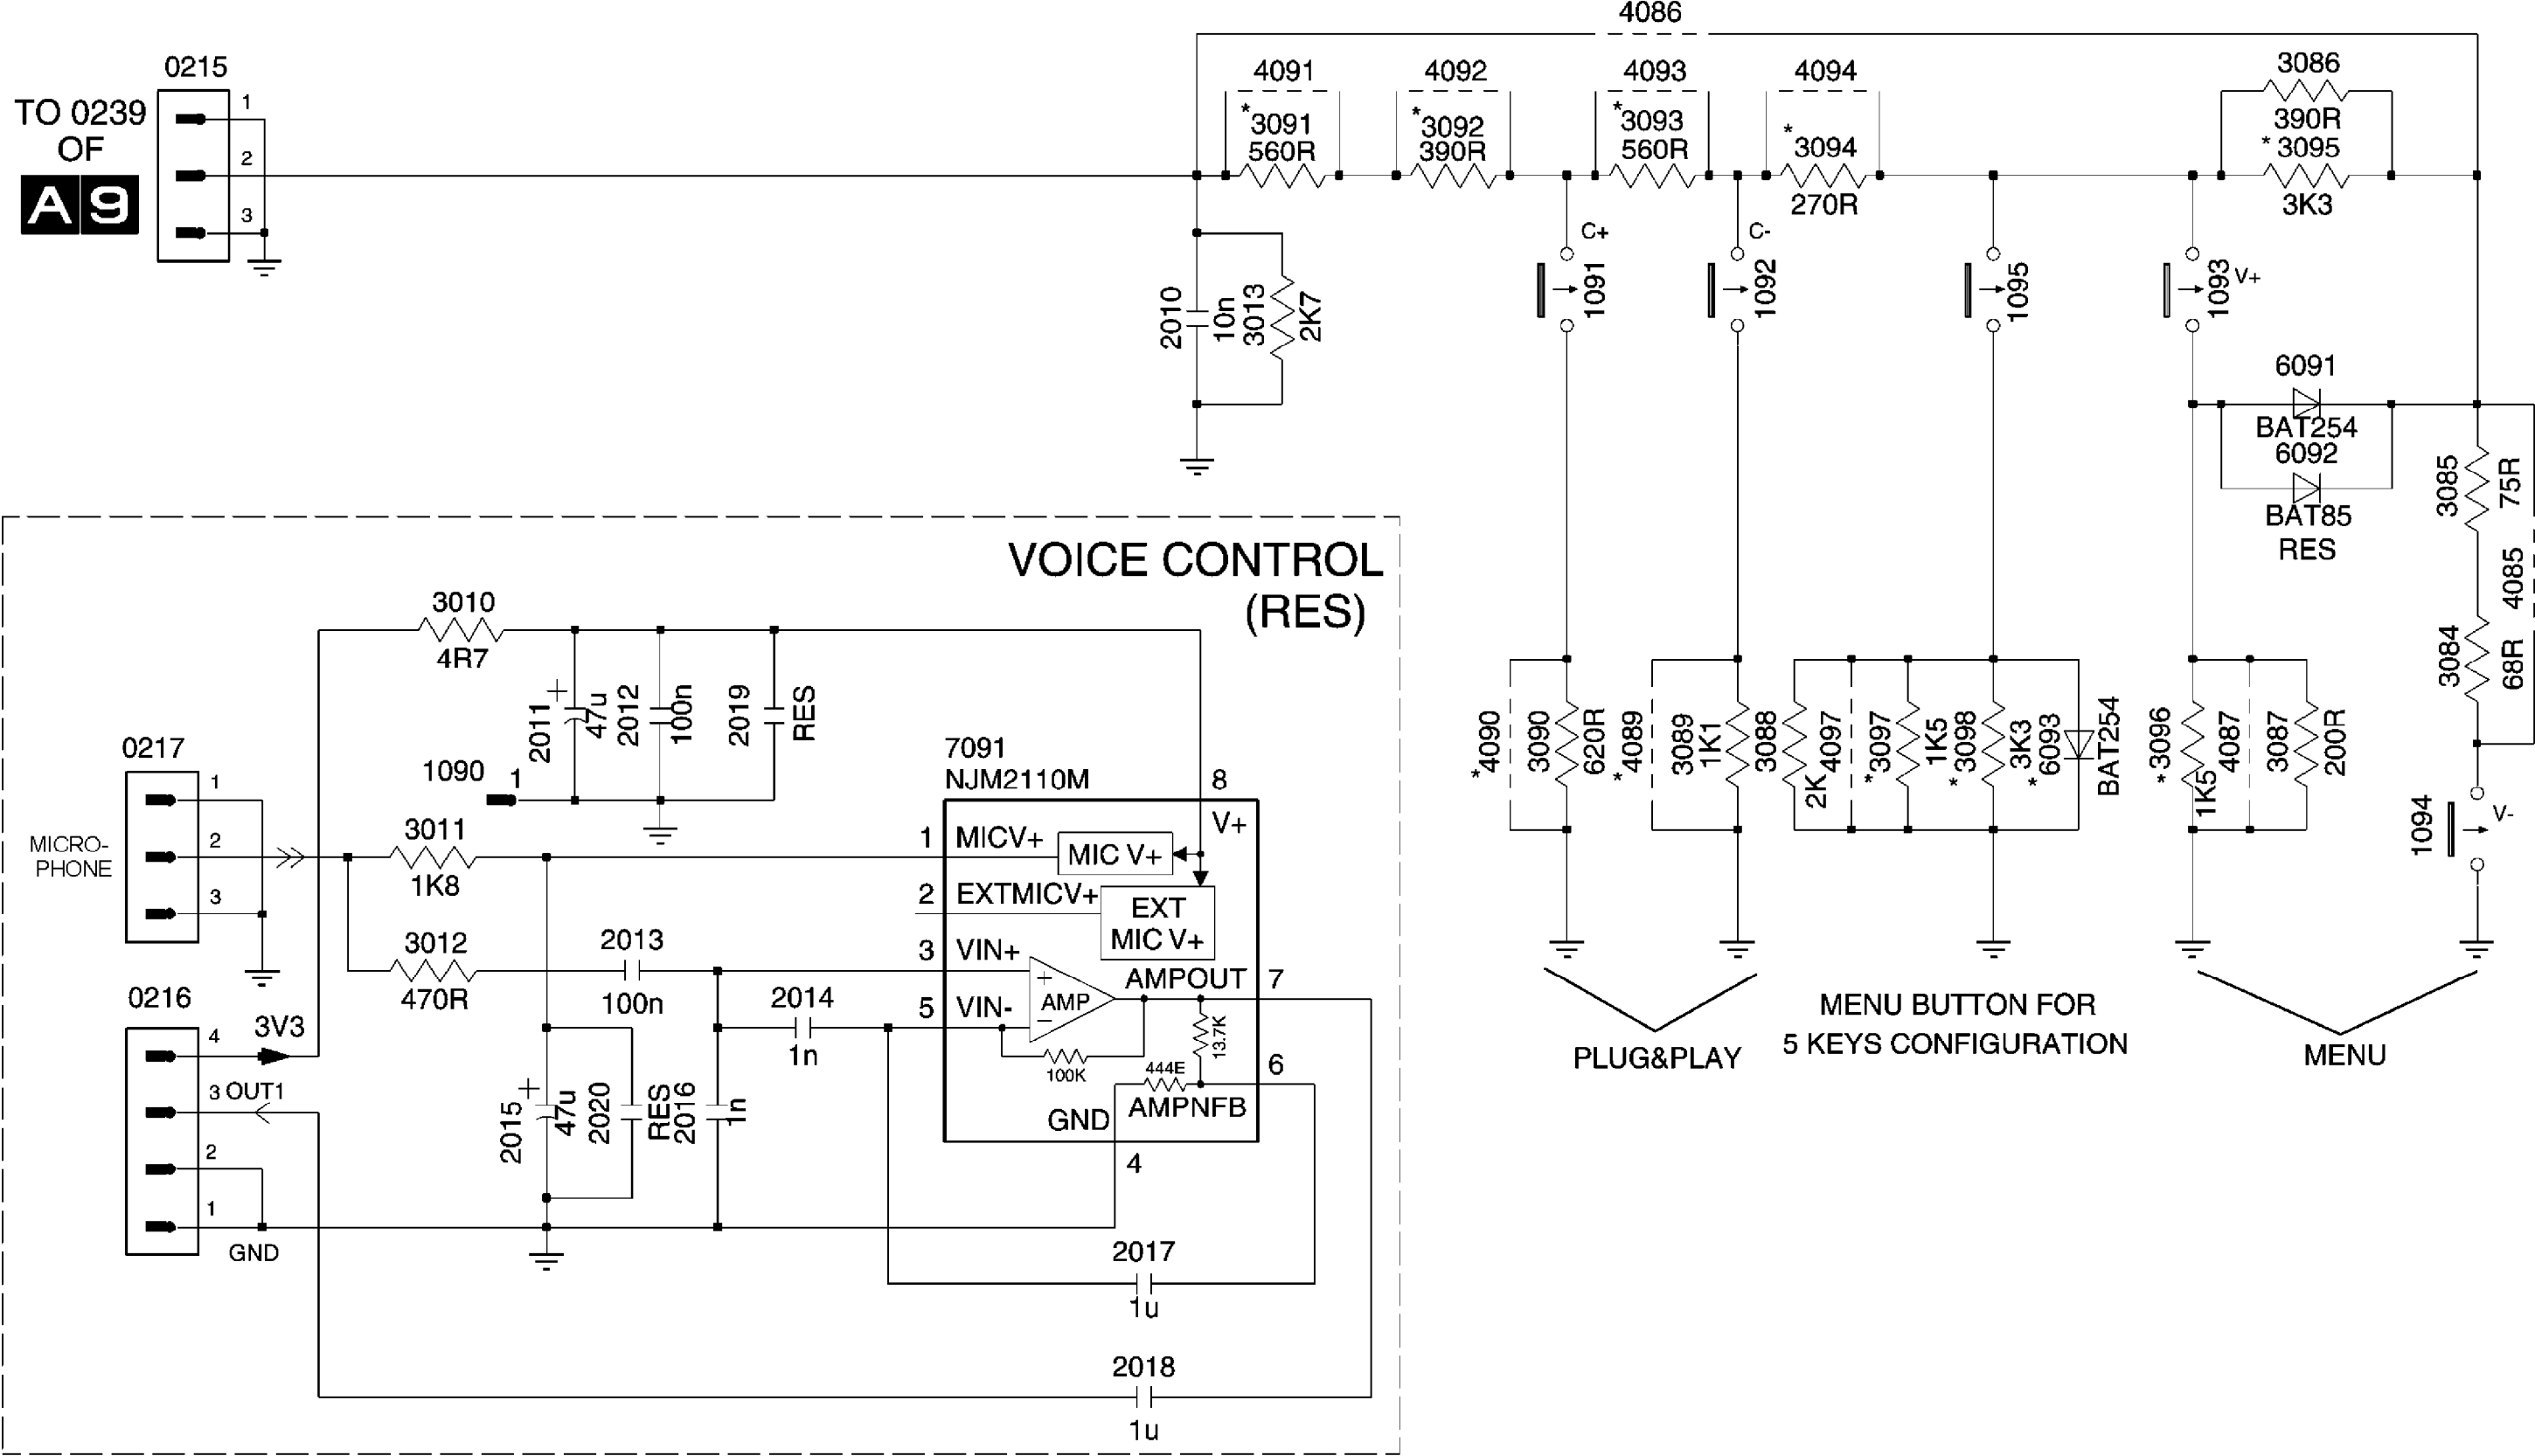


USED ONLY IN MODELS: 27PT663R37A, 27PT663R37C, 29PT563S85A, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A, 27PT563S37A, 30PW633F35A, 32LT621L/17 (7638) - [F] 2D 3 Line Comb Filter
32PT563S37A, 32PT563S37G, 32PW633R85C, 29PT663S85A, 36ST220P/35, 36ST230P/35, 32ST230P/35, 32ST220P/17, 32PT563R85G, 29PT6631/44

F 2D 3 LINE COMB FILTER

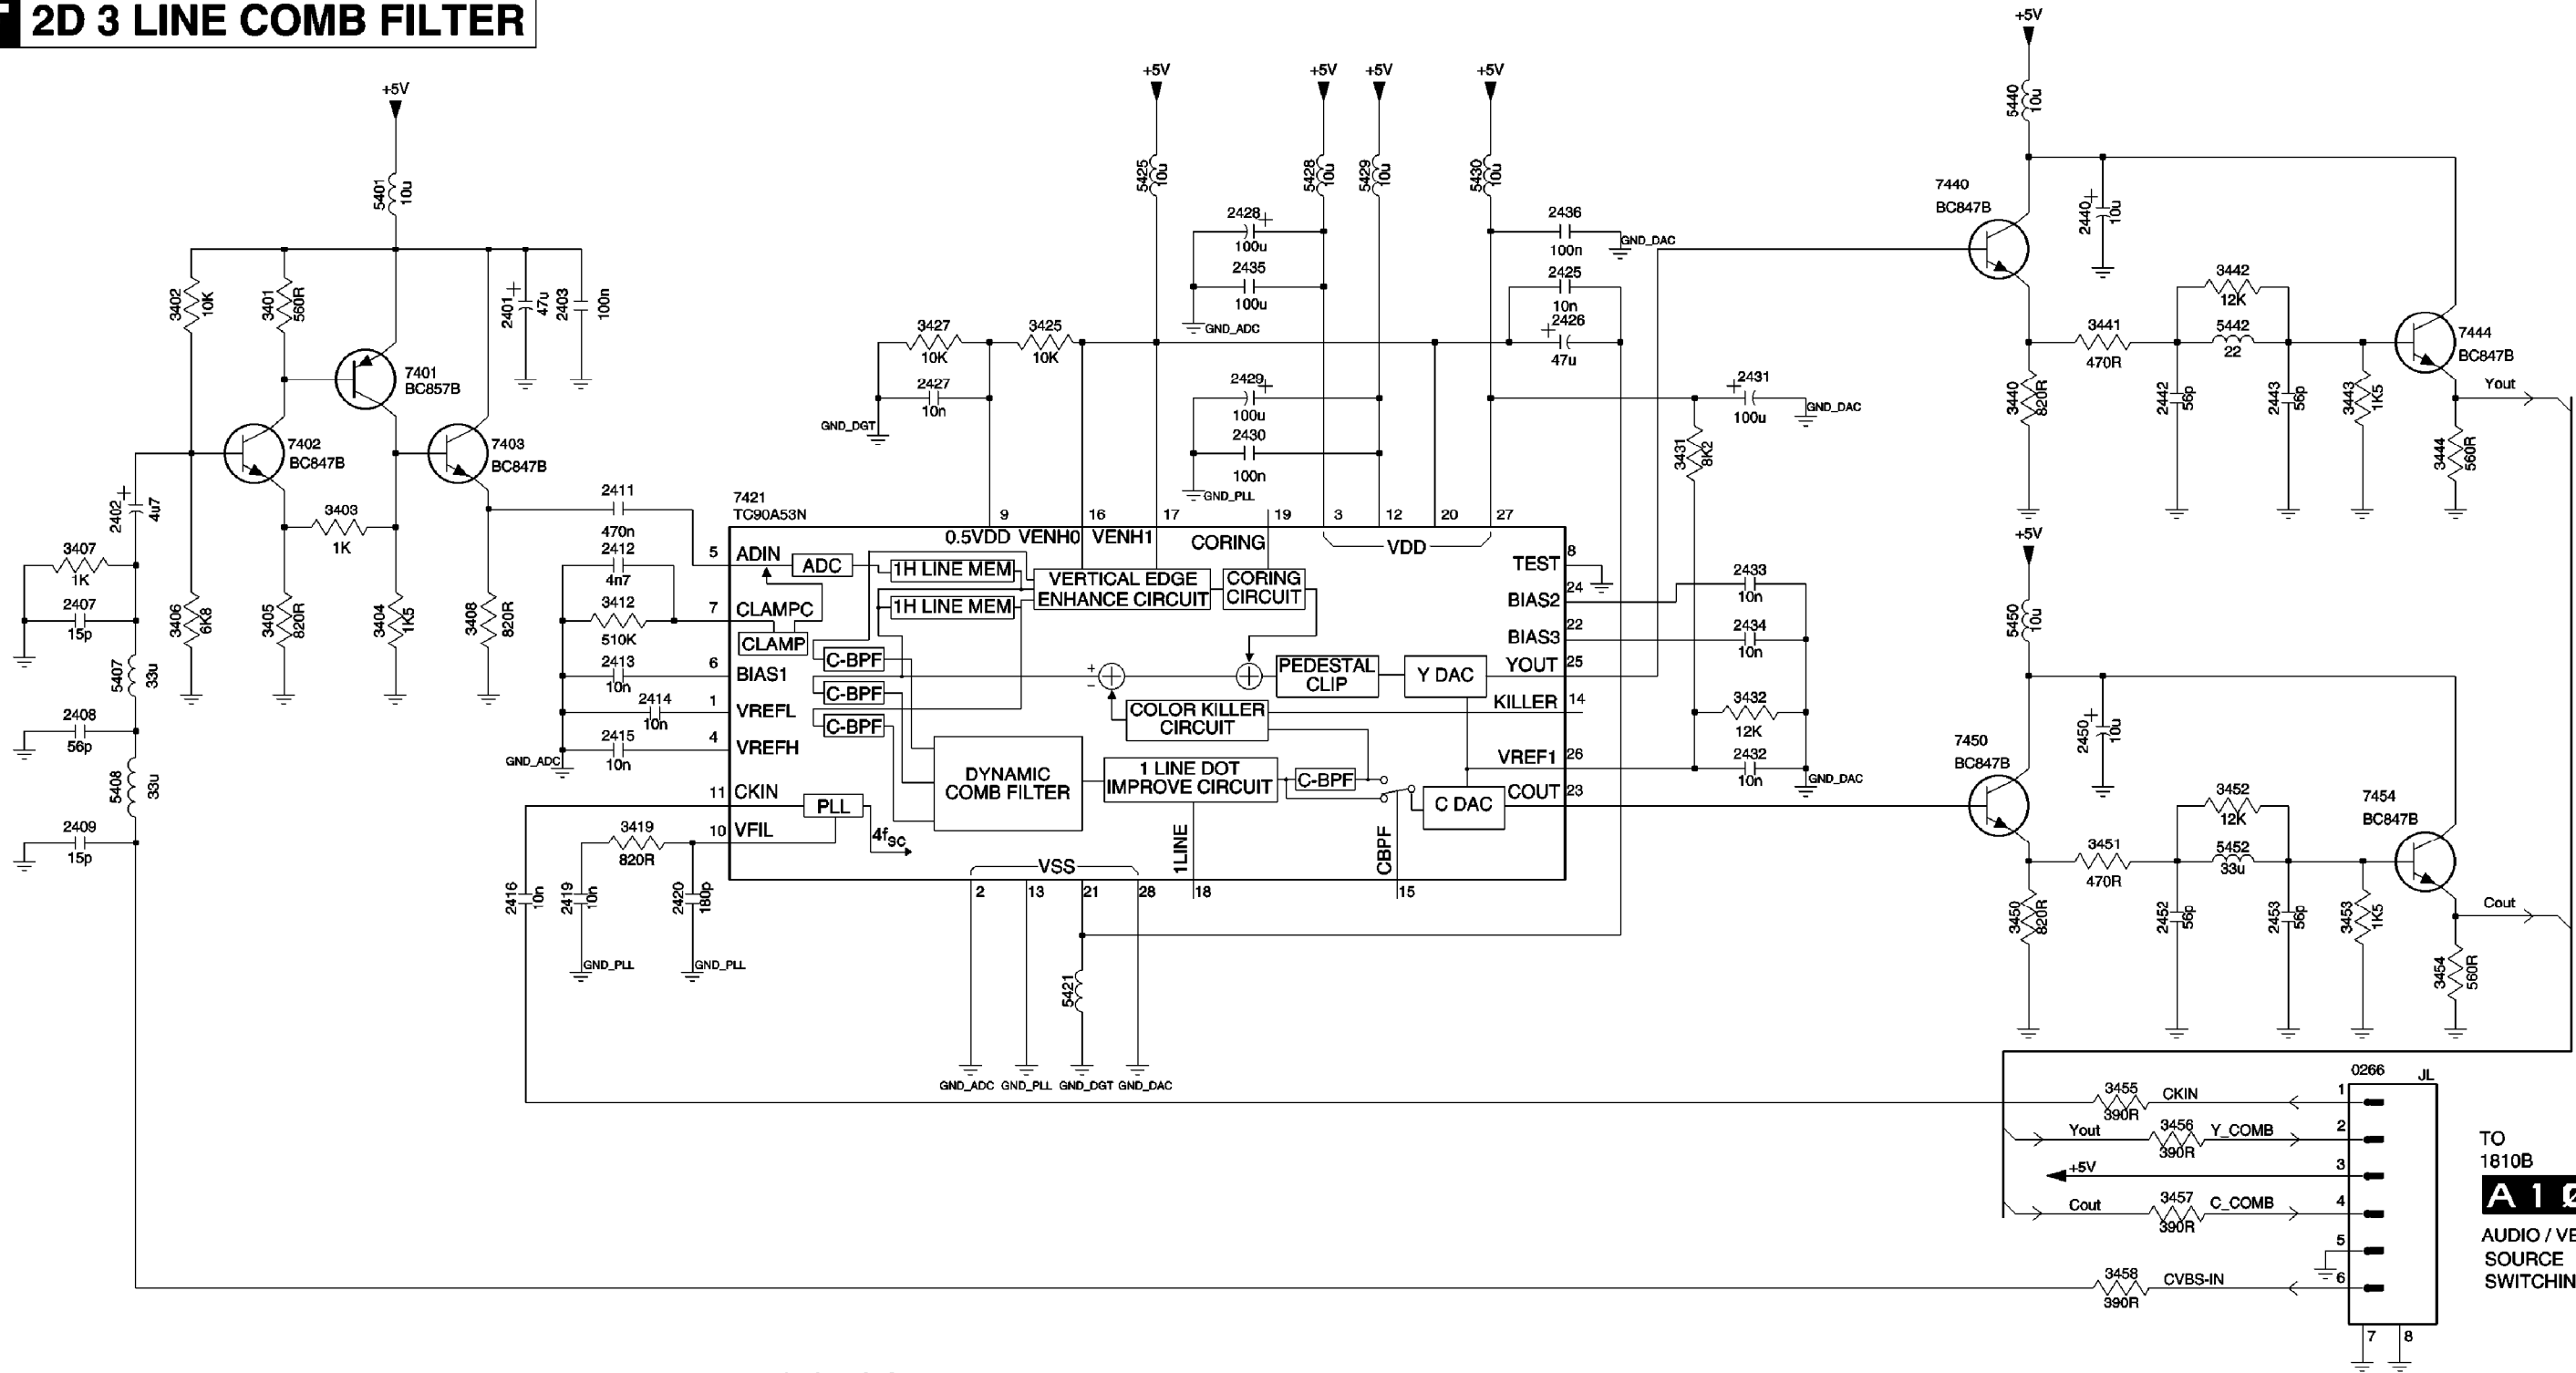


DC VOLTAGES





TO
1810B
A 1 0
AUDIO / VEDEO
SOURCE
SWITCHING


LATAM 100V - 250V
NAFTA 110V
EUROPE 220V - 240V


Q 1 FRONT INTERFACE PANEL

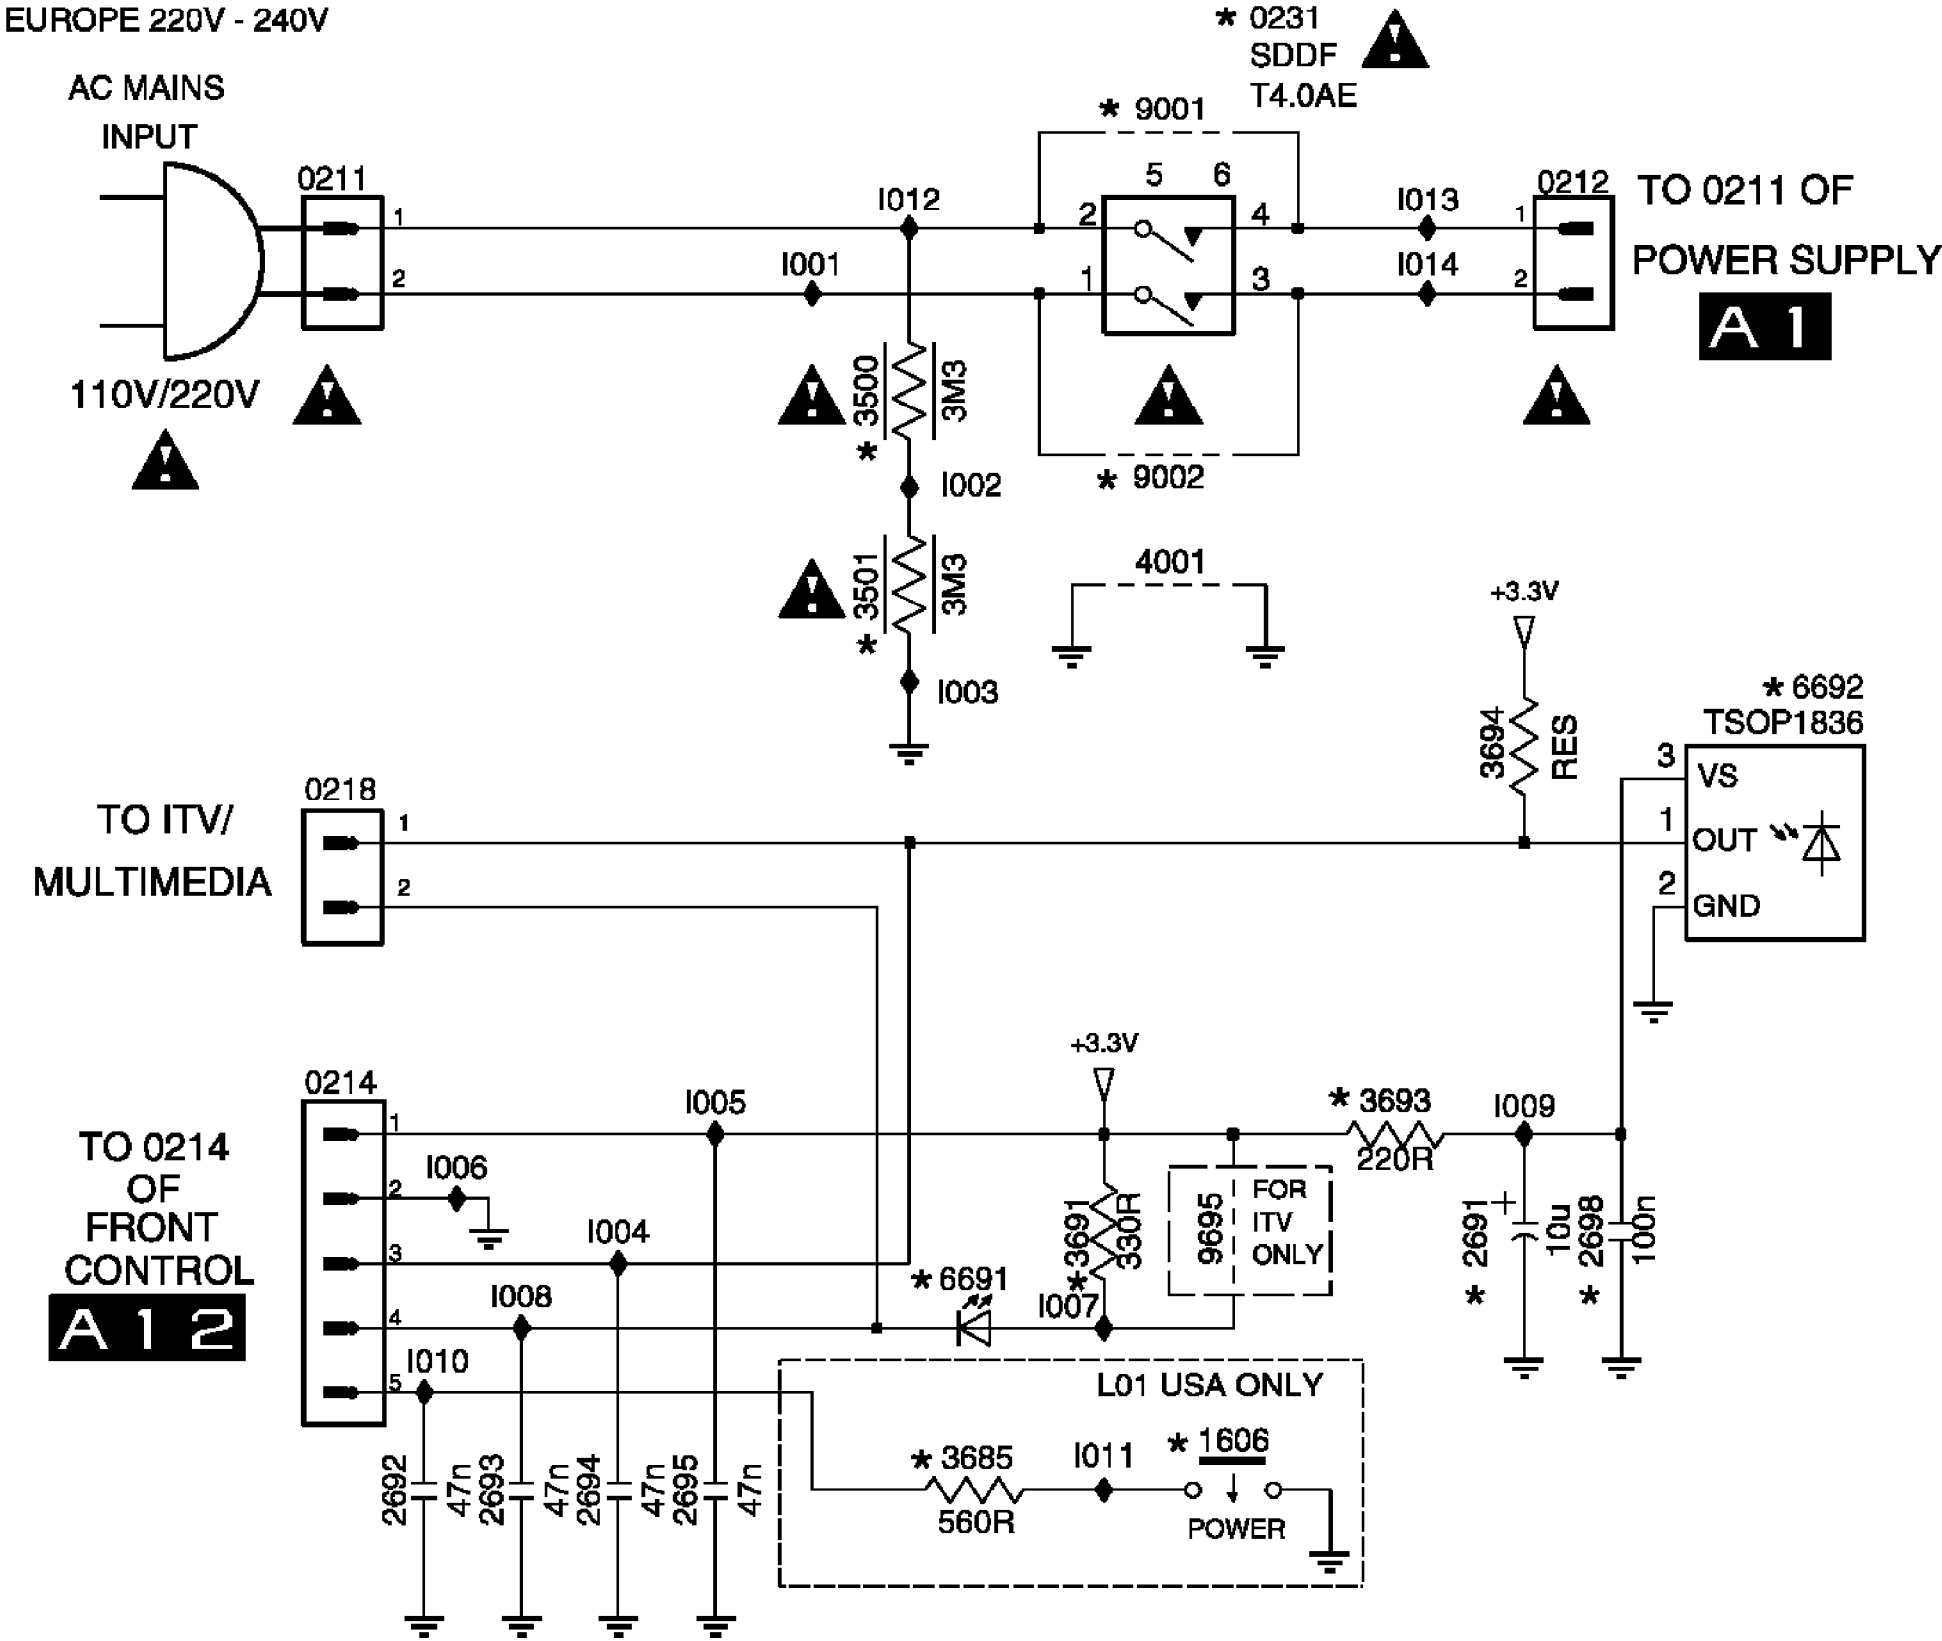

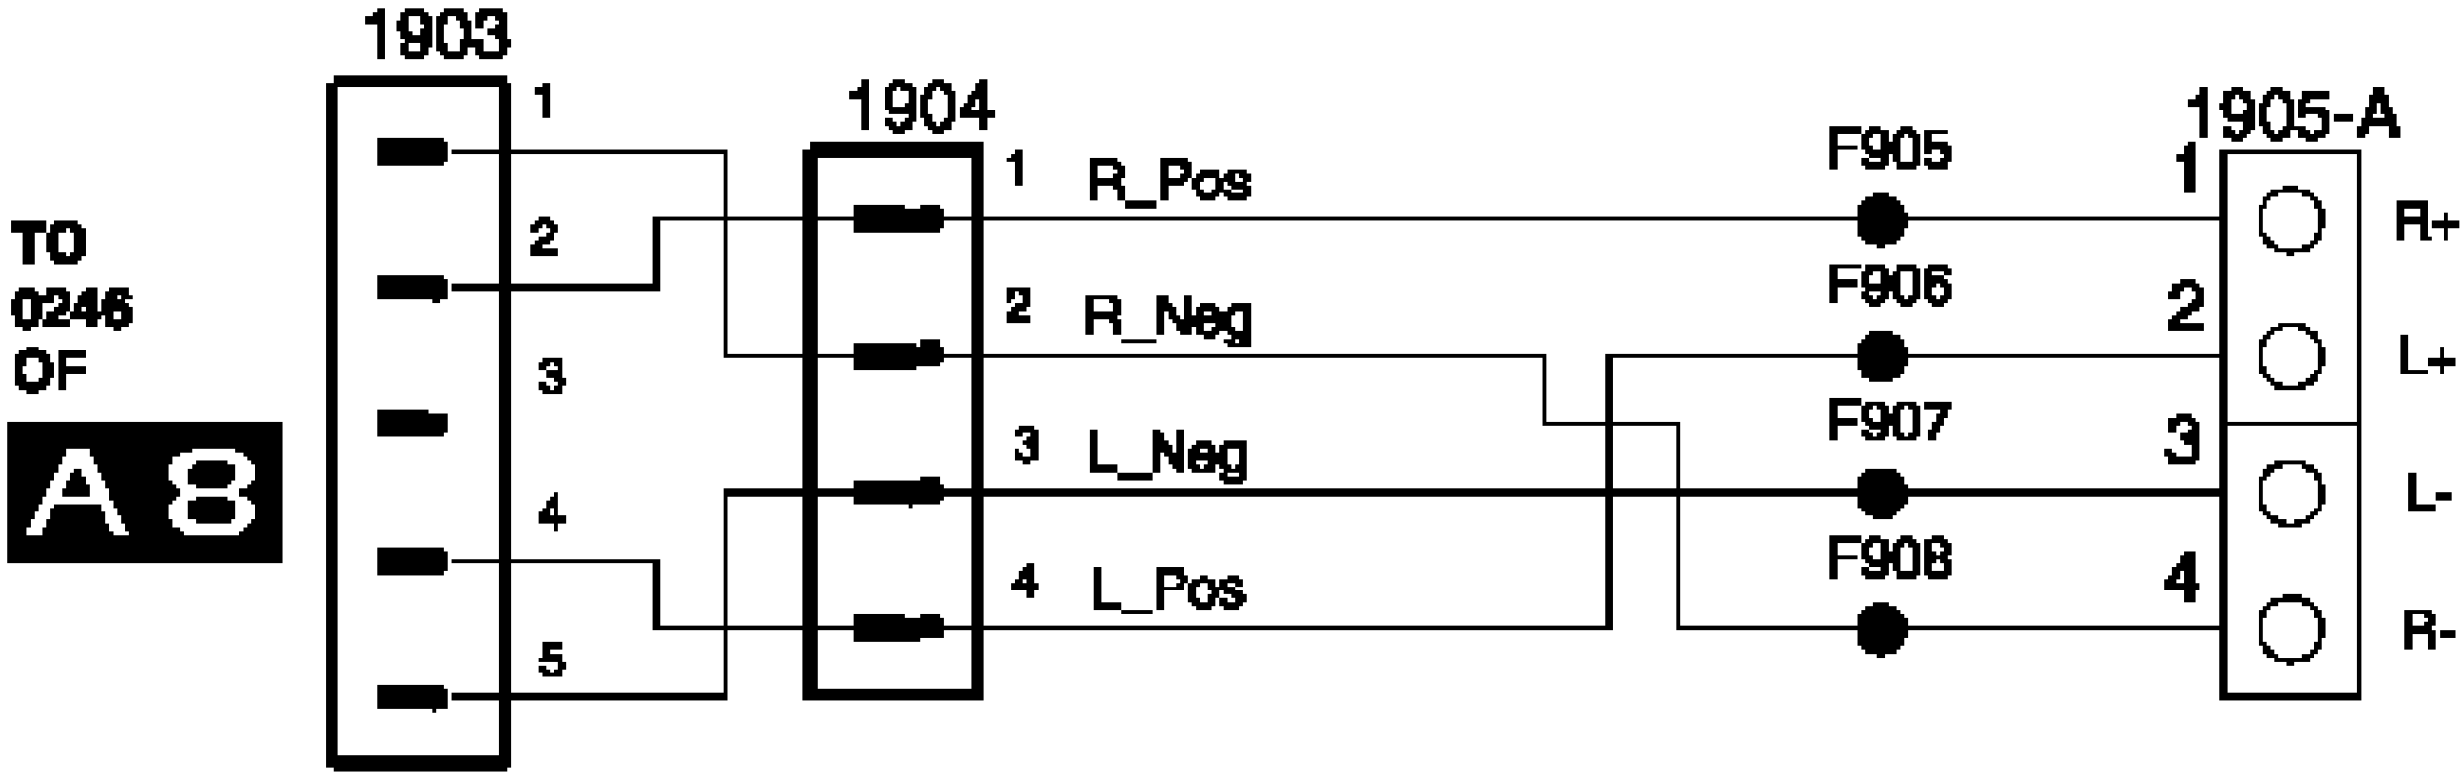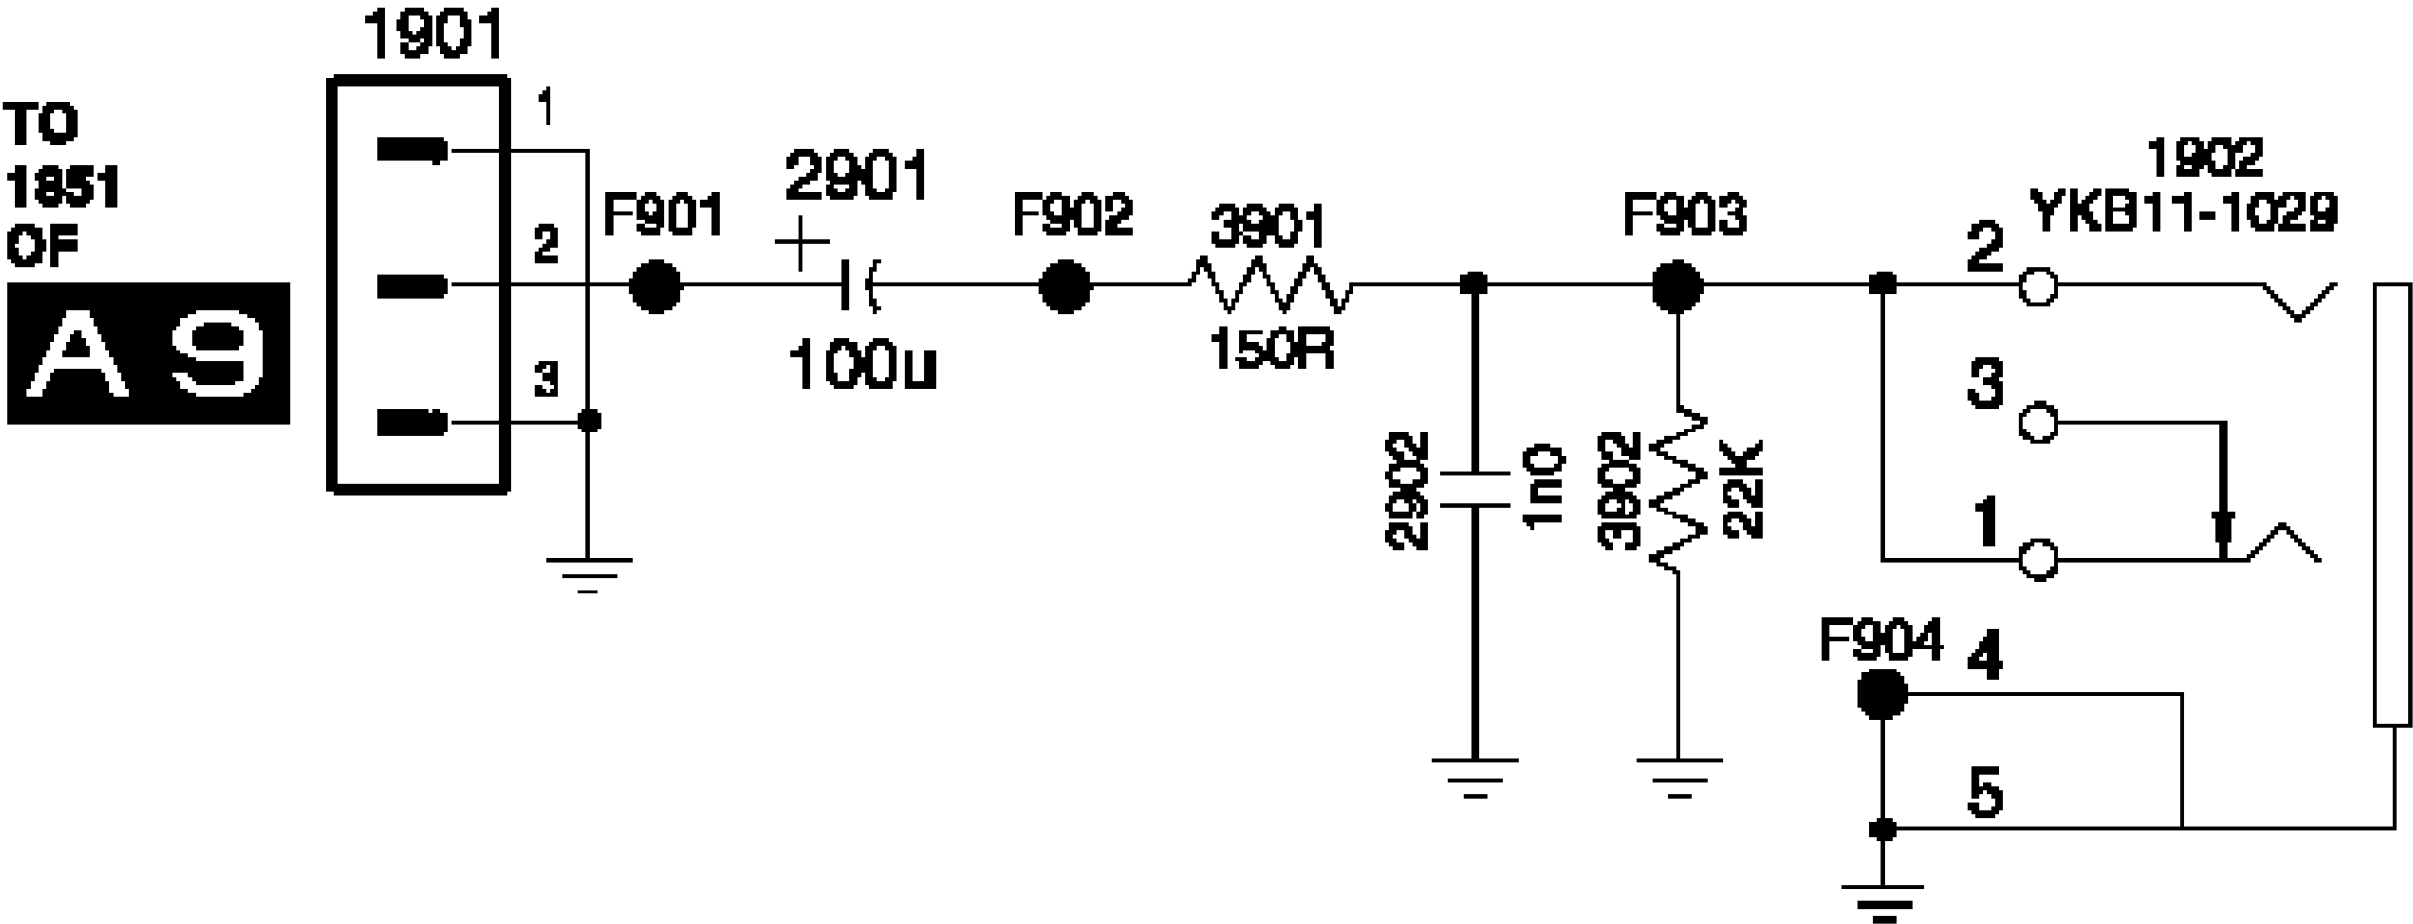


W DAF PANEL & INNER PIN CUSHION CORRECTION

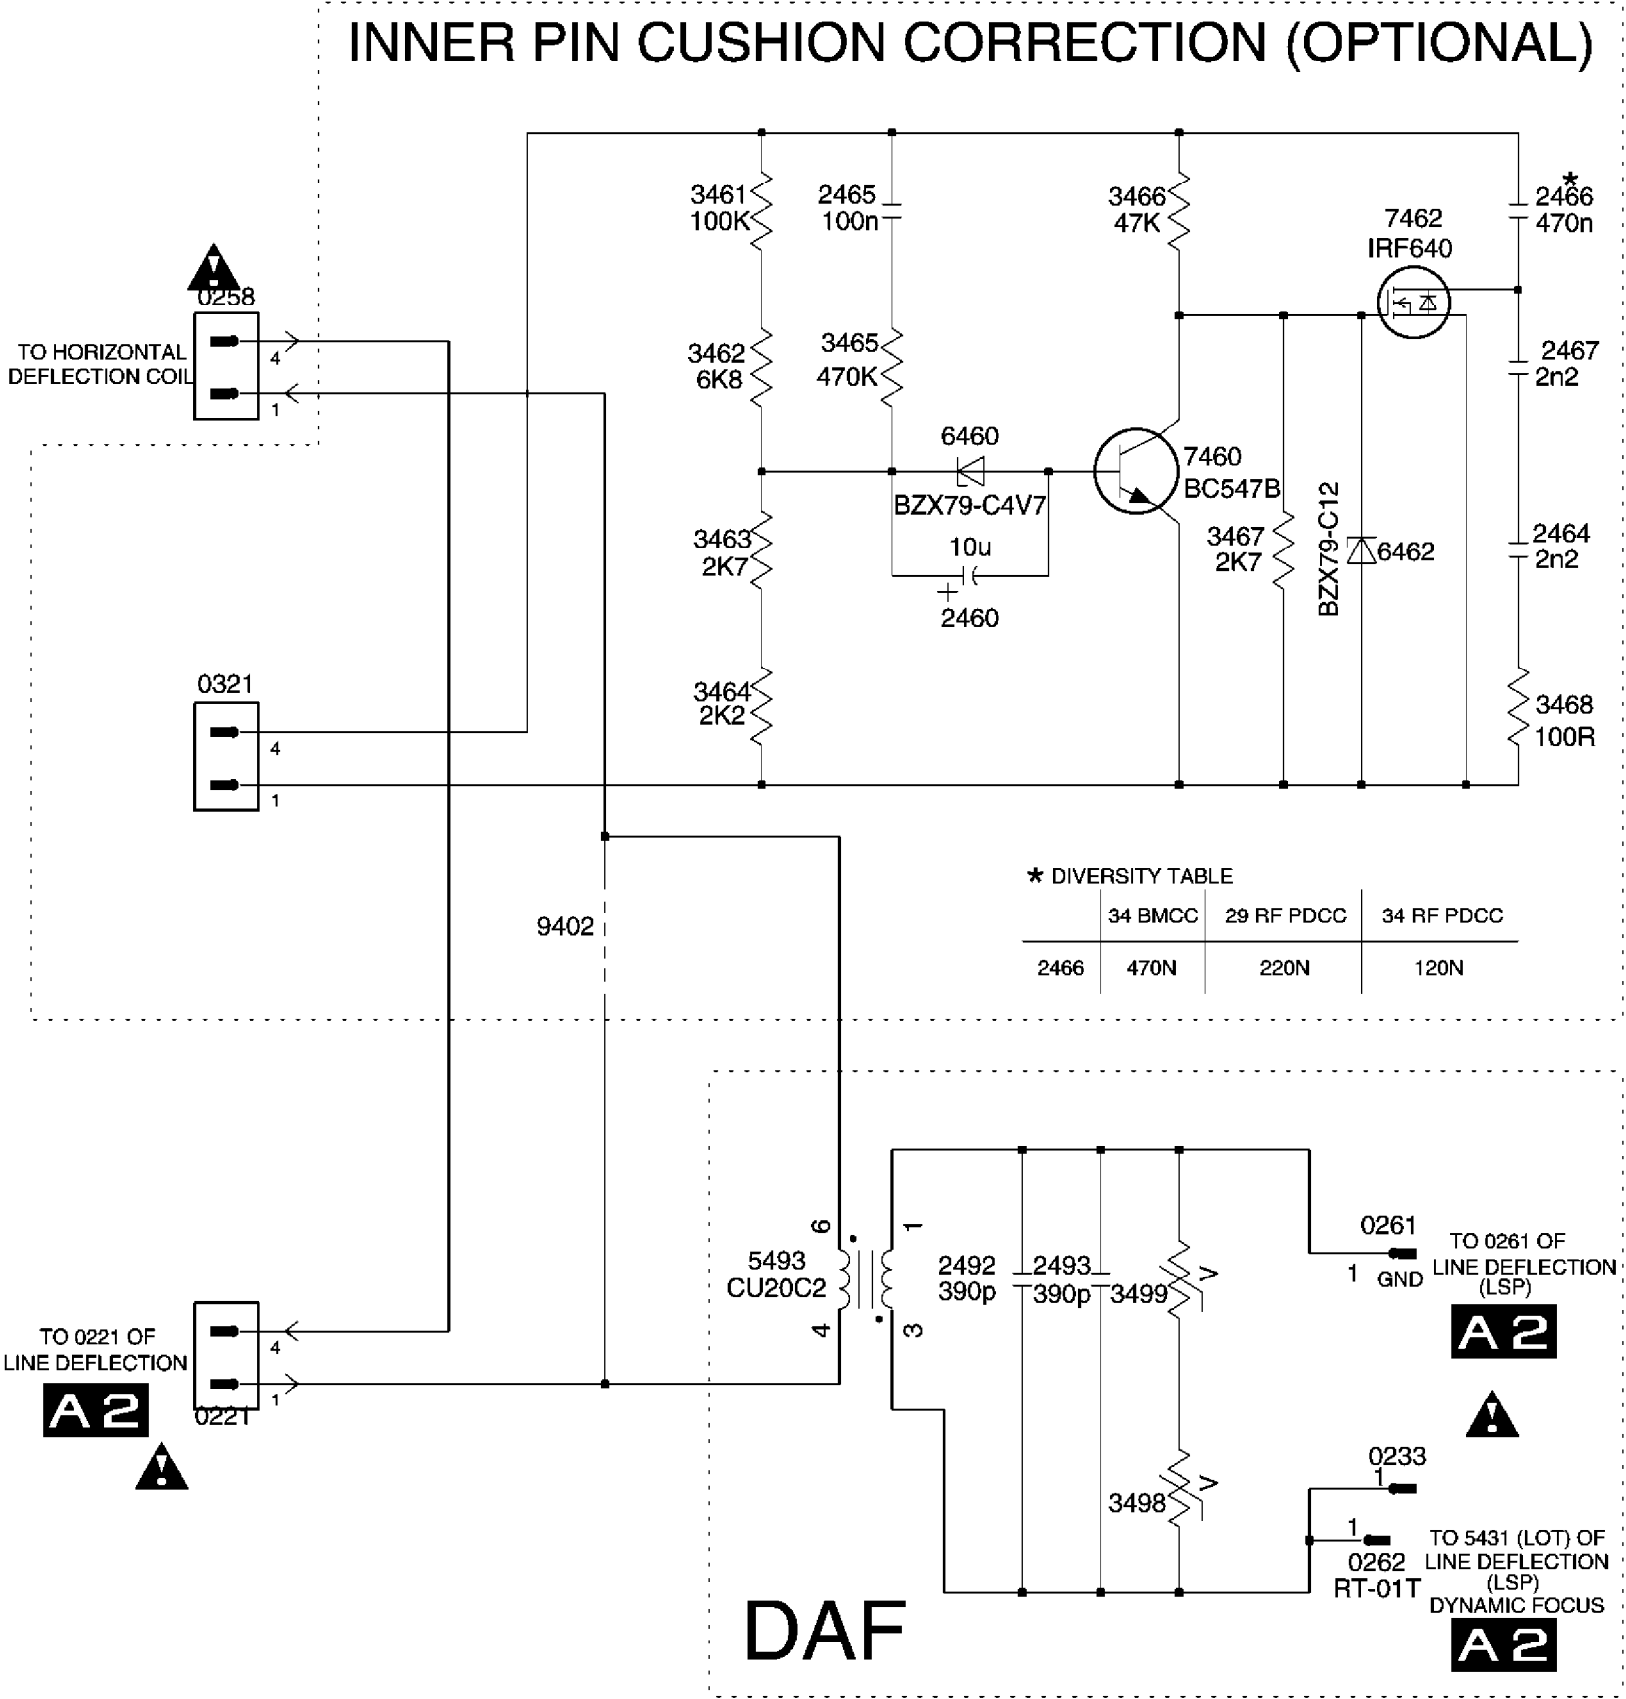


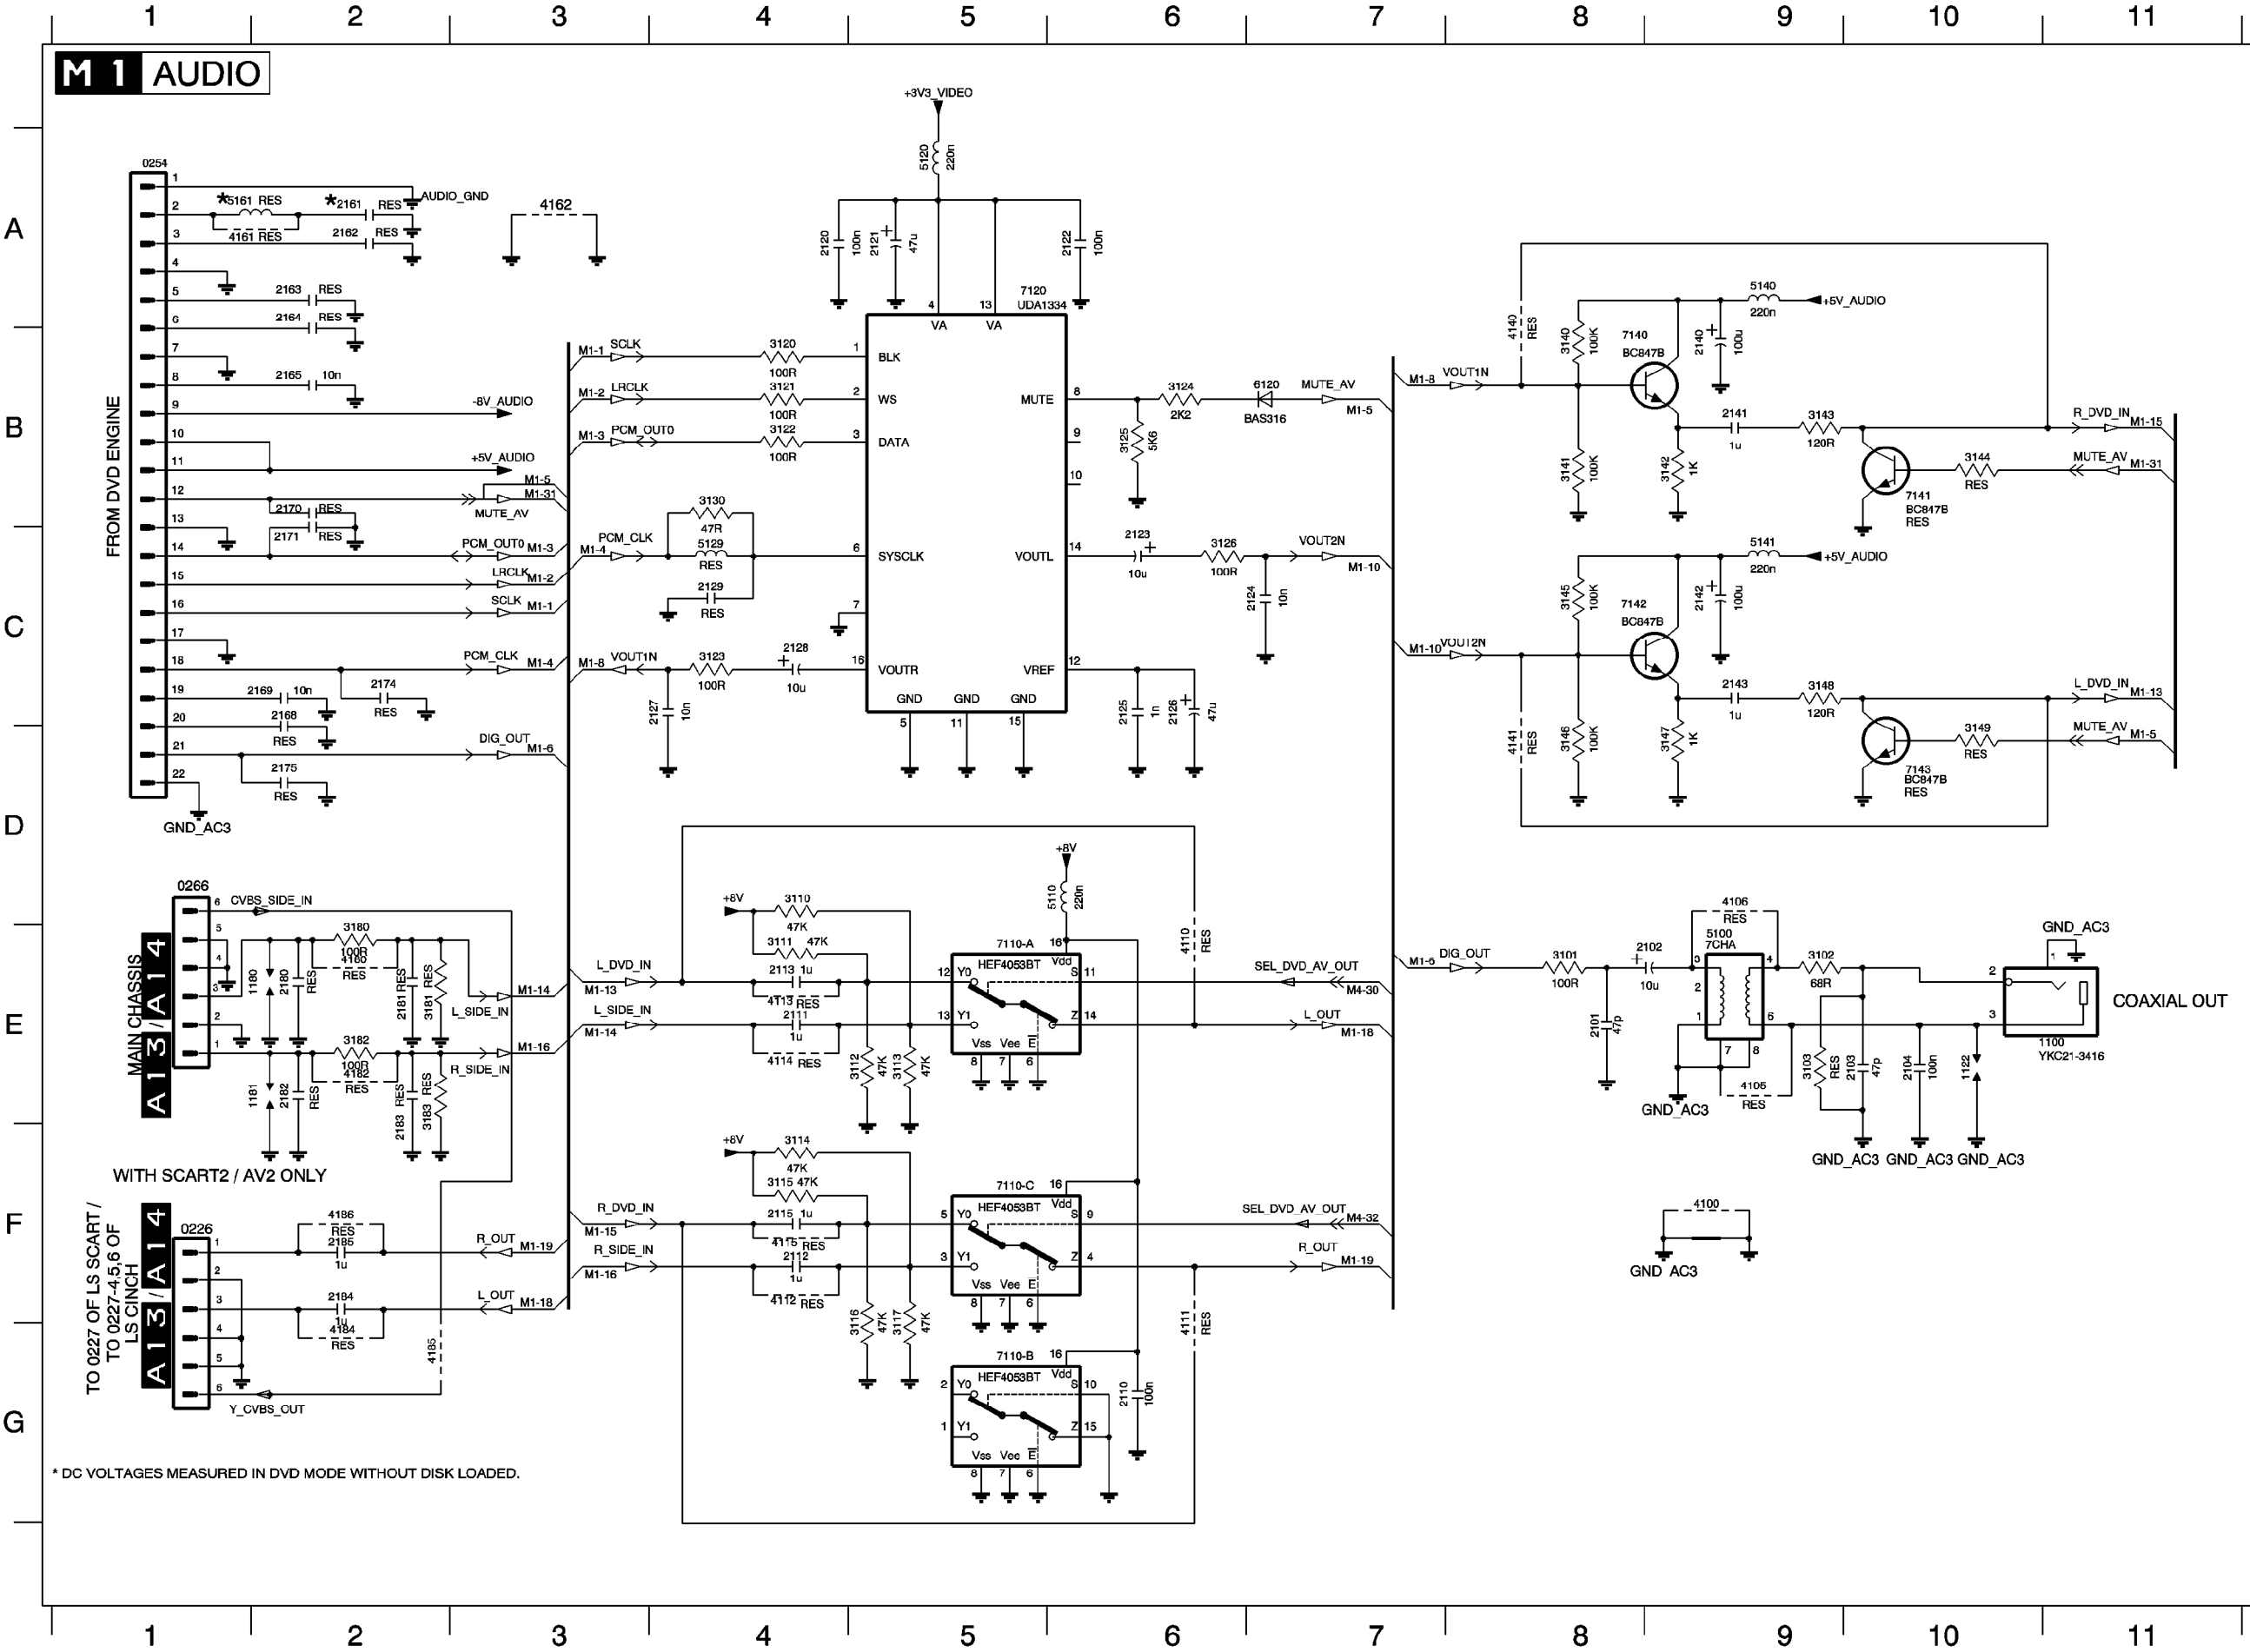

| | |
|----------|-----------|
| 0226 F1 | 4182 E2 |
| 0254 A1 | 4184 G2 |
| 0266 D1 | 4185 G2 |
| 1100 E10 | 4186 F2 |
| 1122 E10 | 5100 E9 |
| 1180 E1 | 5110 D6 |
| 1181 E1 | 5120 A5 |
| 2101 E8 | 5129 C4 |
| 2102 E9 | 5140 A9 |
| 2103 E10 | 5141 C9 |
| 2104 E10 | 5161 A1 |
| 2110 G6 | 6120 B7 |
| 2111 E4 | 7110-A E5 |
| 2112 F4 | 7110-B G5 |
| 2113 E4 | 7110-C F5 |
| 2115 F4 | 7120 A5 |
| 2120 A4 | 7140 B8 |
| 2121 A5 | 7141 B10 |
| 2122 A6 | 7142 C8 |
| 2123 C6 | 7143 D10 |
| 2124 C7 | |
| 2125 C6 | |
| 2126 C6 | |
| 2127 C4 | |
| 2128 C4 | |
| 2129 C4 | |
| 2140 B9 | |
| 2141 B9 | |
| 2142 C9 | |
| 2143 C9 | |
| 2161 A2 | |
| 2162 A2 | |
| 2163 A2 | |
| 2164 A2 | |
| 2165 B2 | |
| 2168 C2 | |
| 2169 C2 | |
| 2170 B2 | |
| 2171 C2 | |
| 2174 C2 | |
| 2175 D2 | |
| 2180 E2 | |
| 2181 E2 | |
| 2182 E2 | |
| 2183 F2 | |
| 2184 F2 | |
| 2185 F2 | |
| 3101 E8 | |
| 3102 E9 | |
| 3103 E9 | |
| 3110 D4 | |
| 3111 E4 | |
| 3112 E5 | |
| 3113 E5 | |
| 3114 F4 | |
| 3115 F4 | |
| 3116 F5 | |
| 3117 F5 | |
| 3120 B4 | |
| 3121 B4 | |
| 3122 B4 | |
| 3123 C4 | |
| 3124 B6 | |
| 3125 B6 | |
| 3126 C6 | |
| 3130 B4 | |
| 3140 B8 | |
| 3141 B8 | |
| 3142 B9 | |
| 3143 B9 | |
| 3144 B10 | |
| 3145 C8 | |
| 3146 D8 | |
| 3147 D9 | |
| 3148 C9 | |
| 3149 D10 | |
| 3180 E2 | |
| 3181 E2 | |
| 3182 E2 | |
| 3183 E2 | |
| 4100 F9 | |
| 4105 E9 | |
| 4106 D9 | |
| 4110 E6 | |
| 4111 F6 | |
| 4112 F4 | |
| 4113 E4 | |
| 4114 E4 | |
| 4115 F4 | |
| 4140 A8 | |
| 4141 D8 | |
| 4161 A1 | |
| 4162 A3 | |
| 4180 E2 | |






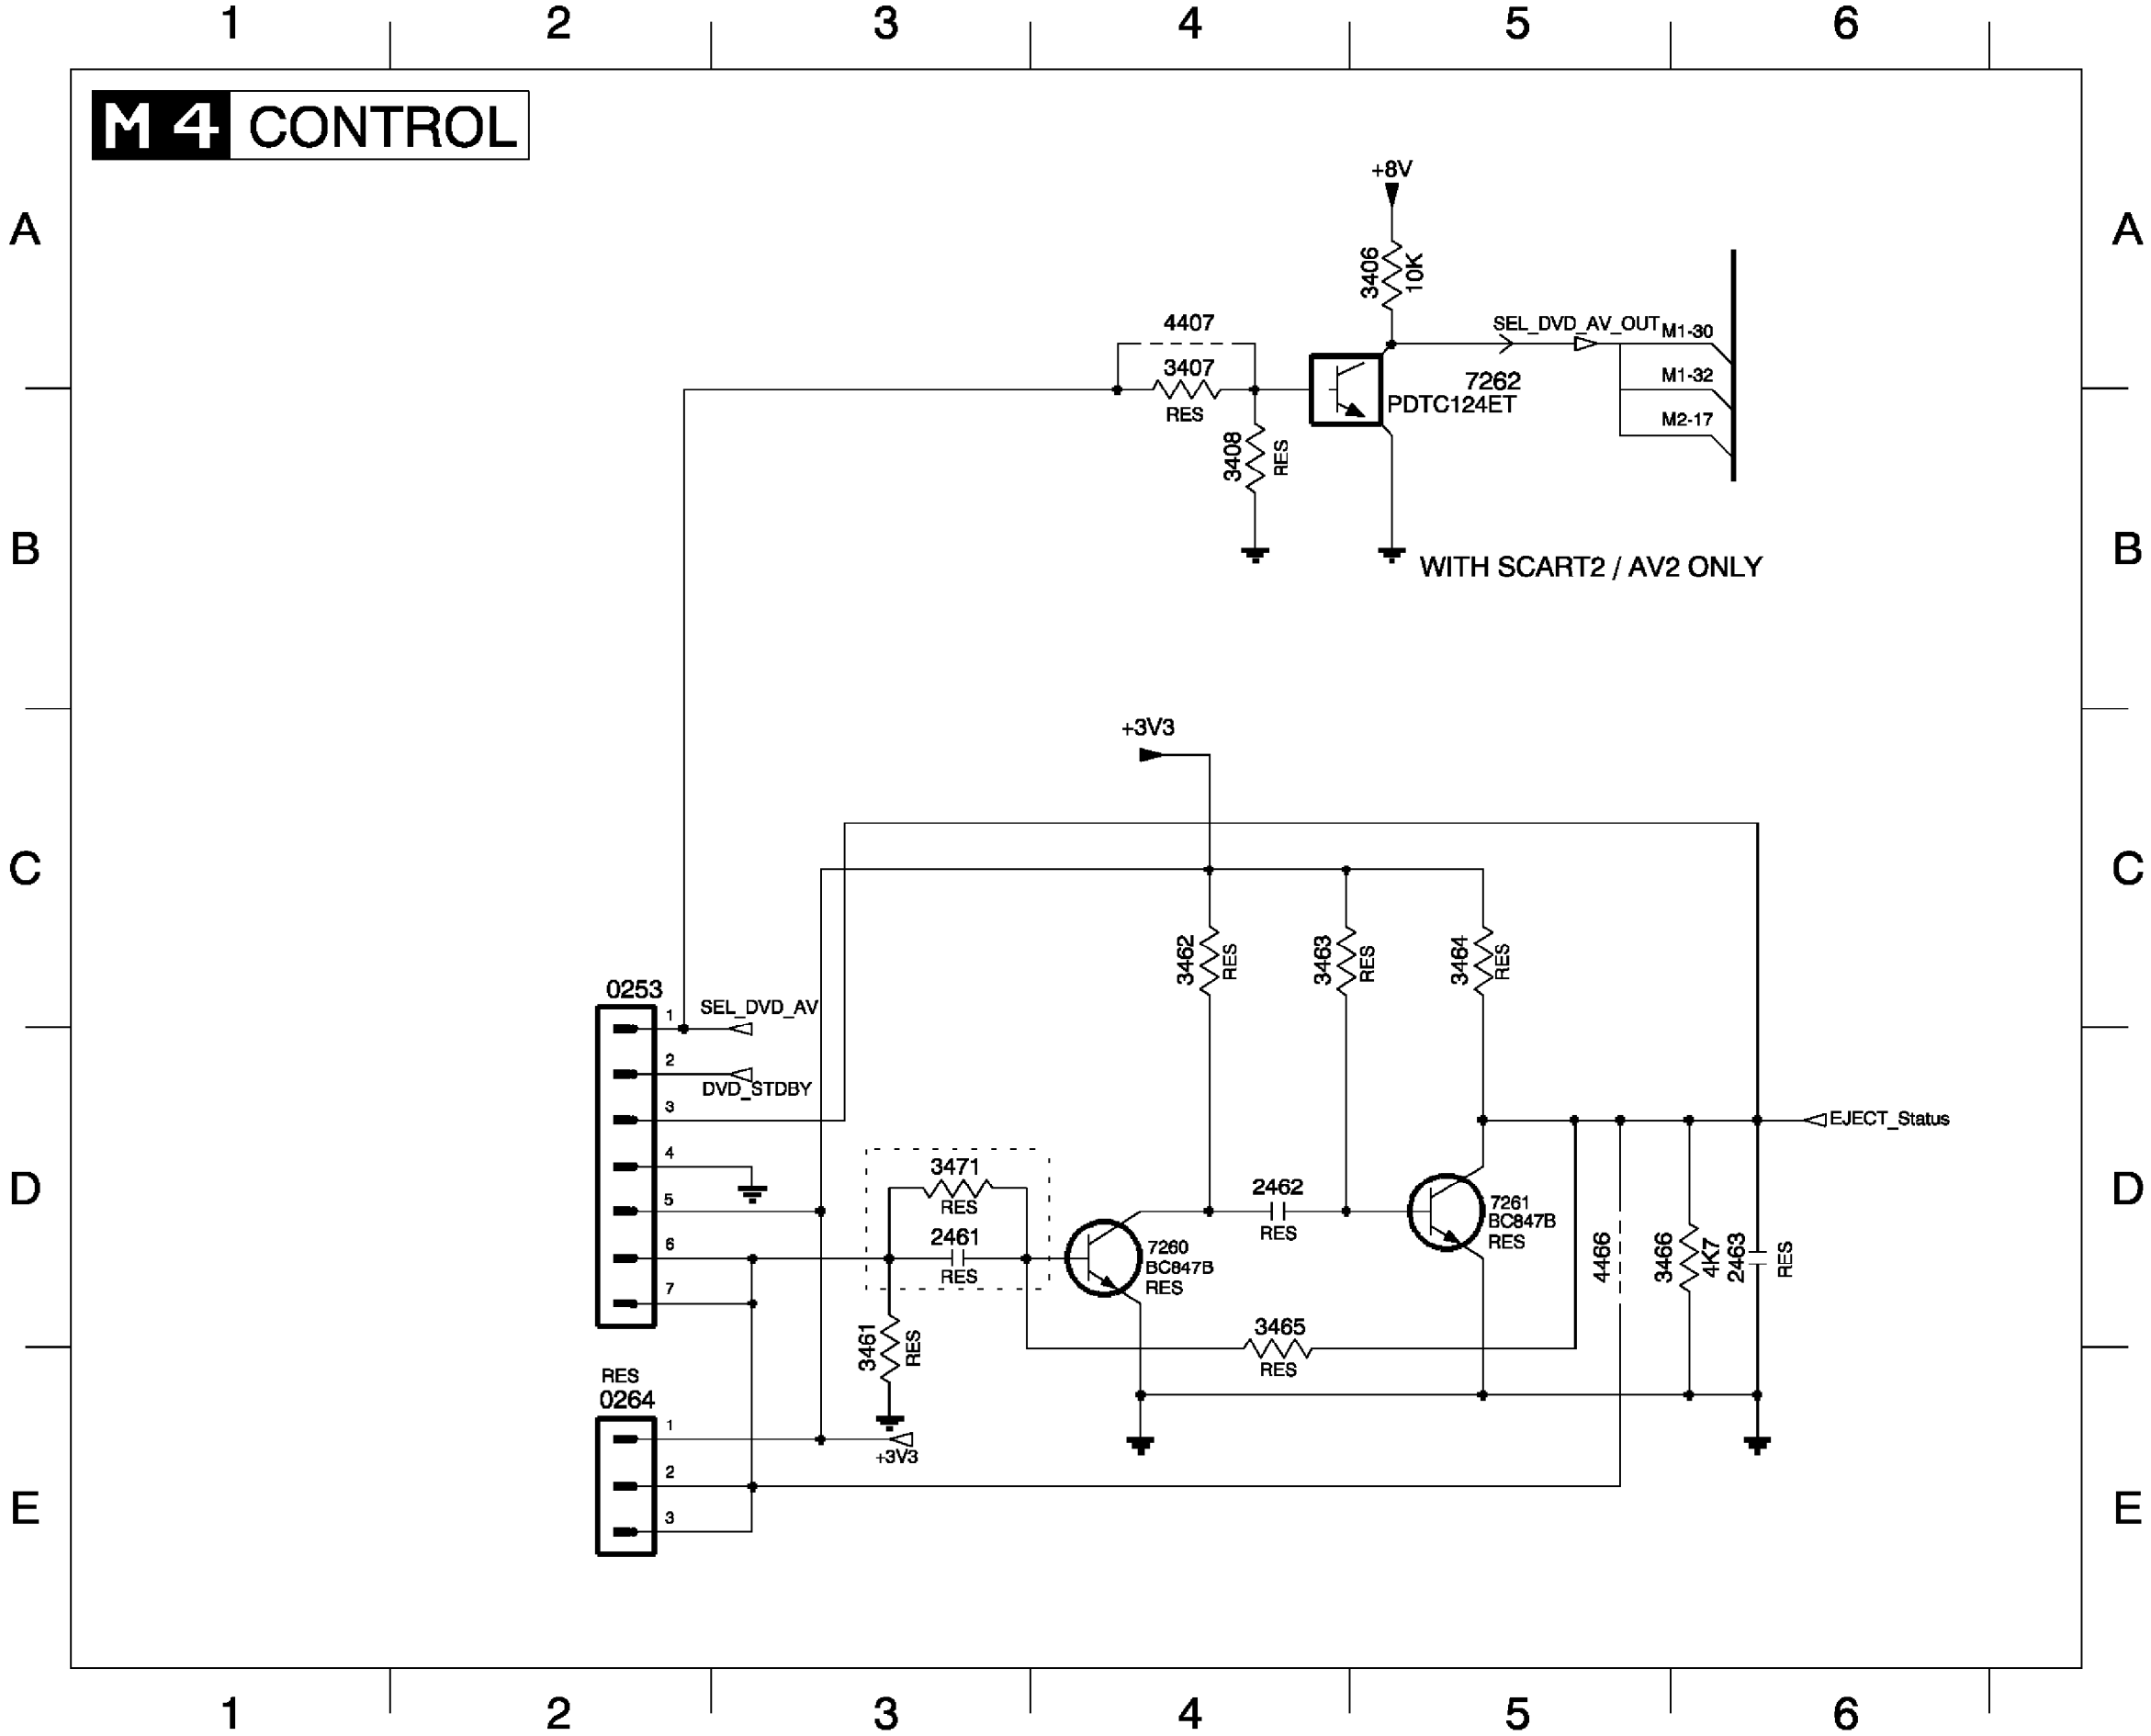




0253 C2
0264 E2
2461 D3
2462 D4
2463 D6
3406 A5
3407 A4
3408 B4
3461 D3
3462 C4
3463 C4
3464 C5
3465 D4
3466 D6
3471 D3
4407 A4
4466 D5
7260 D4
7261 D5
7262 A5

M1 VIDEO AUDIO SWITCH

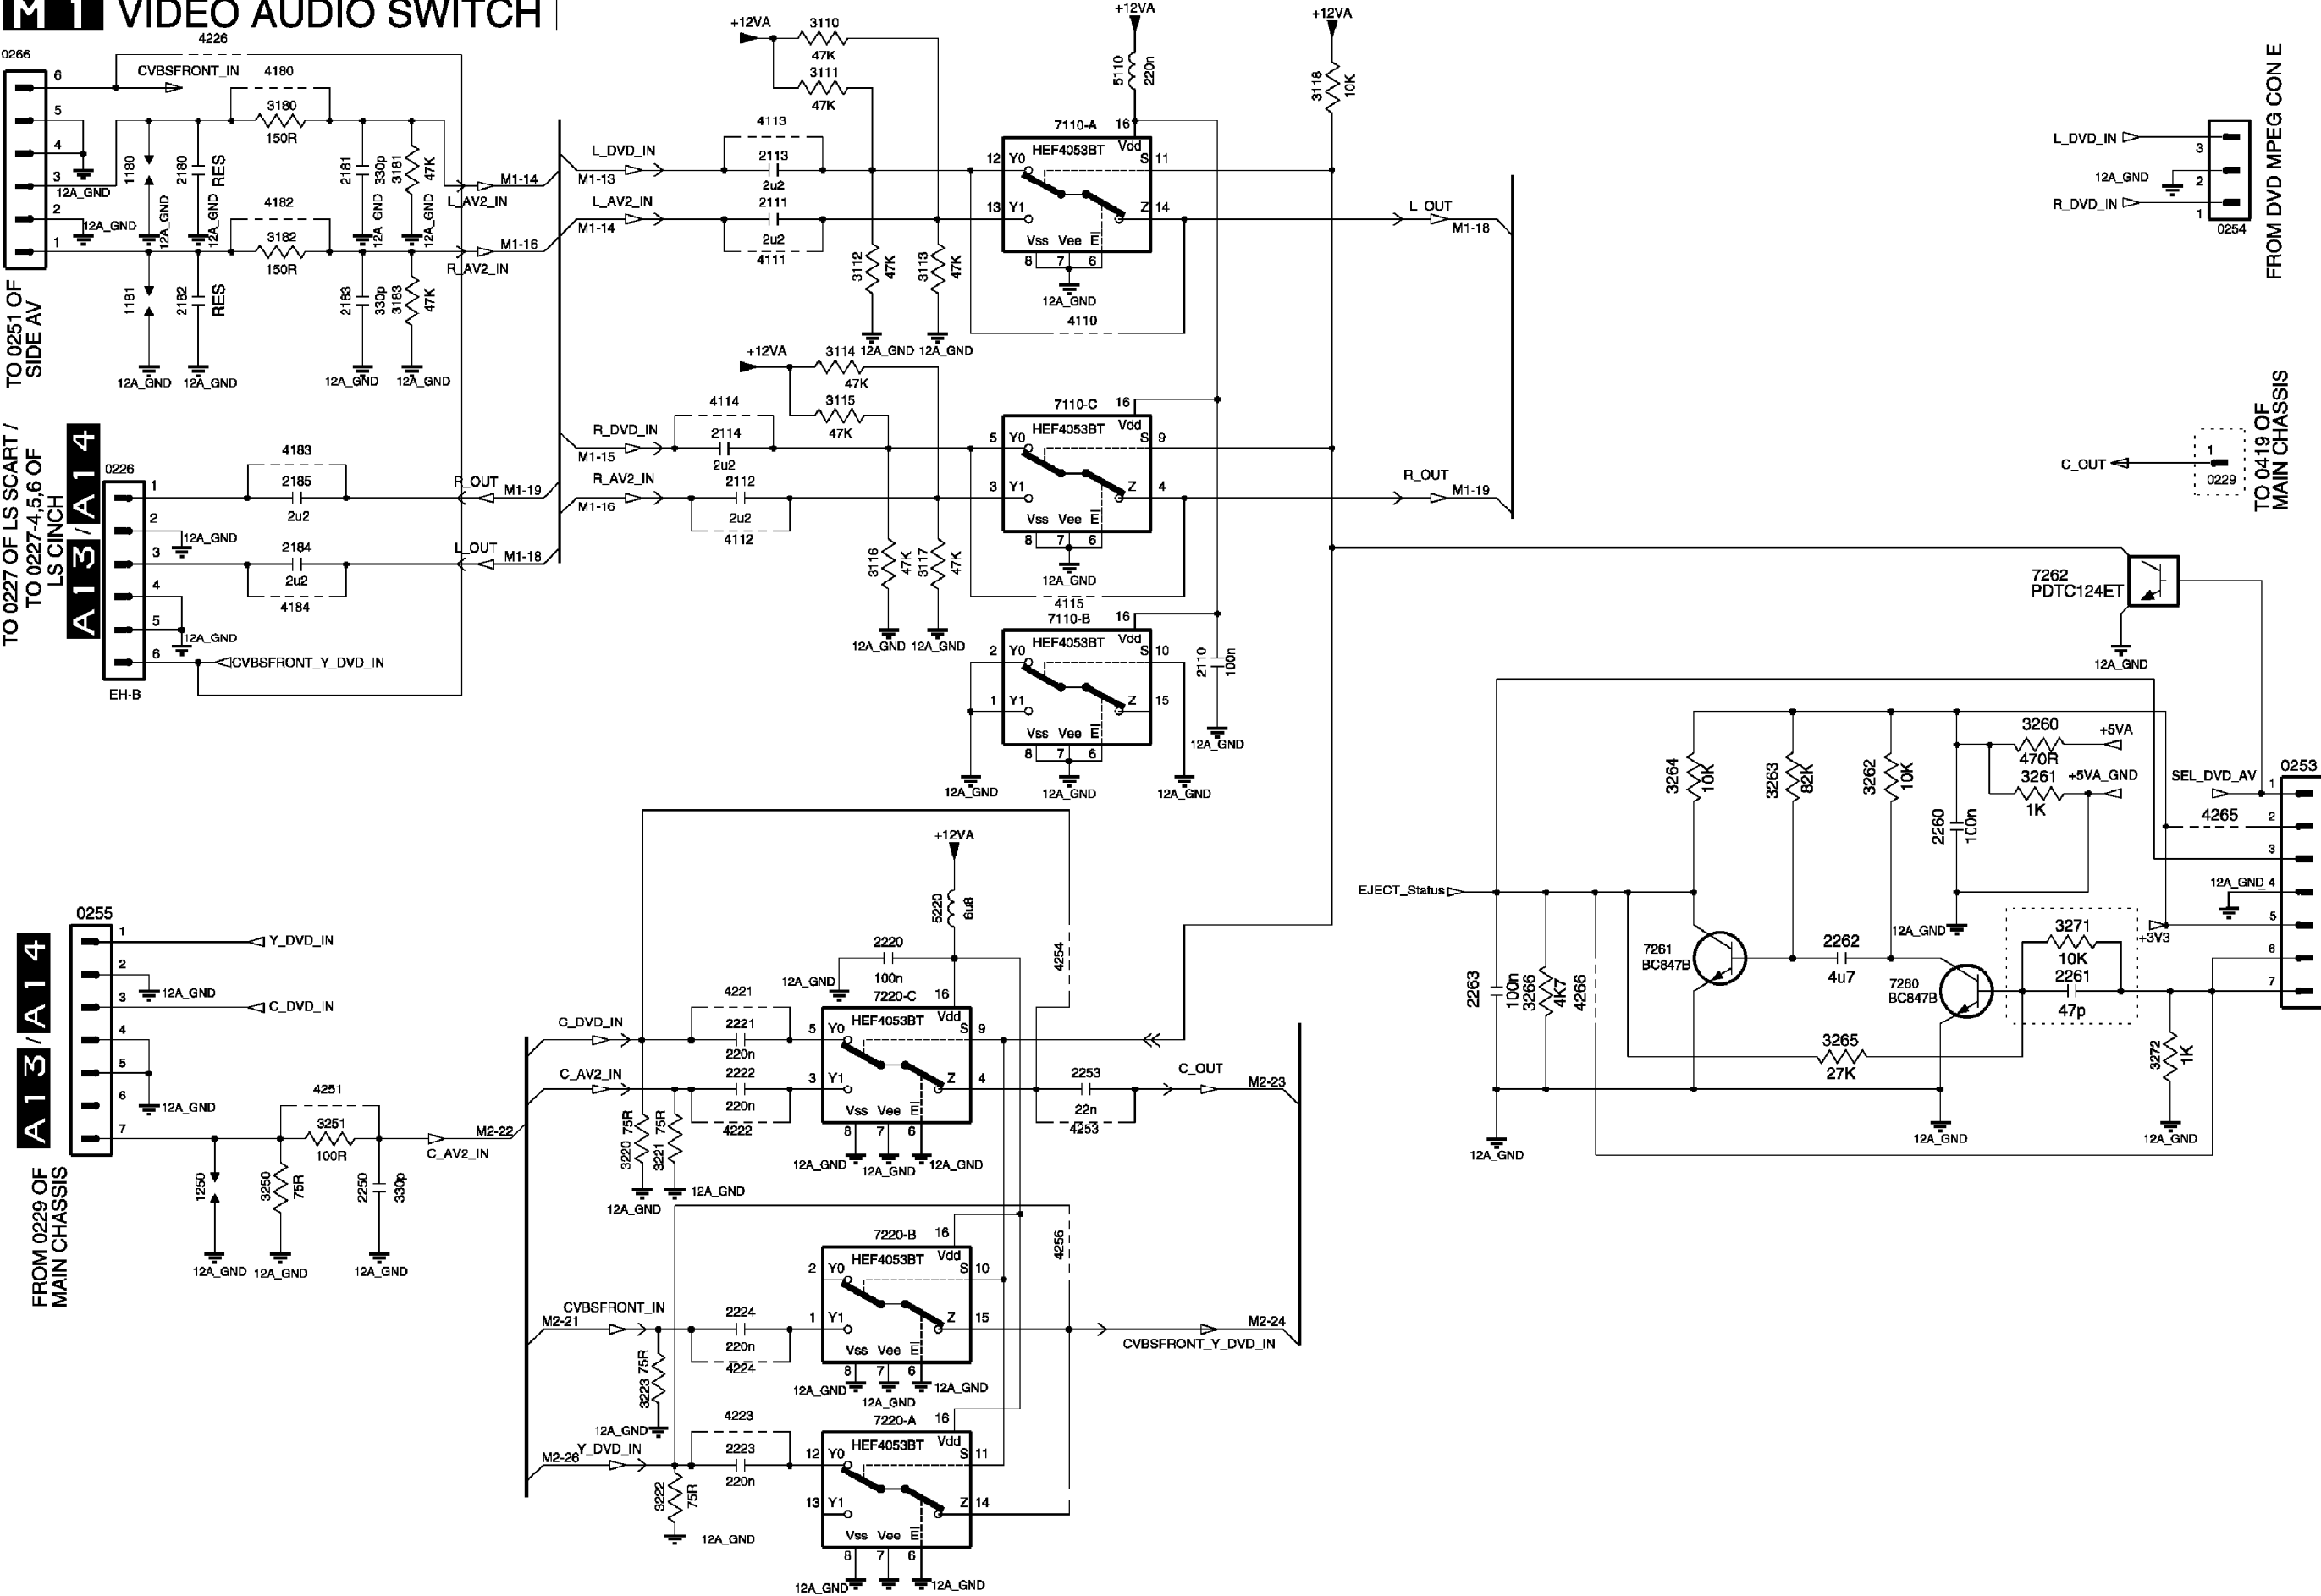


M3 POWER SUPPLY

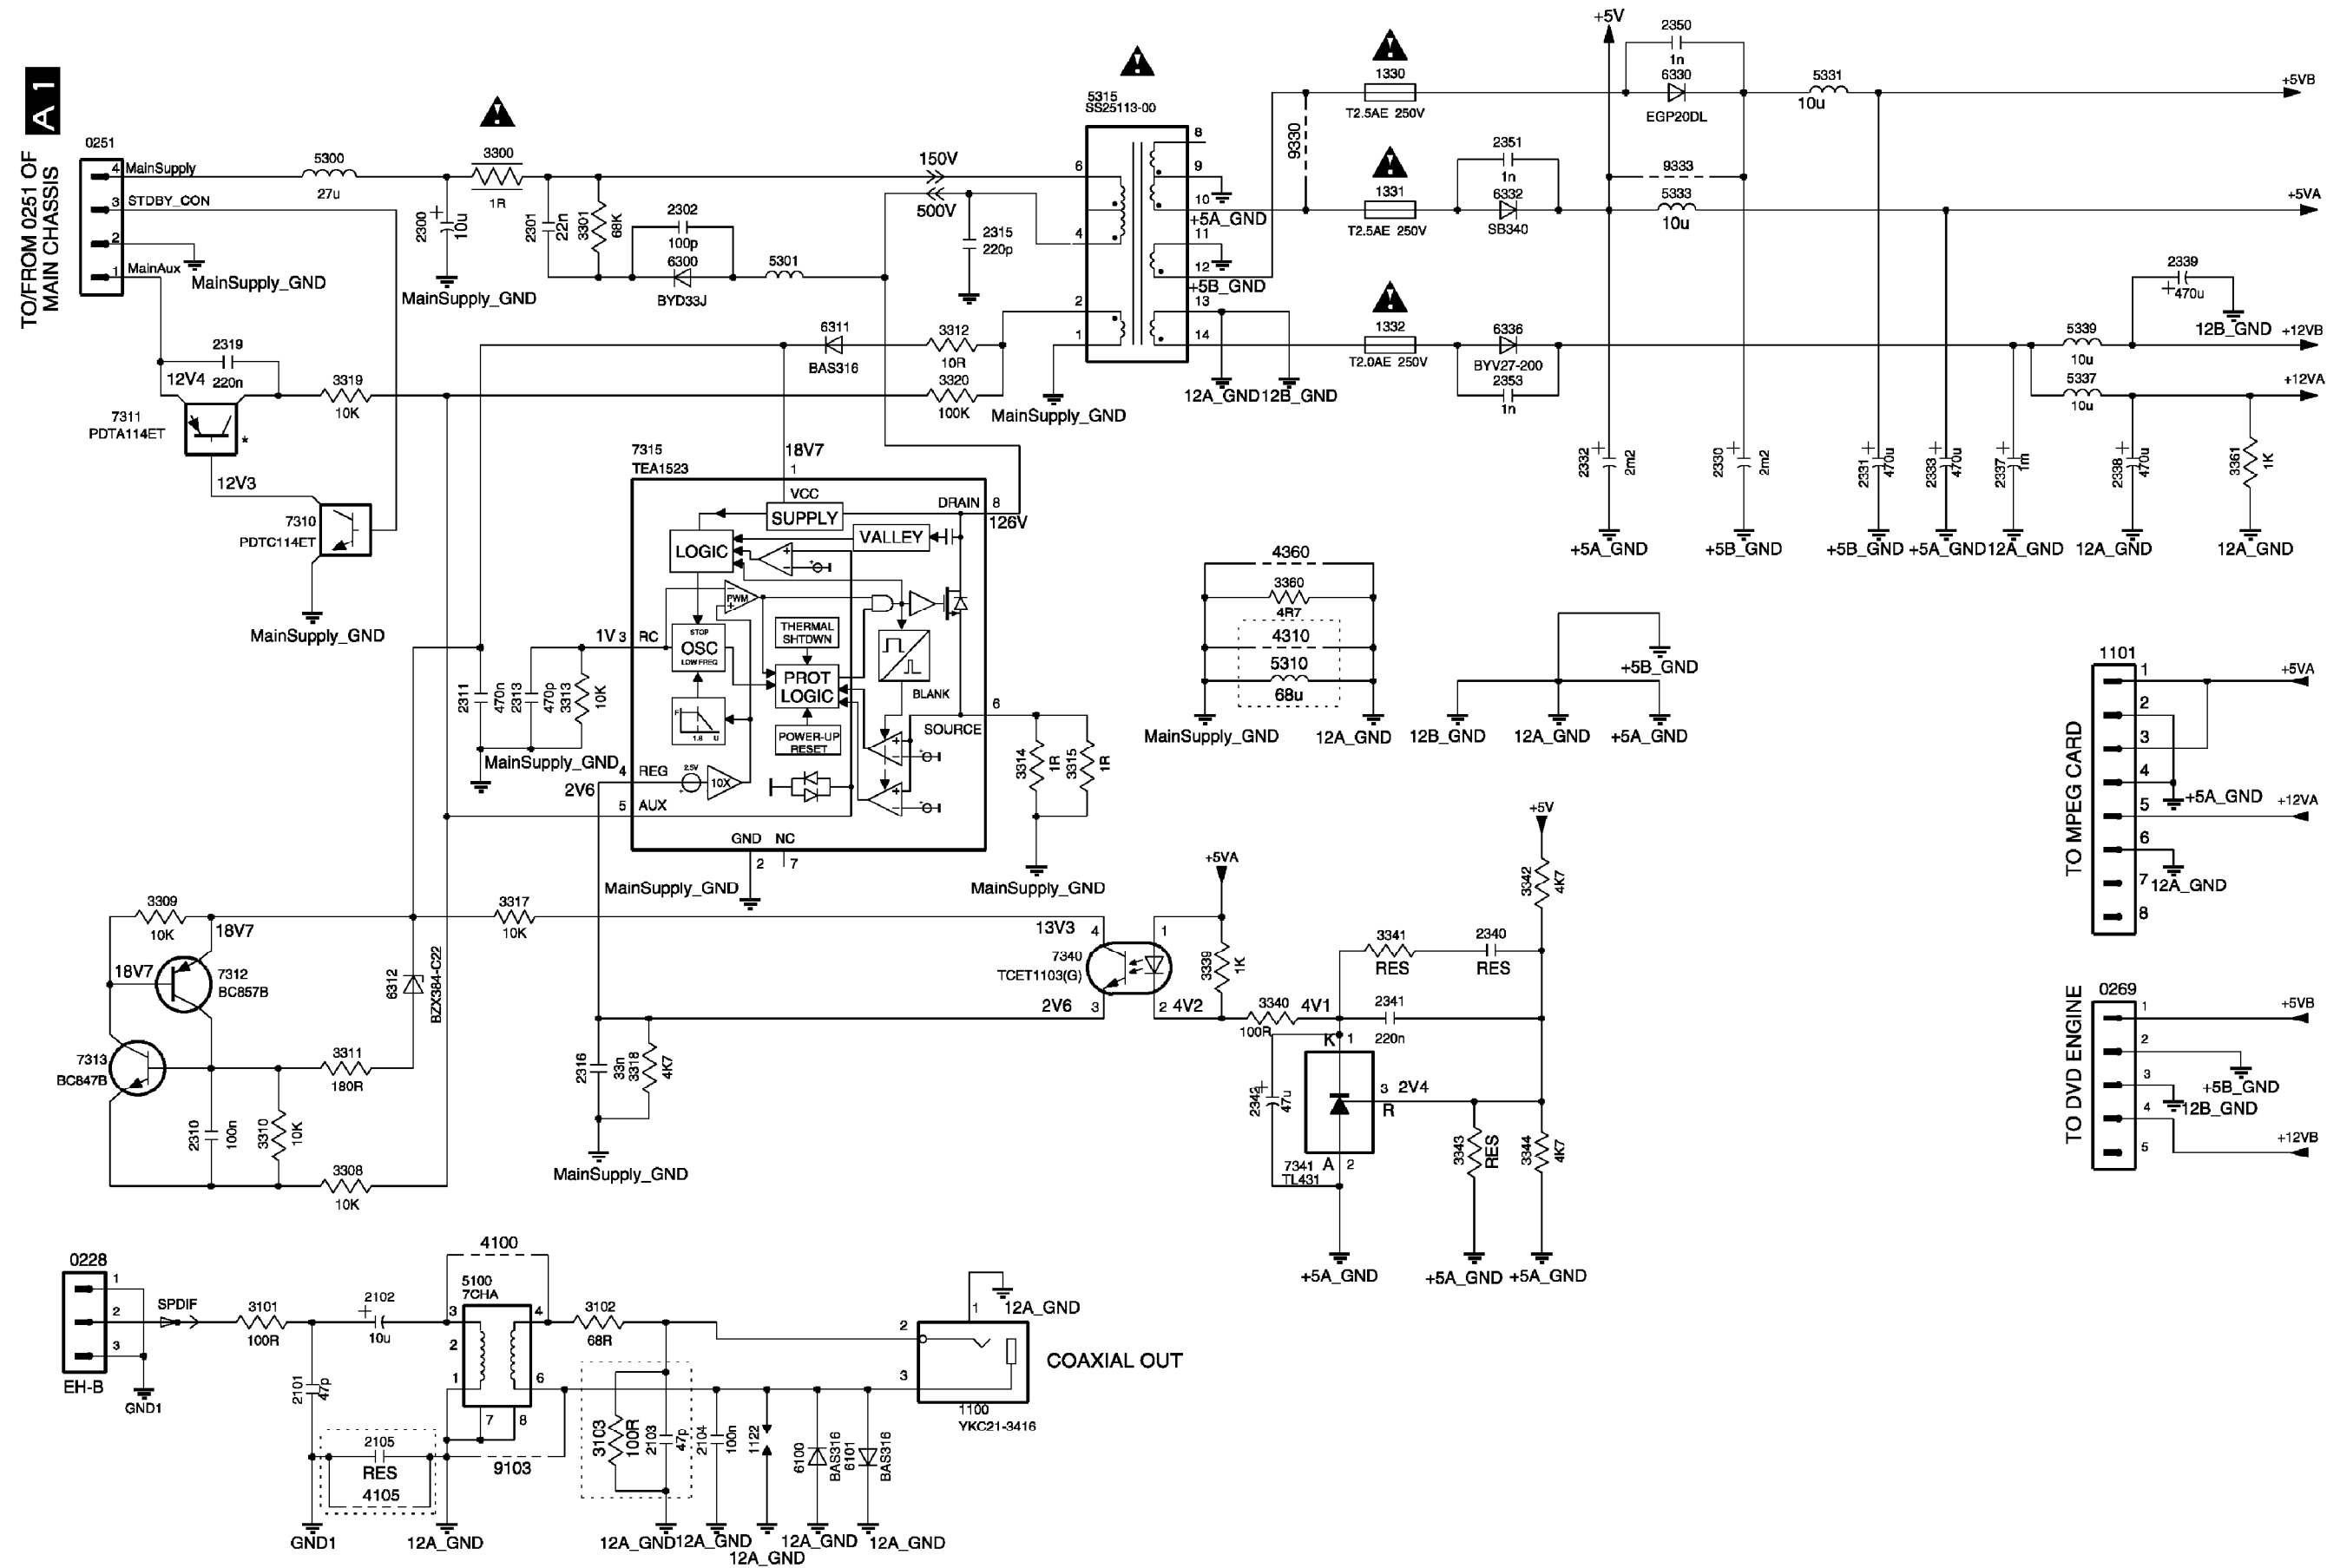


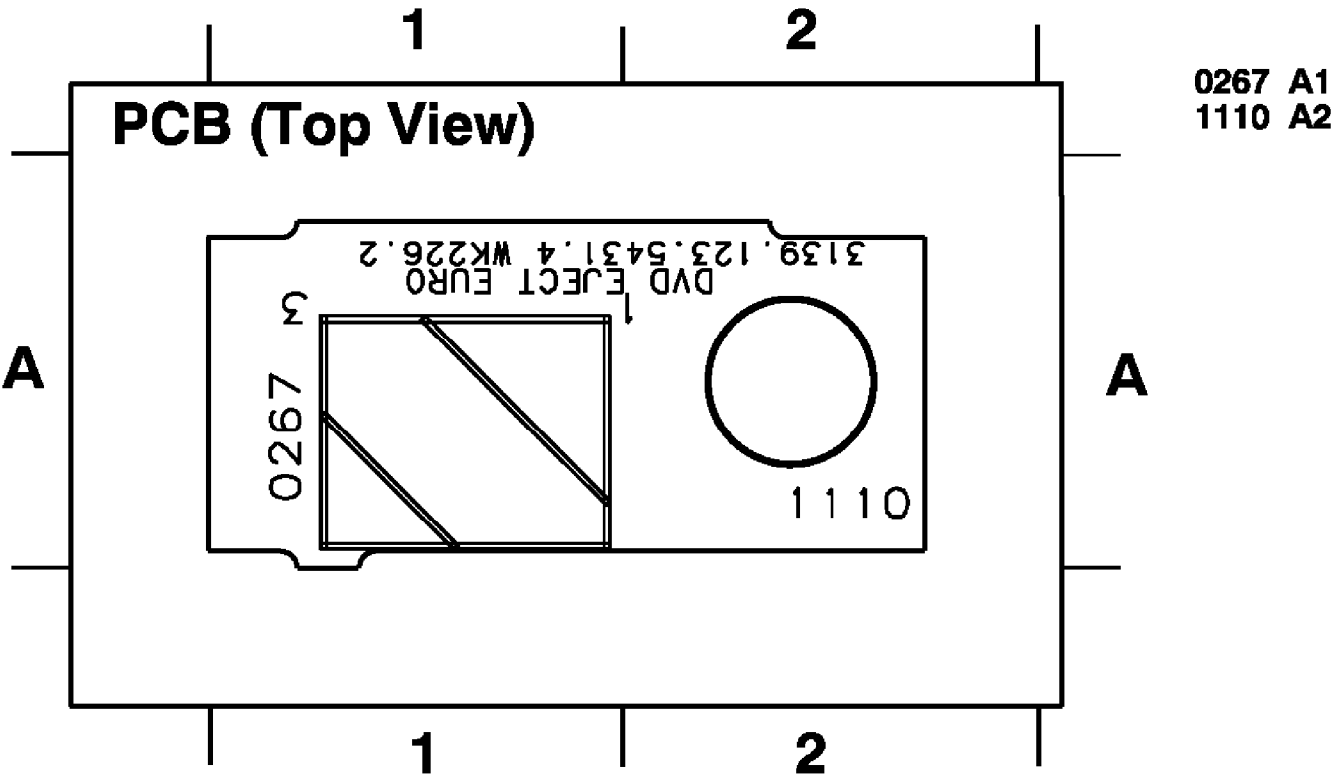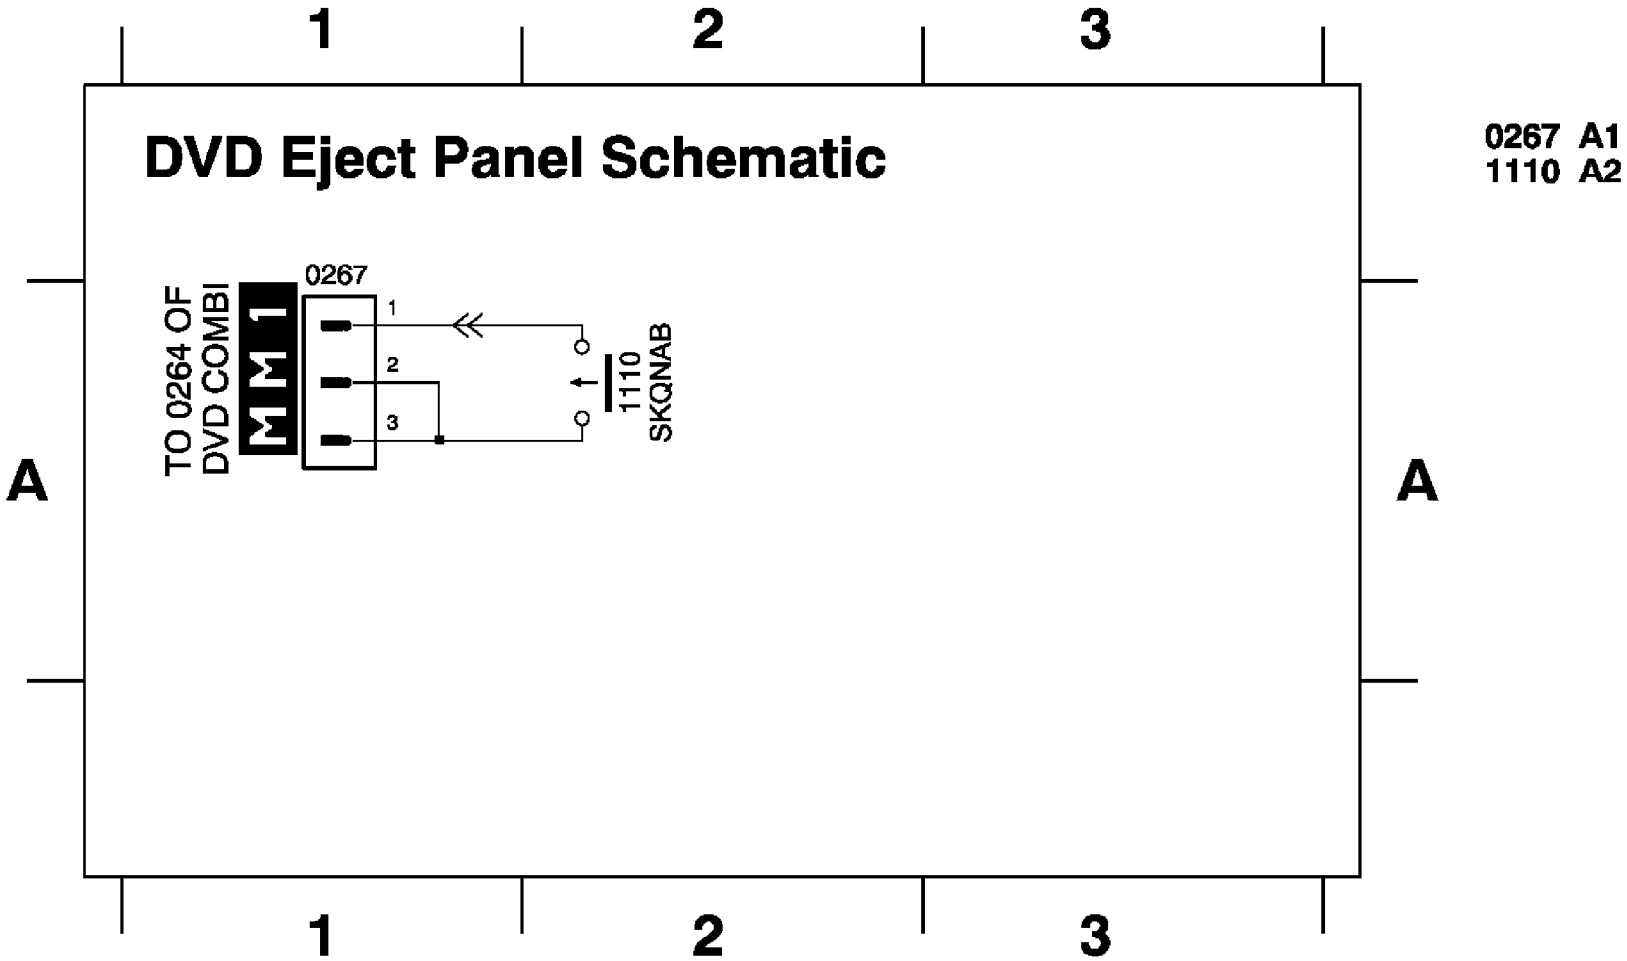



Channel One Card Schematic

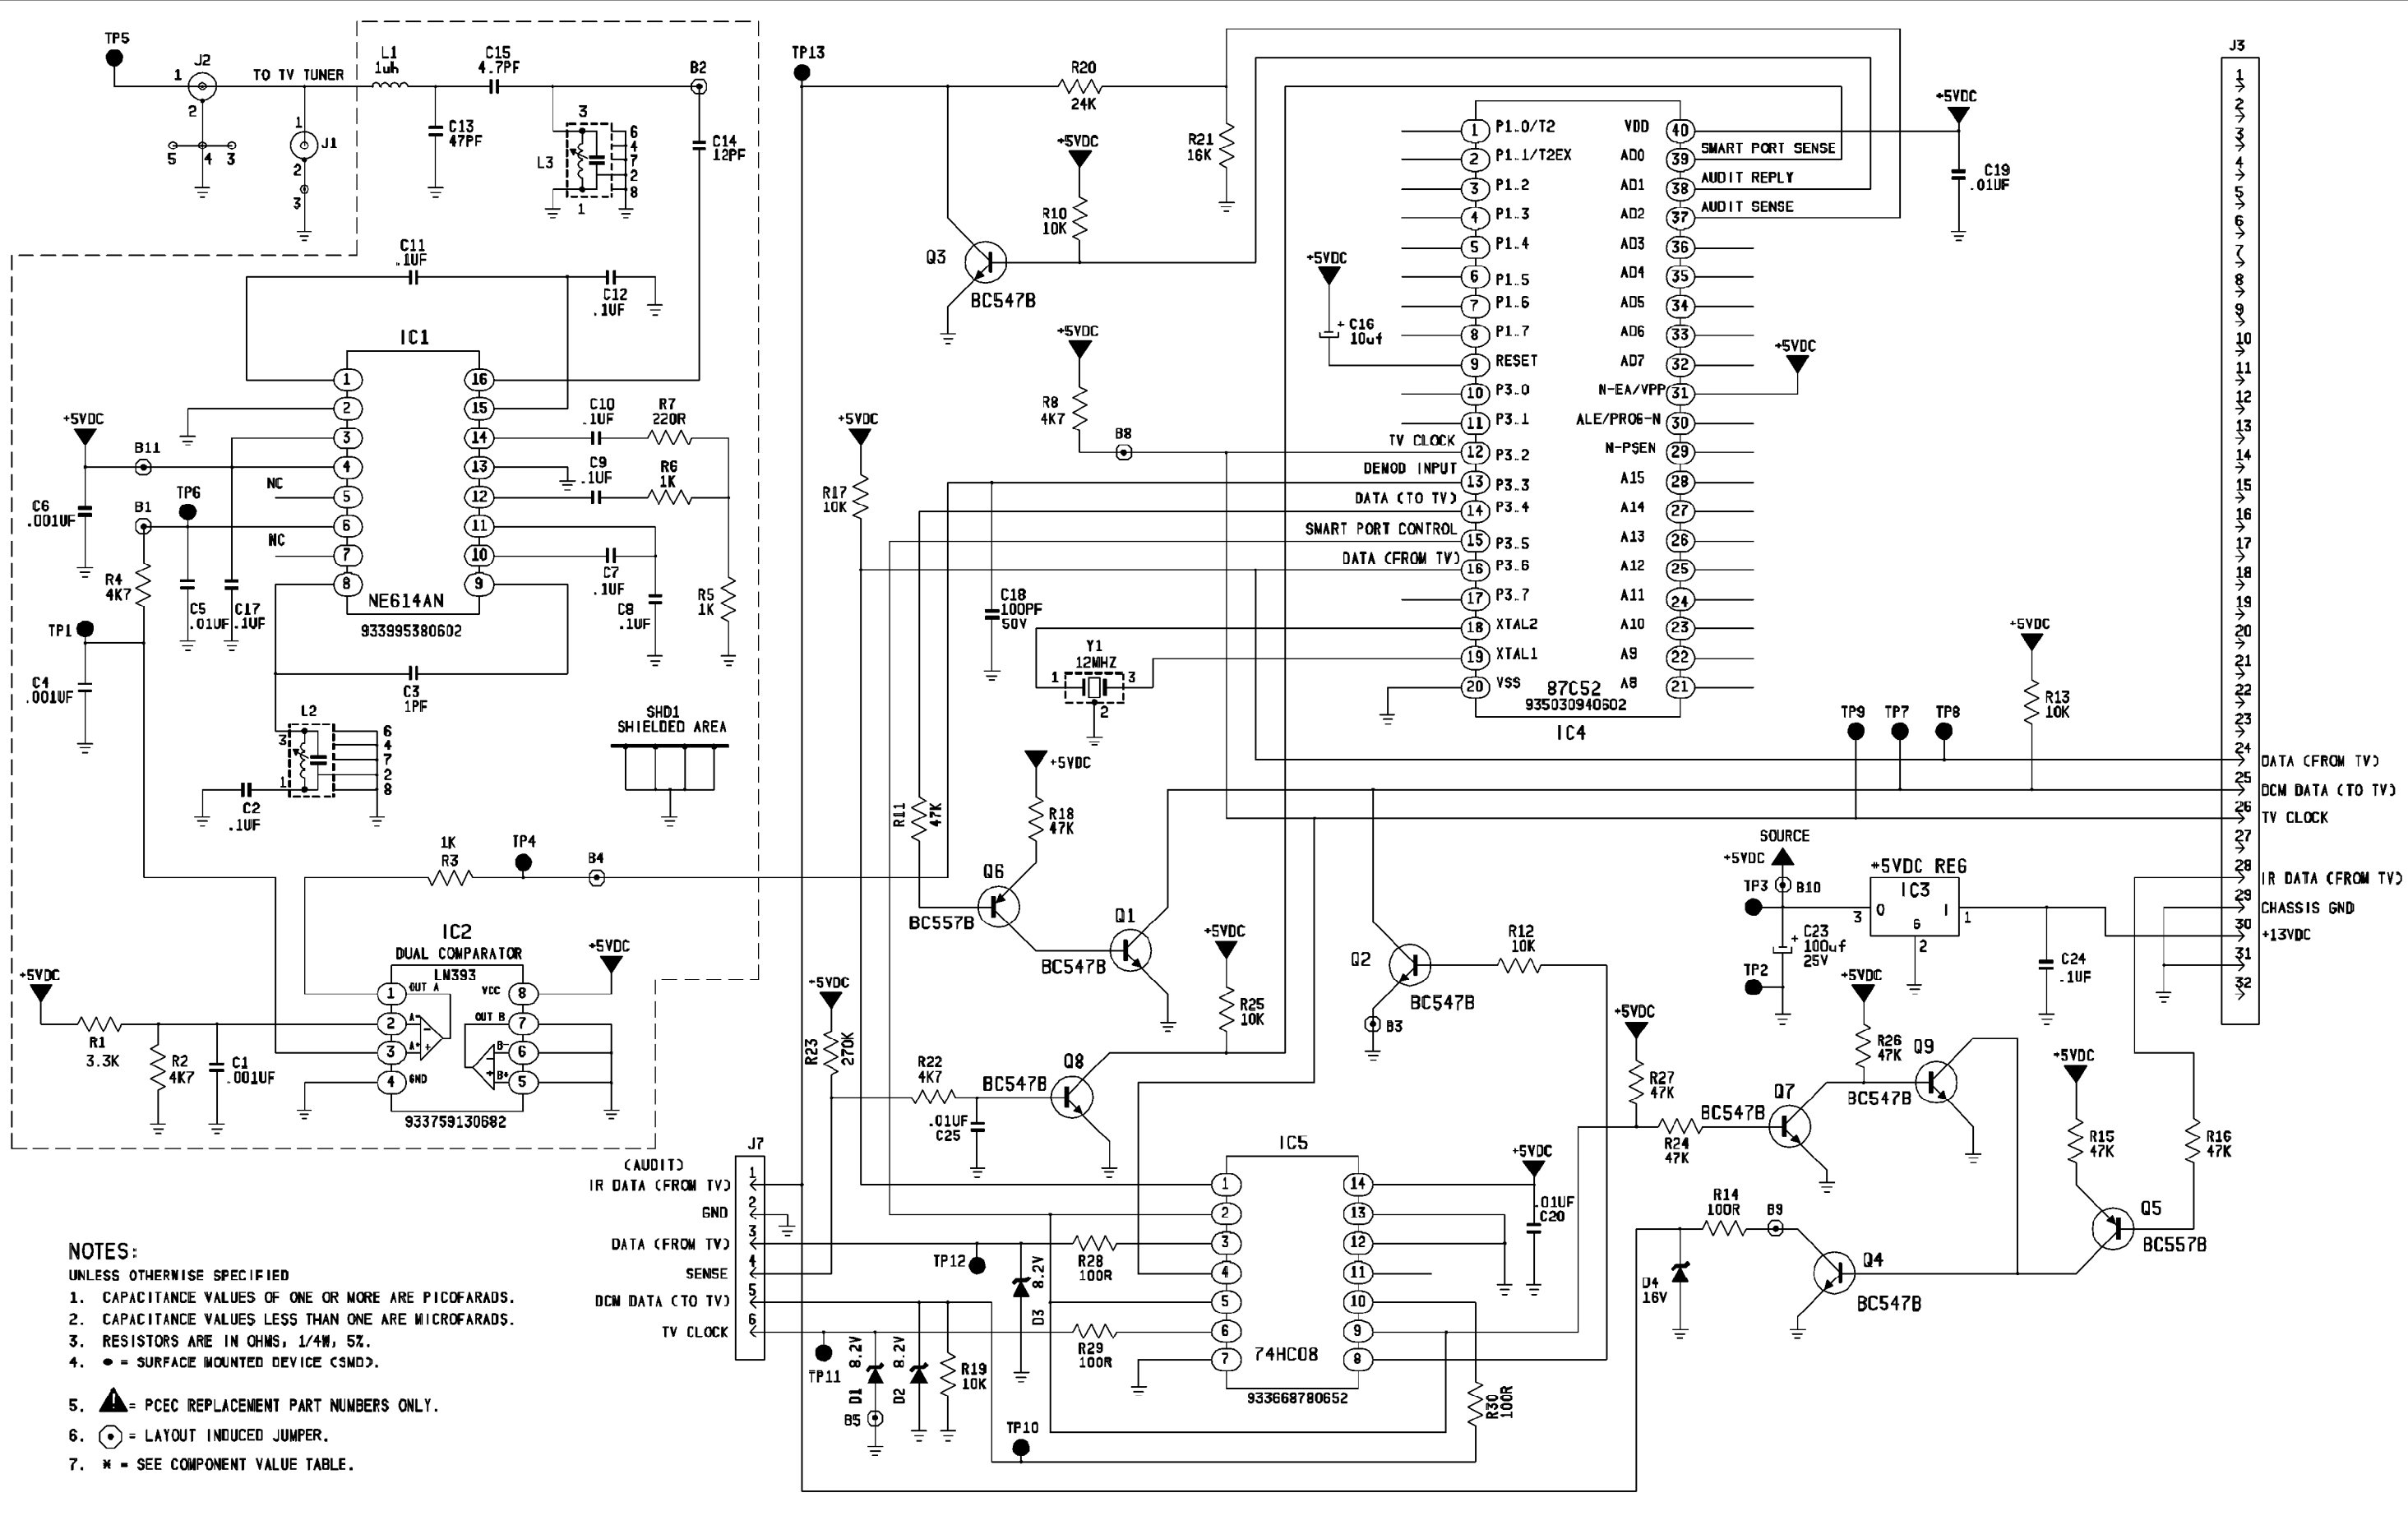


- NOTES:
- UNLESS OTHERWISE SPECIFIED
1. CAPACITANCE VALUES OF ONE OR MORE ARE PICOFARADS.
 2. CAPACITANCE VALUES LESS THAN ONE ARE MICROFARADS.
 3. RESISTORS ARE IN OHMS, 1/4W, 5%.
 4. • = SURFACE MOUNTED DEVICE (SMD).
 5. ⚠ = PCEC REPLACEMENT PART NUMBERS ONLY.
 6. ⊙ = LAYOUT INDUCED JUMPER.
 7. * = SEE COMPONENT VALUE TABLE.

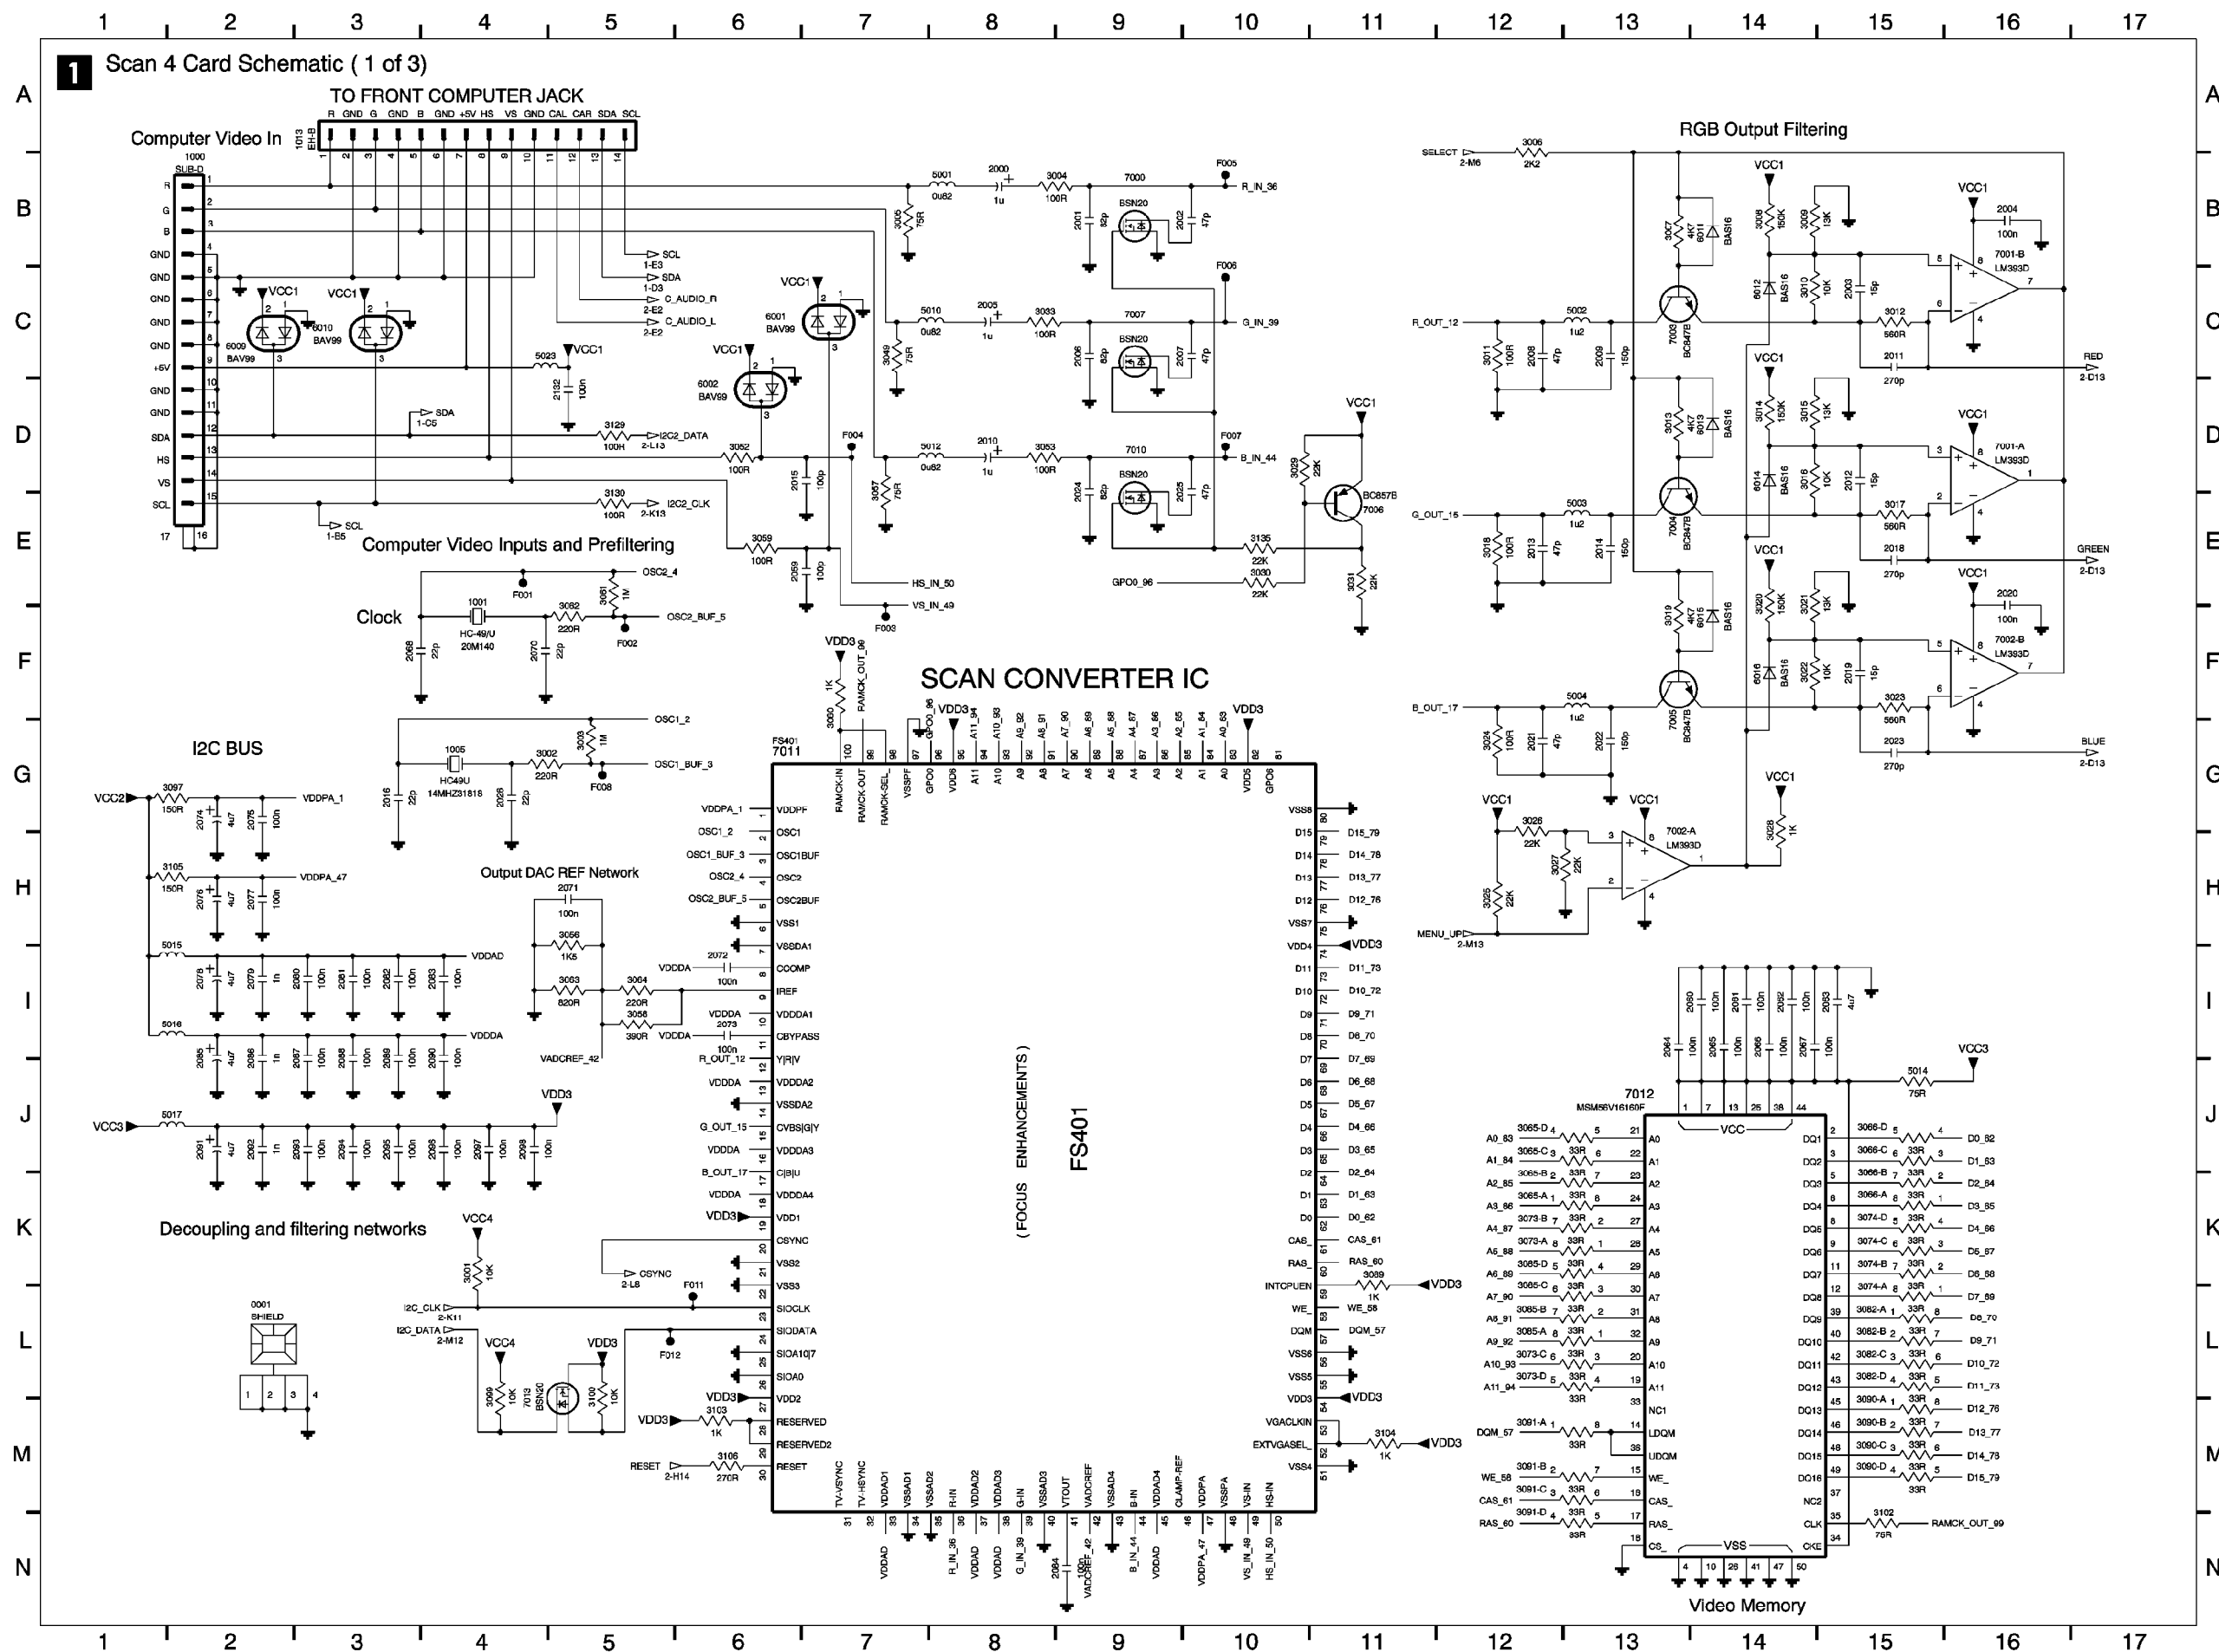

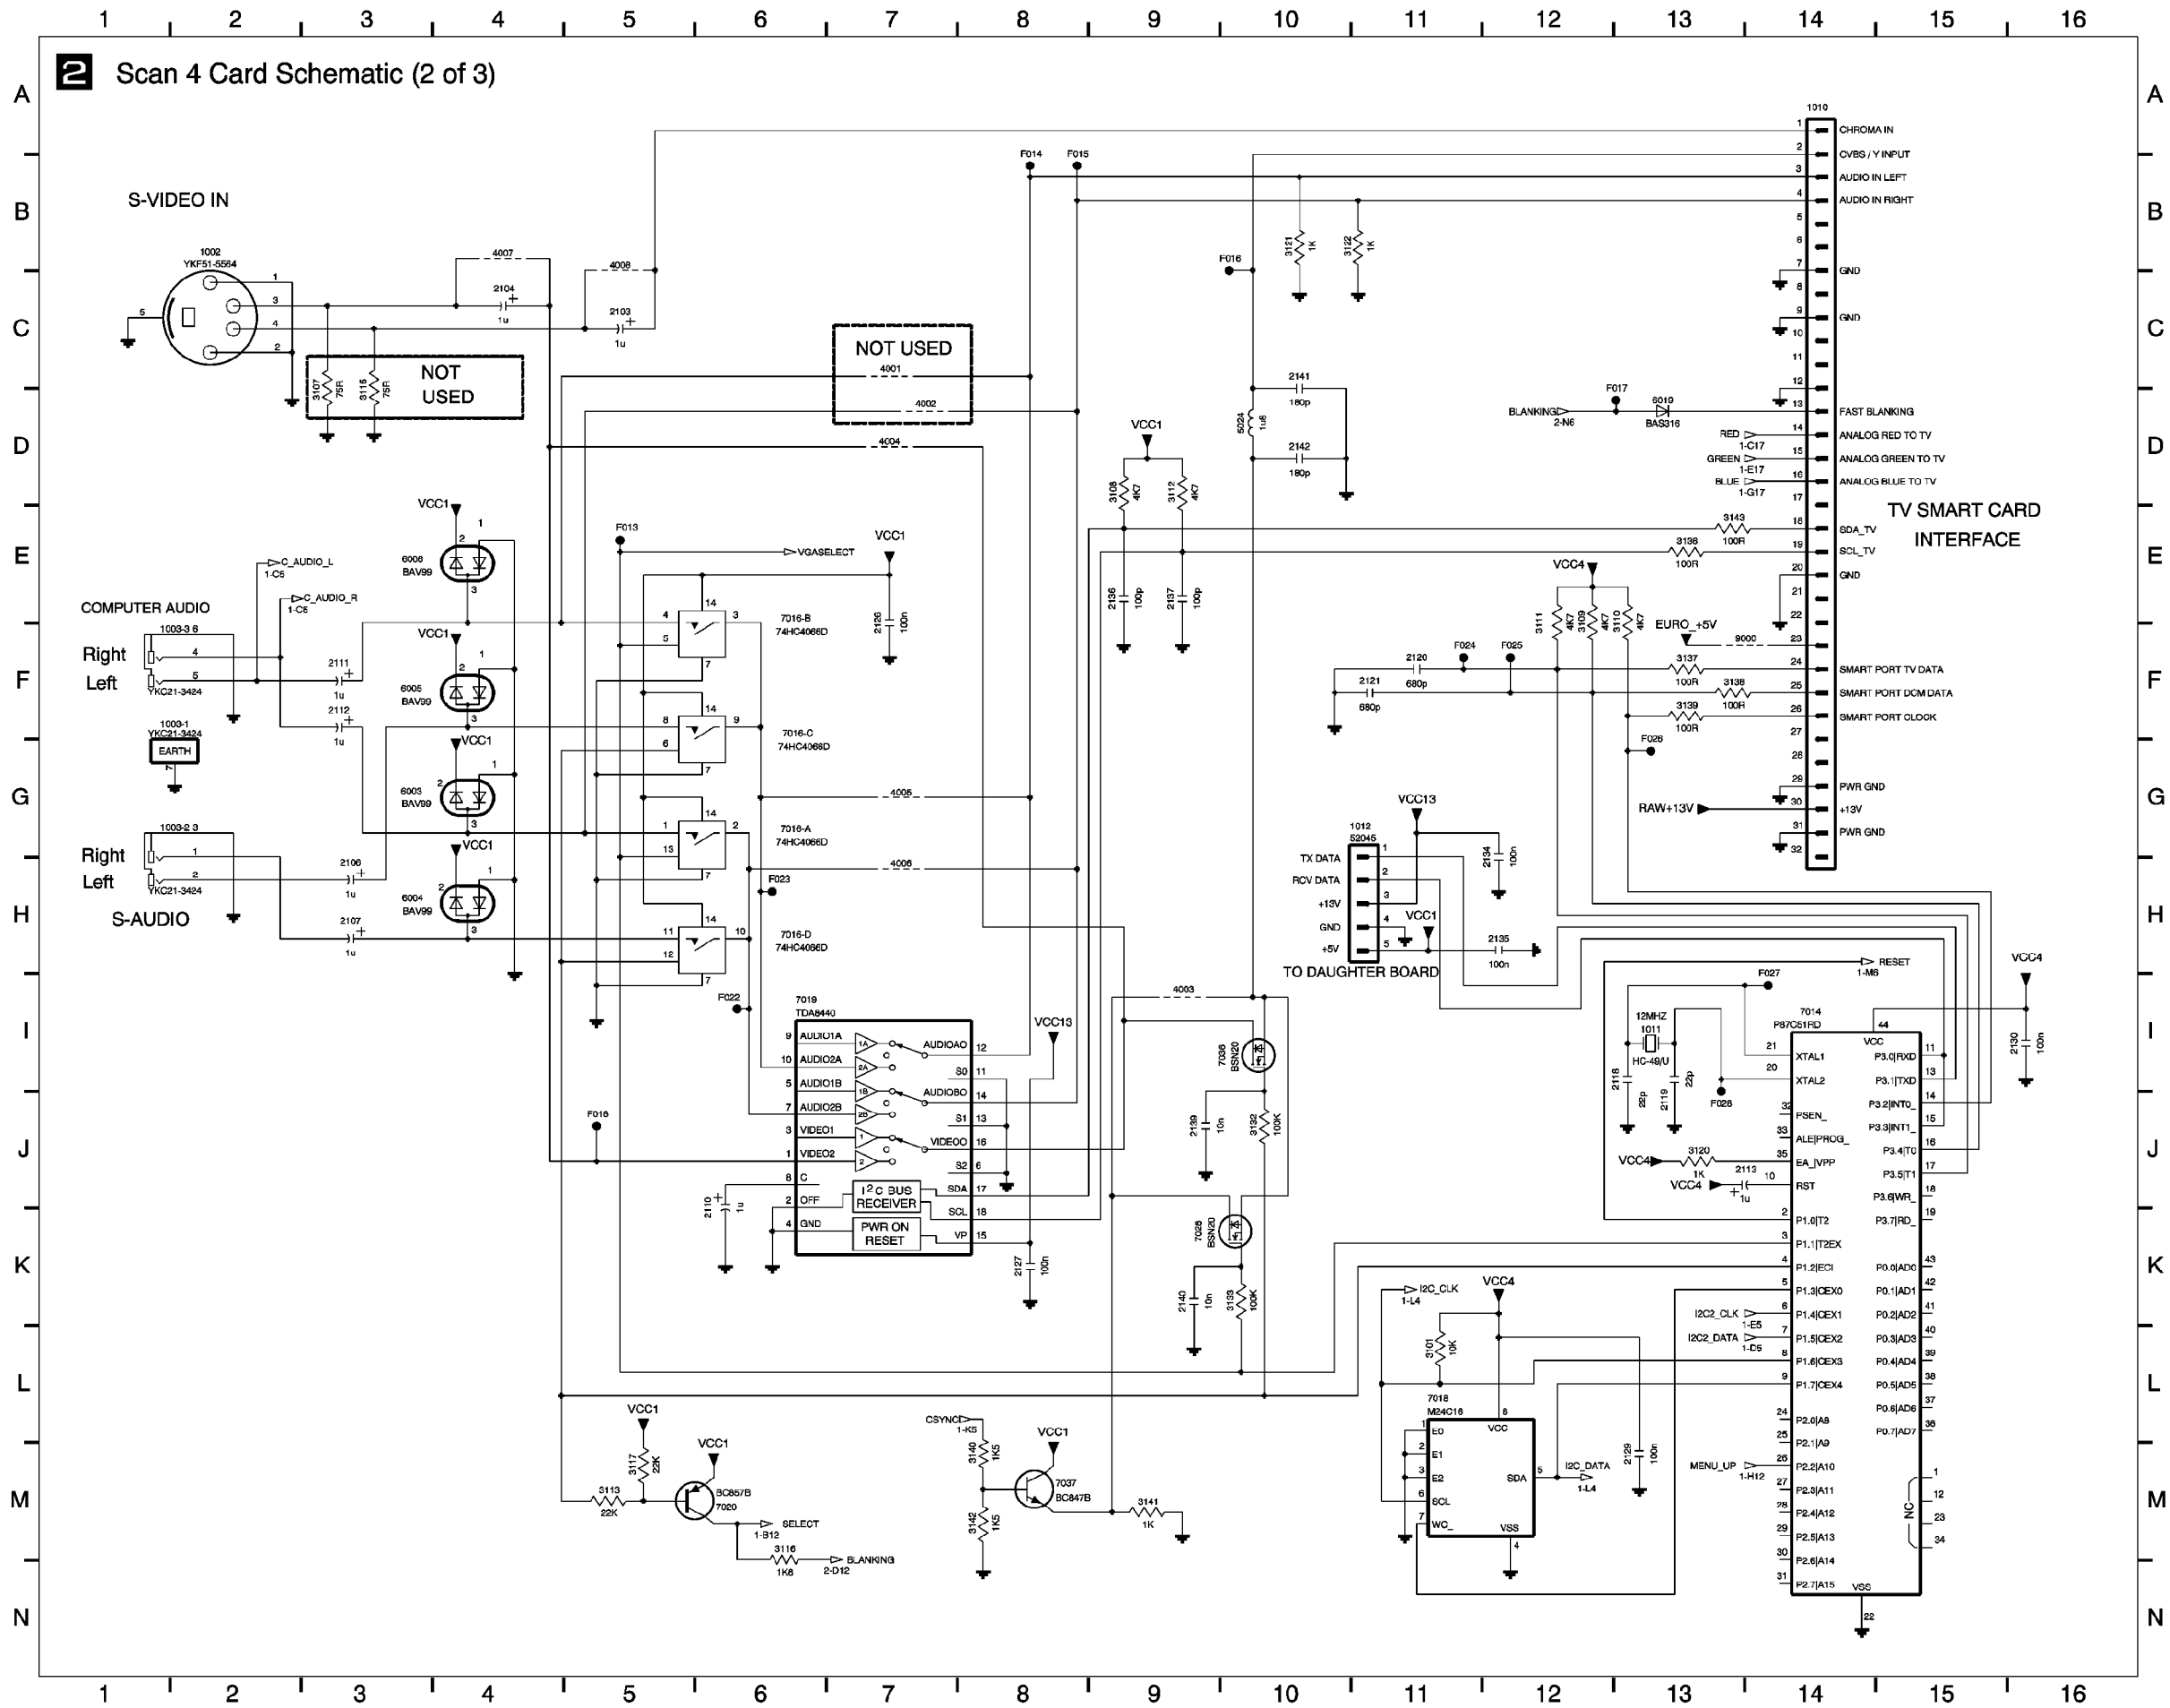


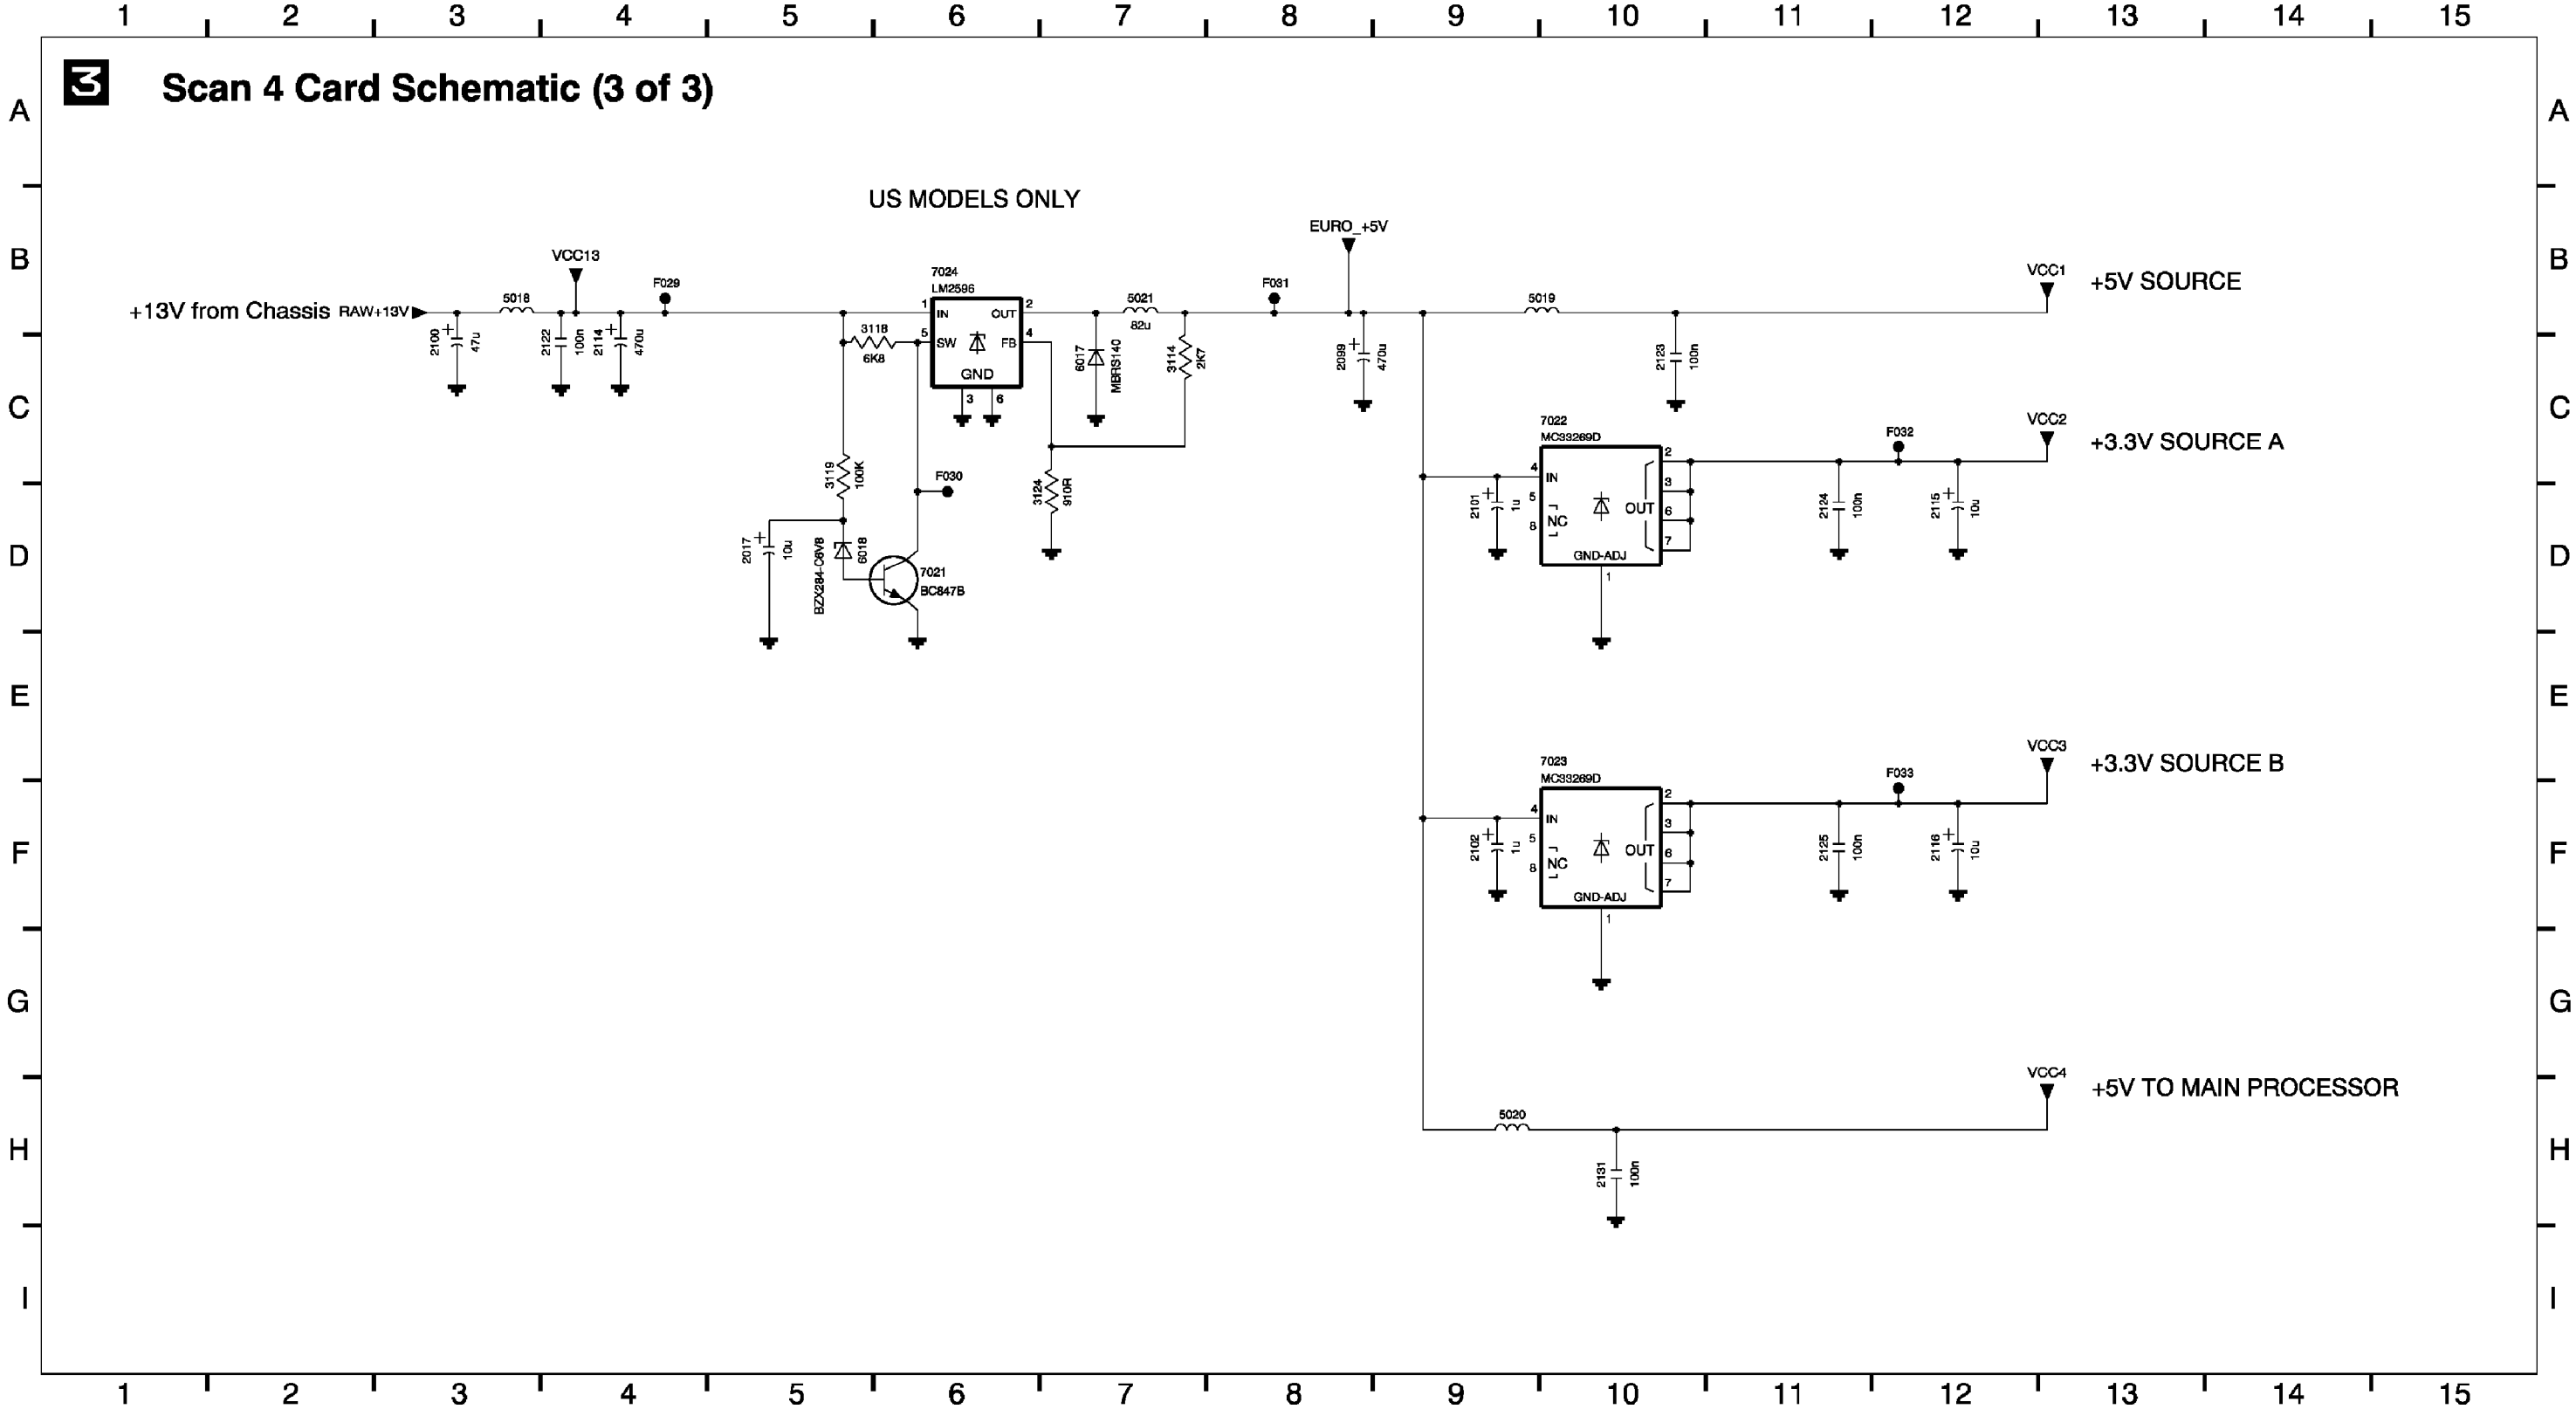


Net 1 Panel Schematic

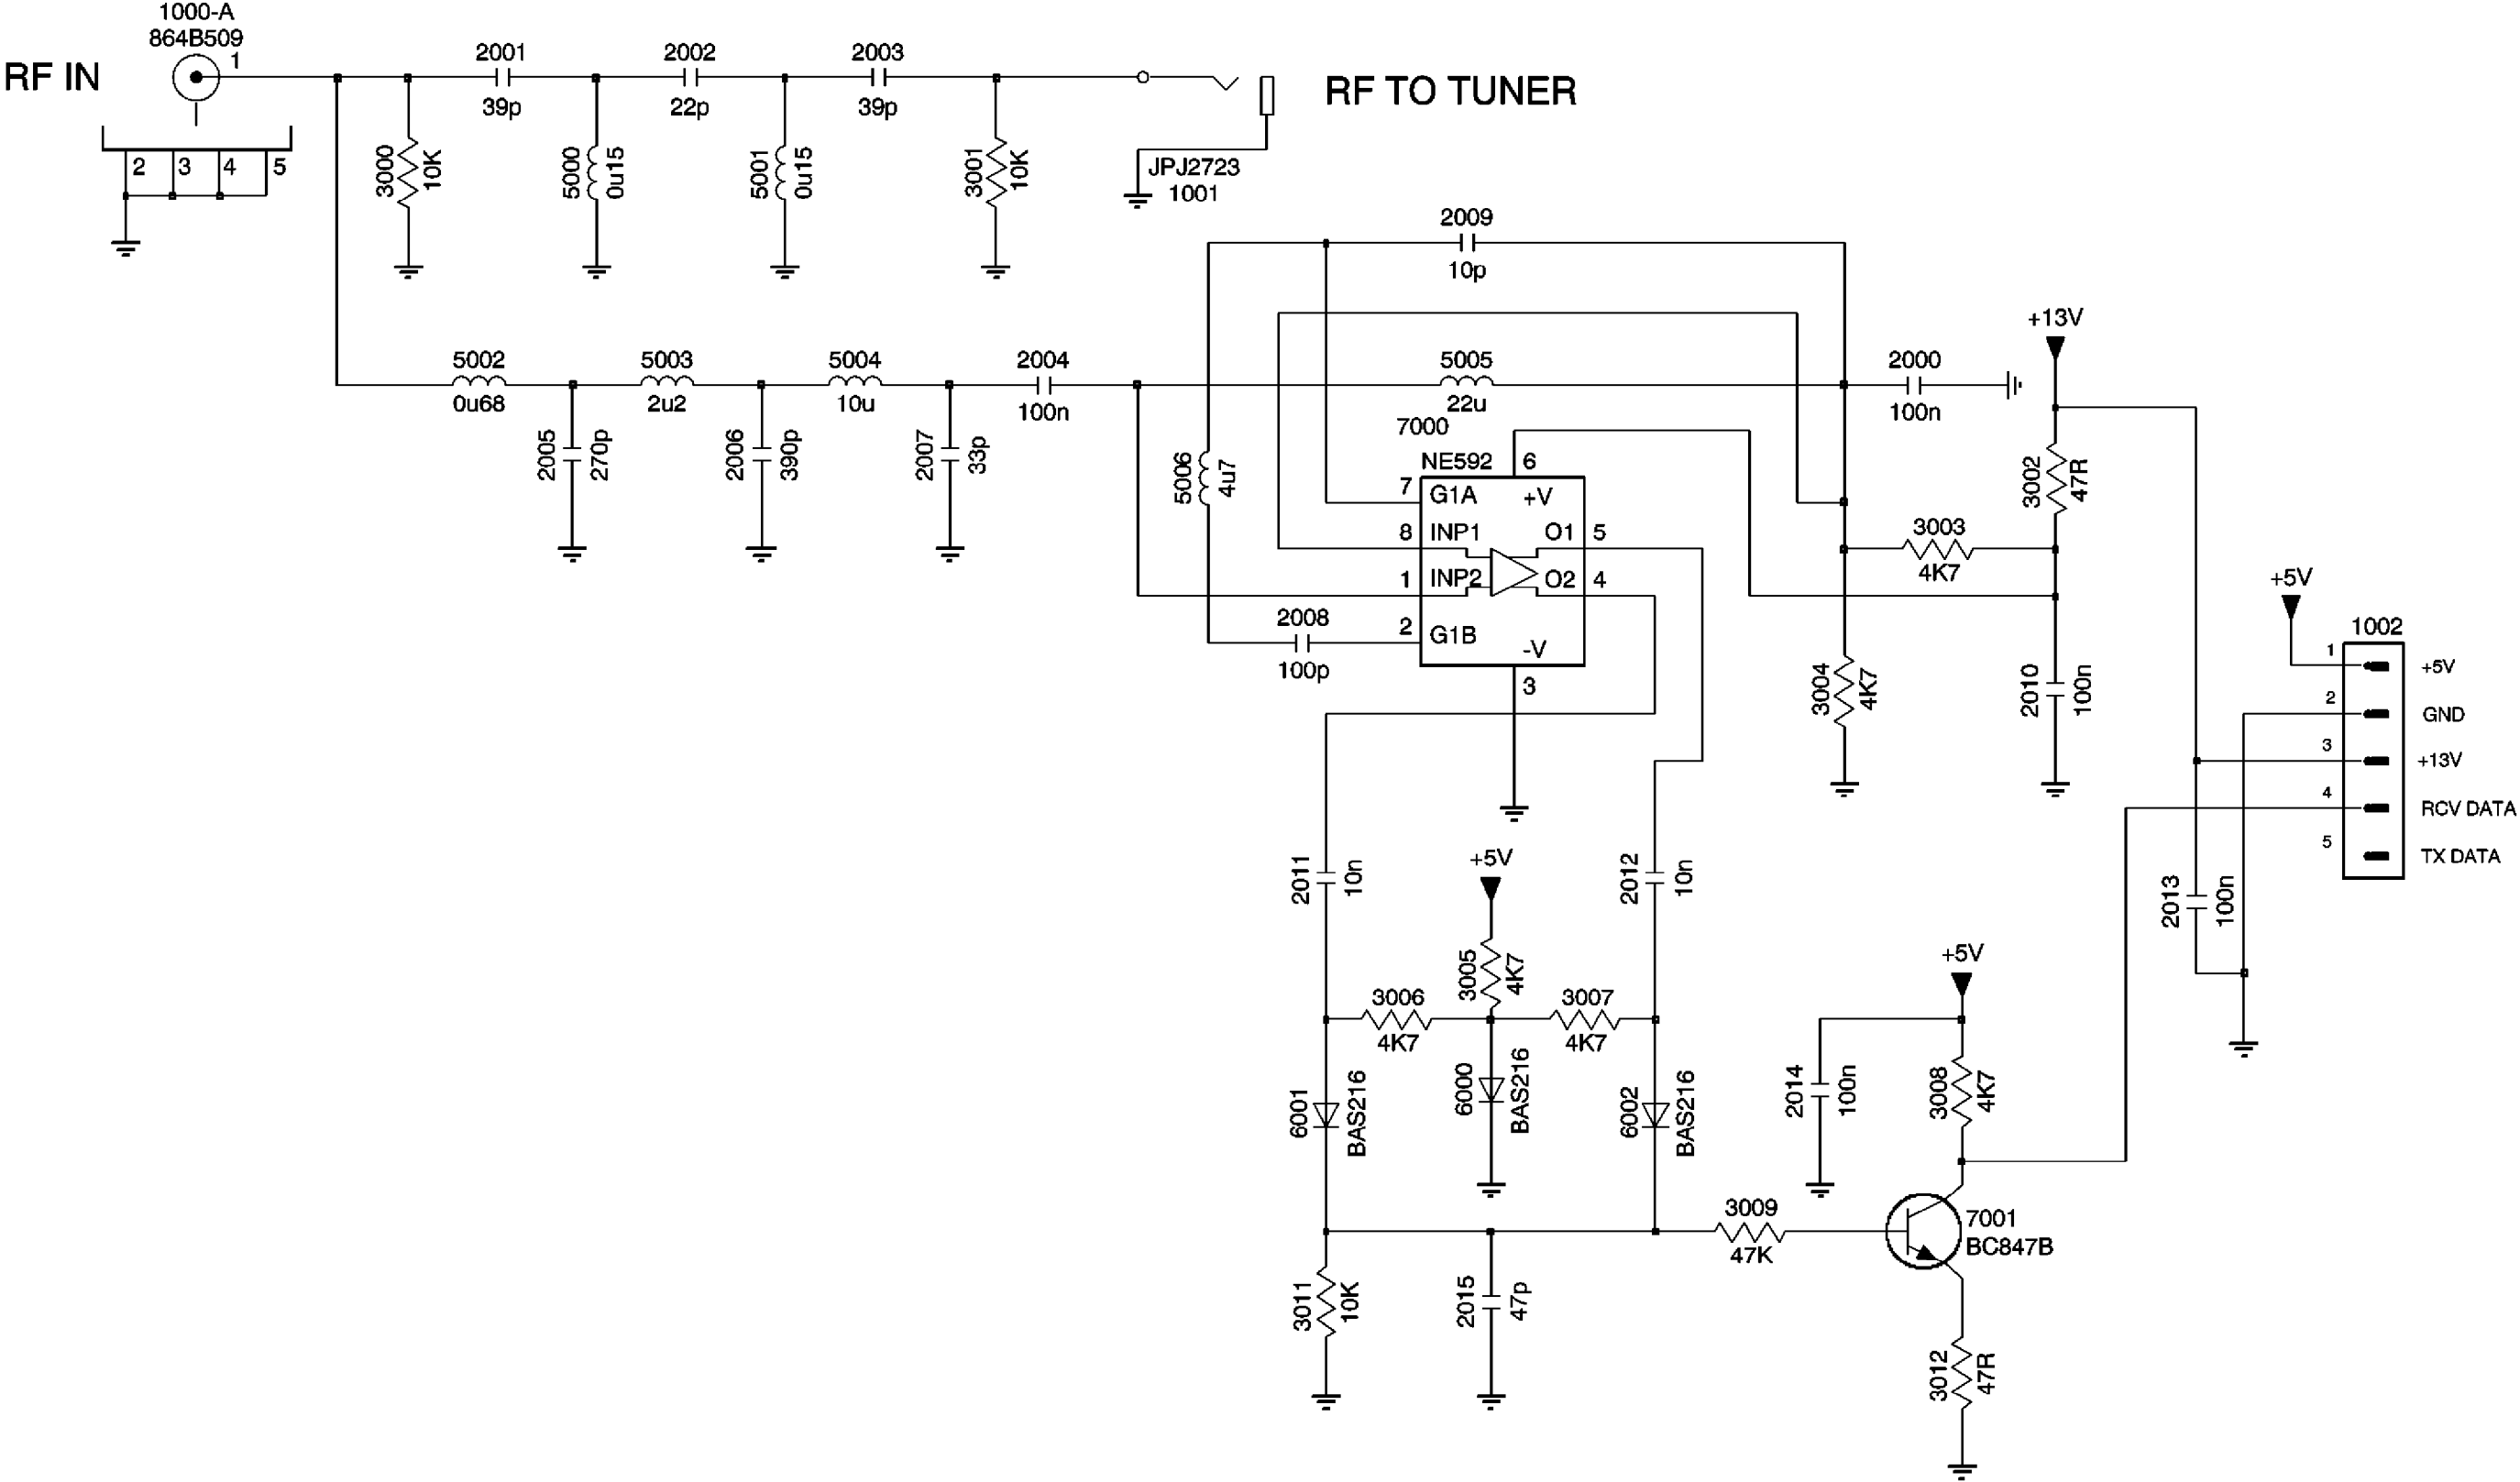

ITV Front Jack Panel

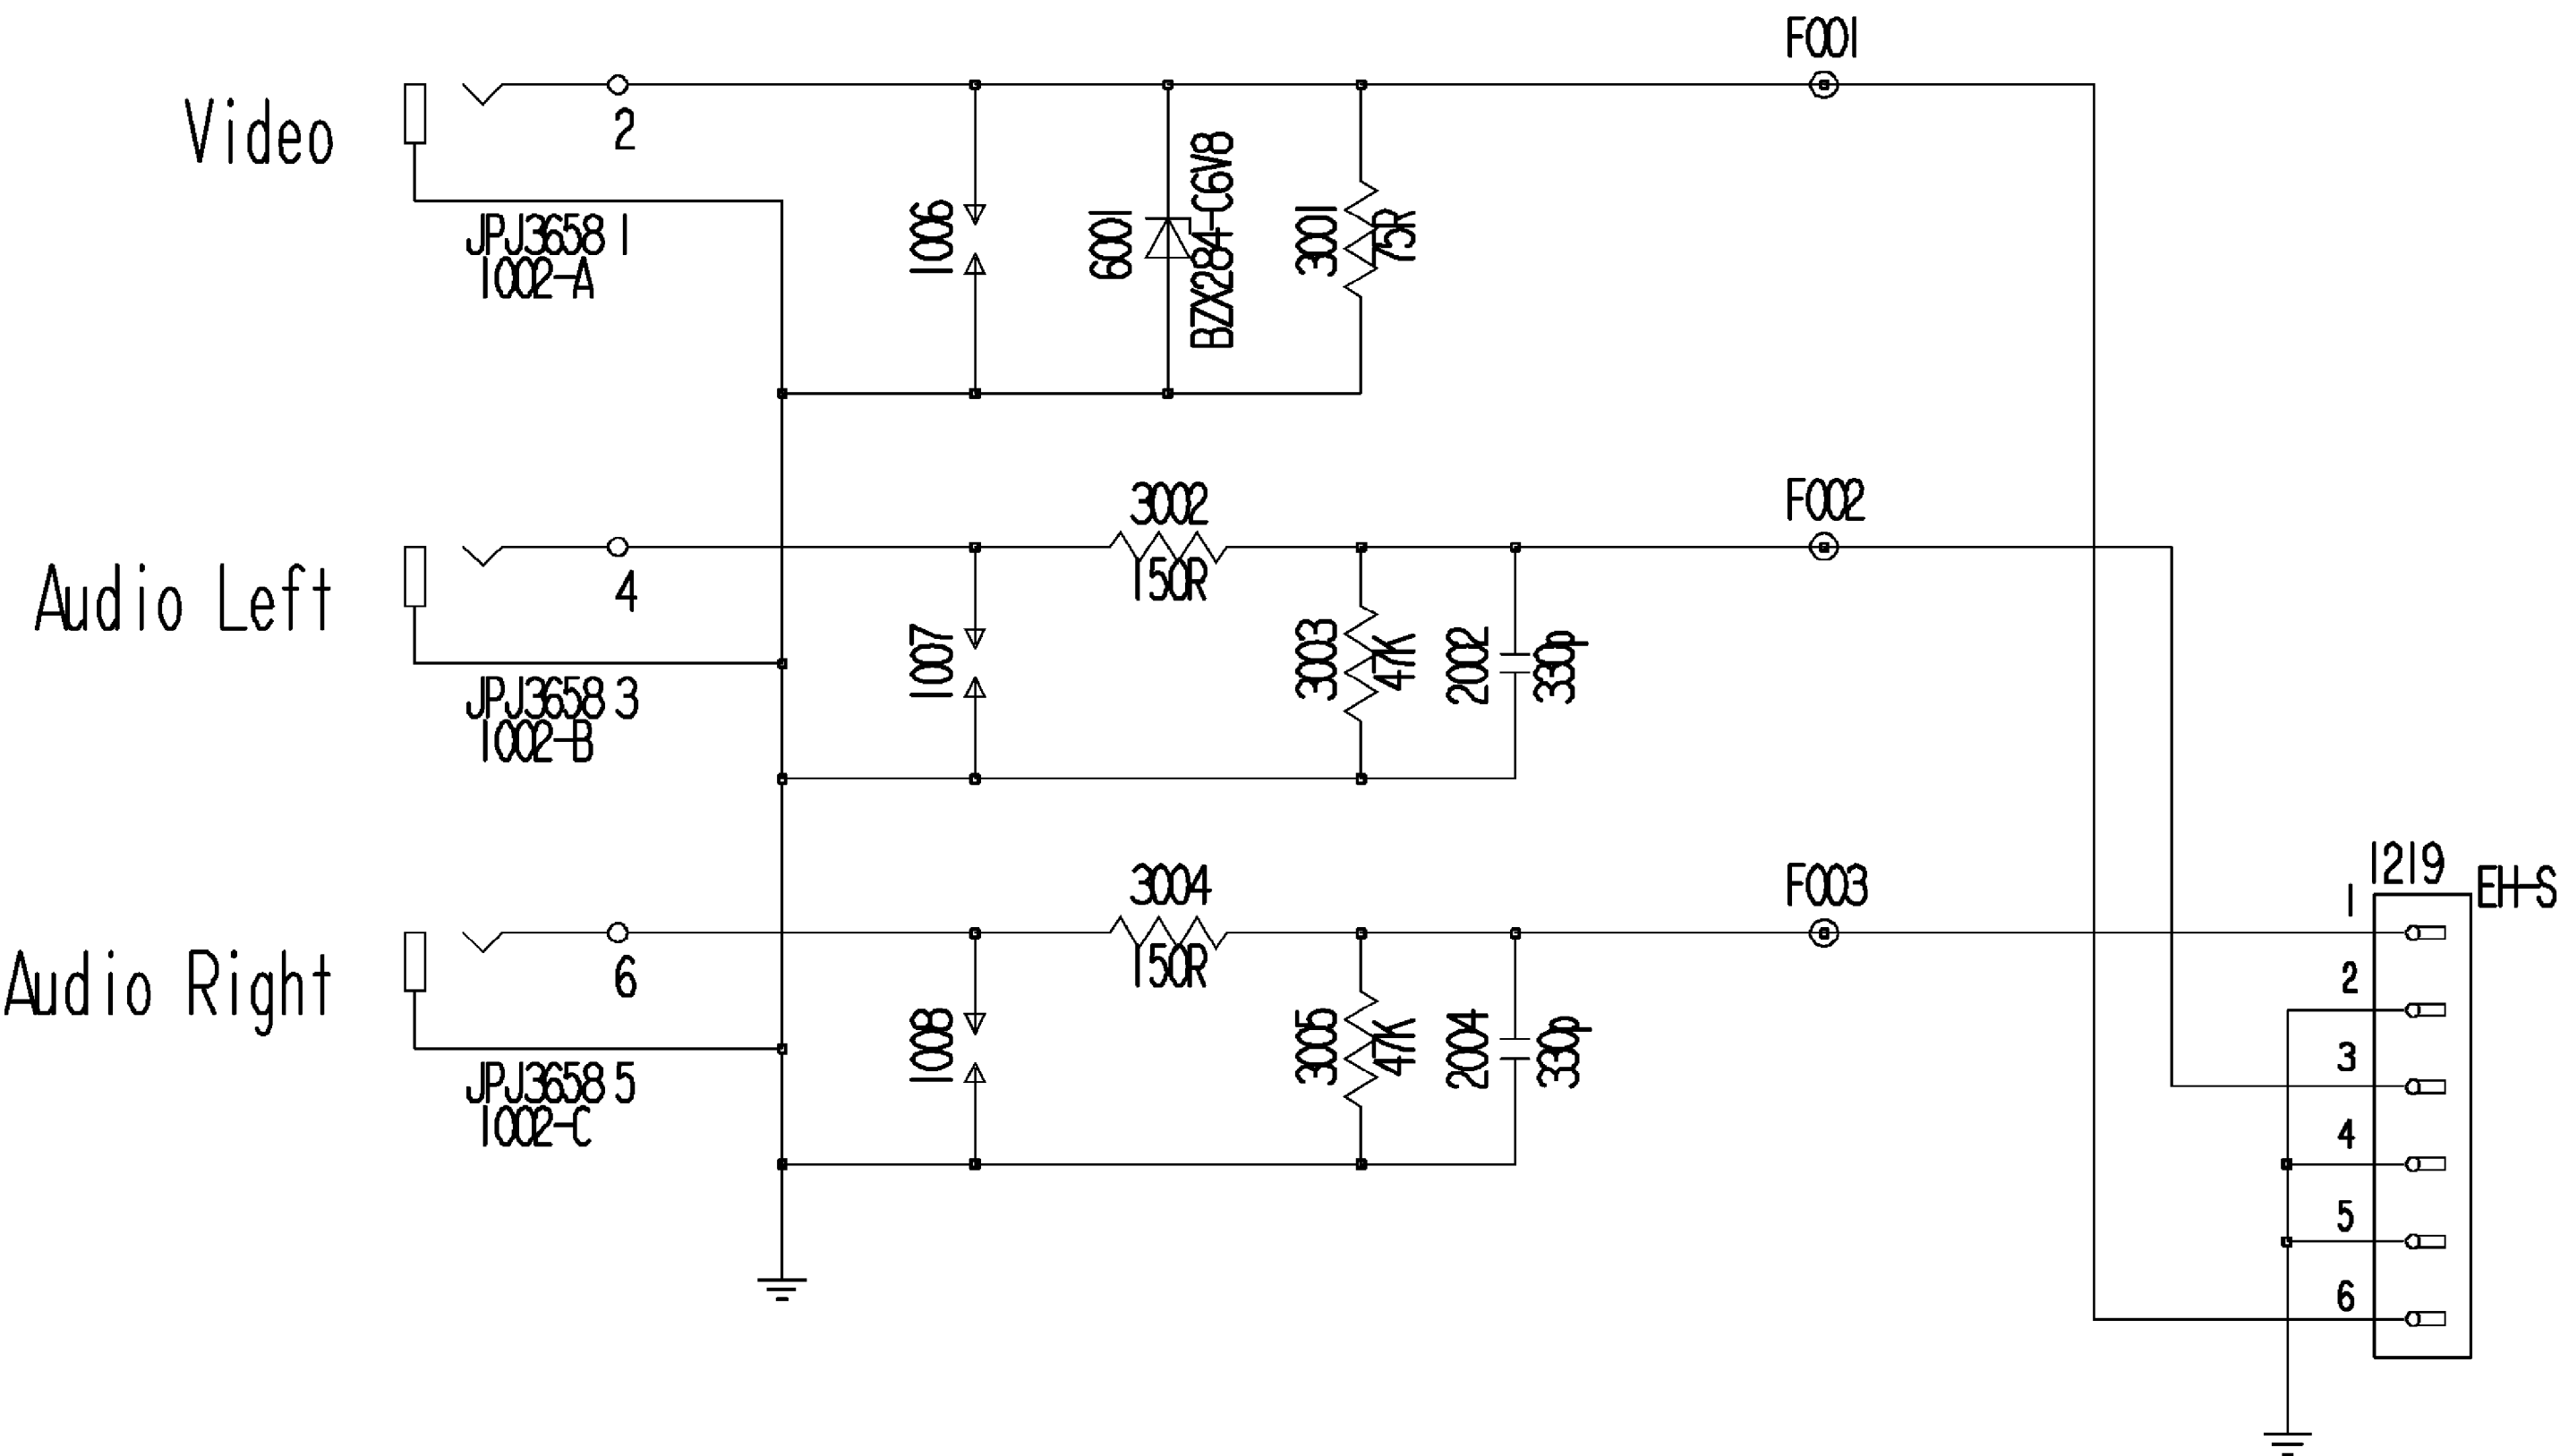


EPS PANEL SCHEMATIC

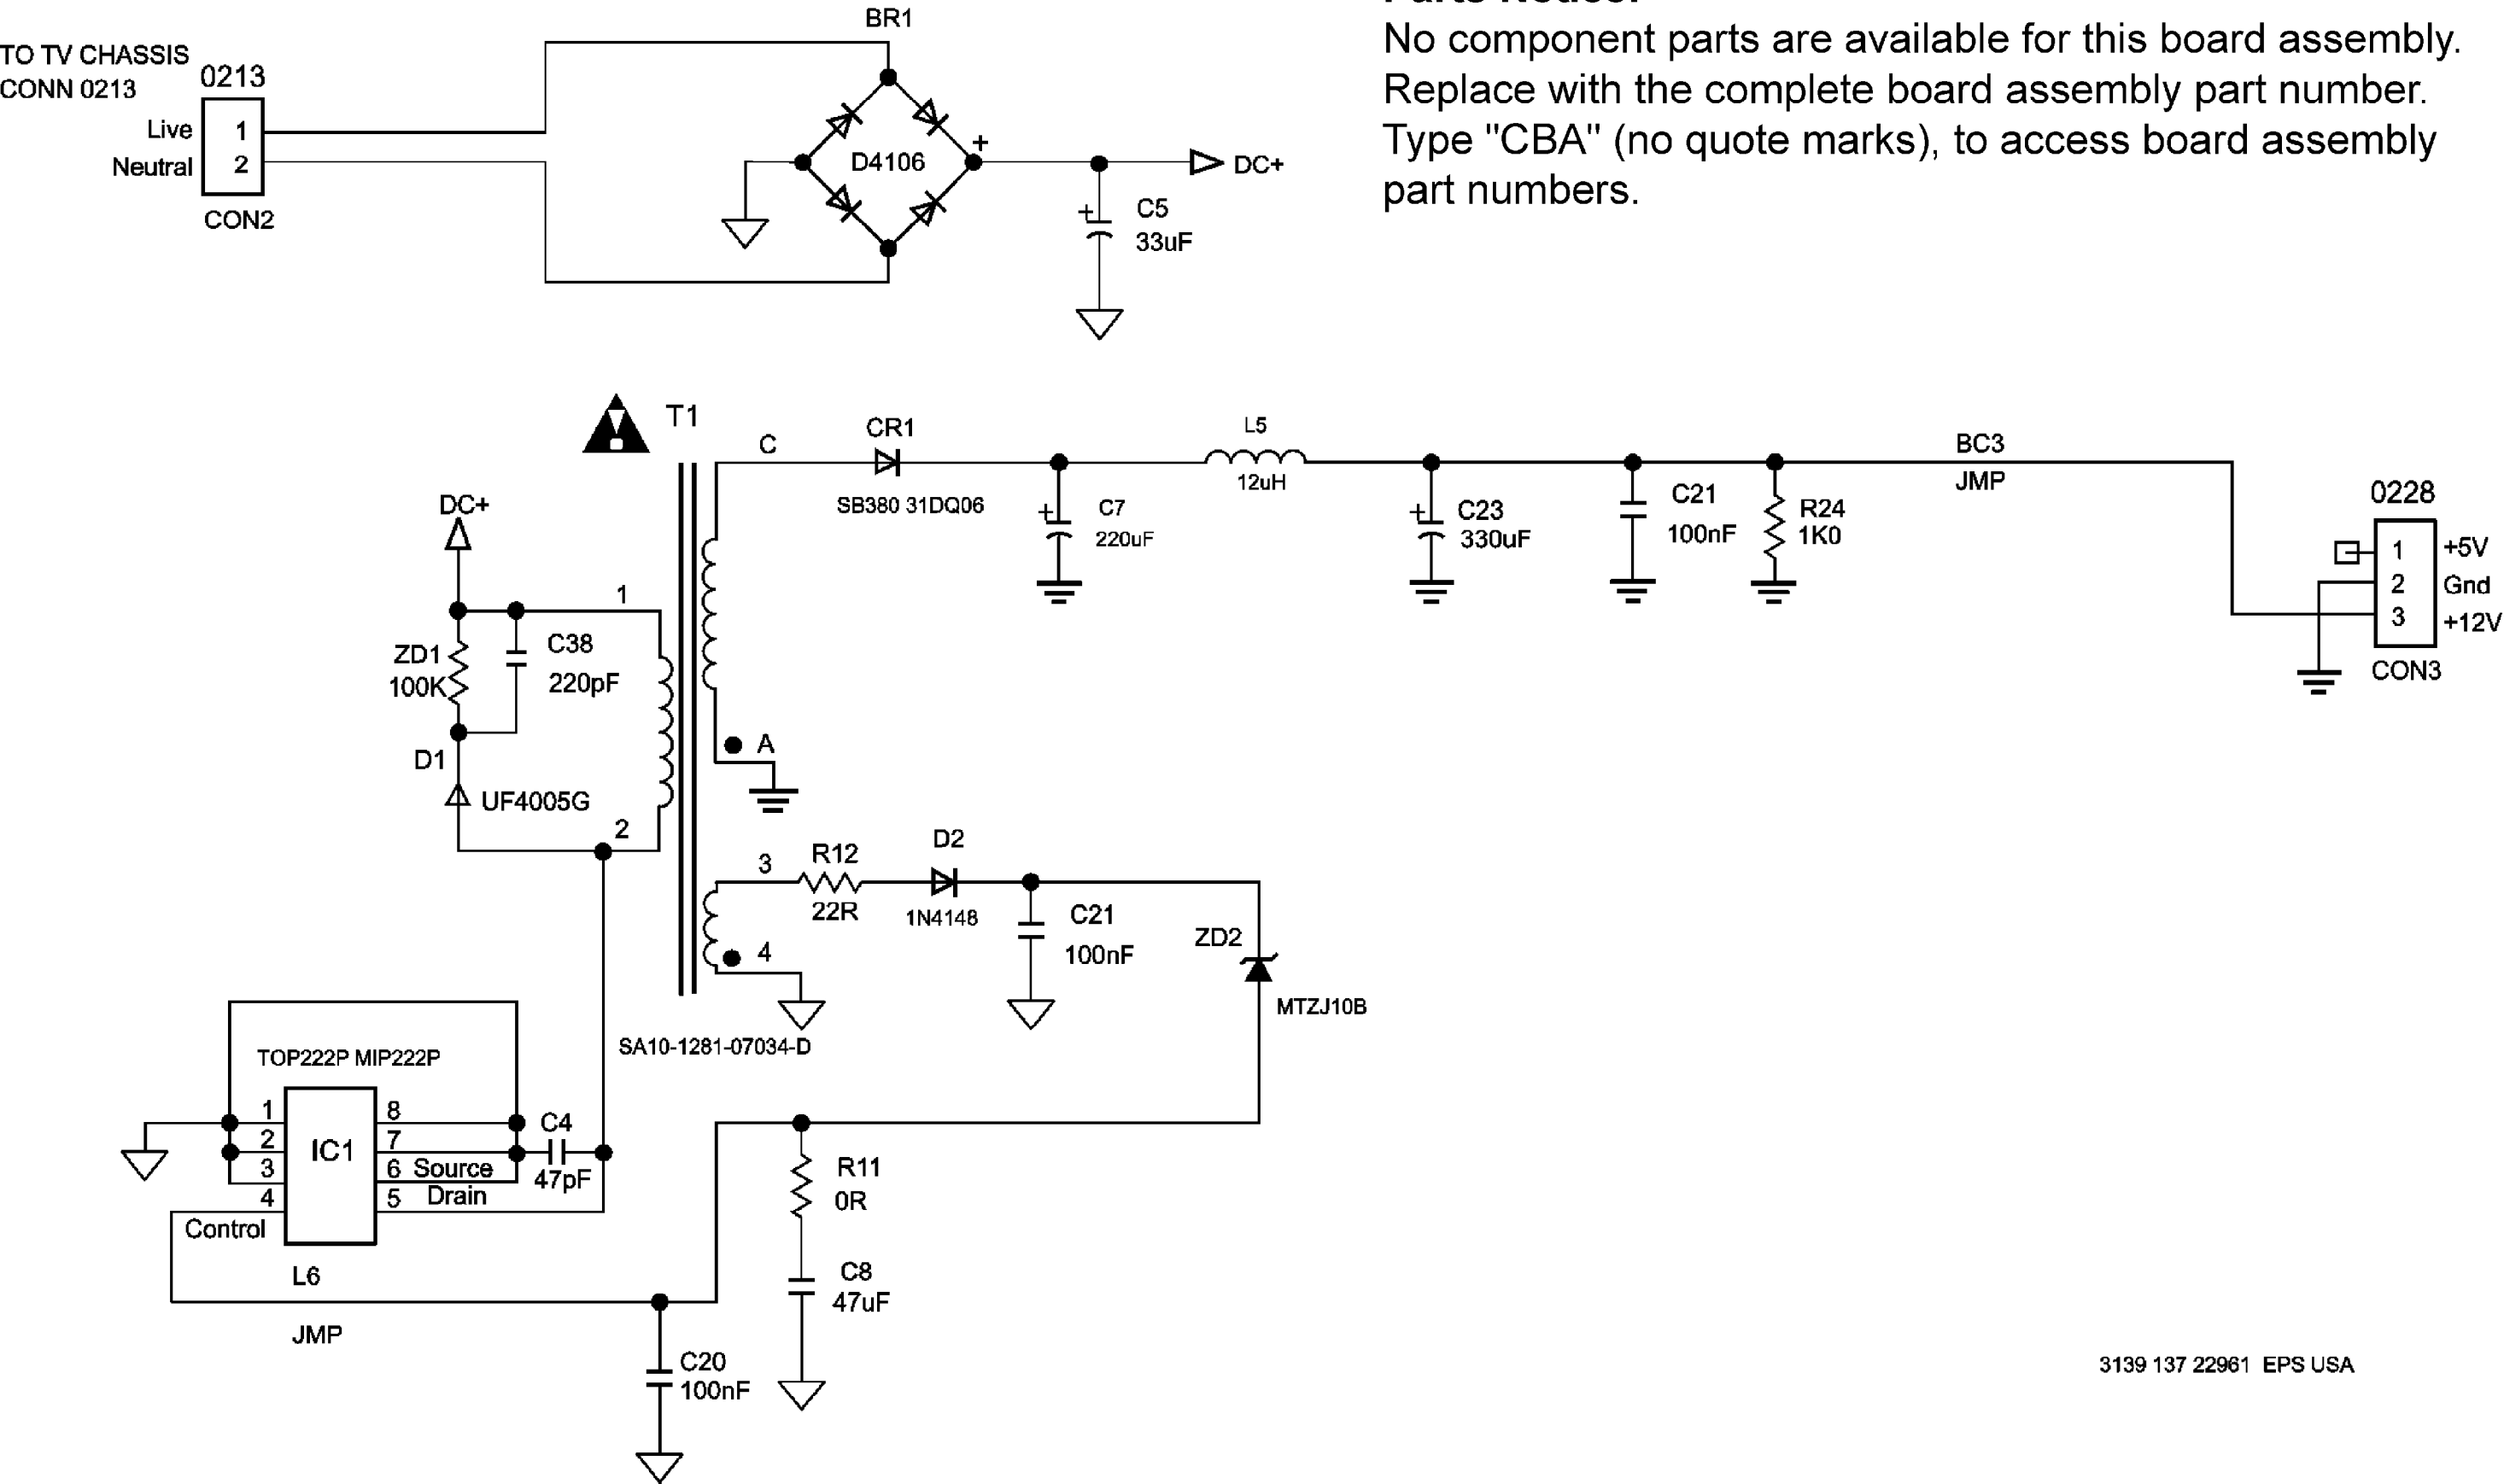

Parts Notice:
No component parts are available for this board assembly.
Replace with the complete board assembly part number.
Type "CBA" (no quote marks), to access board assembly
part numbers.


USED ONLY IN MODELS: 25LT220L/17, 25LT421L/17, 25ST220L/17, 27LT220L/17, 27LT621L/17, 27ST110P/35, 27ST220L/17, 27ST220L17, 27ST240P/35, 27ST230P/35 (7638) - SP/LS Module, Vertical Profile
27ST420L/17, 27ST421L/17, 32LT621L/17, 32ST230P/35, 36ST220P/35, 36ST230P/35, 32ST220P/17


SP / LS Module, Vertical

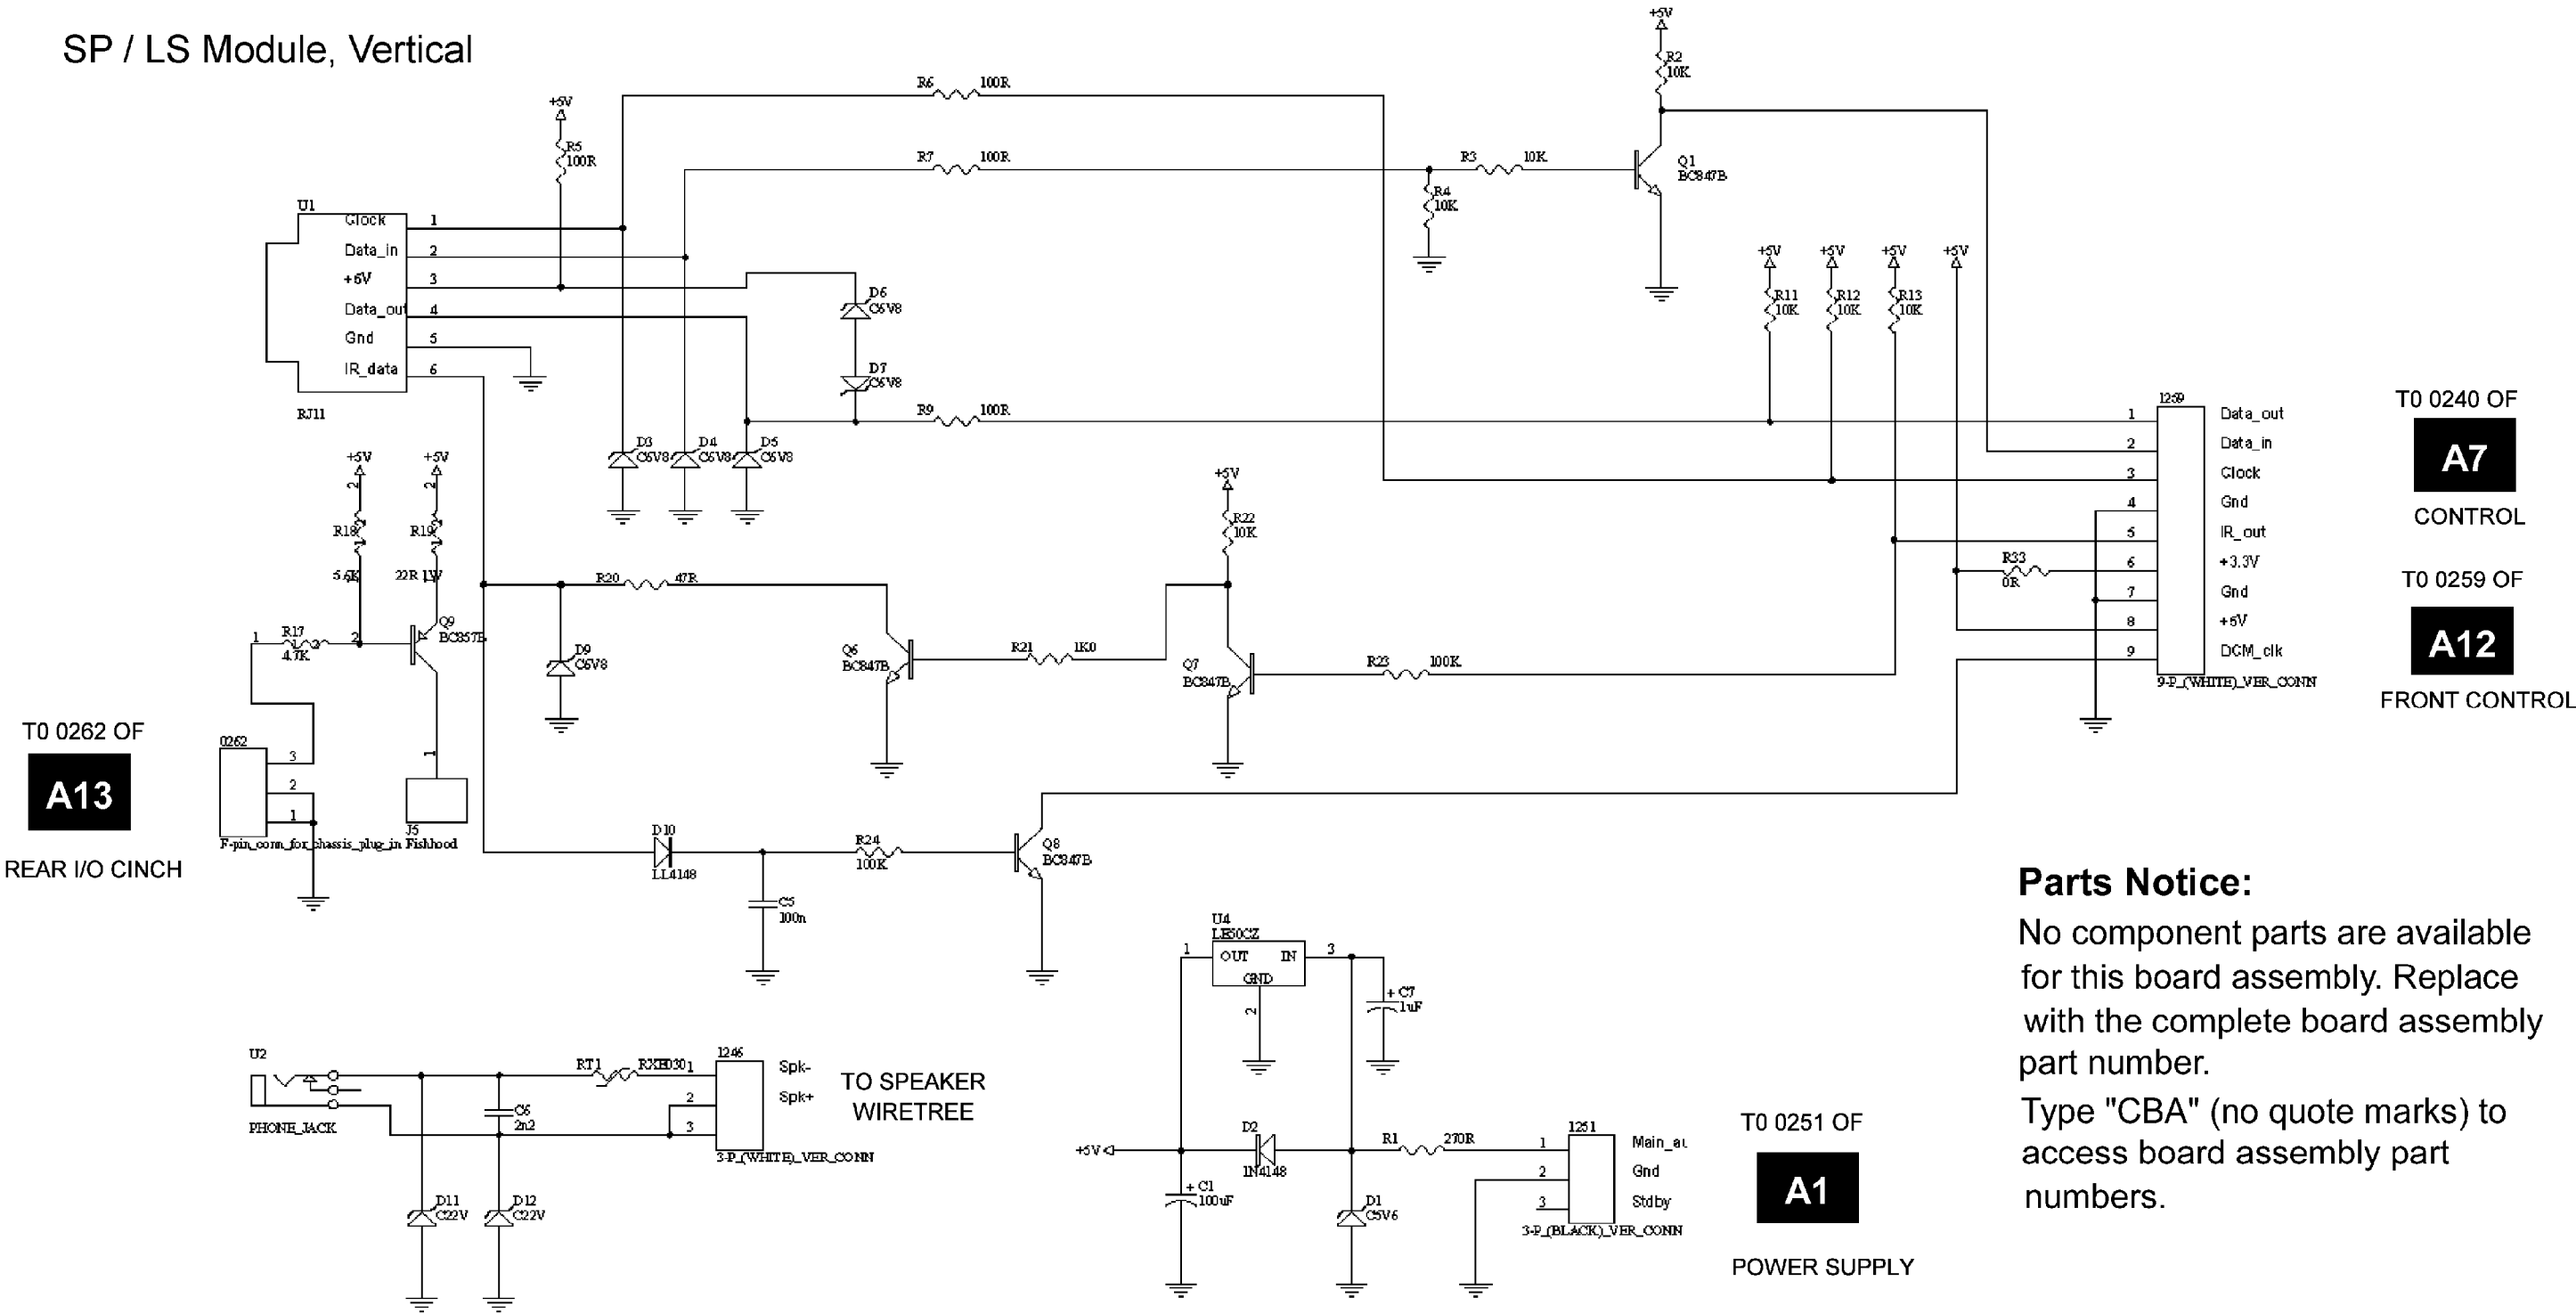


Parts Notice:
No component parts are available for this board assembly. Replace with the complete board assembly part number.
Type "CBA" (no quote marks) to access board assembly part numbers.


INTERFACE PANEL SCHEMATIC

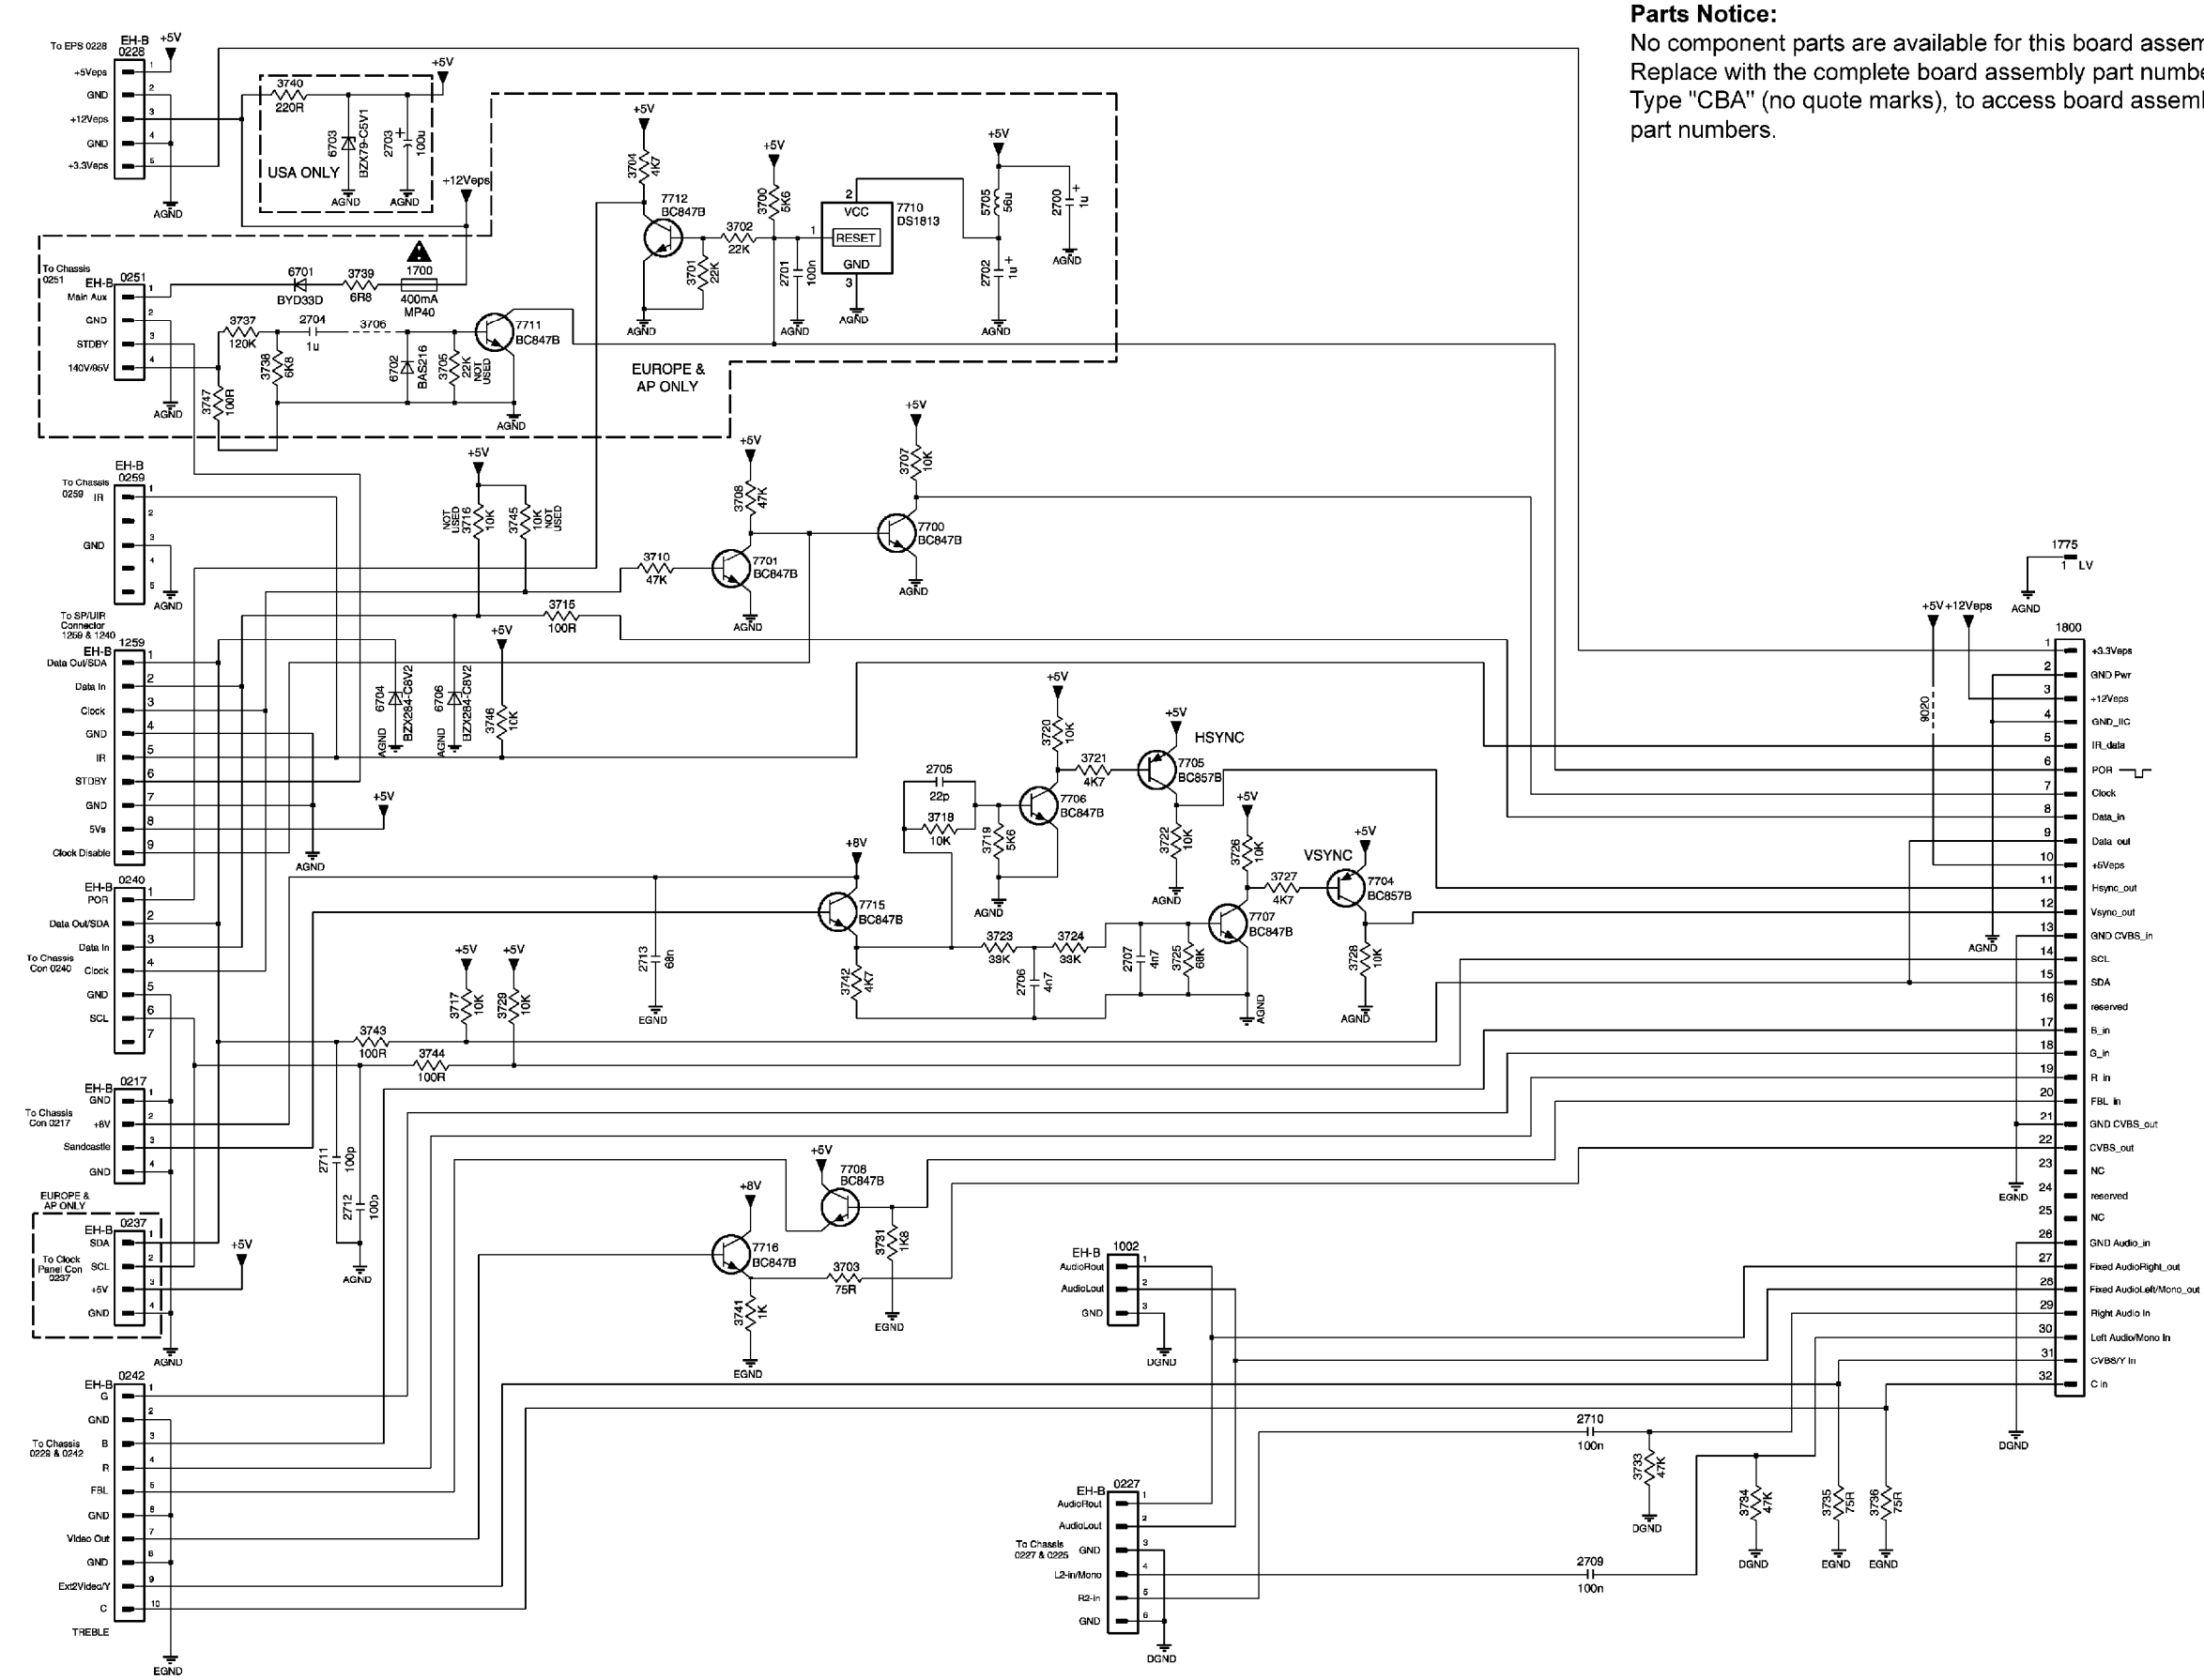

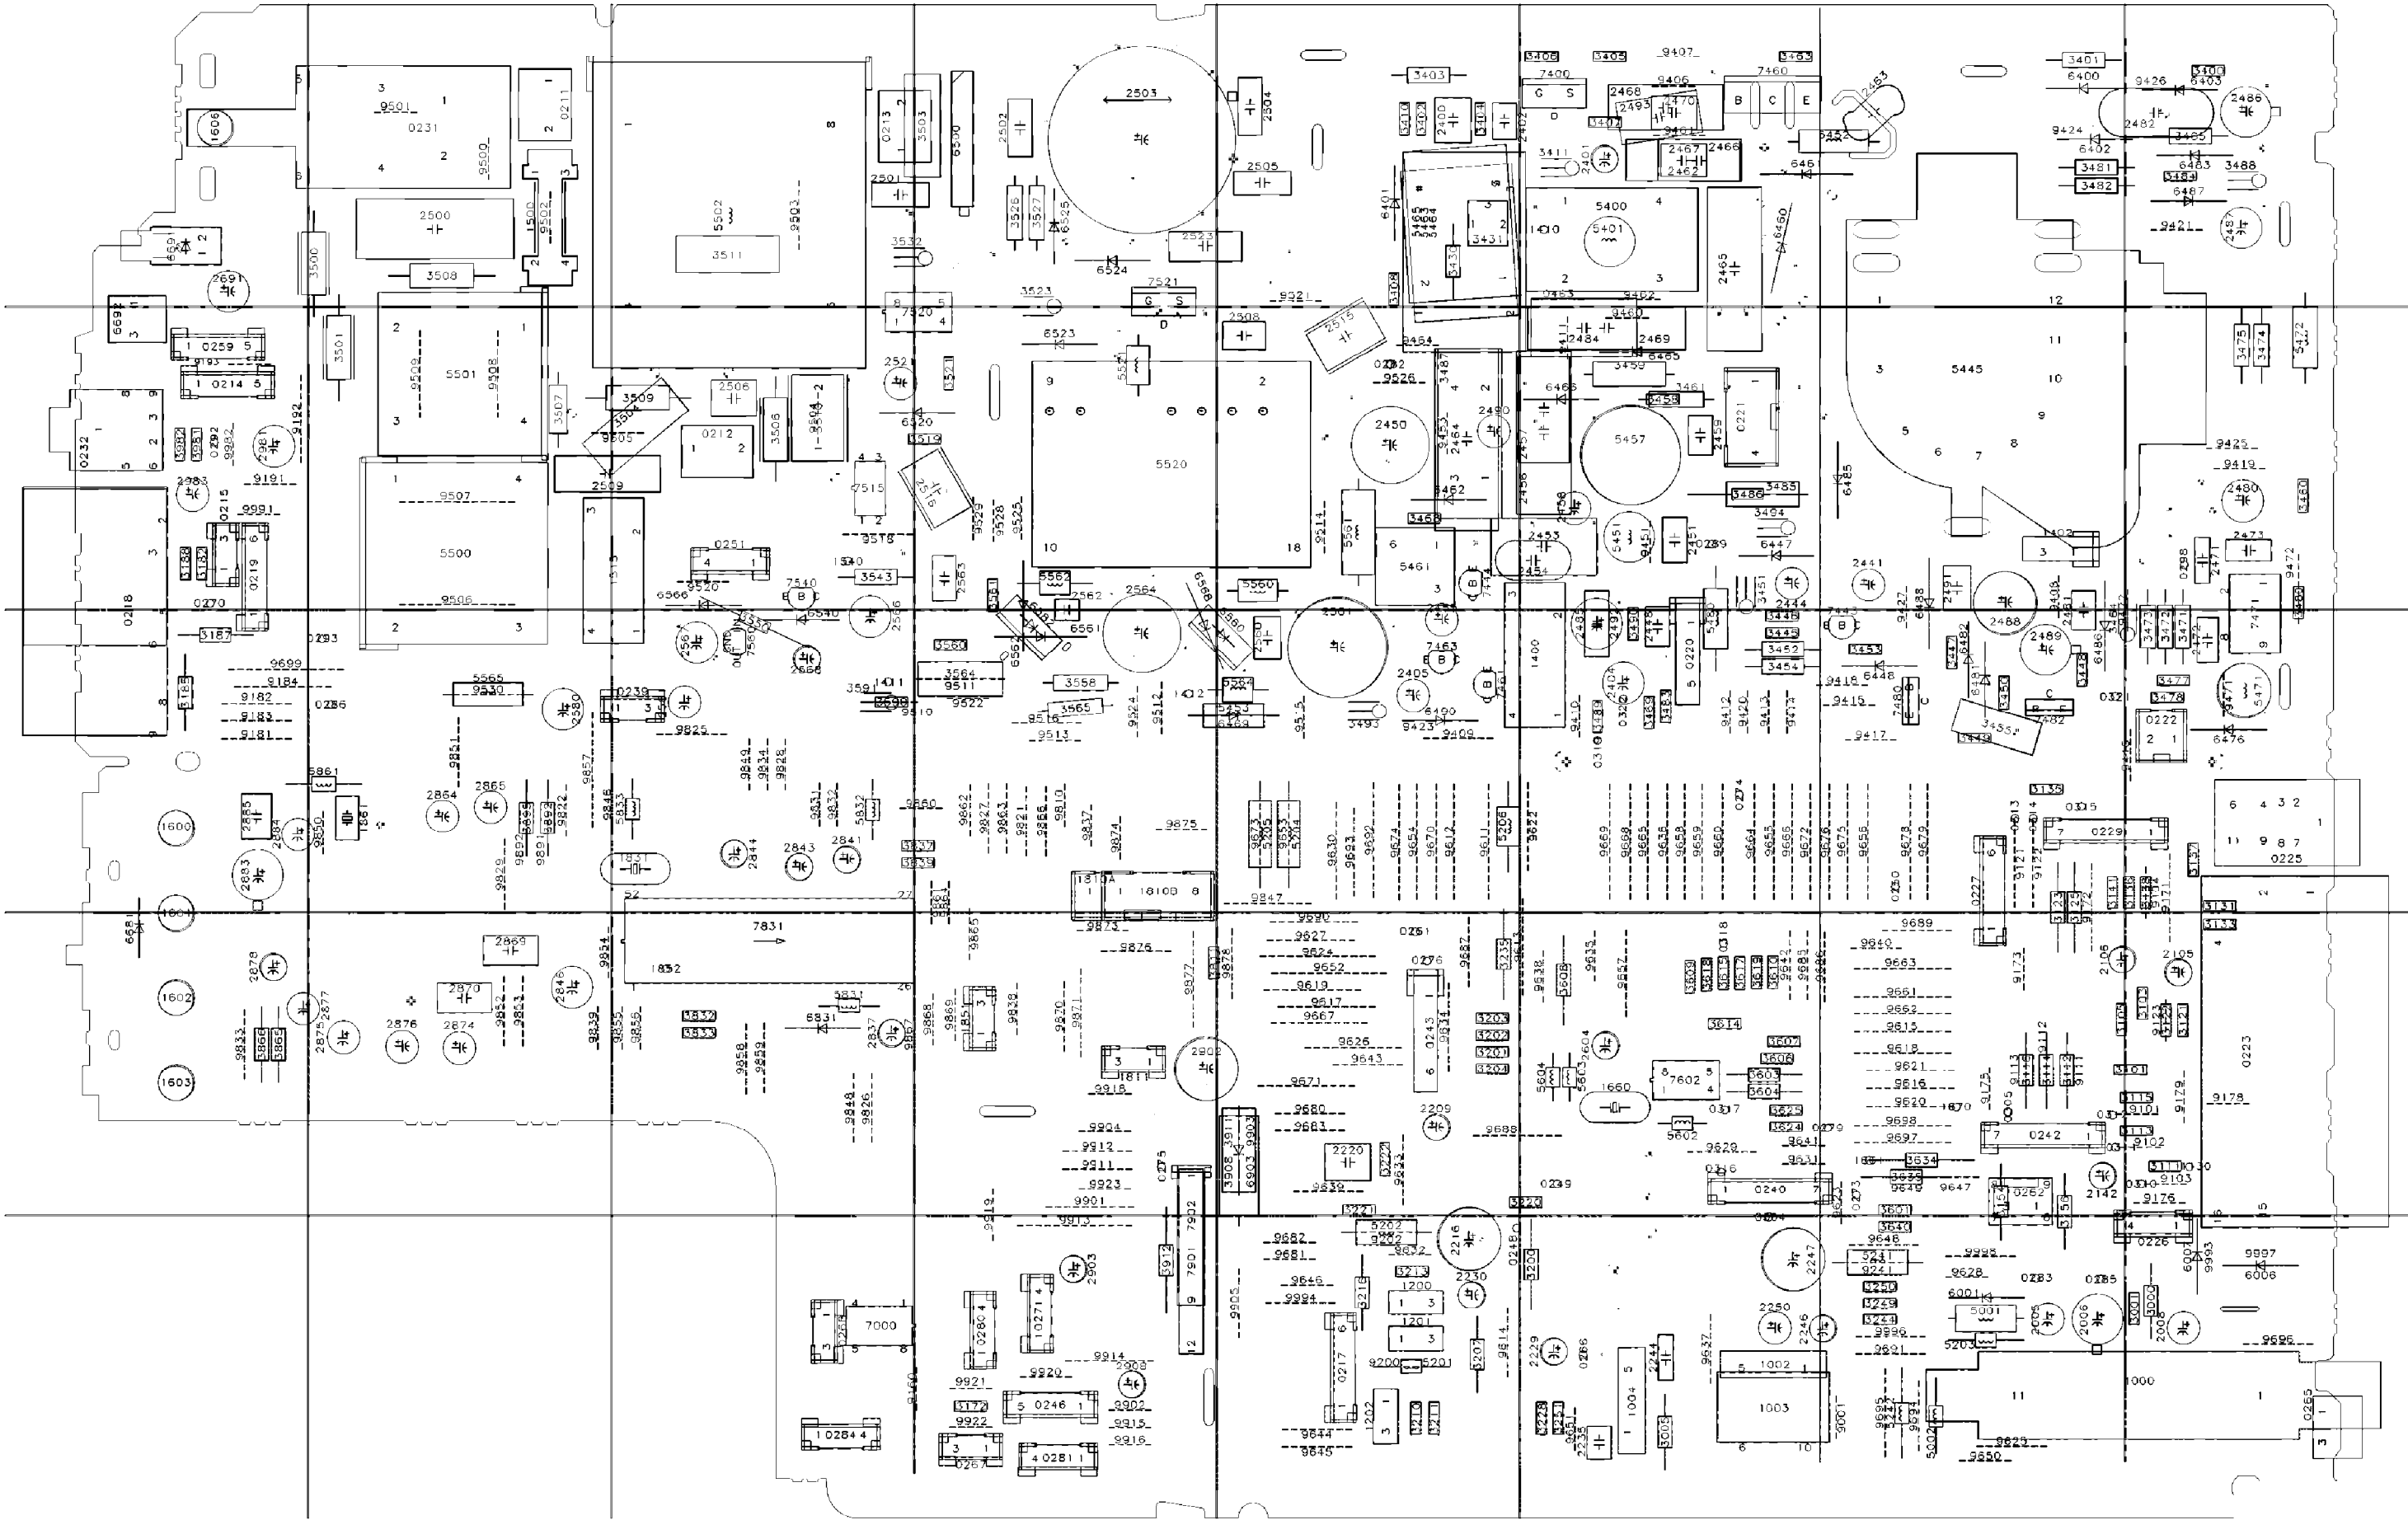




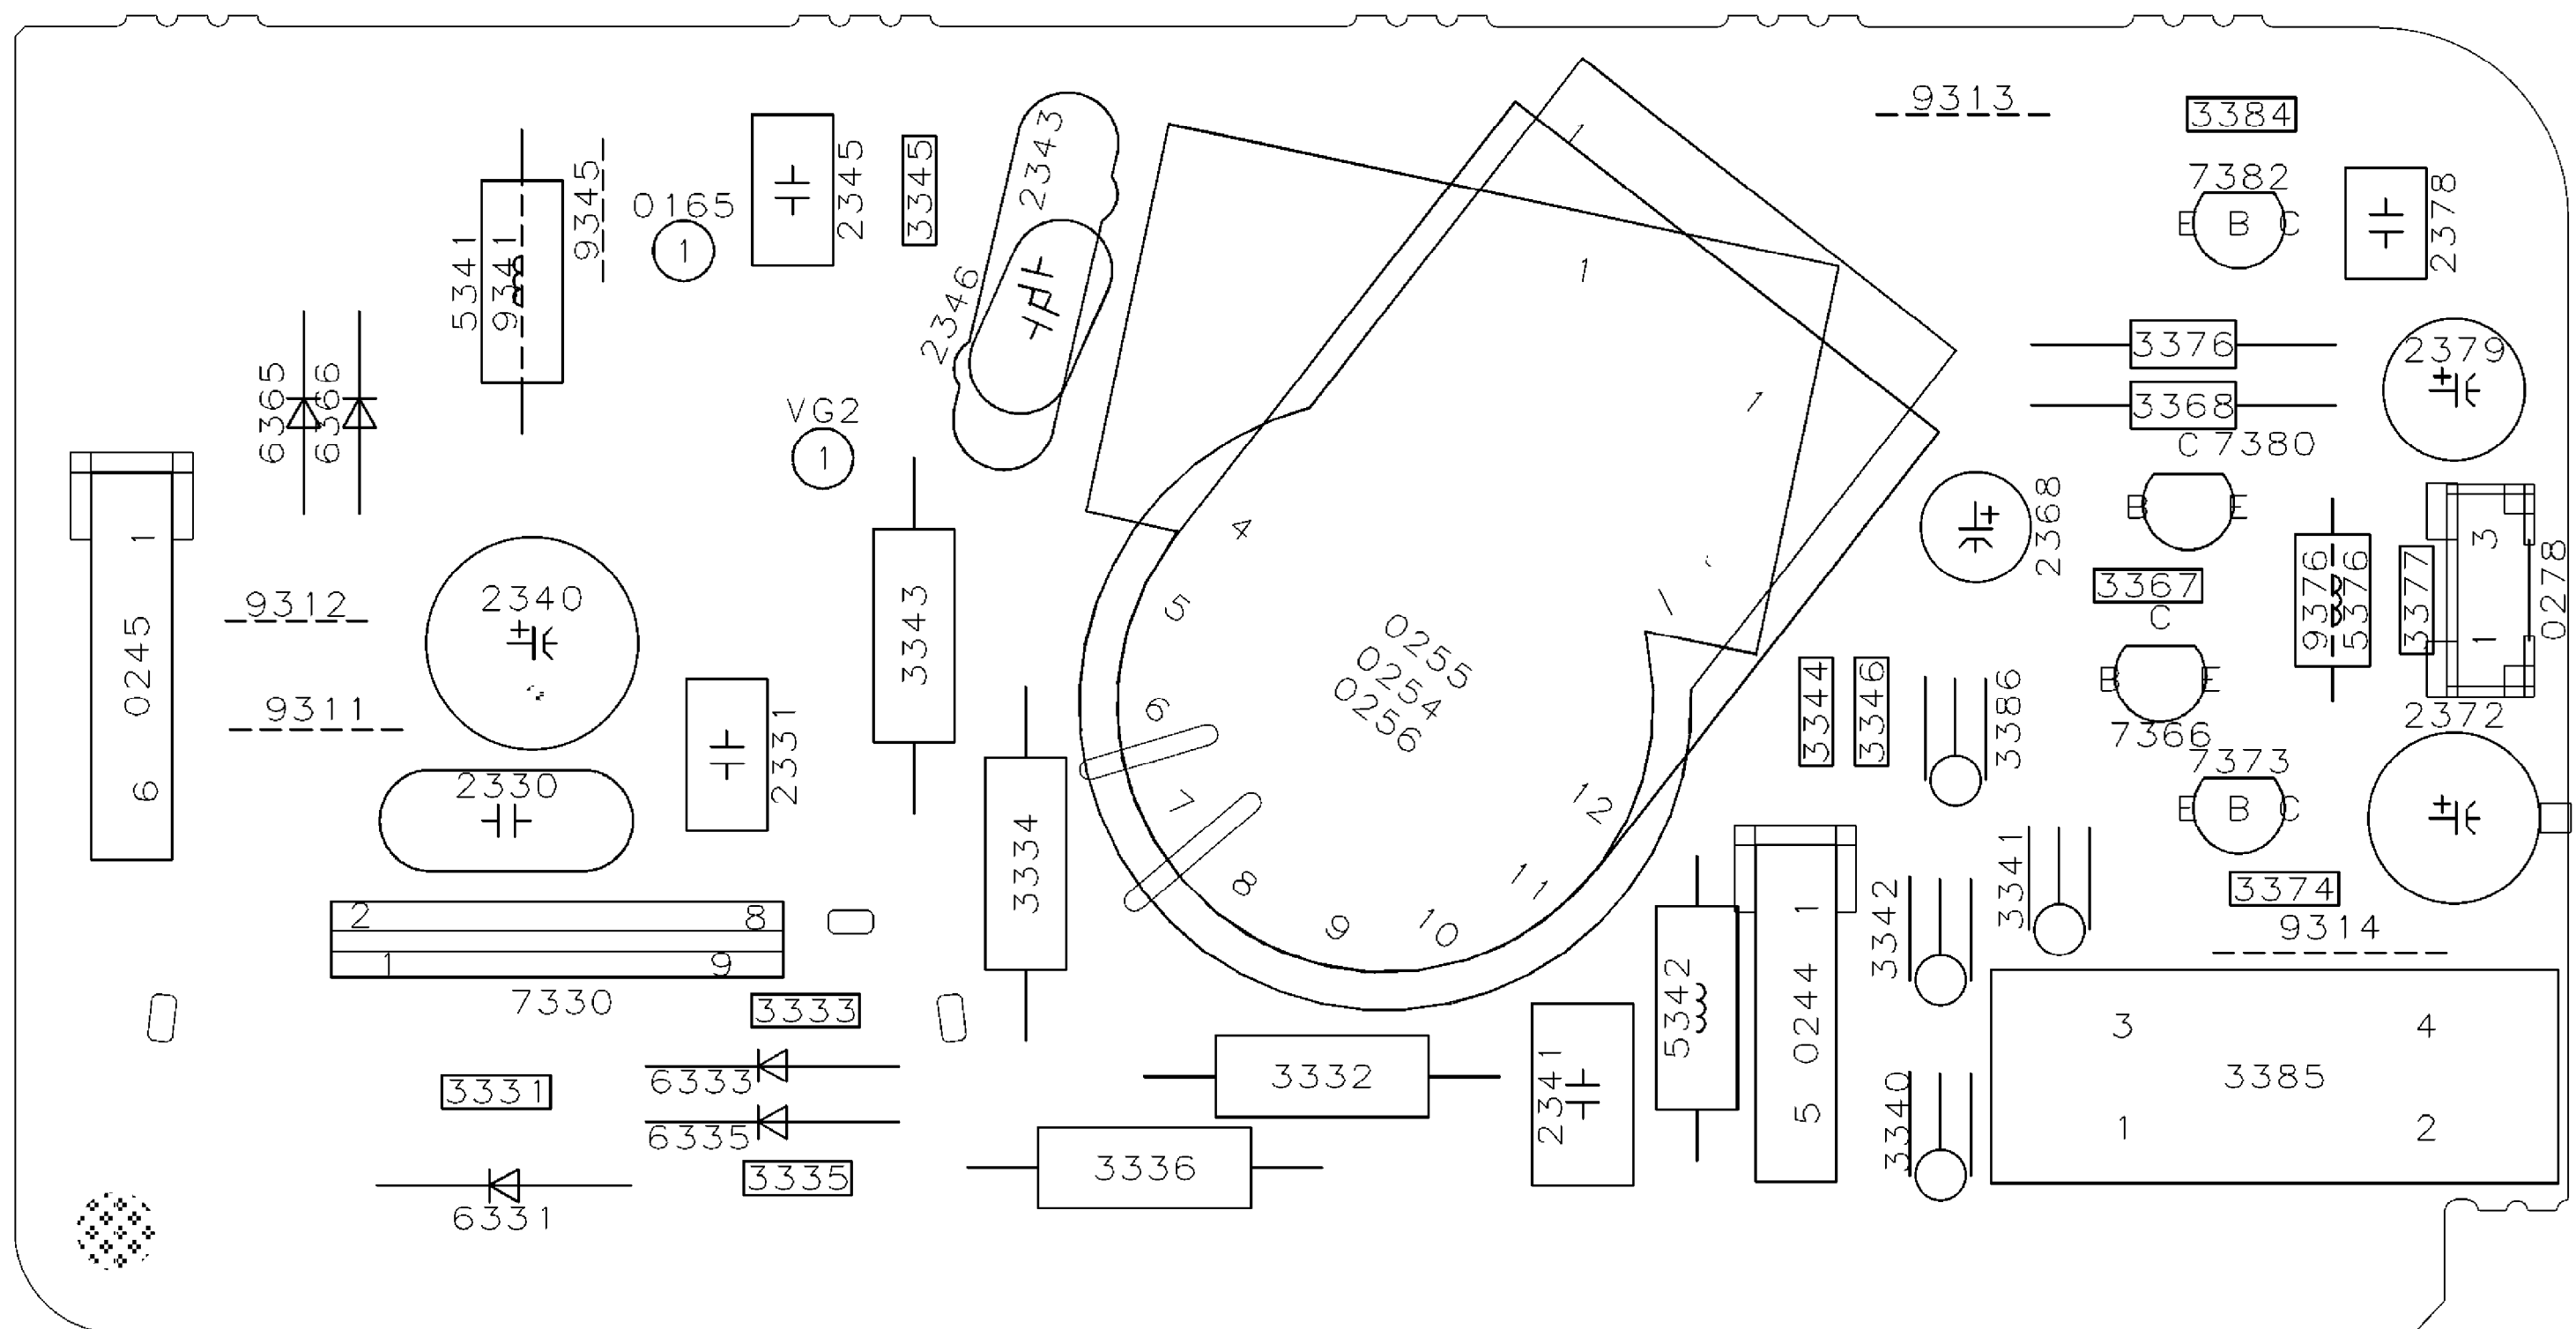


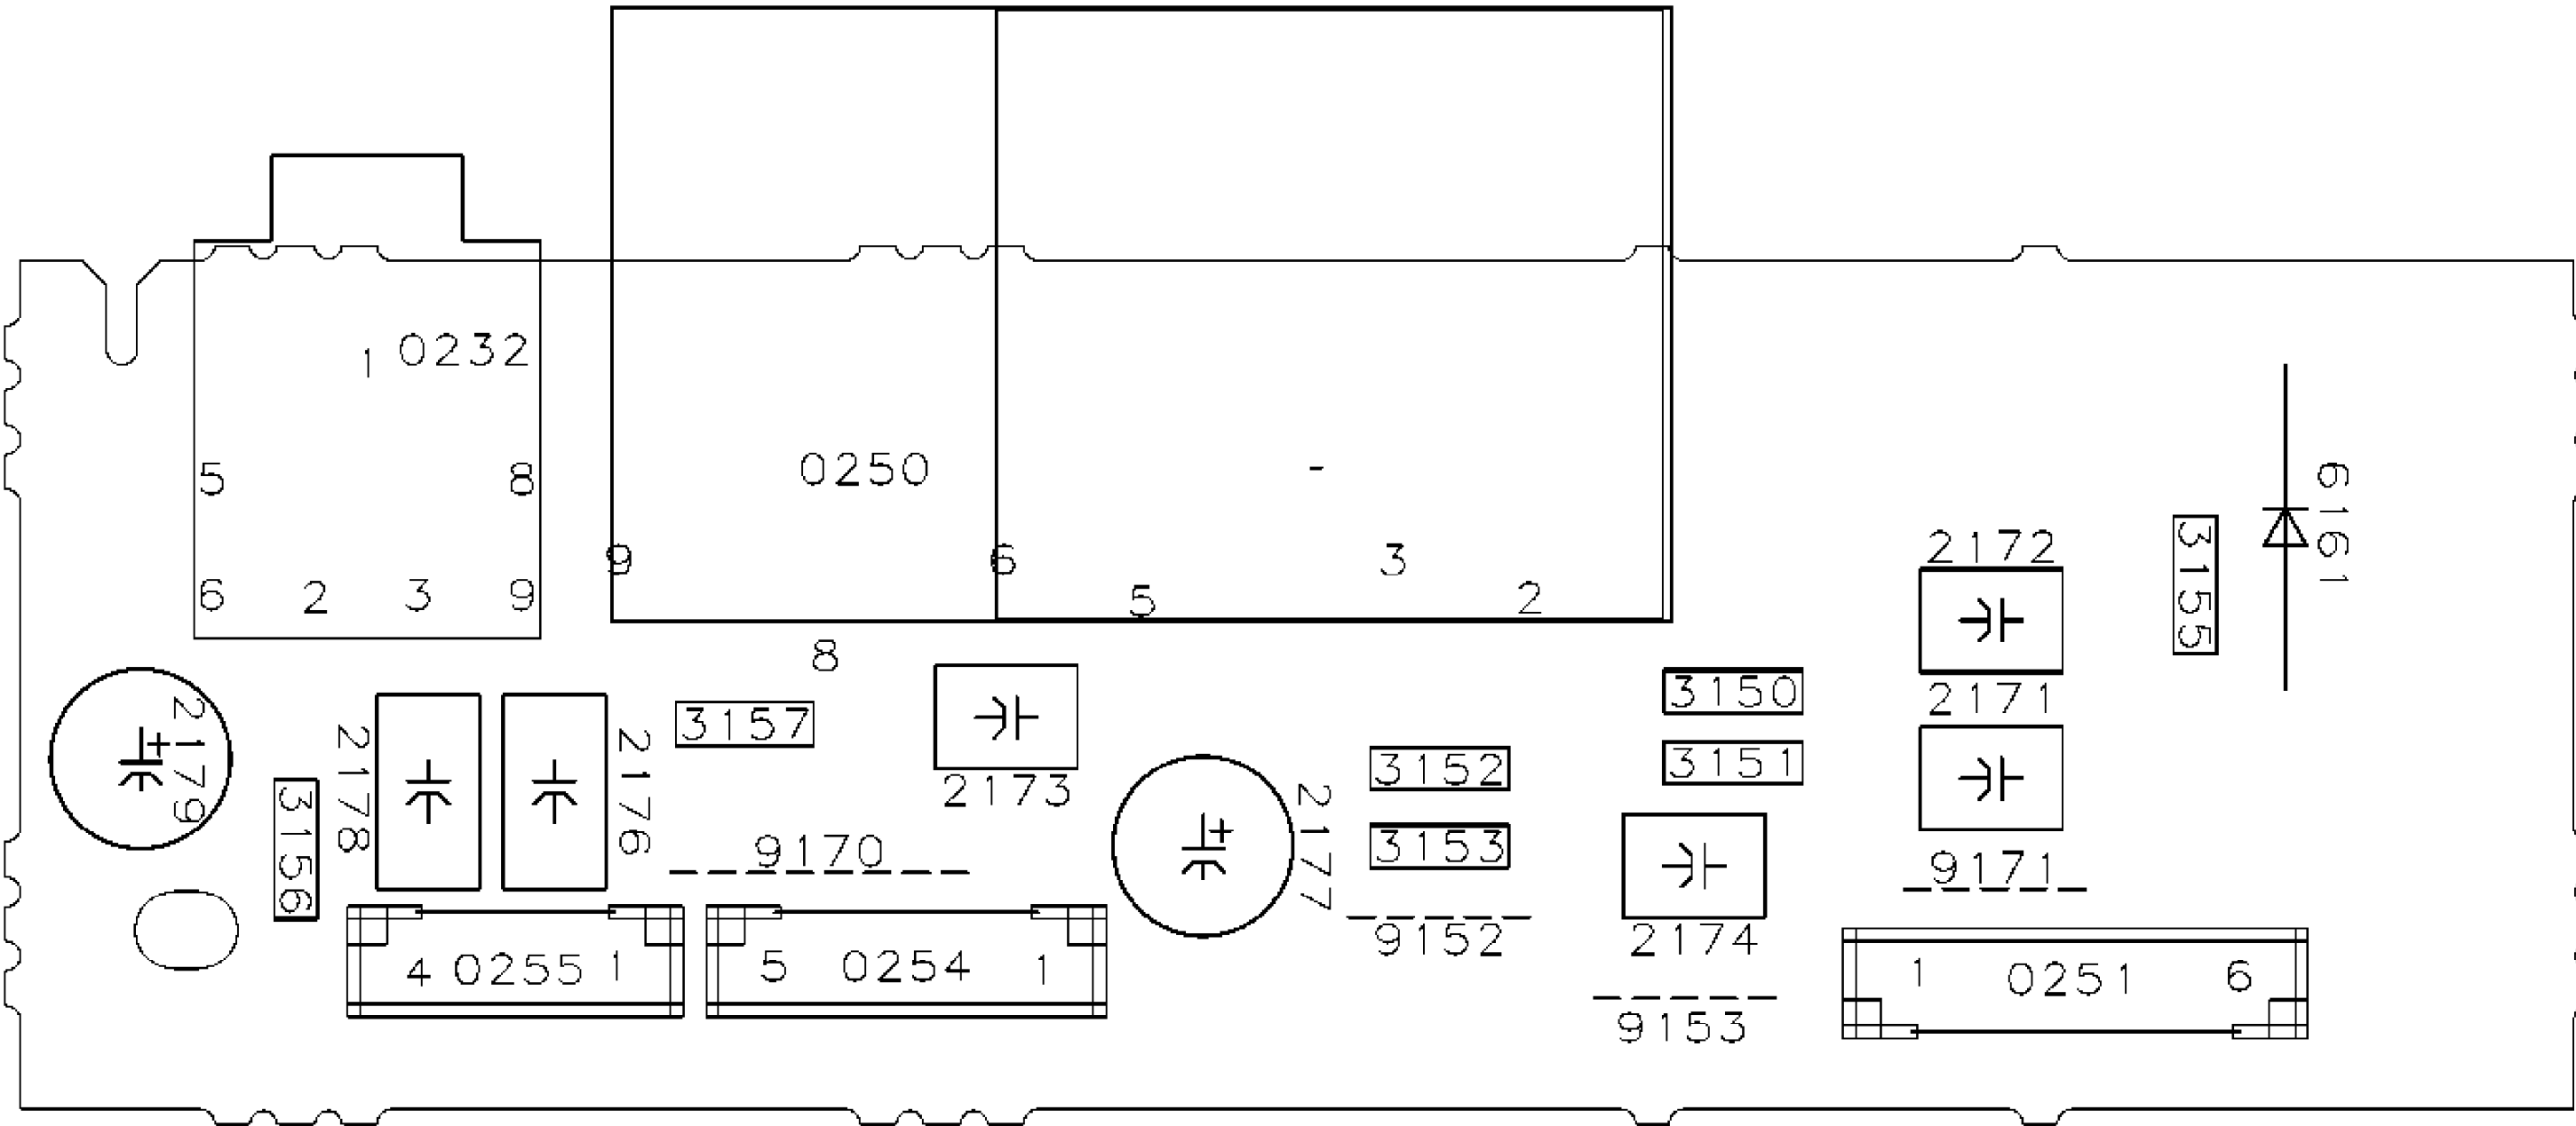



NOT USED IN MODELS: , 20DV6932/37R, 20DV693R02, 20DV693R01, 20MS334R/37, 20MS334R01, 20PT633R/37, 20PT643F/35R, 20PT643R01, 21PT6331/44R, 21PT633R85C (7638) - Side AV + HP Panel , Slim Profile (Com
21PT6431/44R, 21PT643R85C, 24PT633F/35R, 24PT633R37, 25LT220L/17, 25PT633R85C, 25ST220L/17, 27DV693R37A, 27LT220L/17, 27MS3404/17, 27ST110P/35, 27ST220L/17, 27ST220L17, 27ST240P/35, 27ST230P/35, 27S

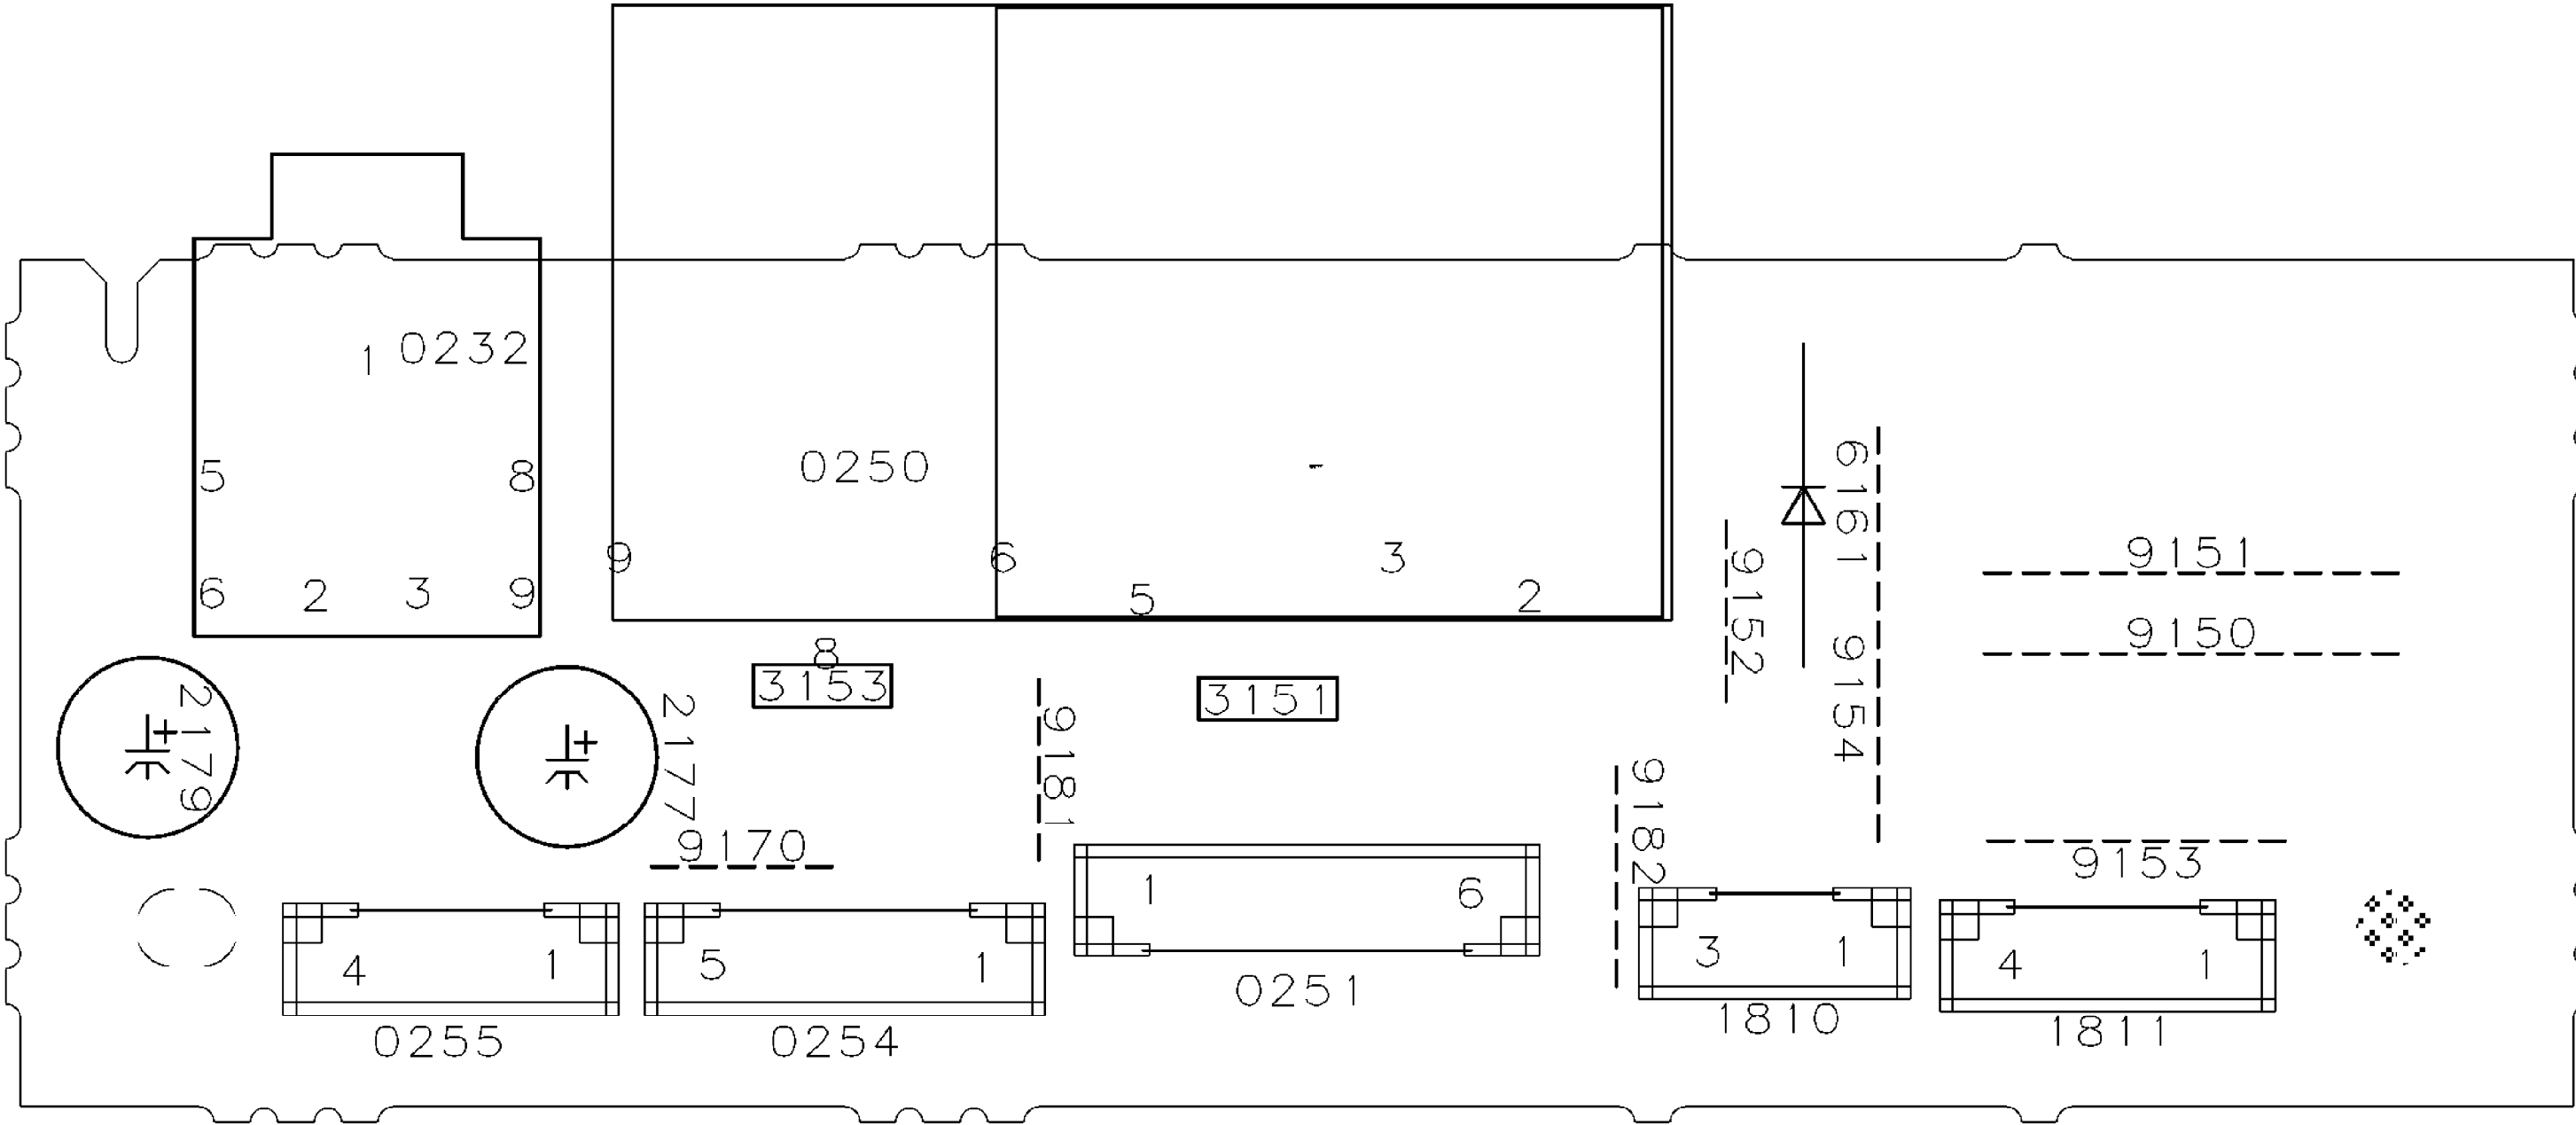



NOT USED IN MODELS: , 20DV6932/37R, 20DV693R02, 20DV693R01, 20MS334R/37, 20MS334R01, 20PT633R/37, 20PT643F/35R, 20PT643R01, 21PT6331/44R, 21PT633R85C (7638) - Side AV + HP Panel, Slim Profile (Copp
21PT6431/44R, 21PT643R85C, 24PT633F/35R, 24PT633R37, 25LT220L/17, 25PT633R85C, 25ST220L/17, 27DV693R37A, 27LT220L/17, 27MS3404/17, 27ST110P/35, 27ST220L/17, 27ST220L17, 27ST240P/35, 27ST230P/35, 27S

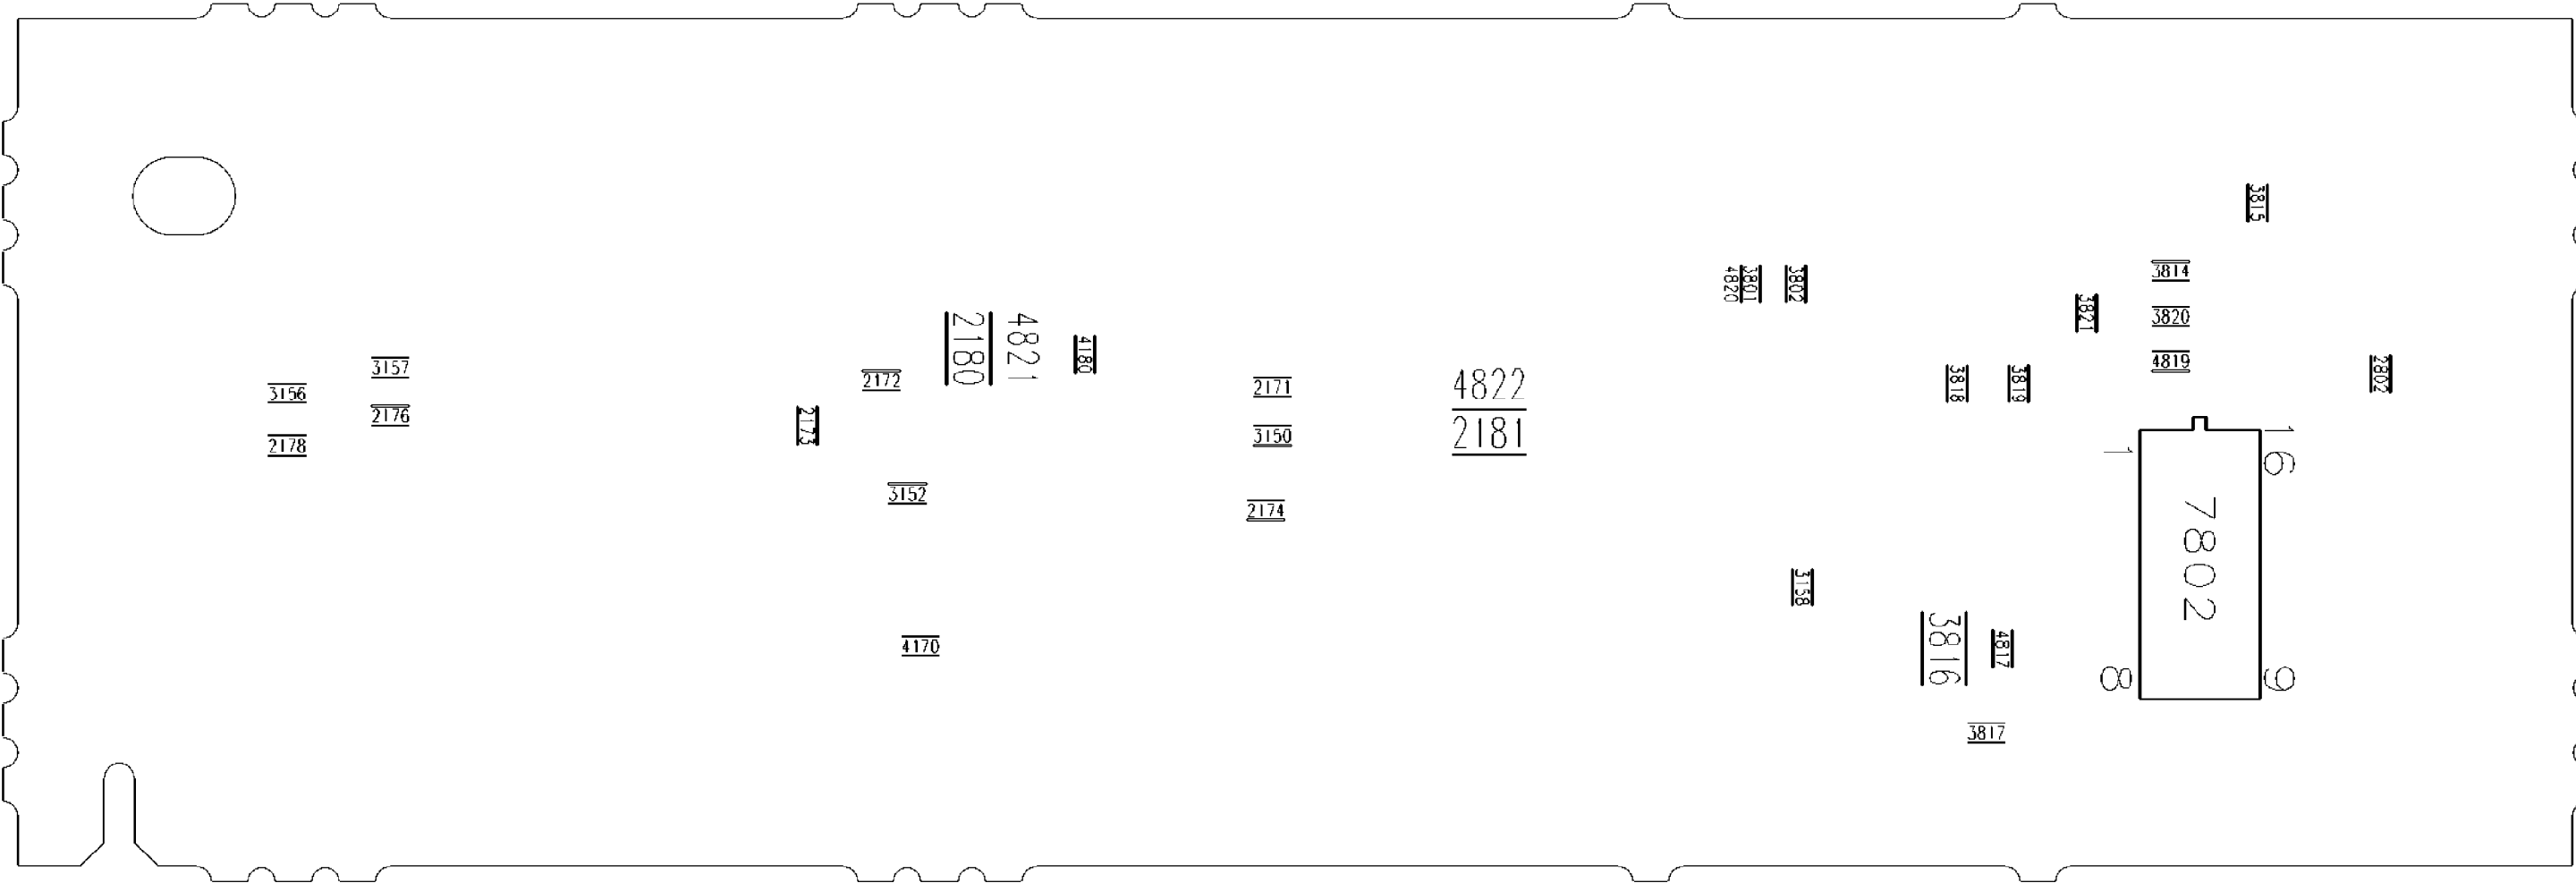


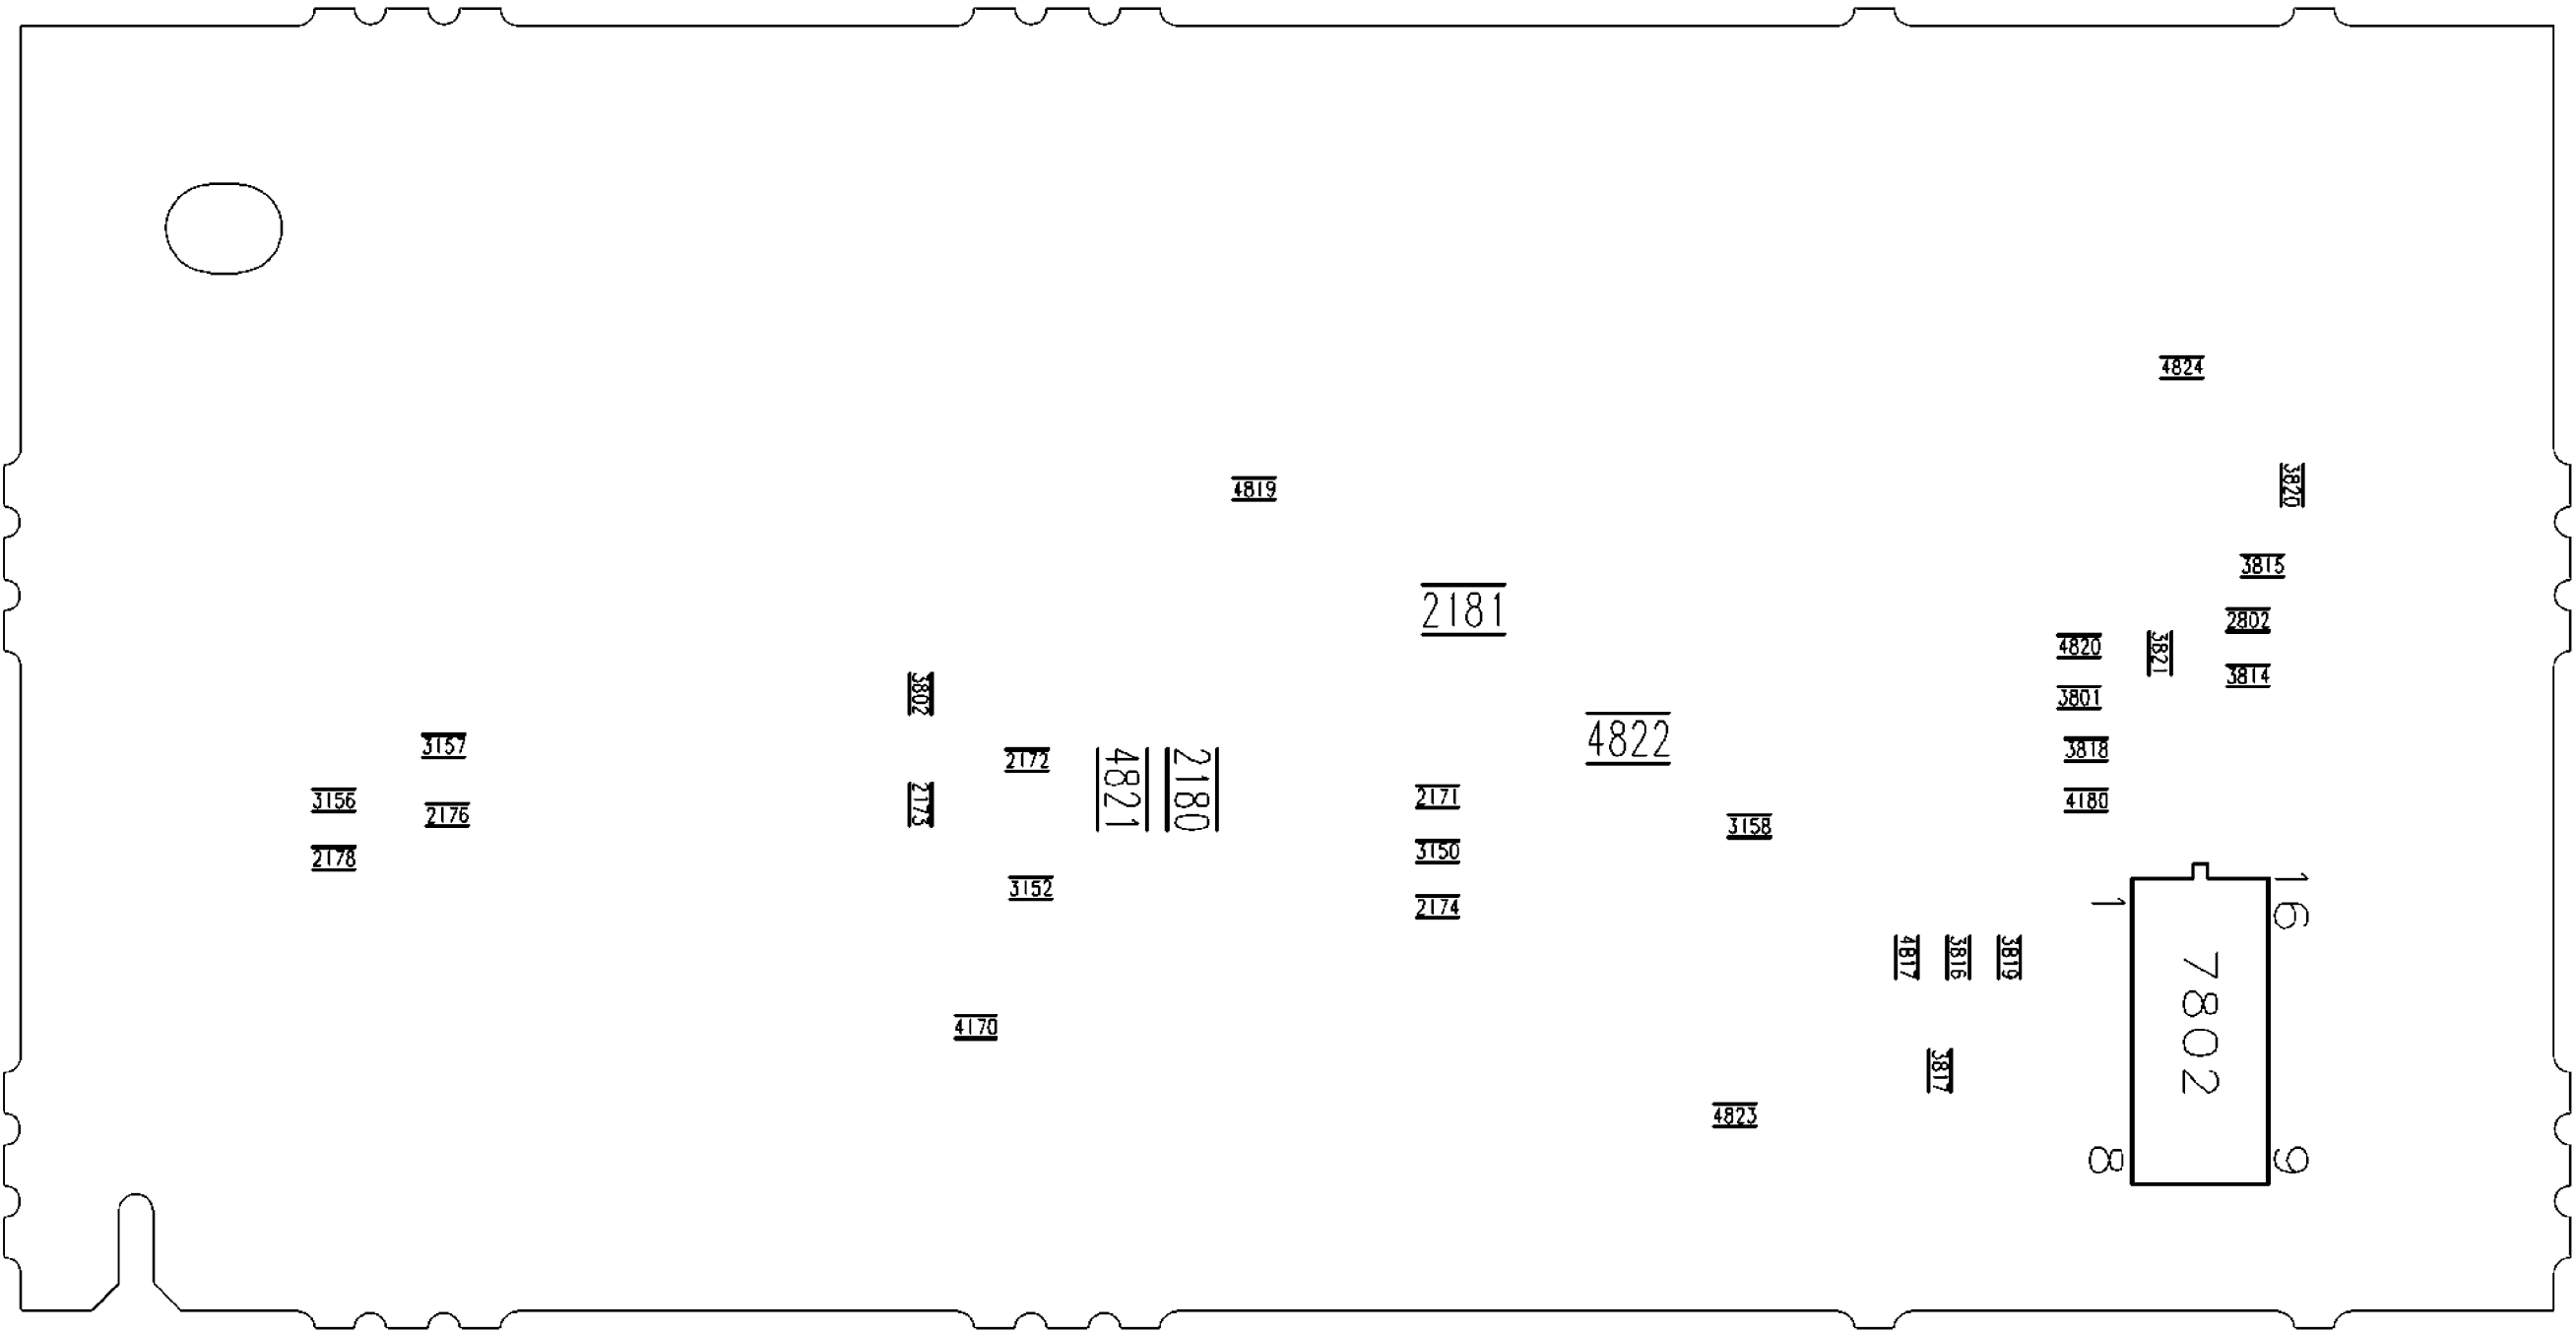

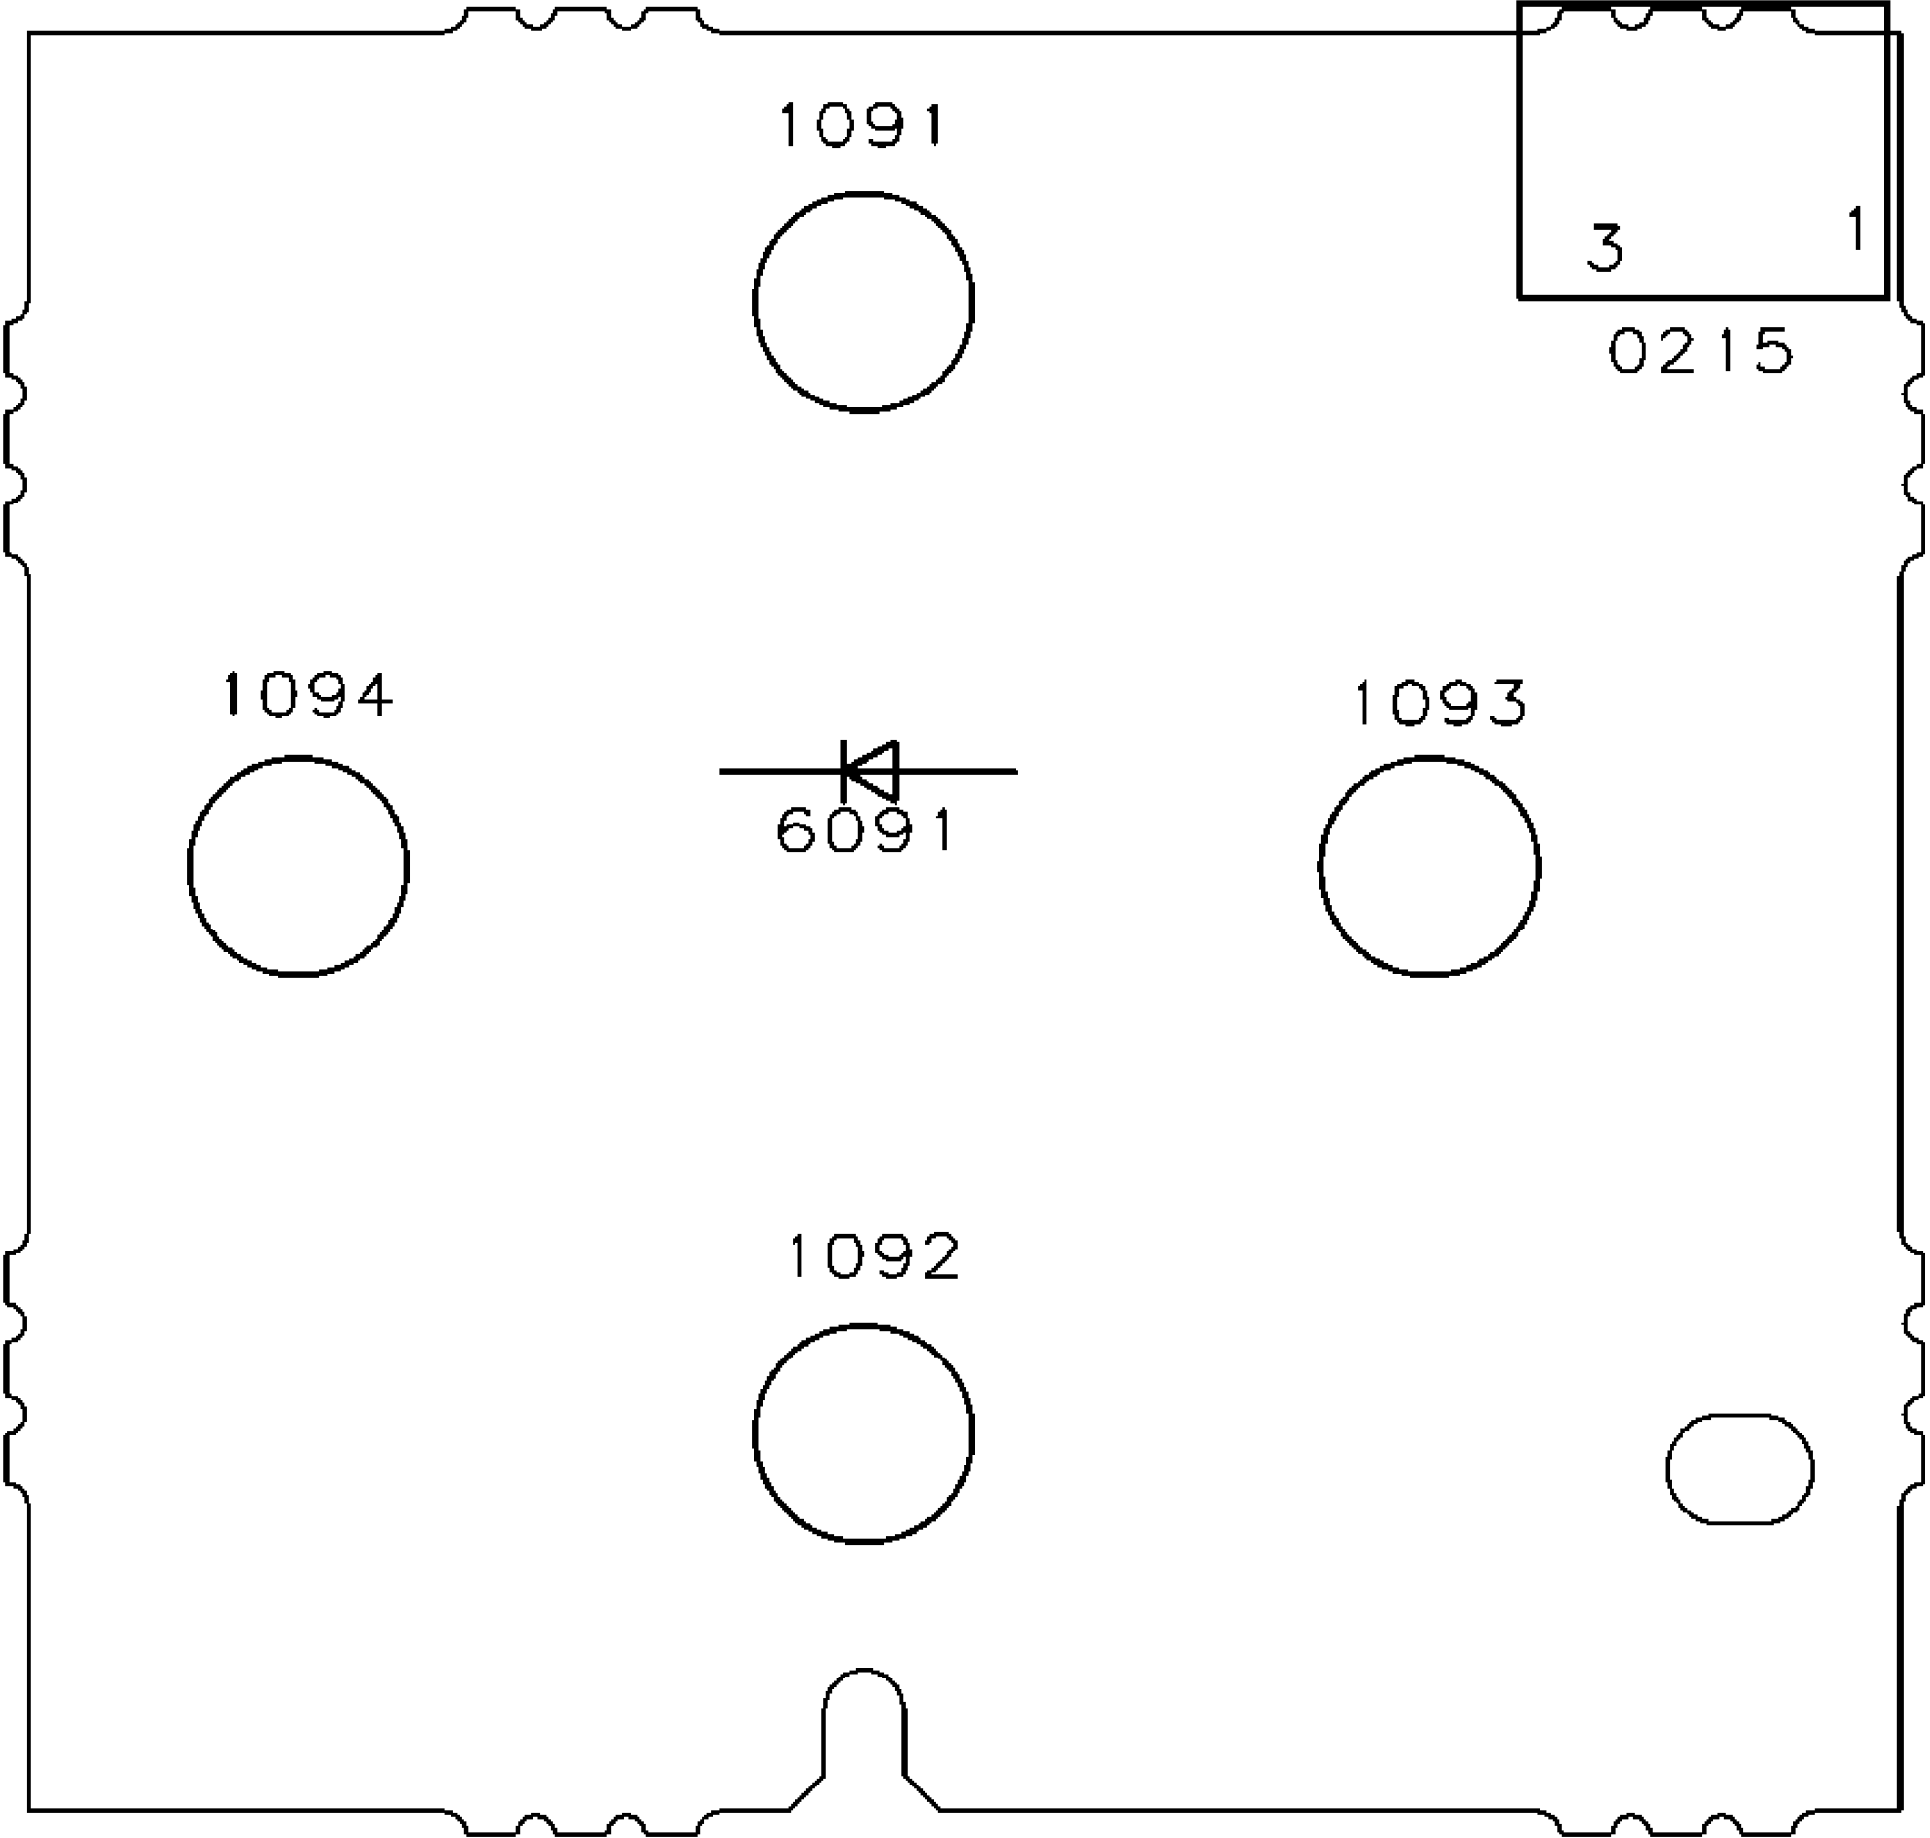


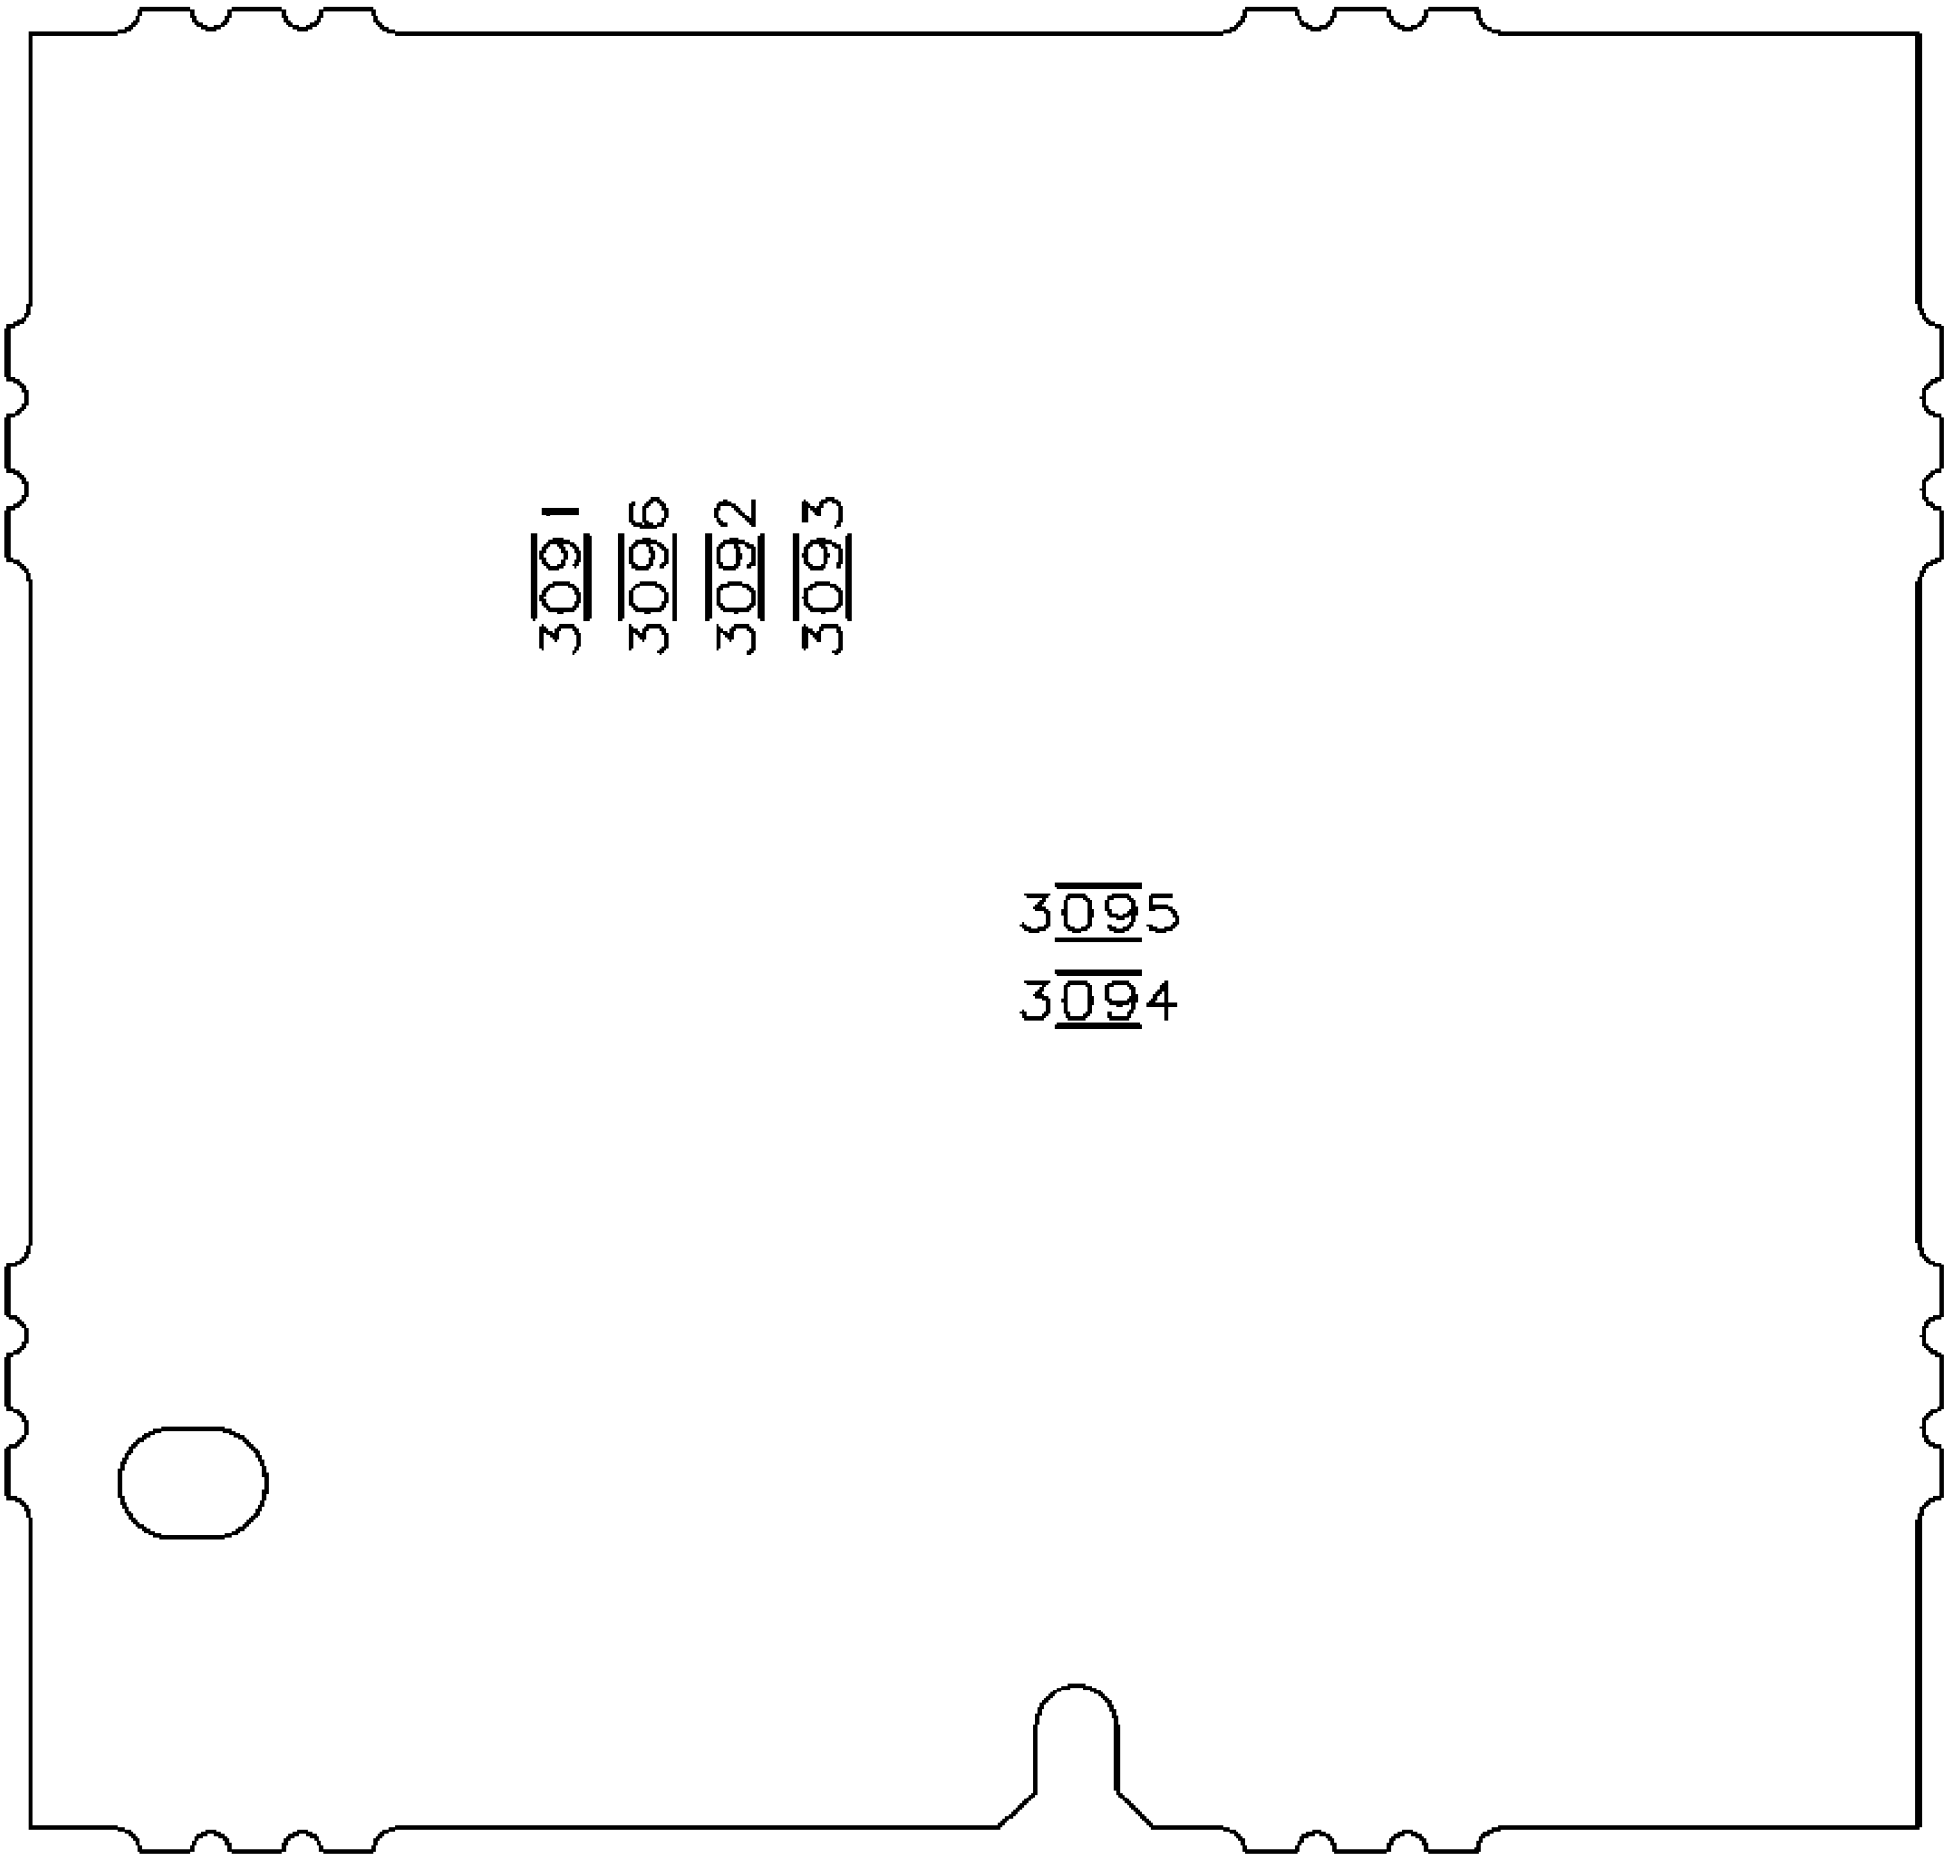


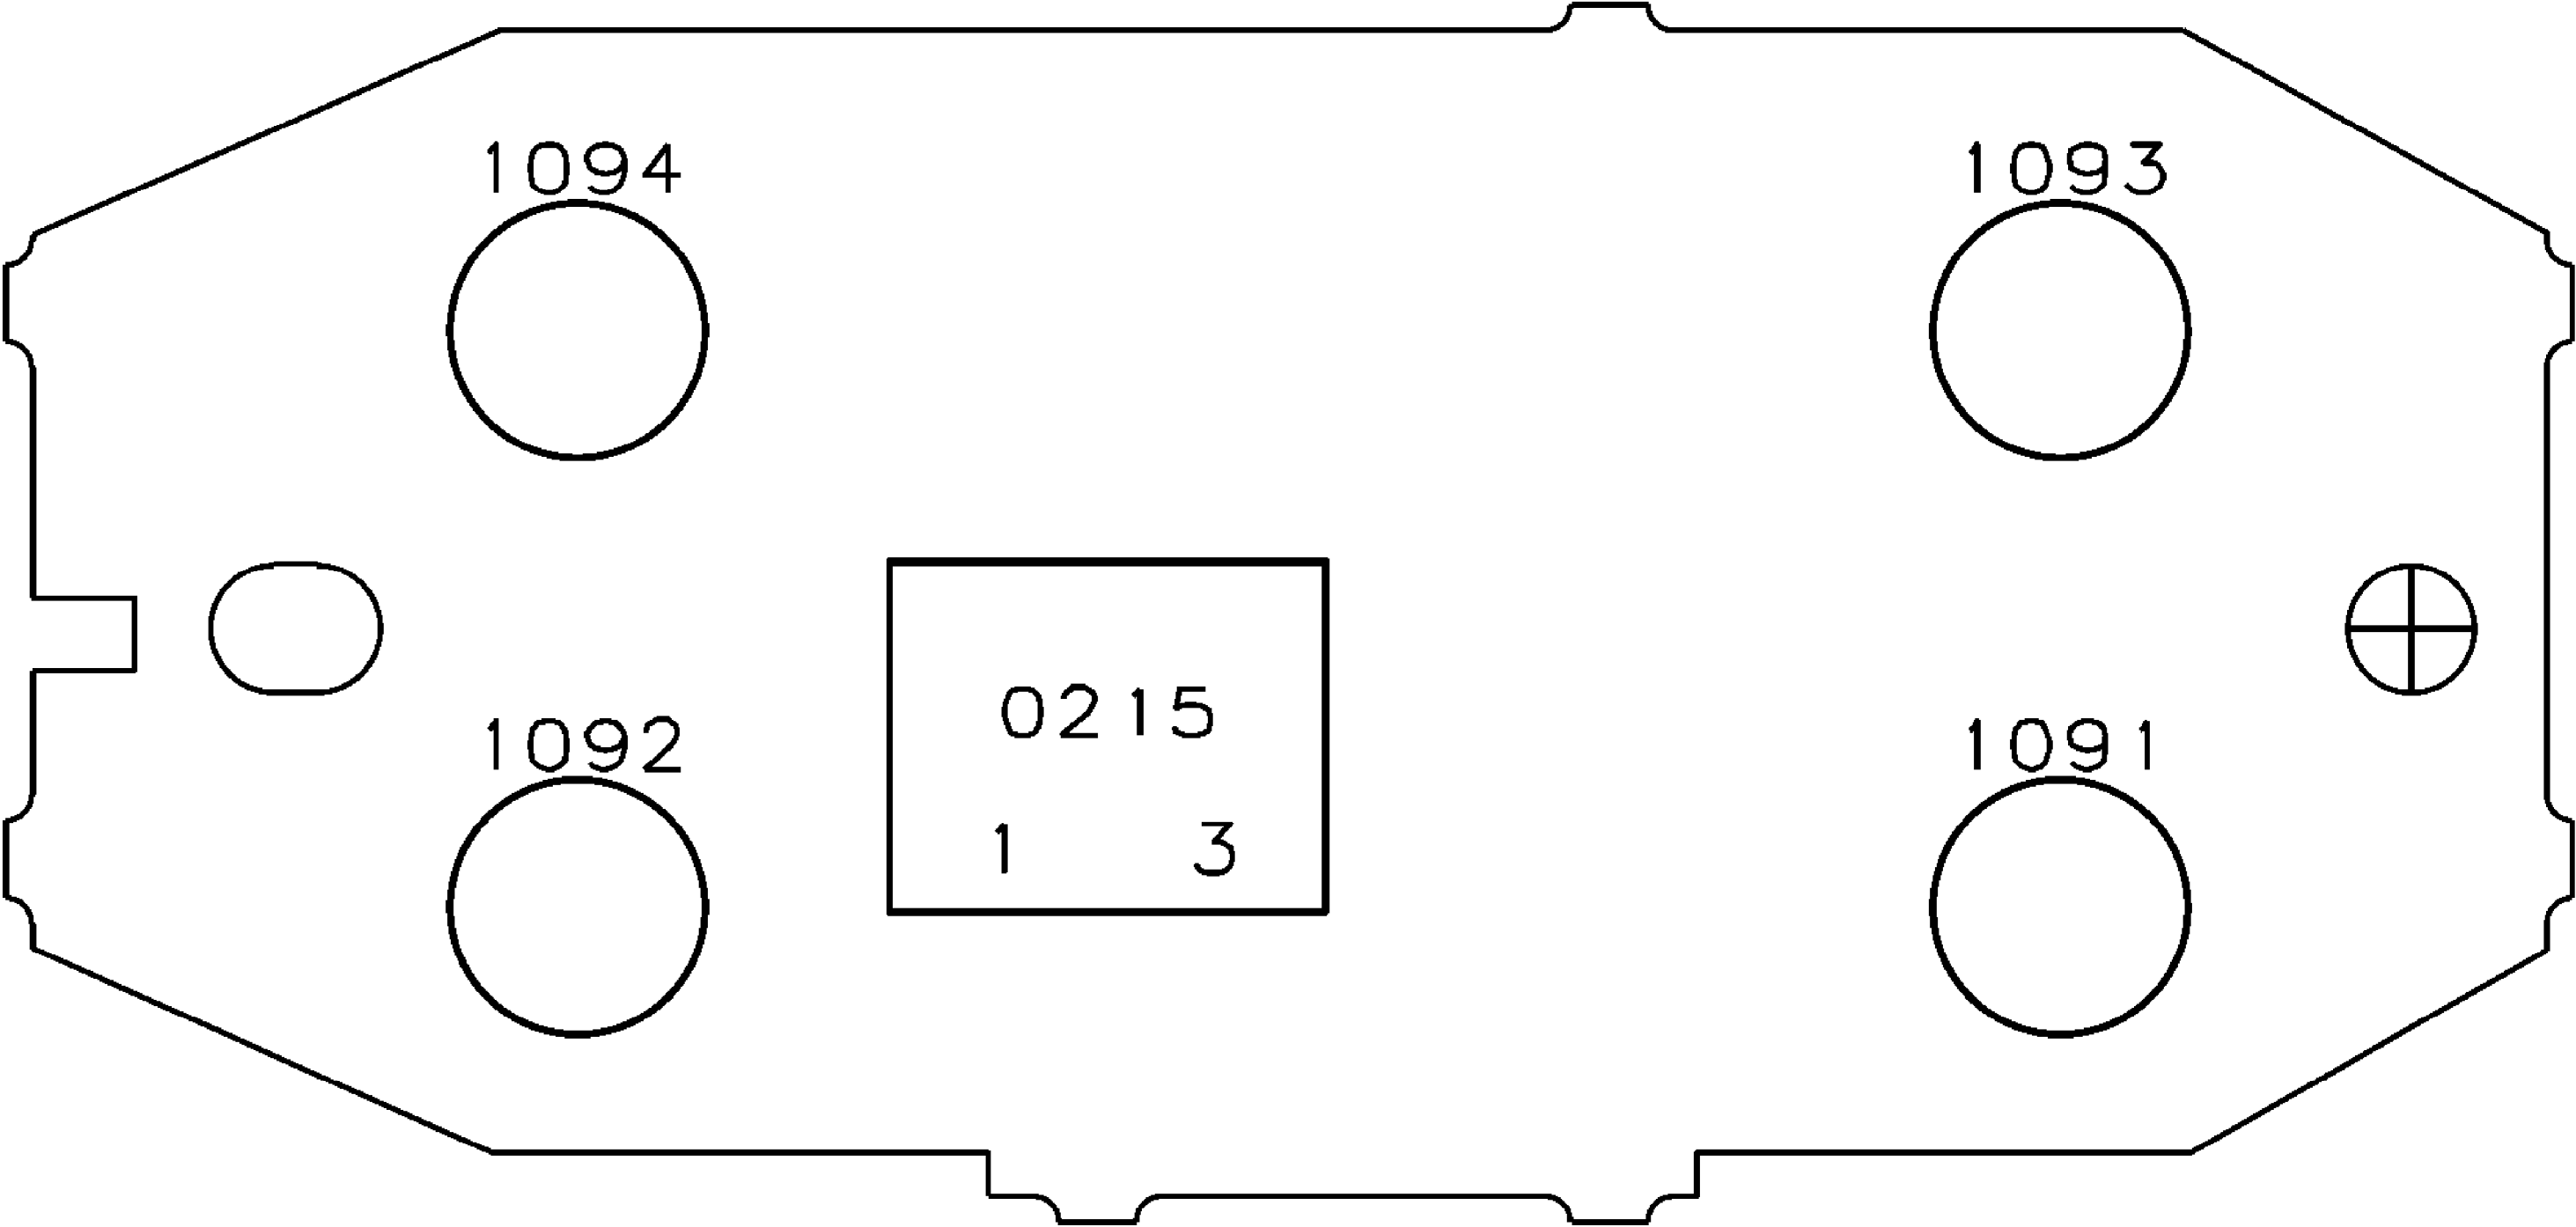

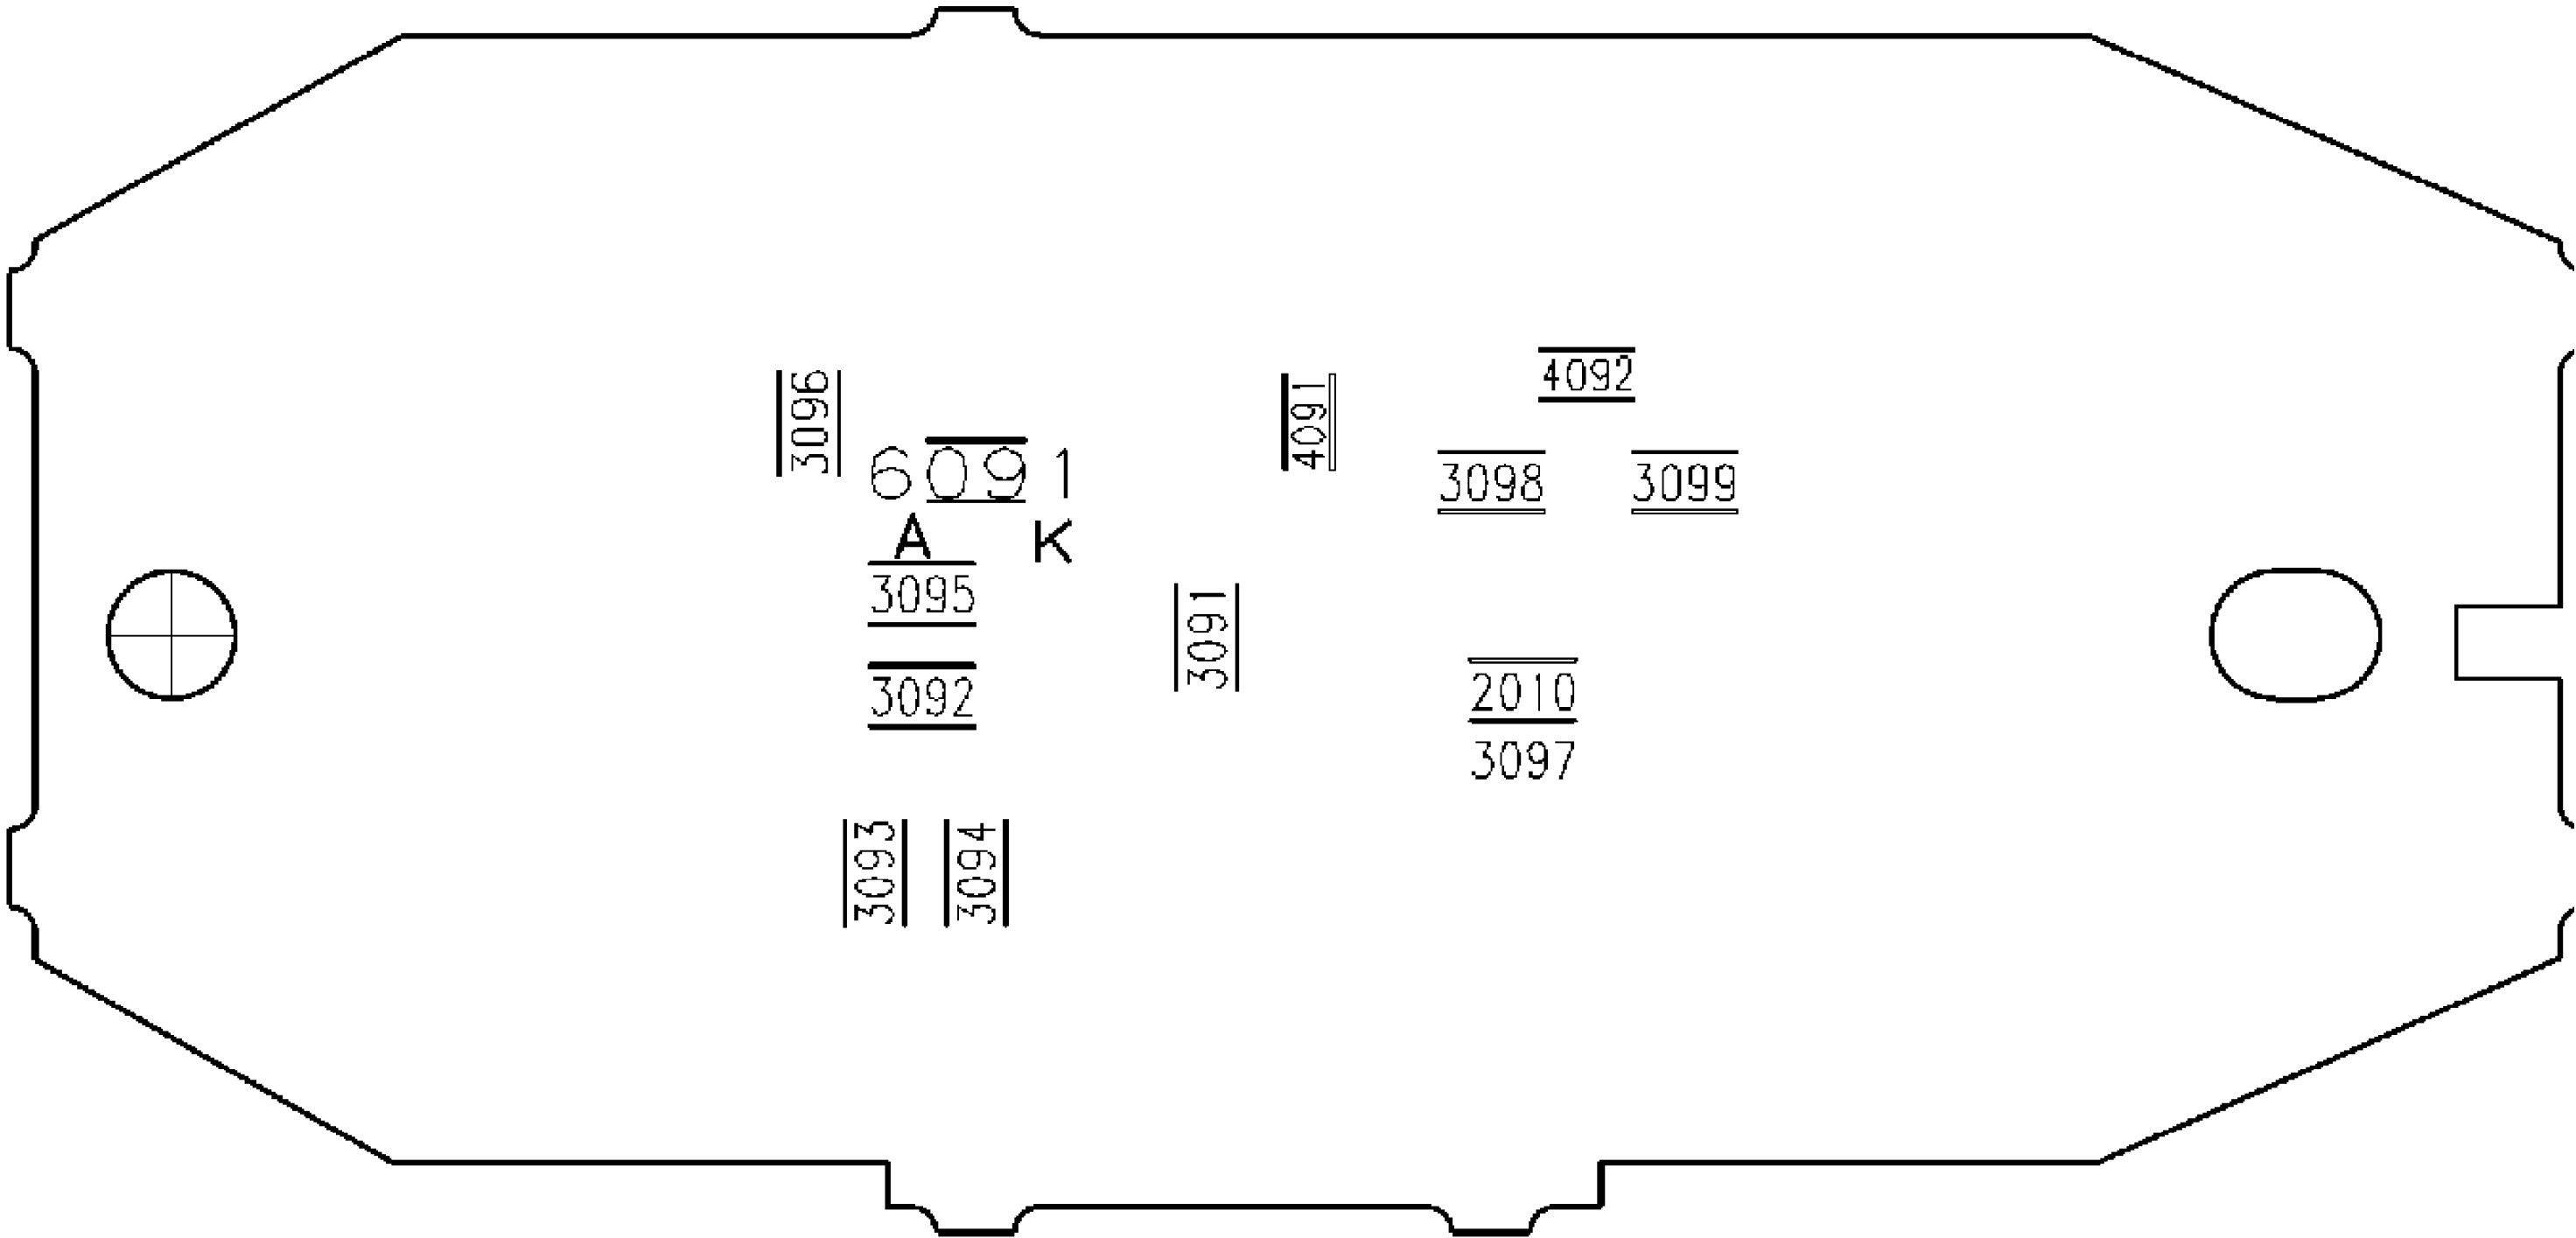



USED ONLY IN MODELS: 27PT663R37A, 27PT663R37C, 29PT563S85A, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A, 27PT563S37A, 30PW633F35A, 32LT621L/17 (7638) - 2D 3 Line Comb Filter (Component Side)
32PT563S37A, 32PT563S37G, 32PW633R85C, 29PT663S85A, 36ST220P/35, 36ST230P/35, 32ST230P/35, 32ST220P/17, 32PT563R85G, 29PT6631/44

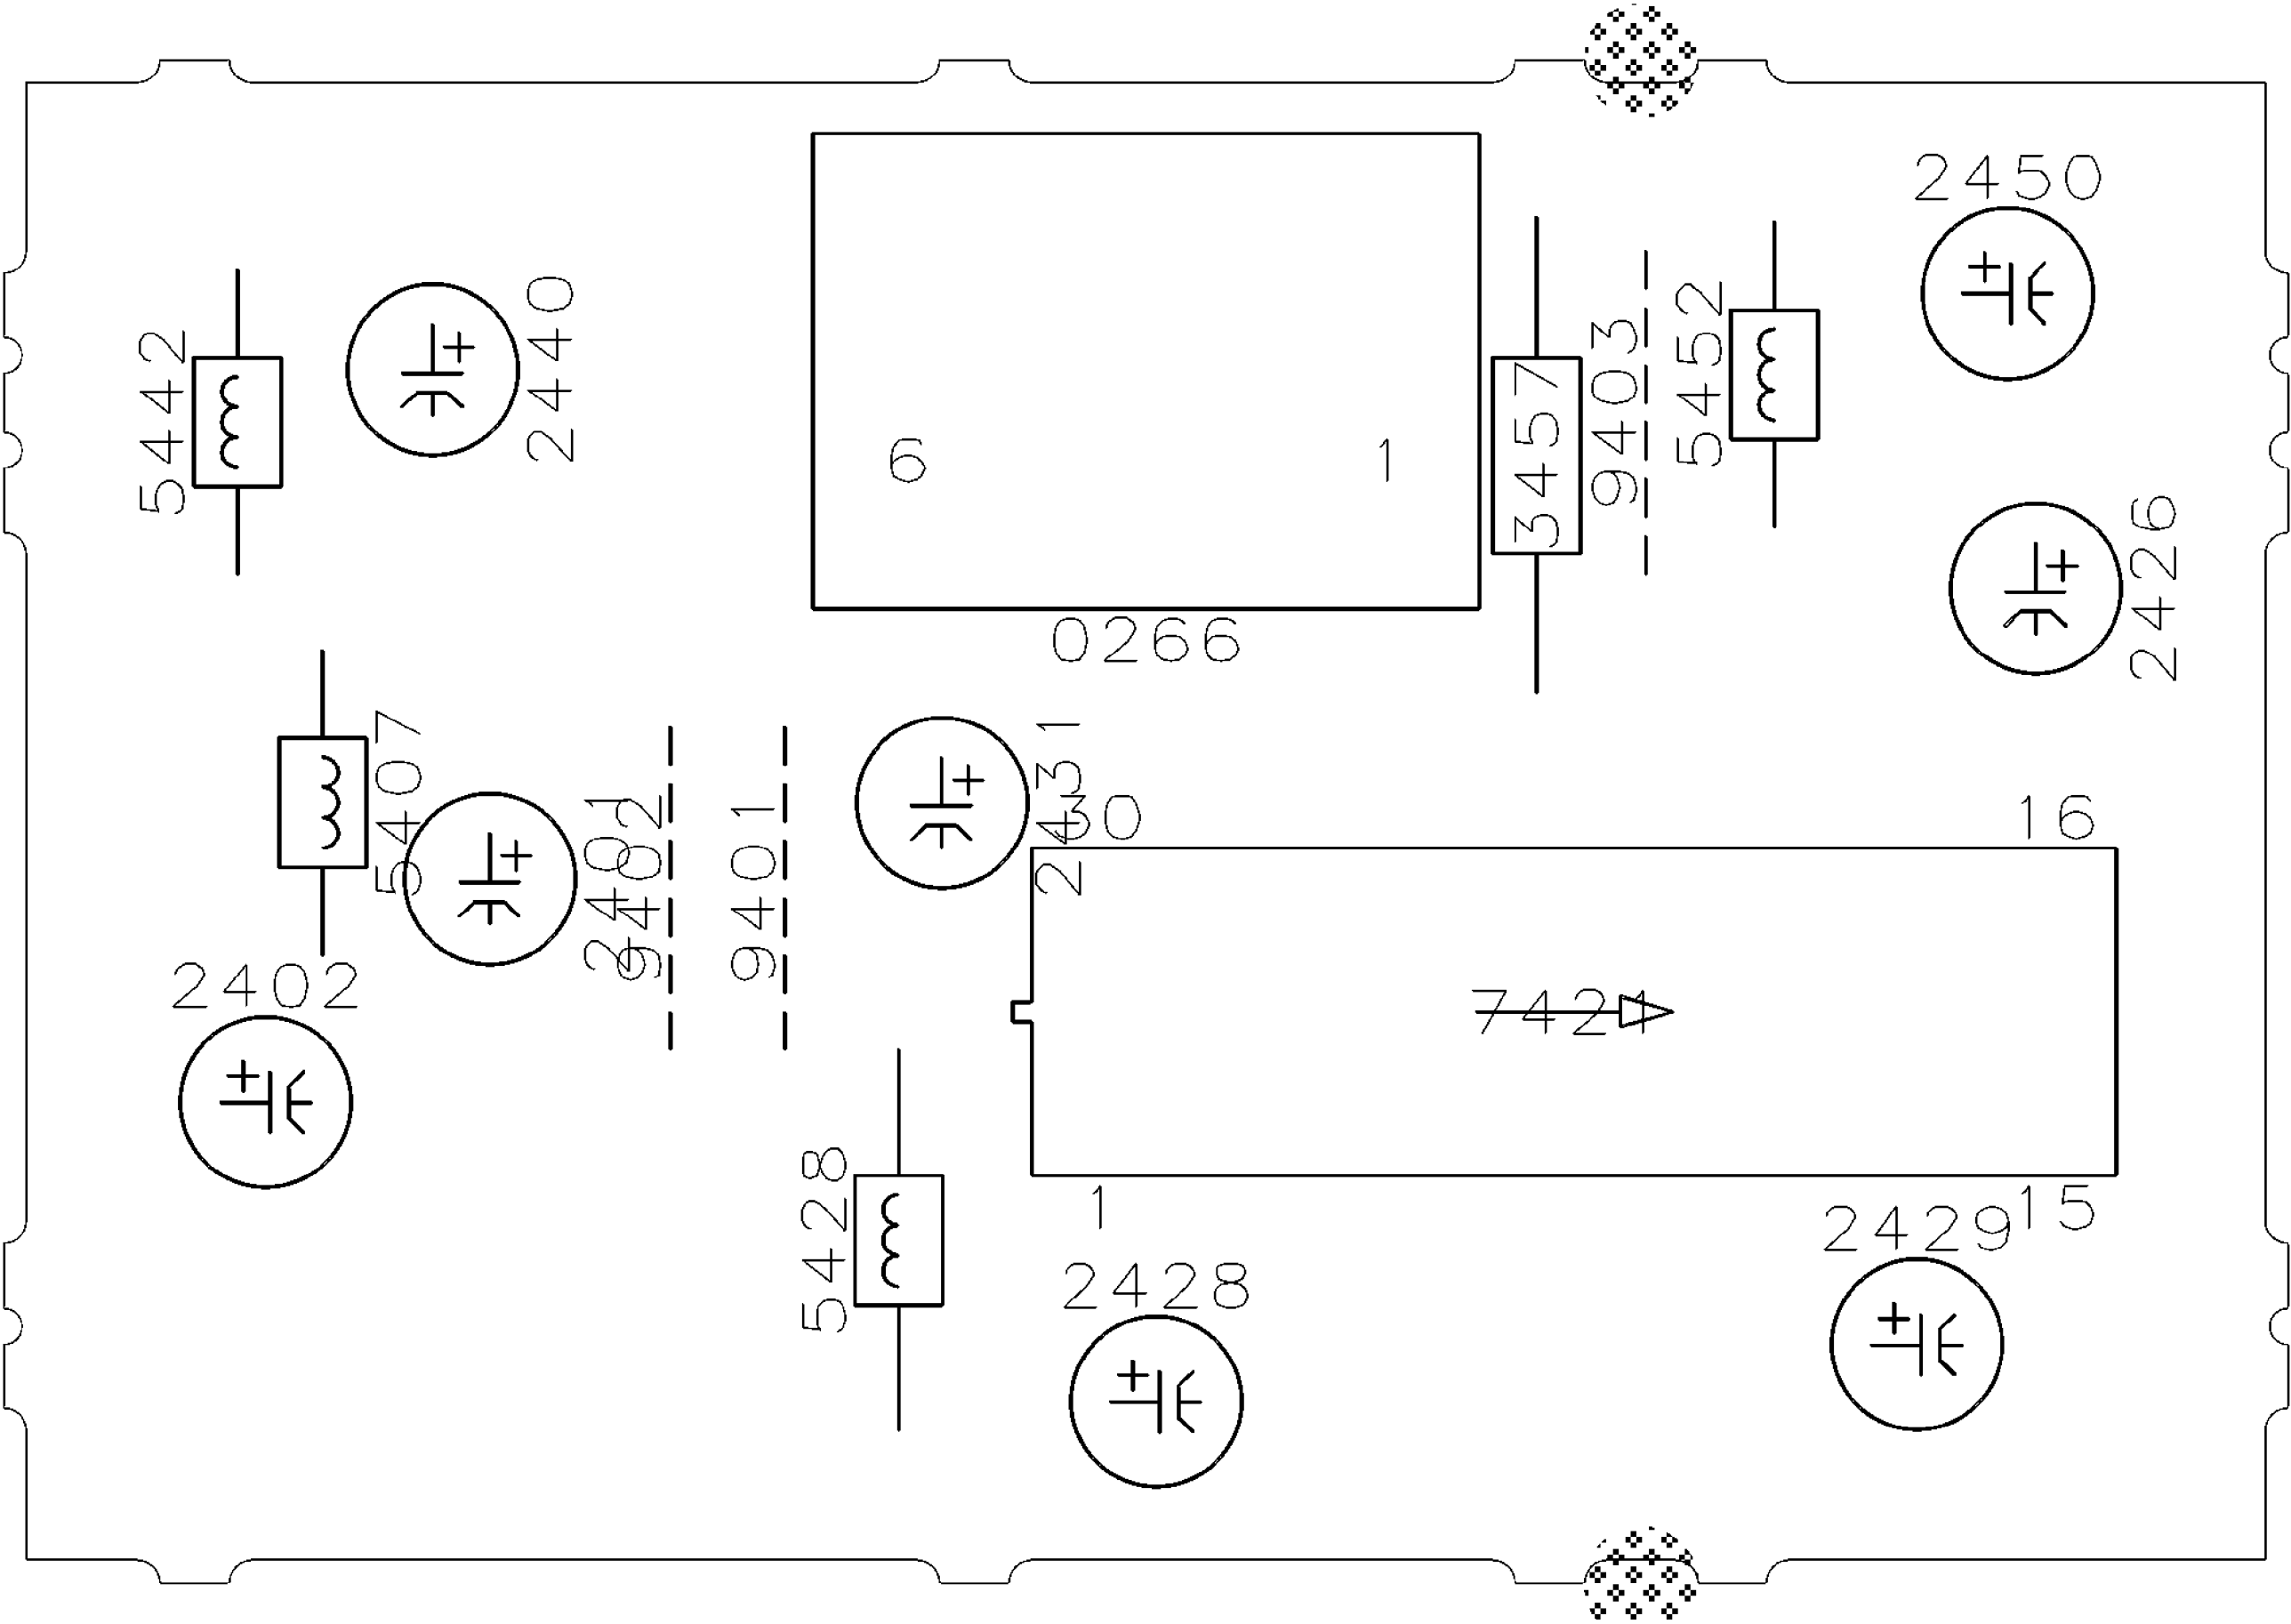

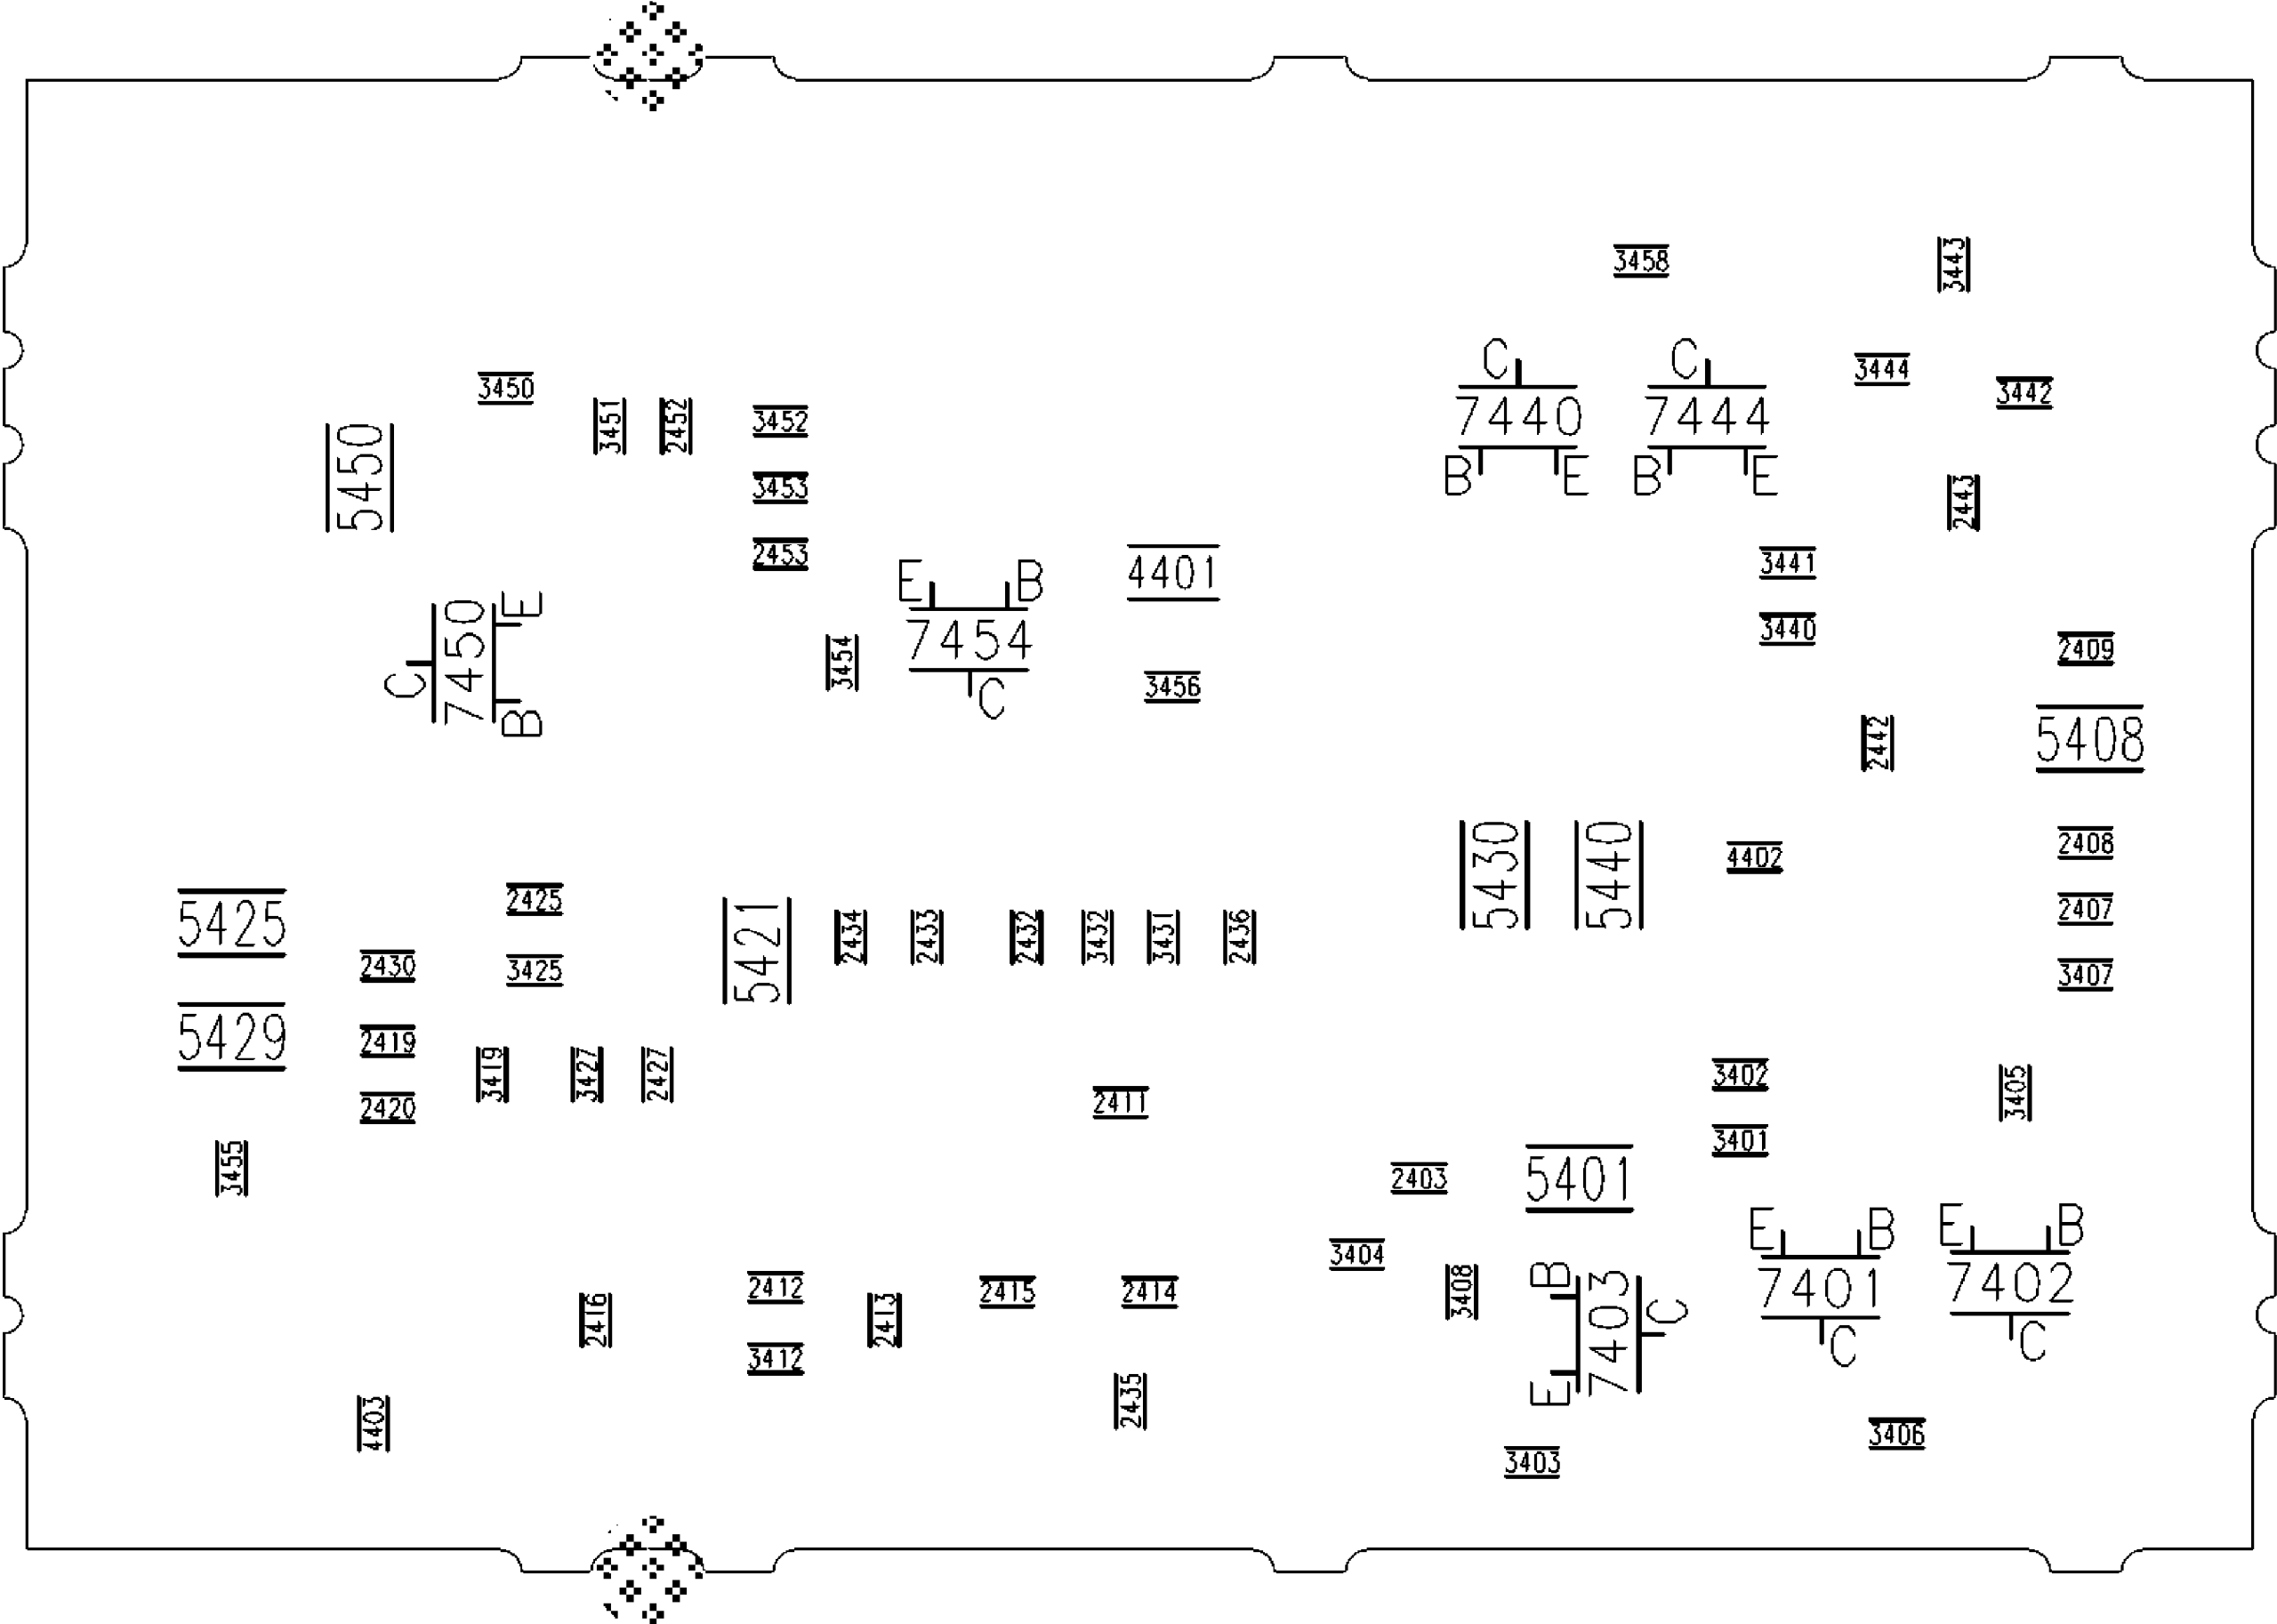


USED ONLY IN MODELS: 27PT633R37C, 27PT643R37A, 27PT663R37A, 27PT663R37C, 29PT633R85A, 29PT633R85C, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A (7638) - Front Interface Panel
20PT653R/37, 20DV6932/37R, 20DV693R02, 27DV693R37A, 27LT621L/17, 27PT643F35A, 29PT643R85A, 30DV693R37A, , 30PW633F35A, 30PW633R37A, 30PW633R37C, 32LT621L/17, 20DV693R01, 27PT643R/37C, 27PT643R/97A,

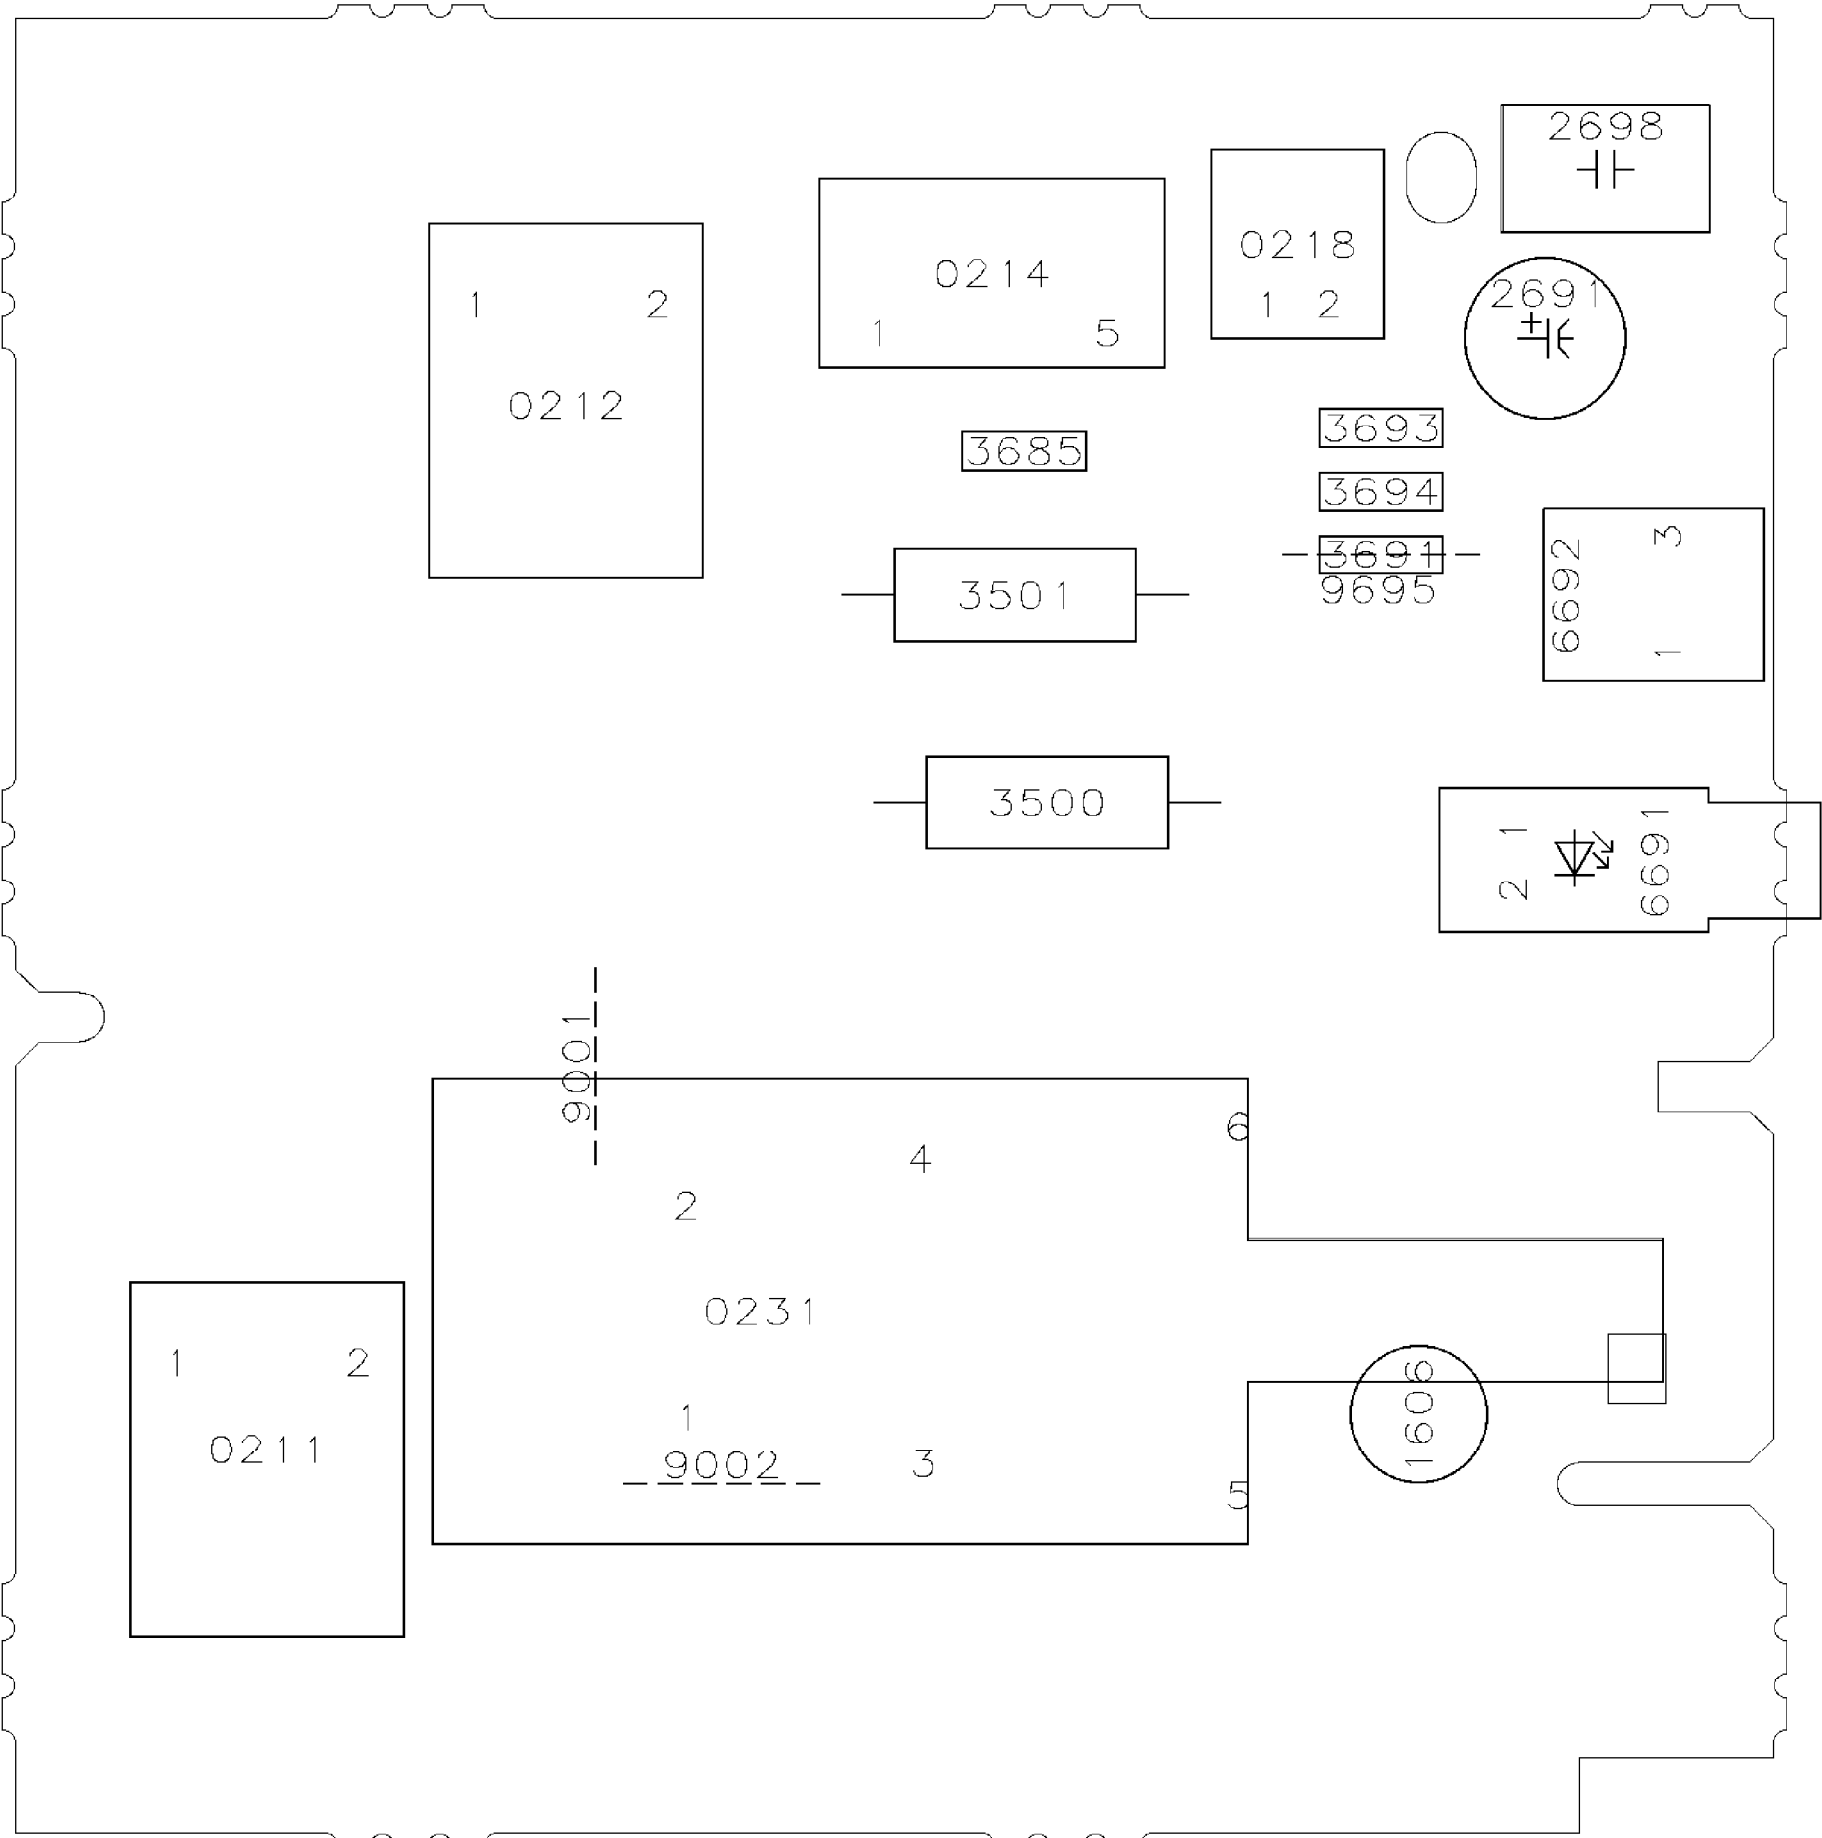


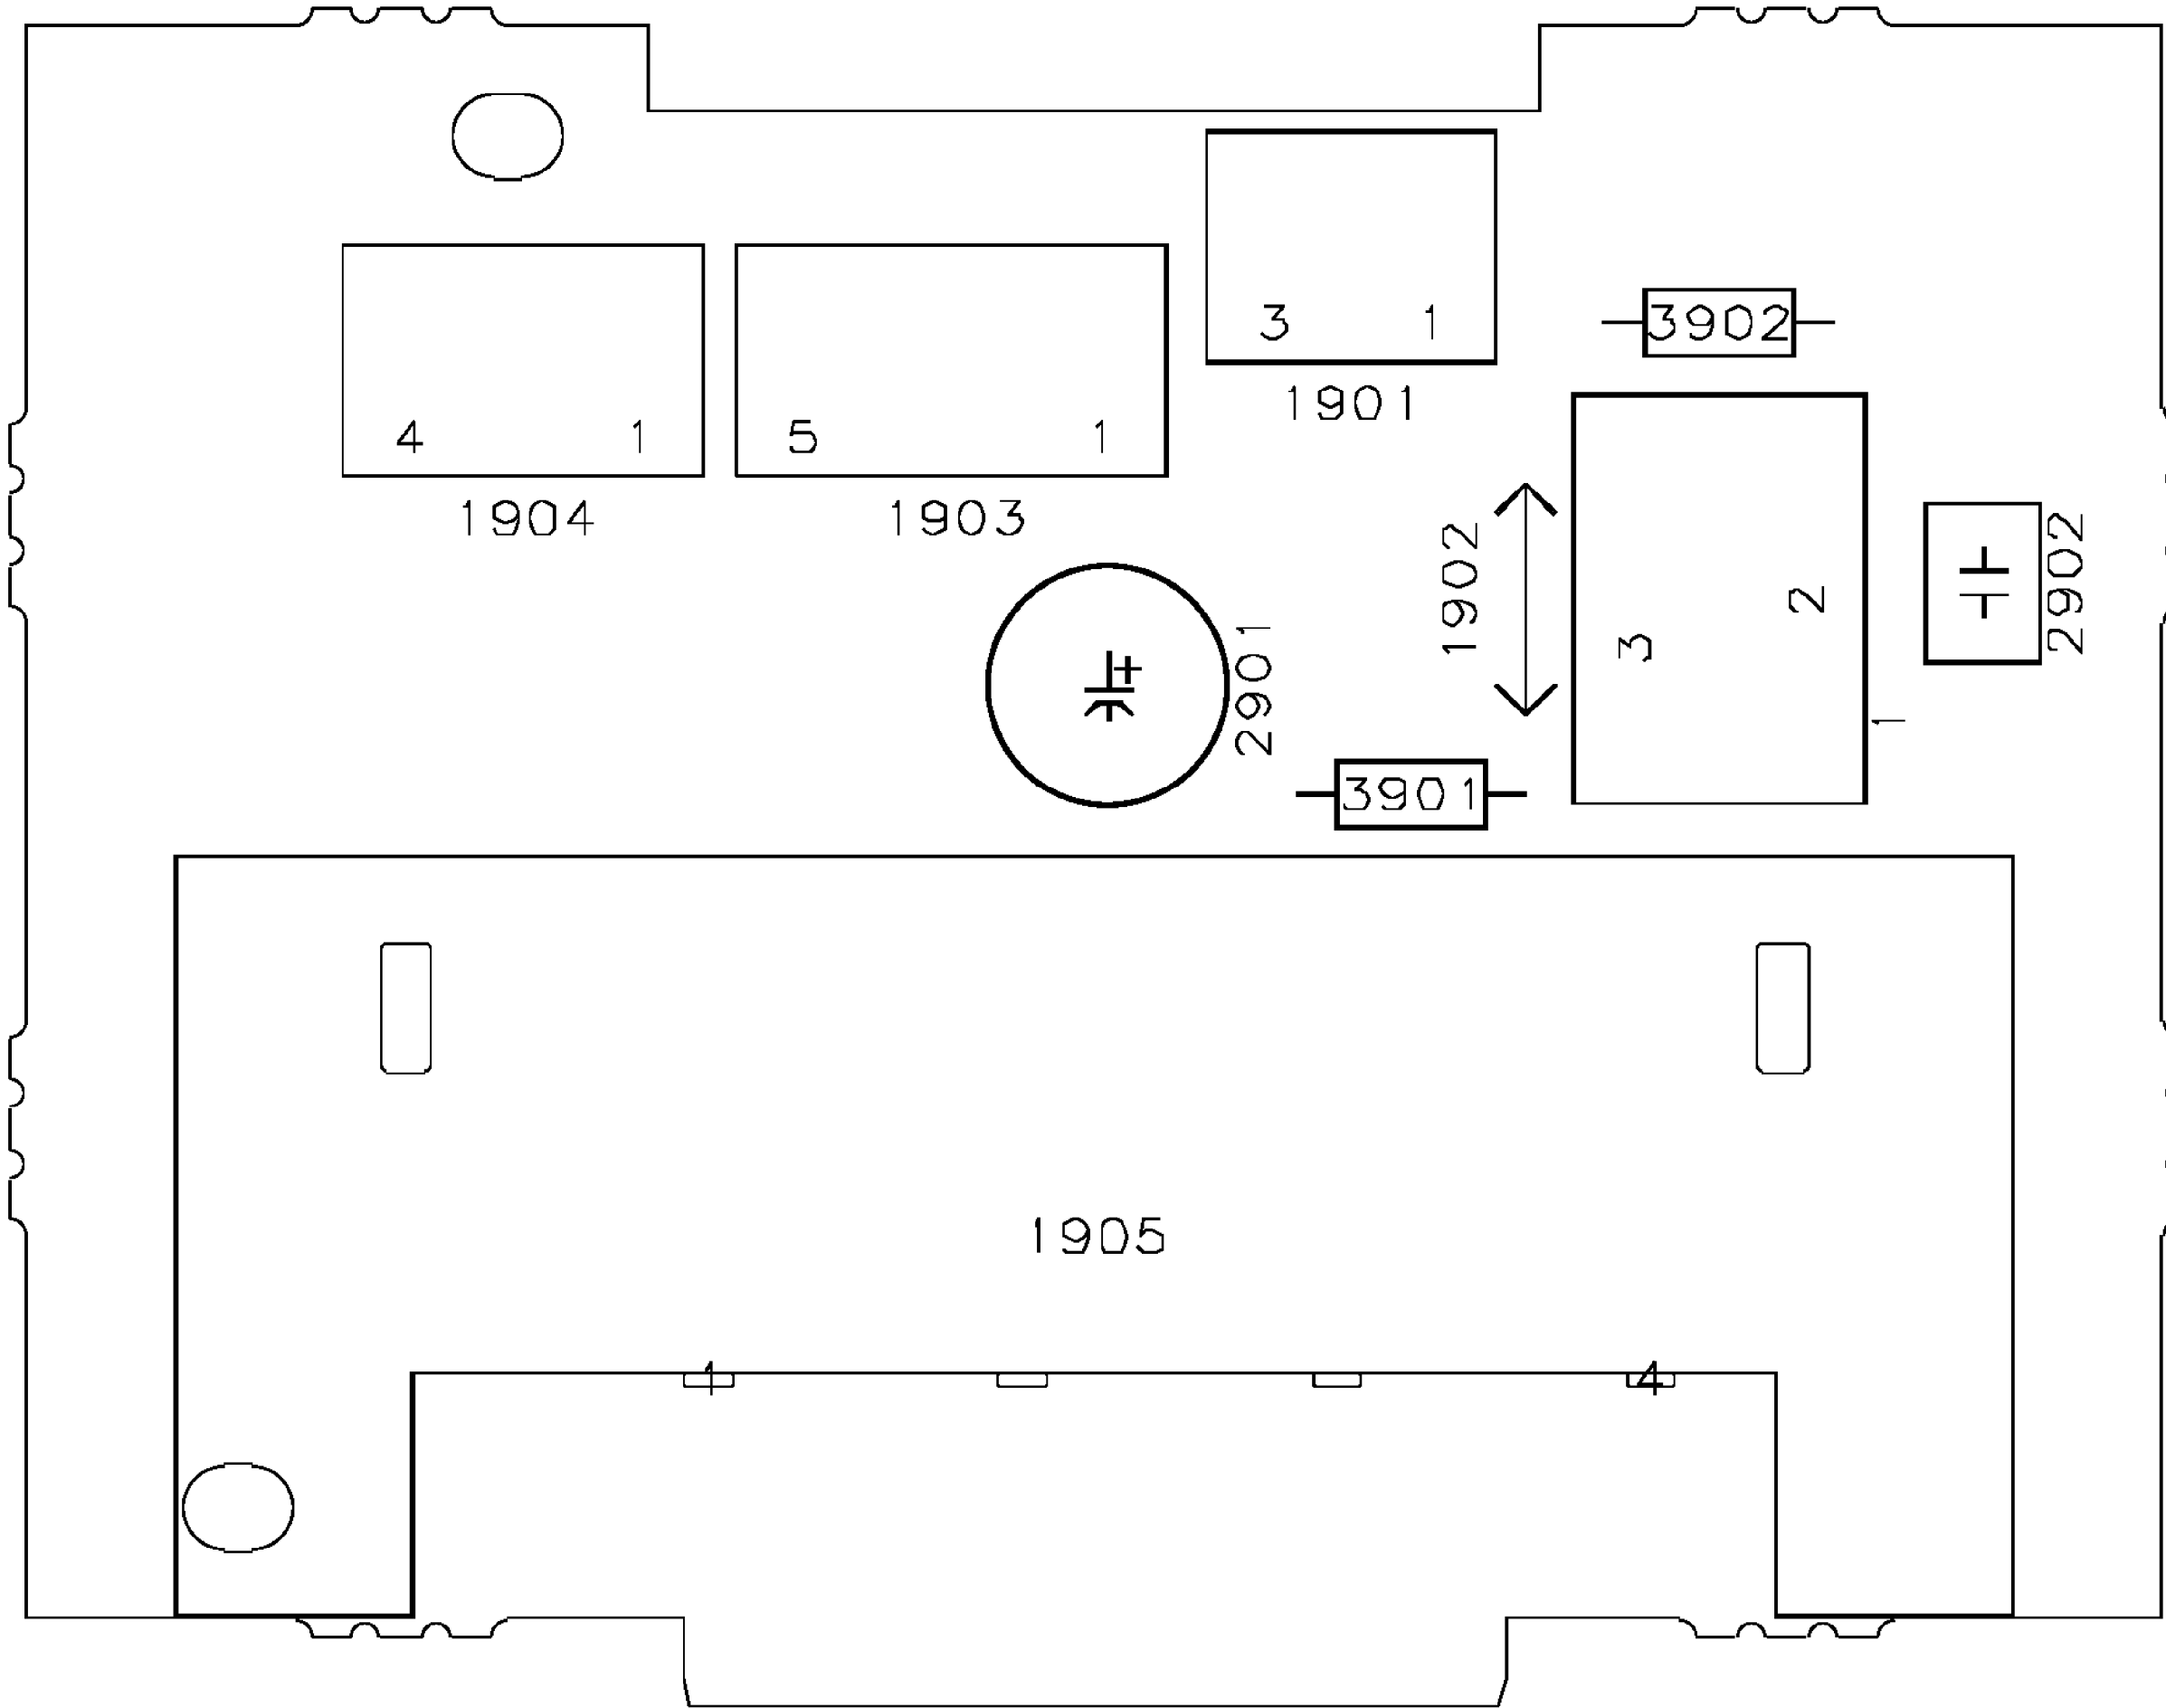

USED ONLY IN MODELS: 27PT643R37A, 27PT663R37A, 27PT663R37C, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A, 20PT653R/37, 20DV6932/37R, 20DV693R02 (7638) - Top Control Panel (Component Side)
27DV693R37A, 27PT643F35A, 29PT643R85A, 30DV693R37A, , 30PW633F35A, 30PW633R37A, 30PW633R37C, 20DV693R01, 27PT643R/37C, 27PT643R/97A, 28PW6532/85R, 32PW633R85C, 29PT663S85A, 29DV6931/85R, 29DV693R85A

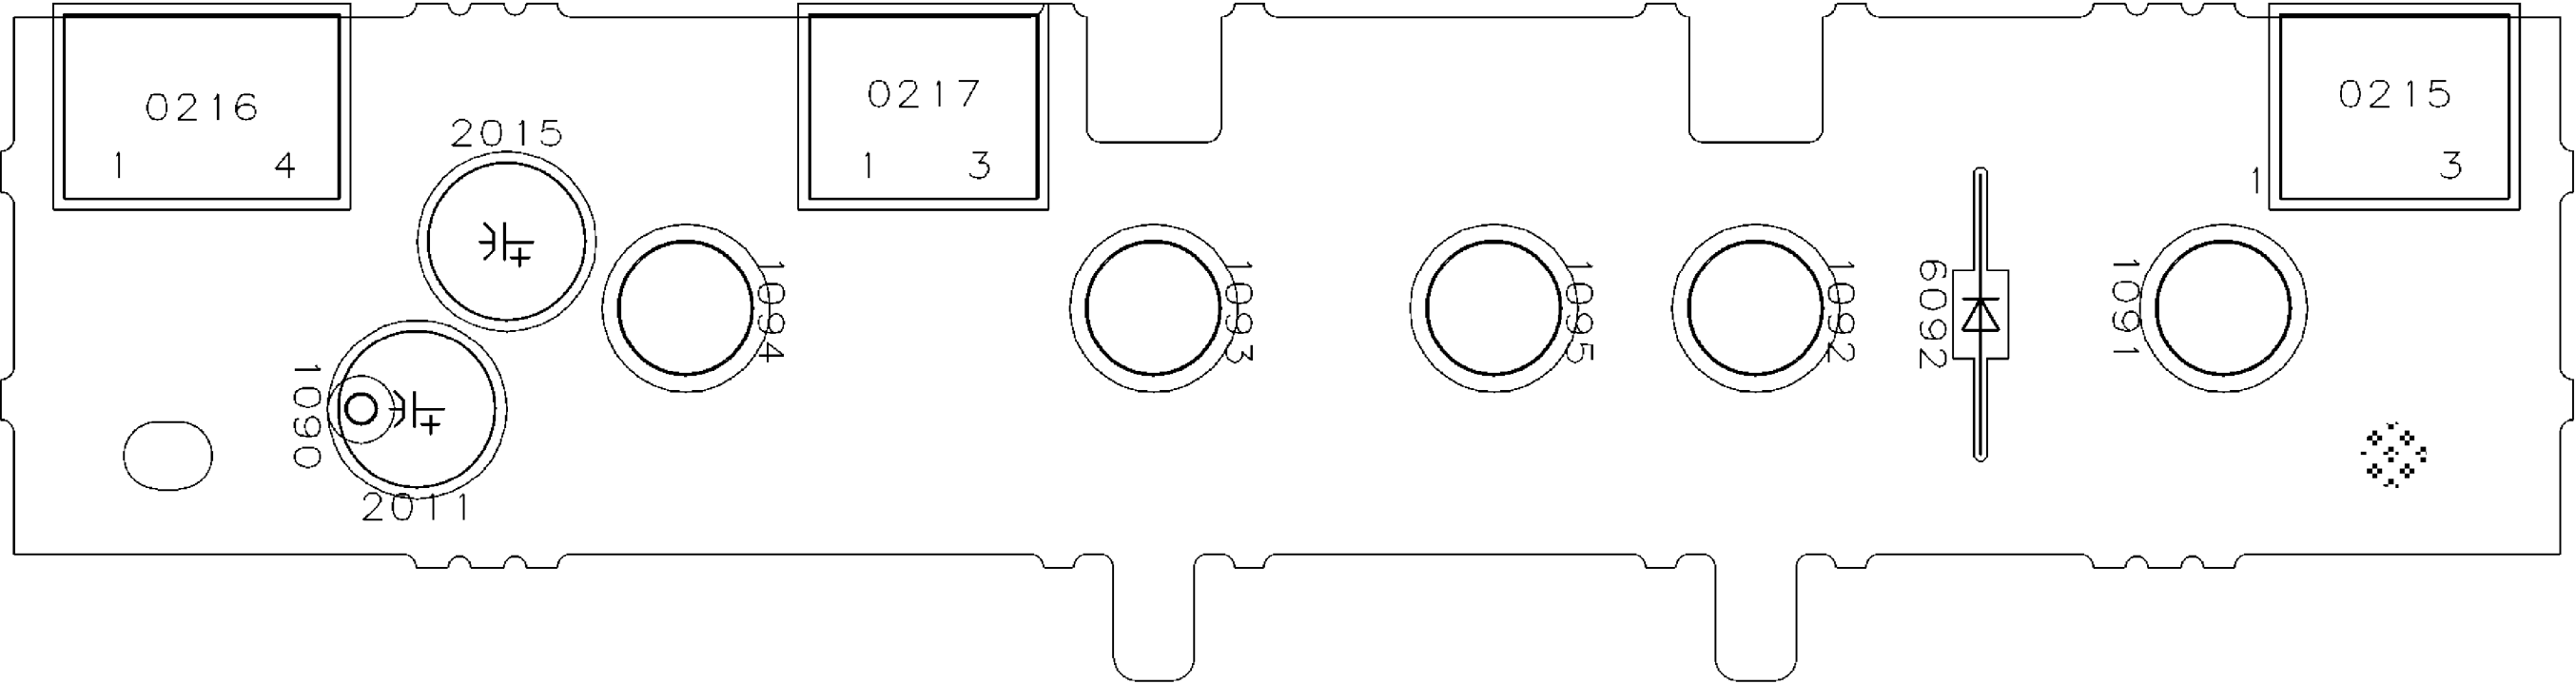


USED ONLY IN MODELS: 27PT643R37A, 27PT663R37A, 27PT663R37C, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A, 20PT653R/37, 20DV6932/37R, 20DV693R02 (7638) - Top Control Panel (Copper Side)
27DV693R37A, 27PT643F35A, 29PT643R85A, 30DV693R37A, , 30PW633F35A, 30PW633R37A, 30PW633R37C, 20DV693R01, 27PT643R/37C, 27PT643R/97A, 28PW6532/85R, 32PW633R85C, 29PT663S85A, 29DV6931/85R, 29DV693R85A

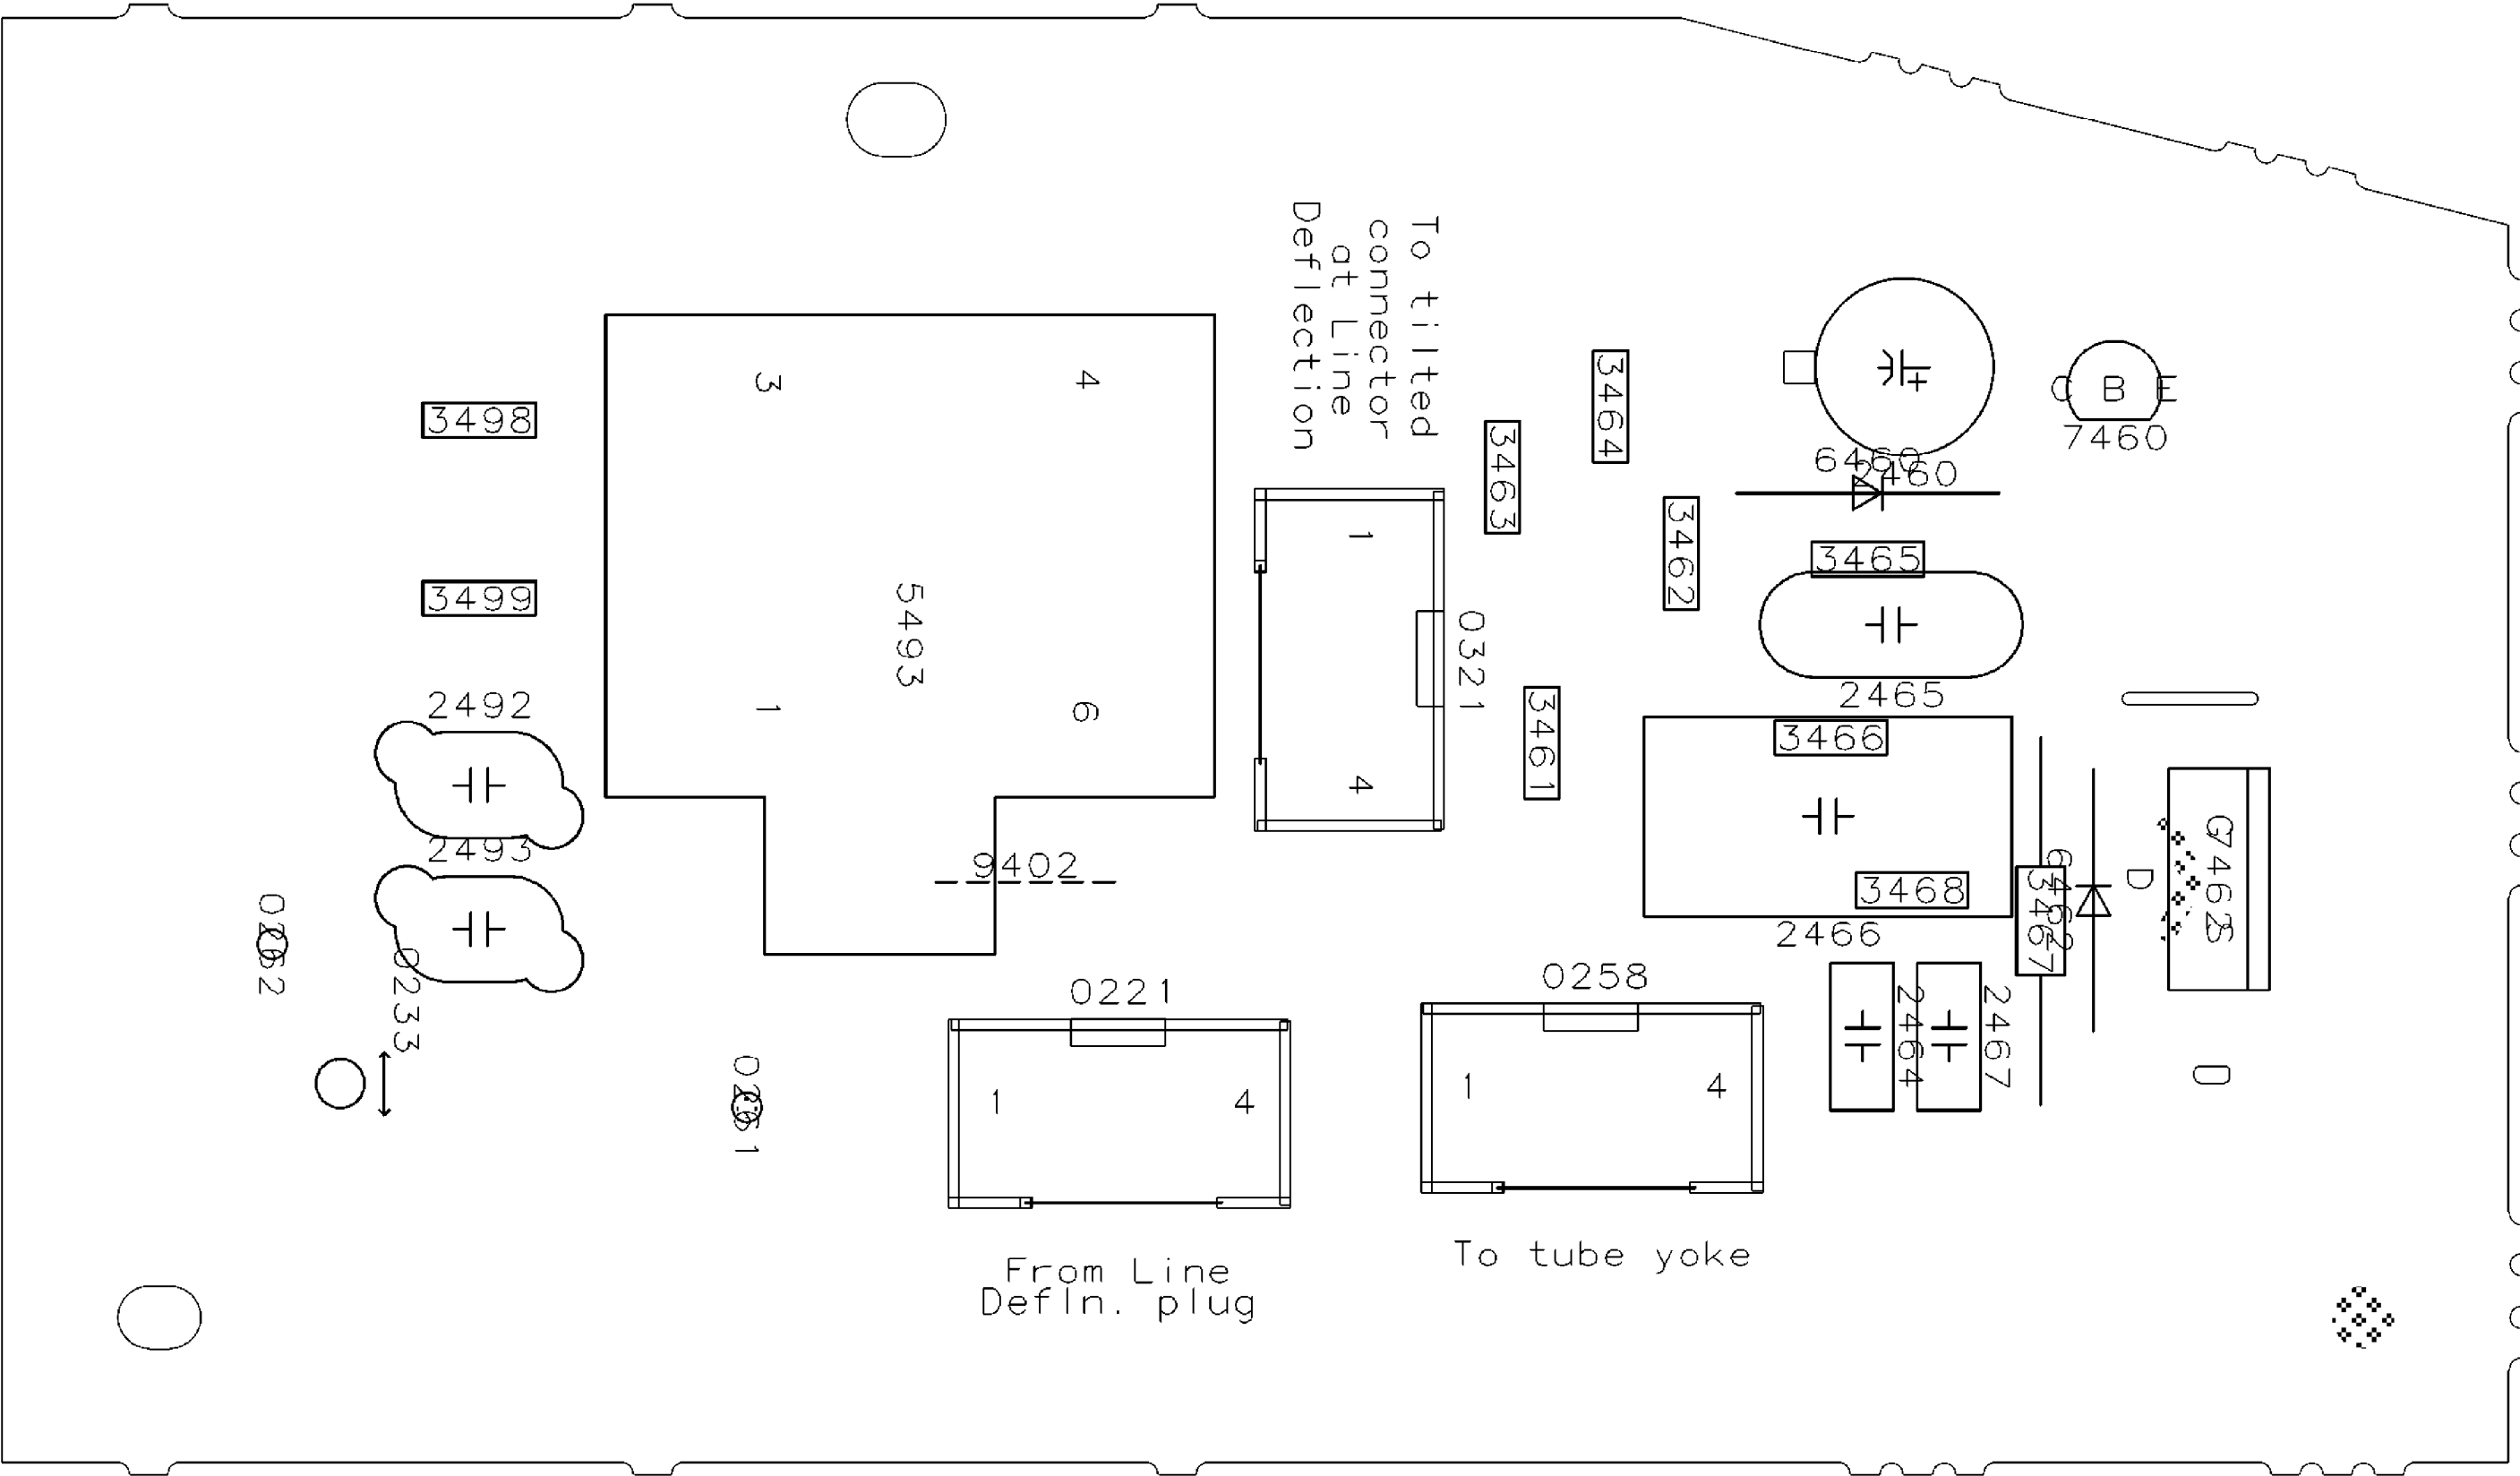



[illegible]


[illegible]

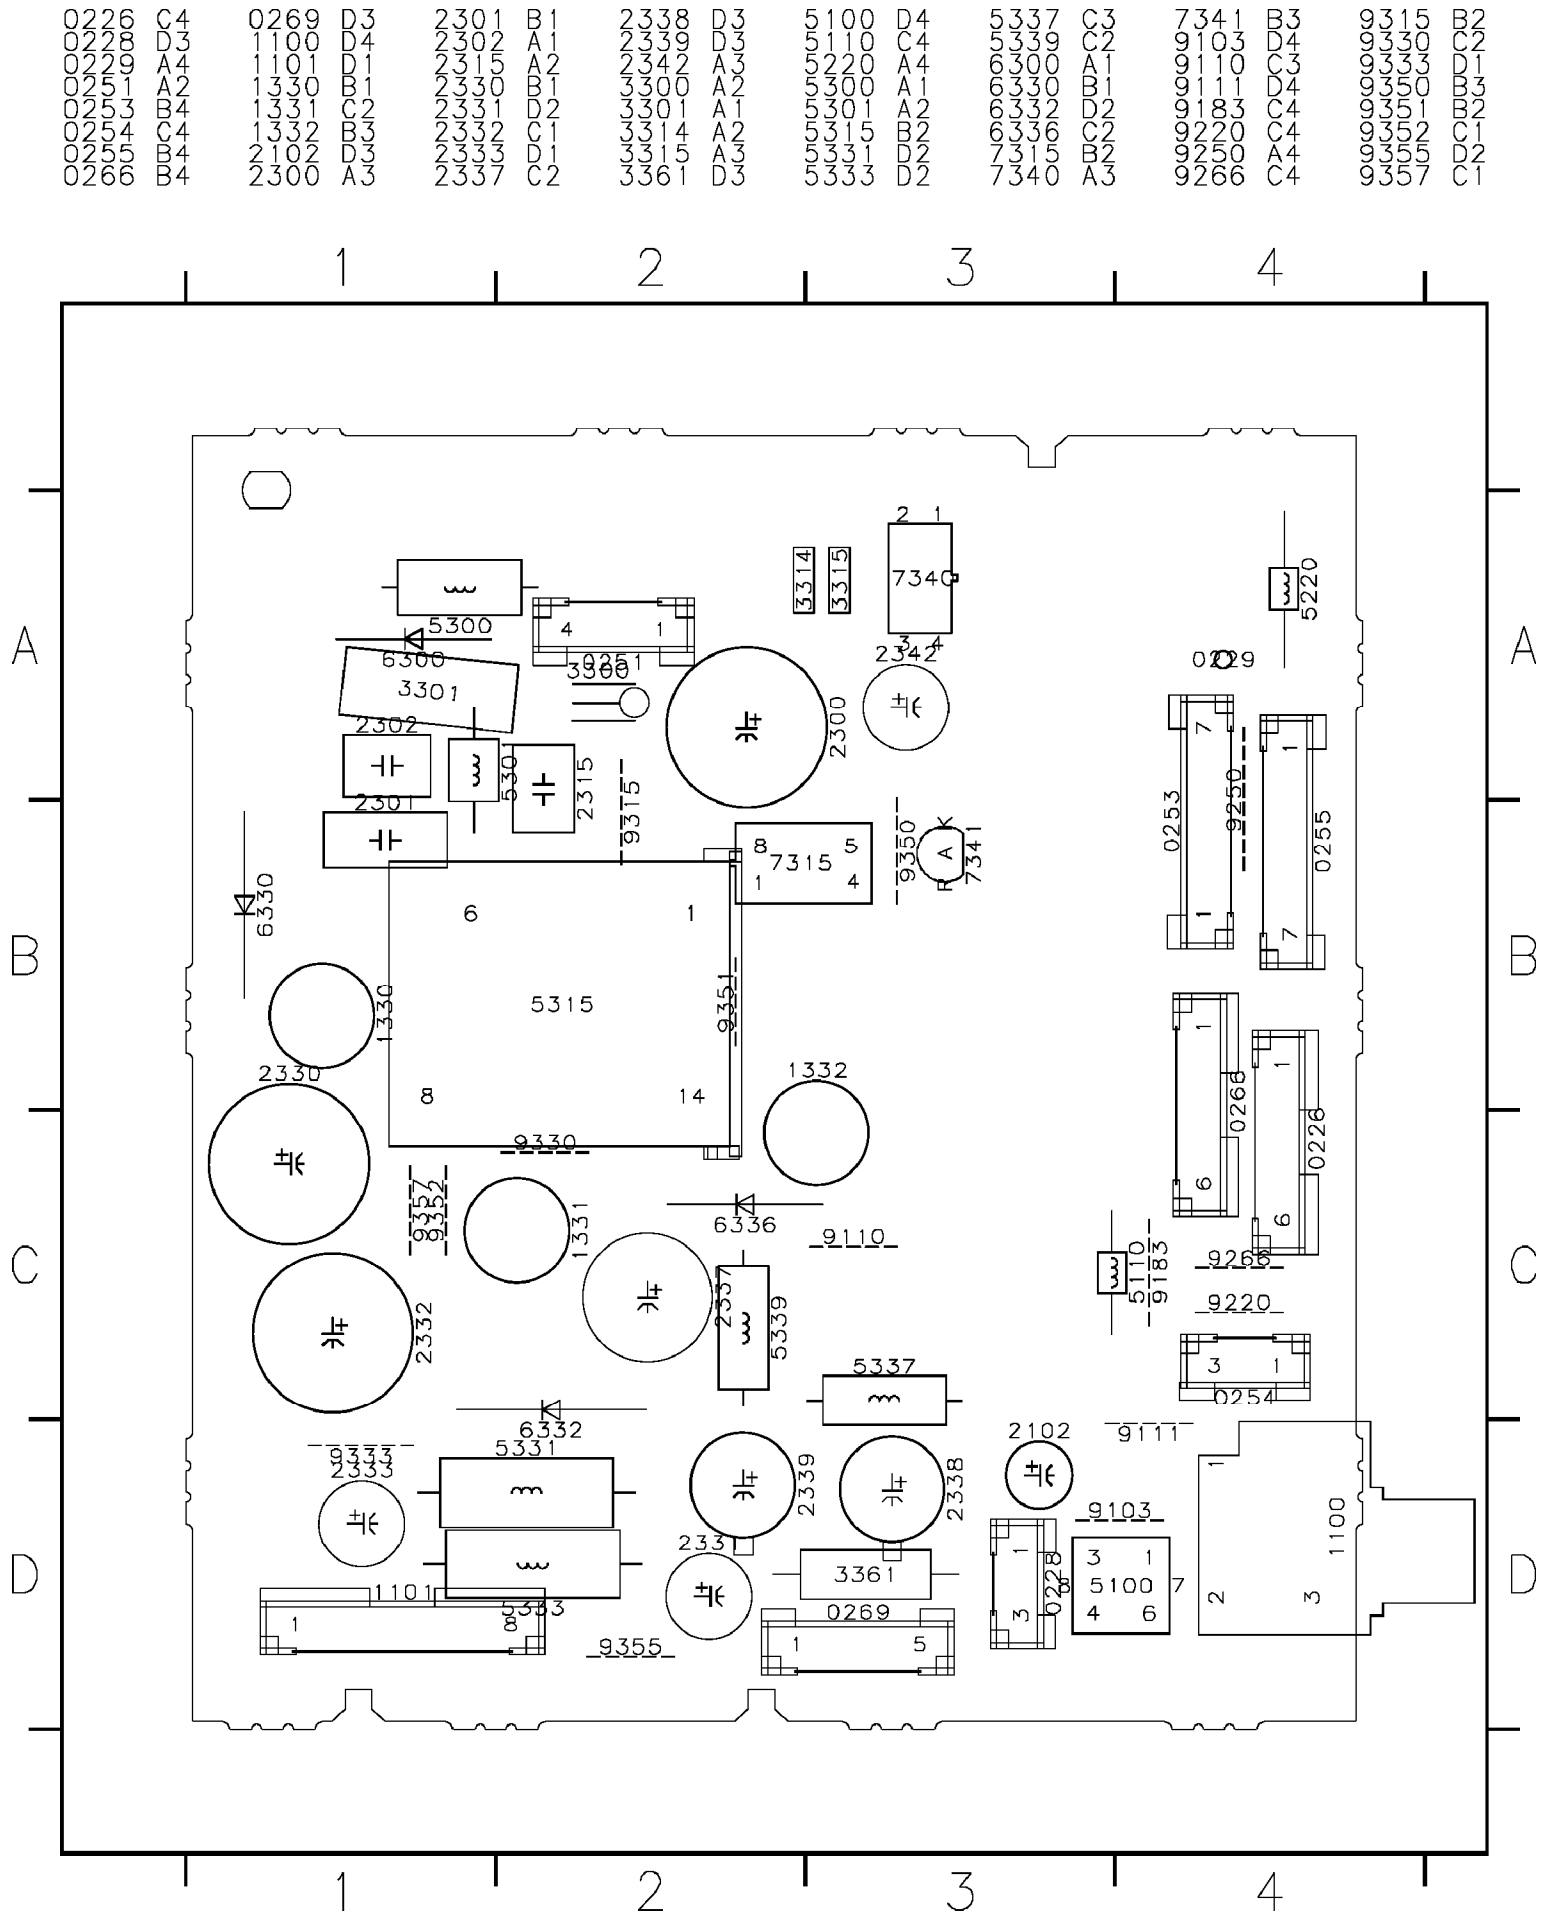



USED ONLY IN MODELS: 27DV693R37A, 30DV693R37A, , 20DV693R01, 29DV6931/85R, 29DV693R85A, 29DV693R85C (7638) - DVD Interface Panel, SD5.12 DVD Module (Copper Side)

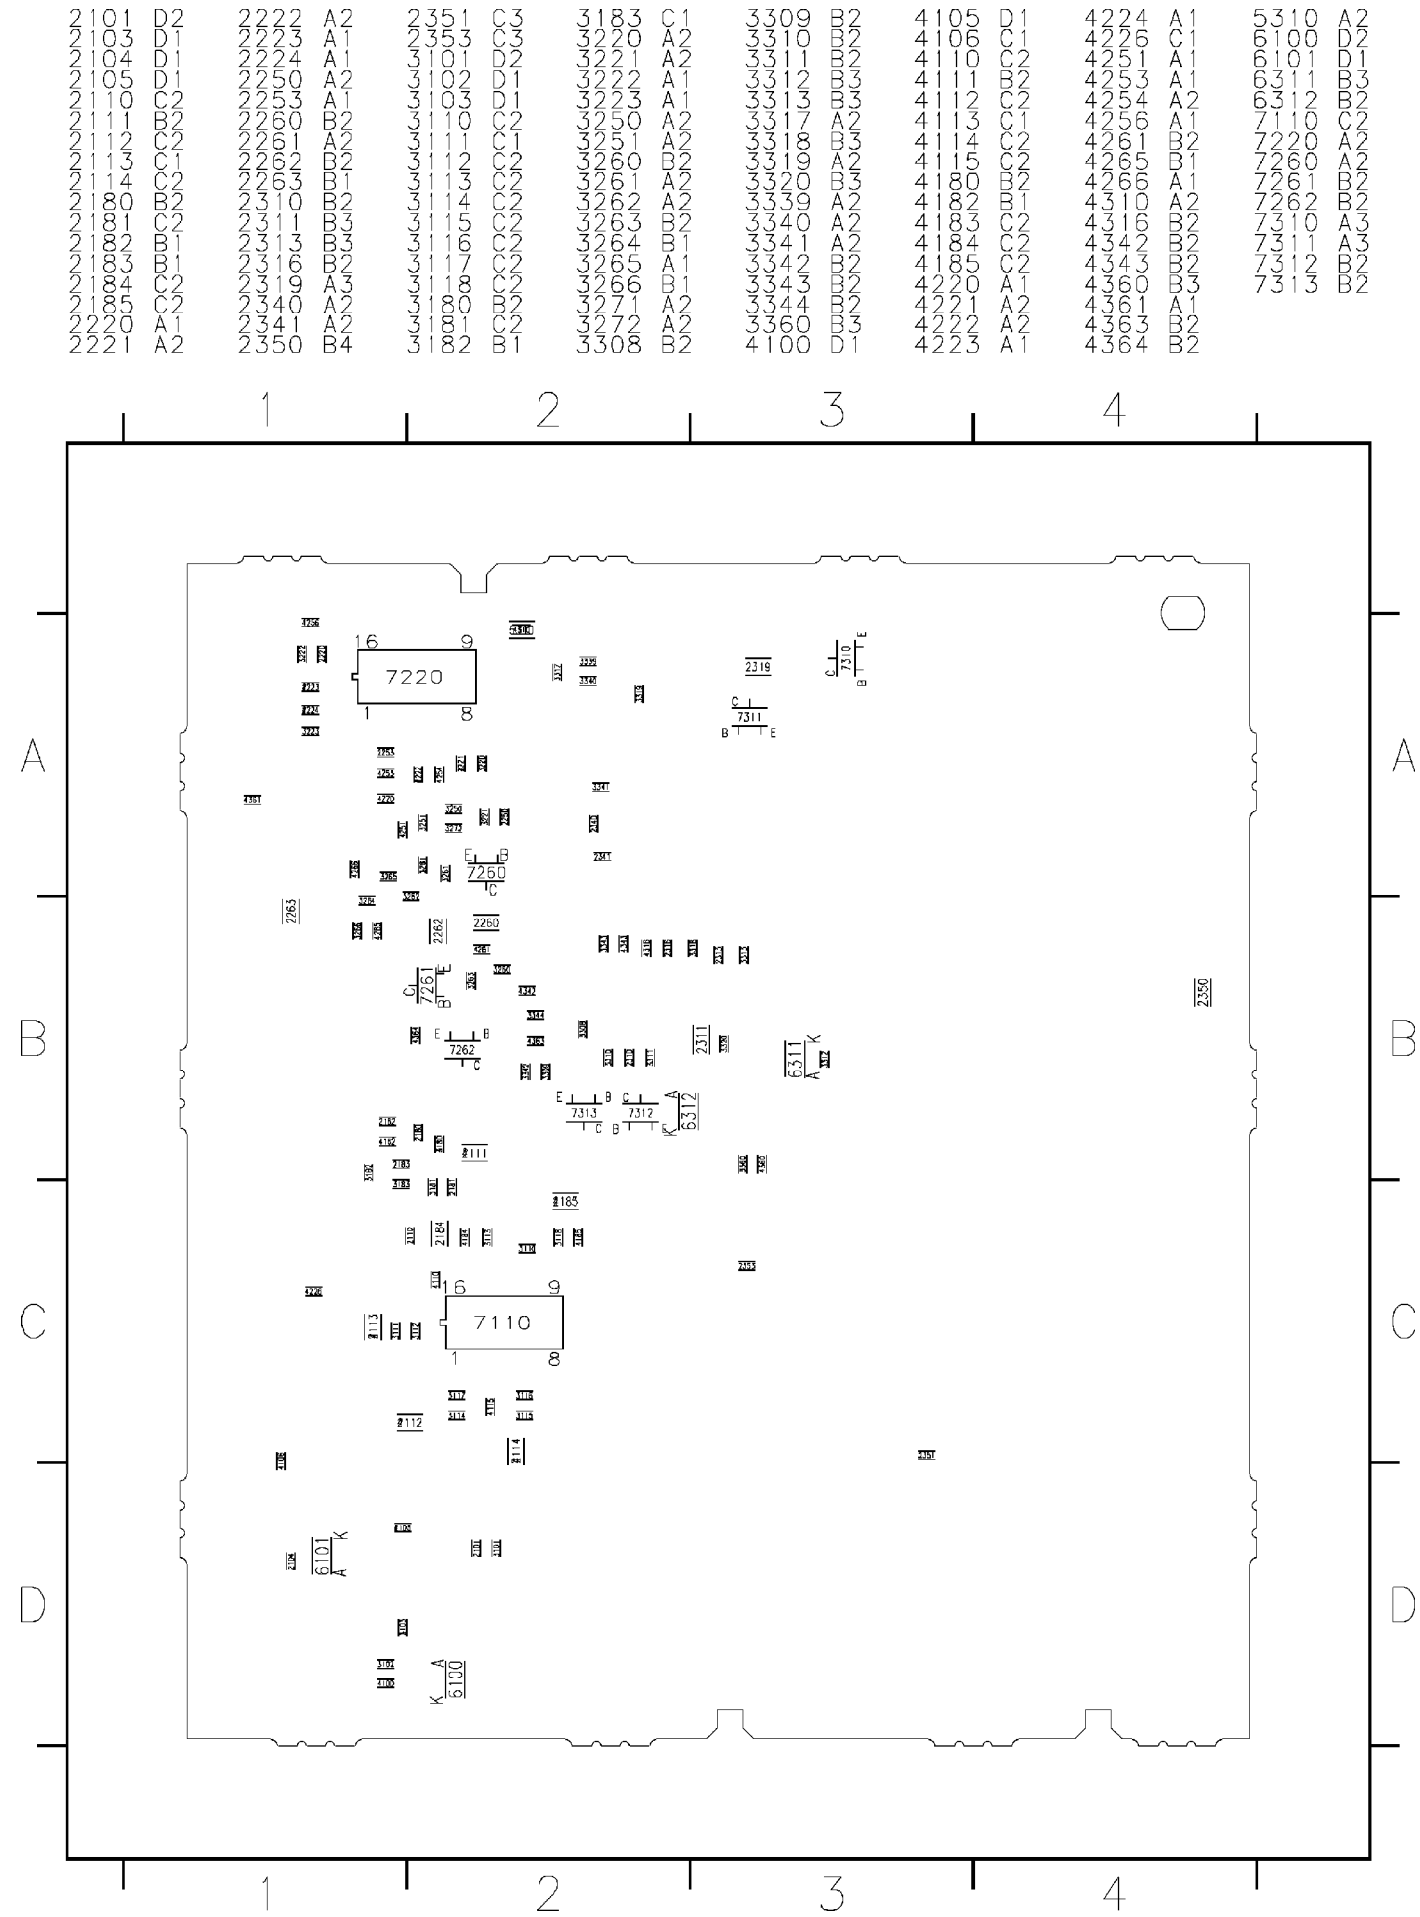


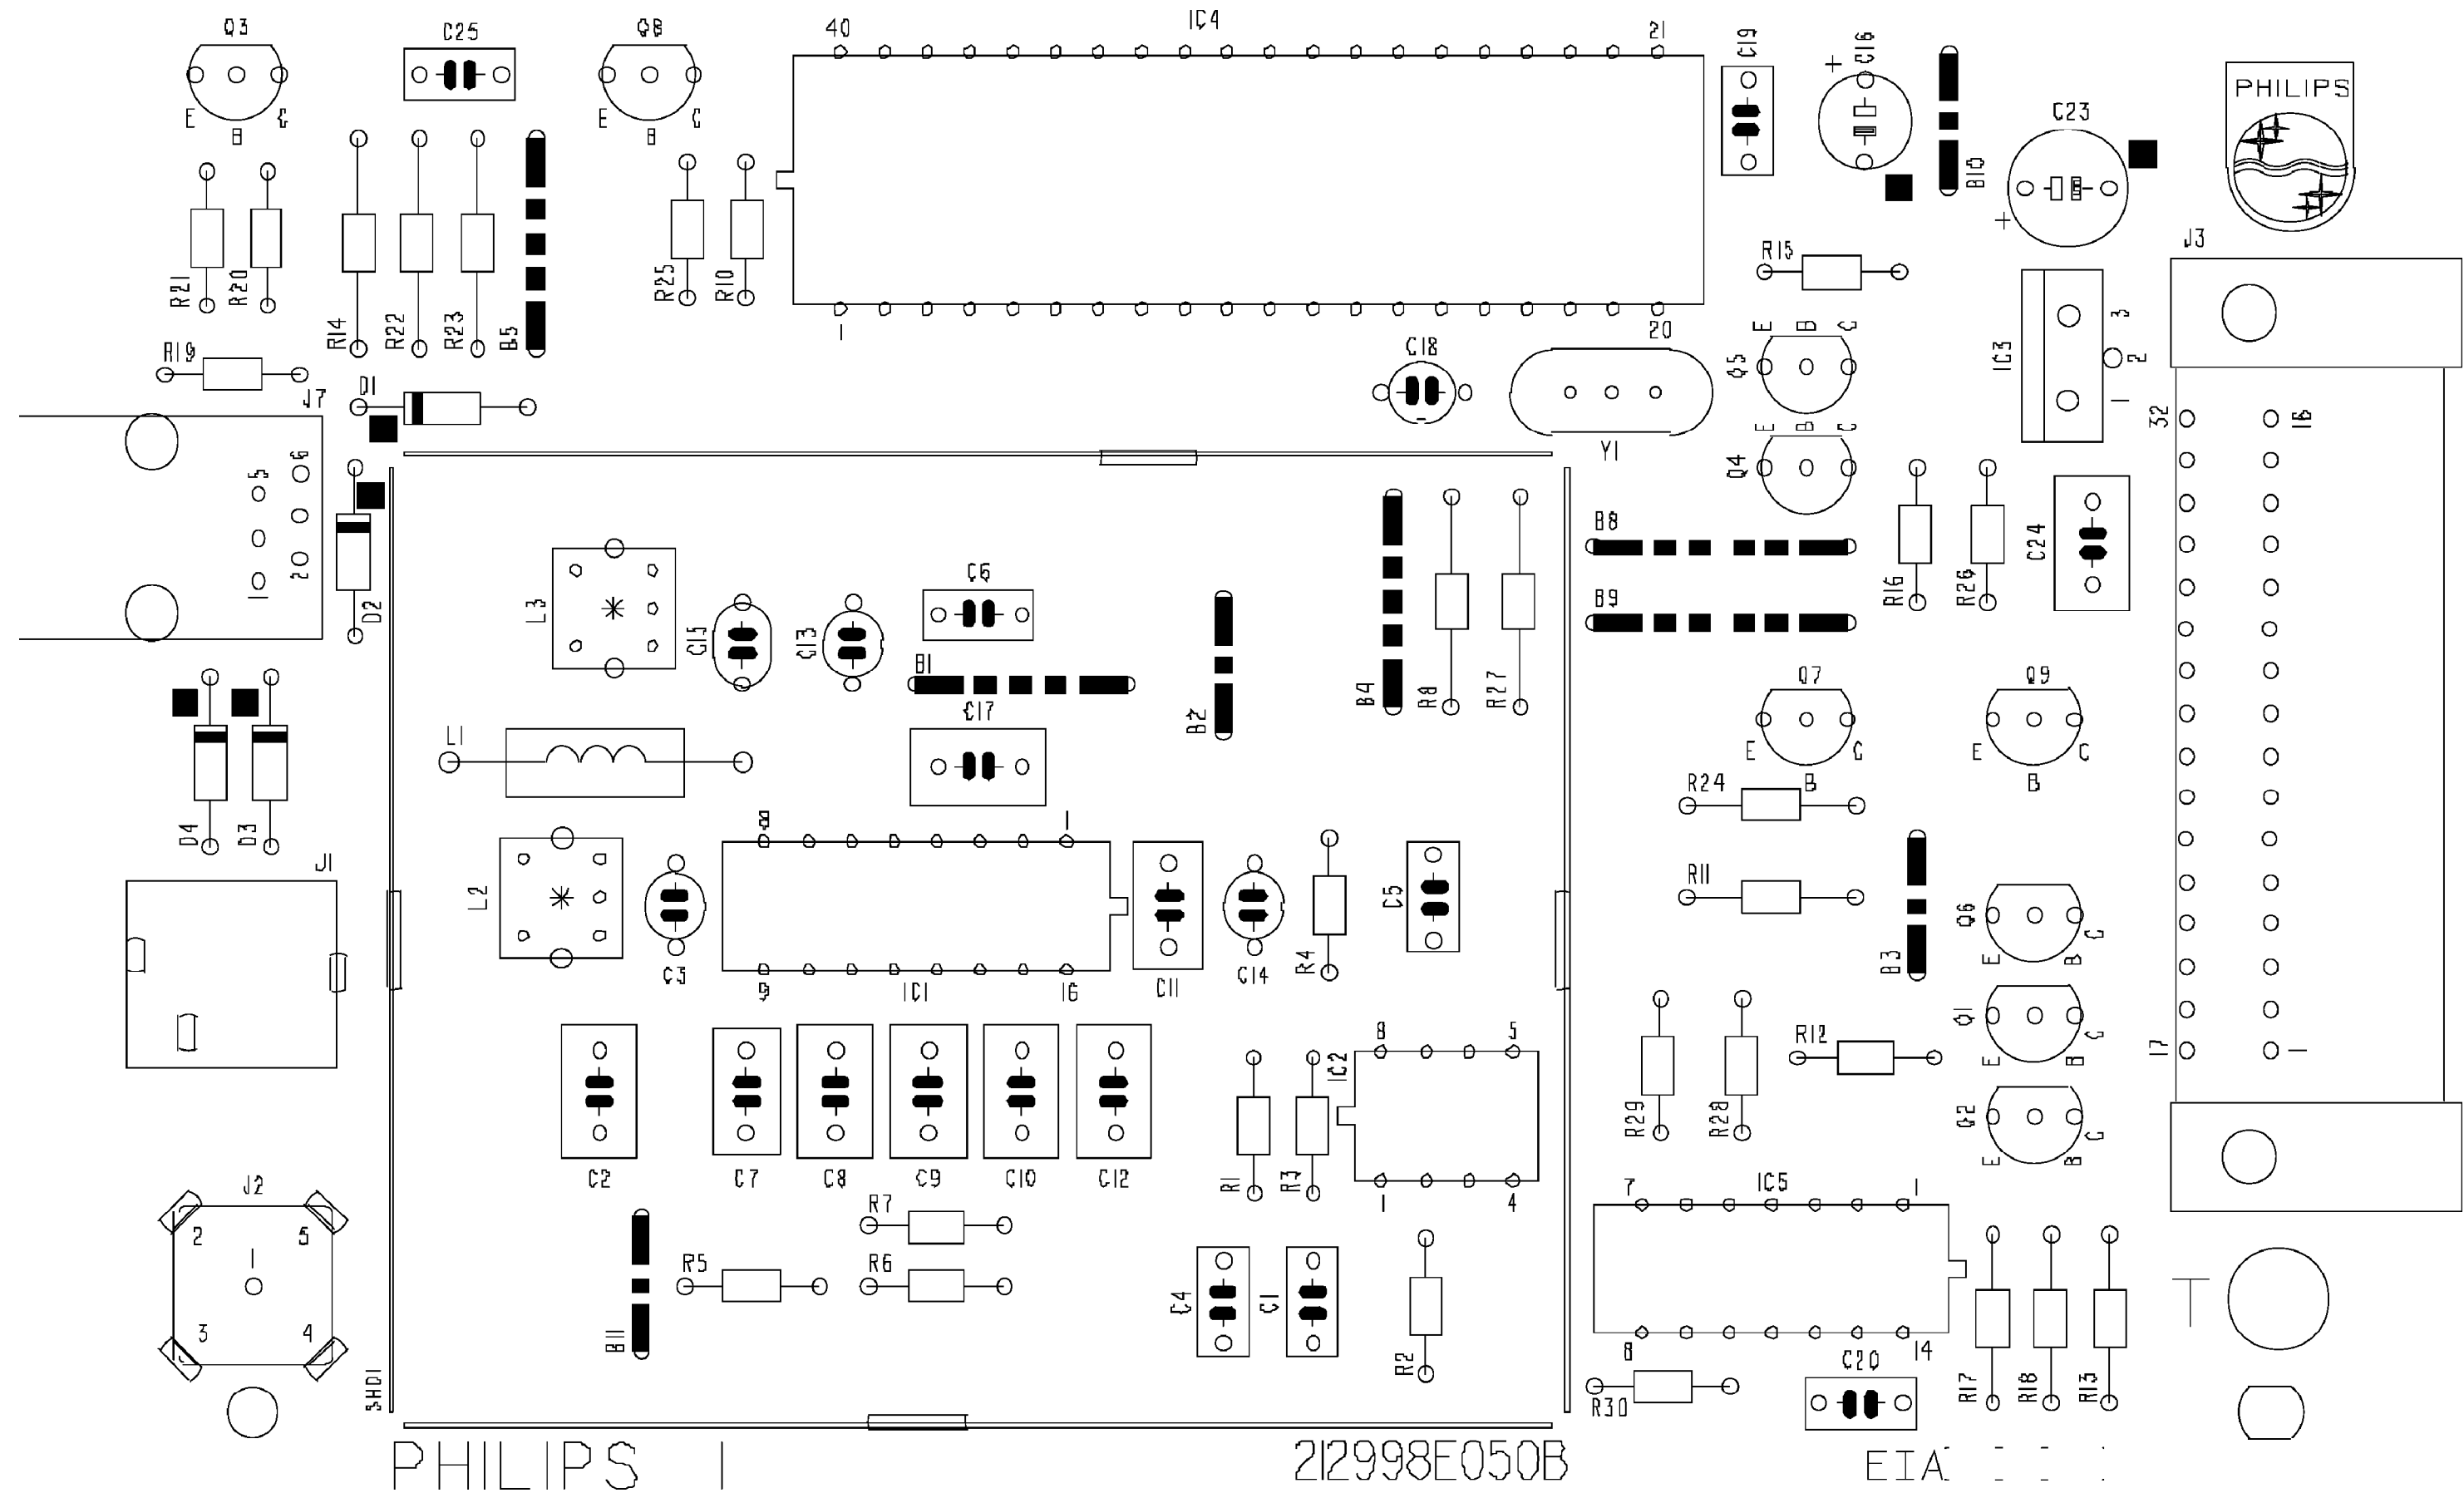

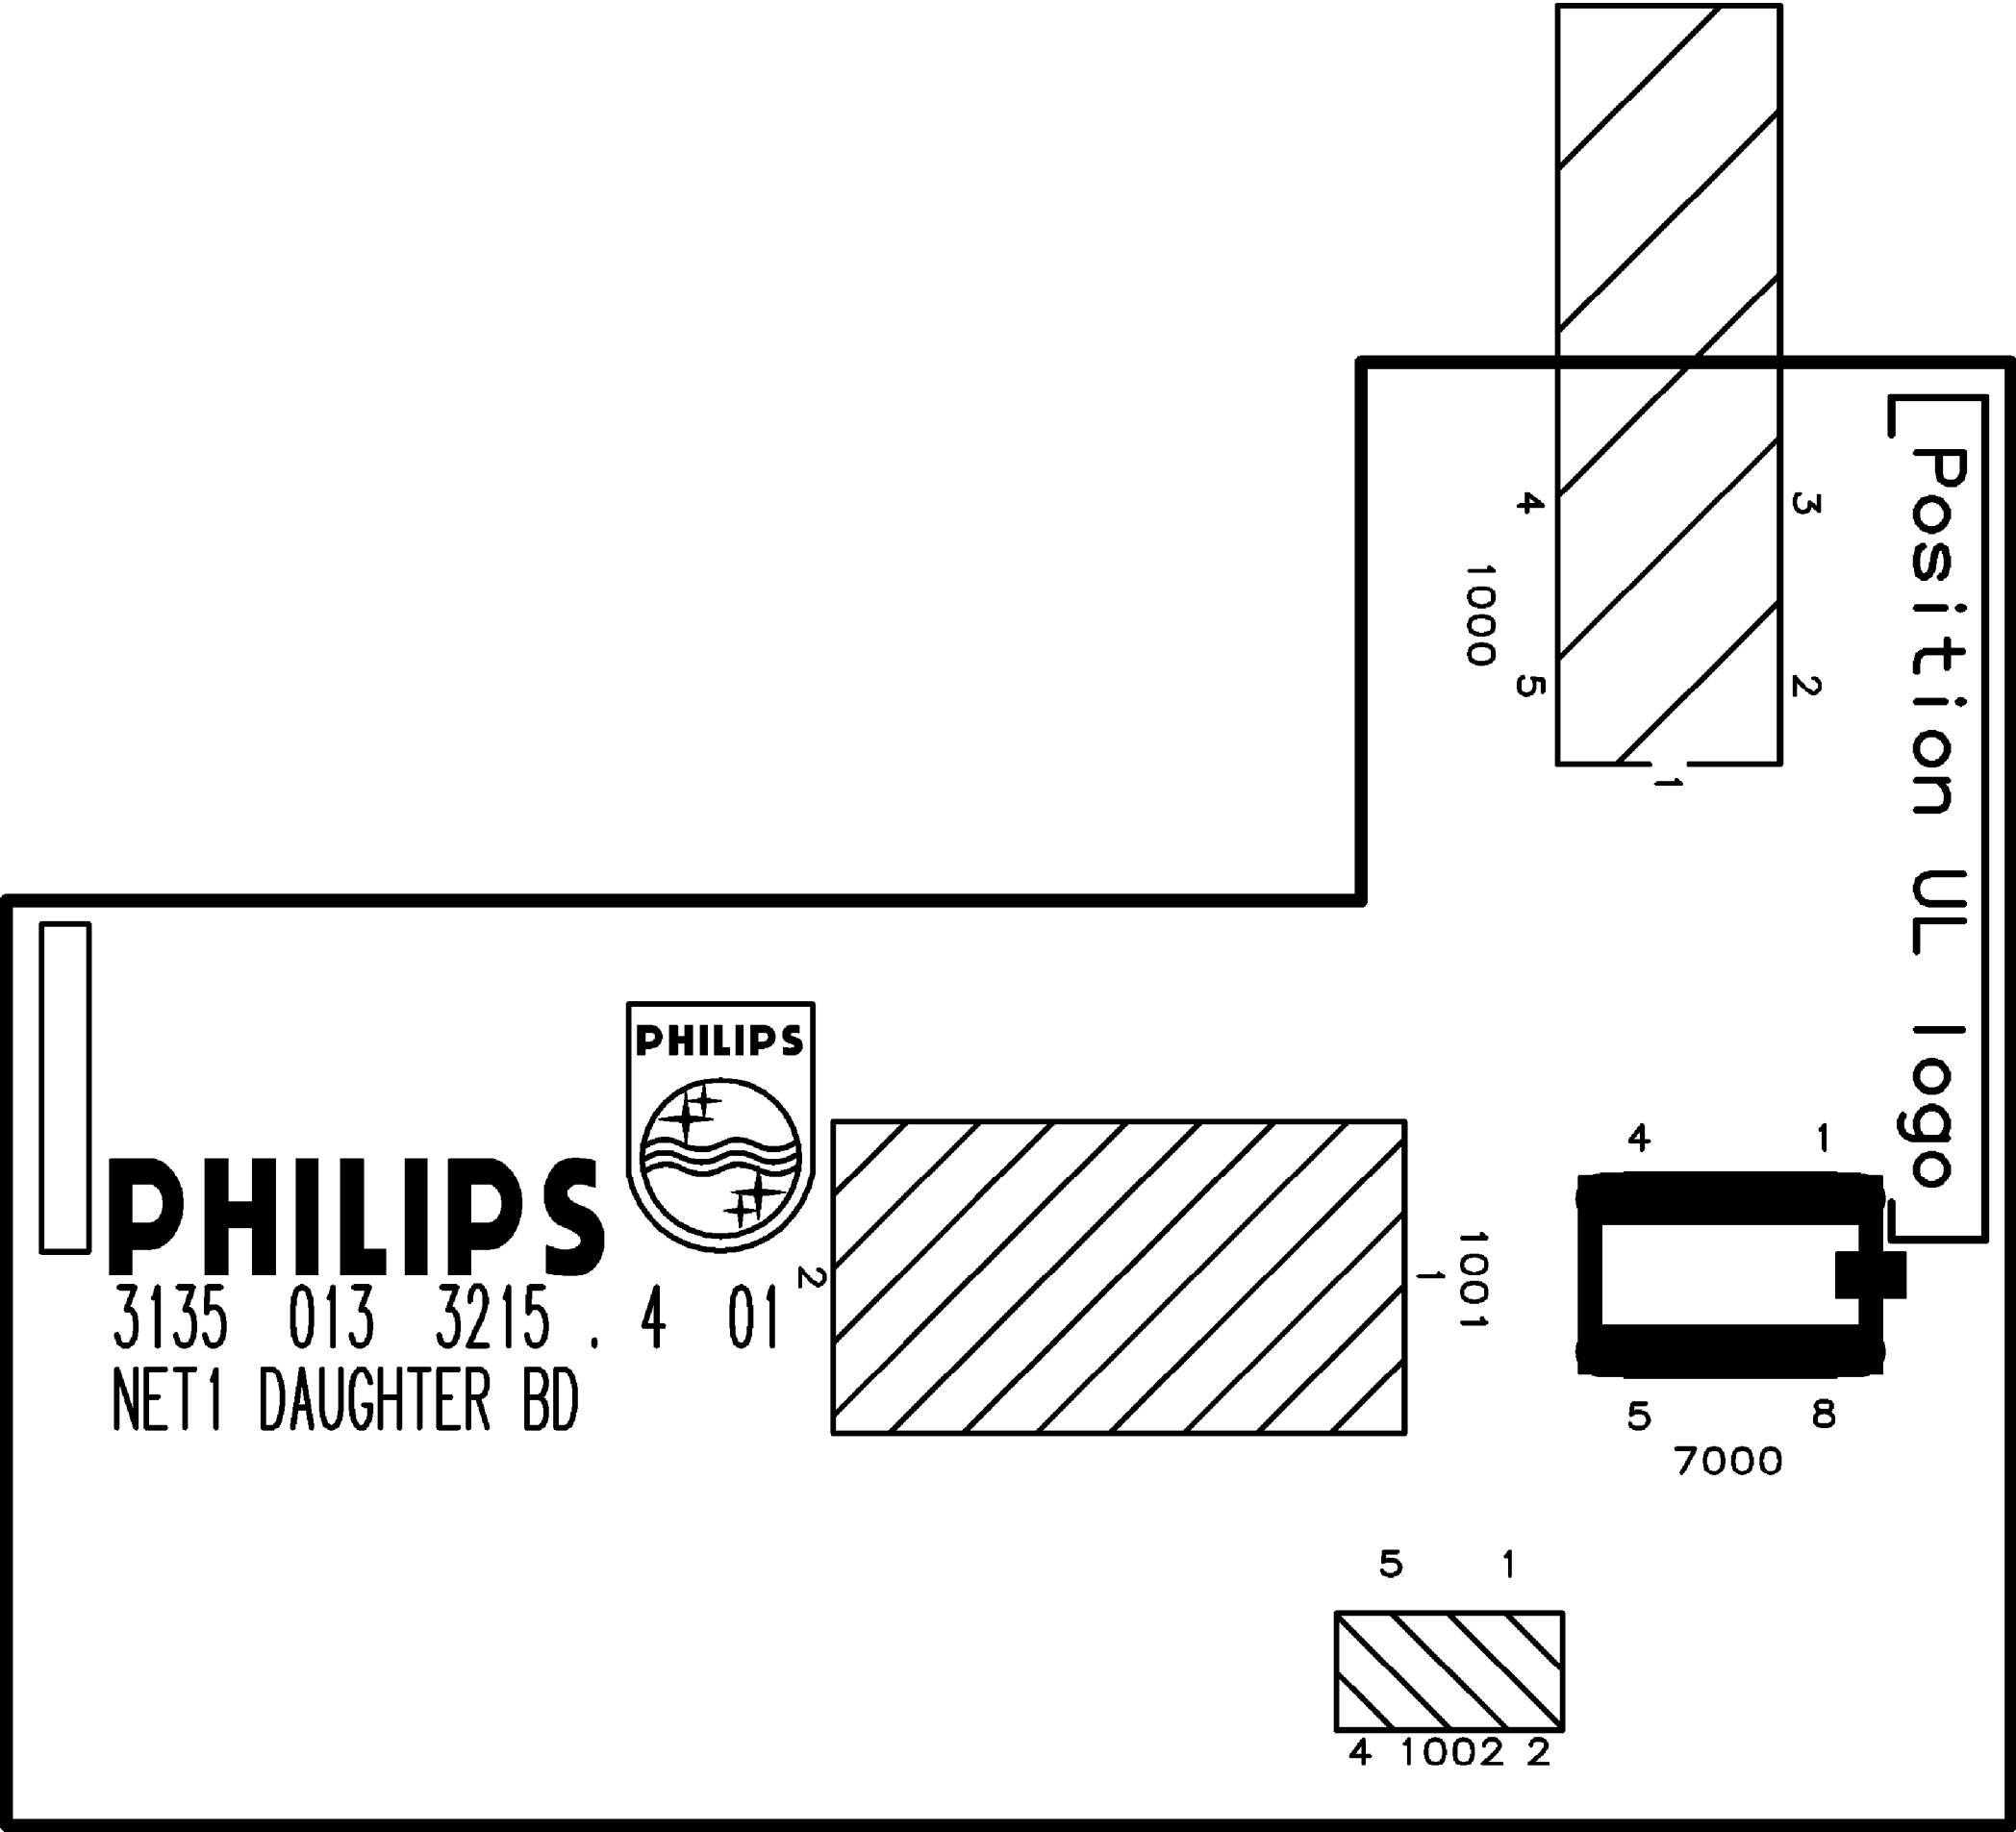


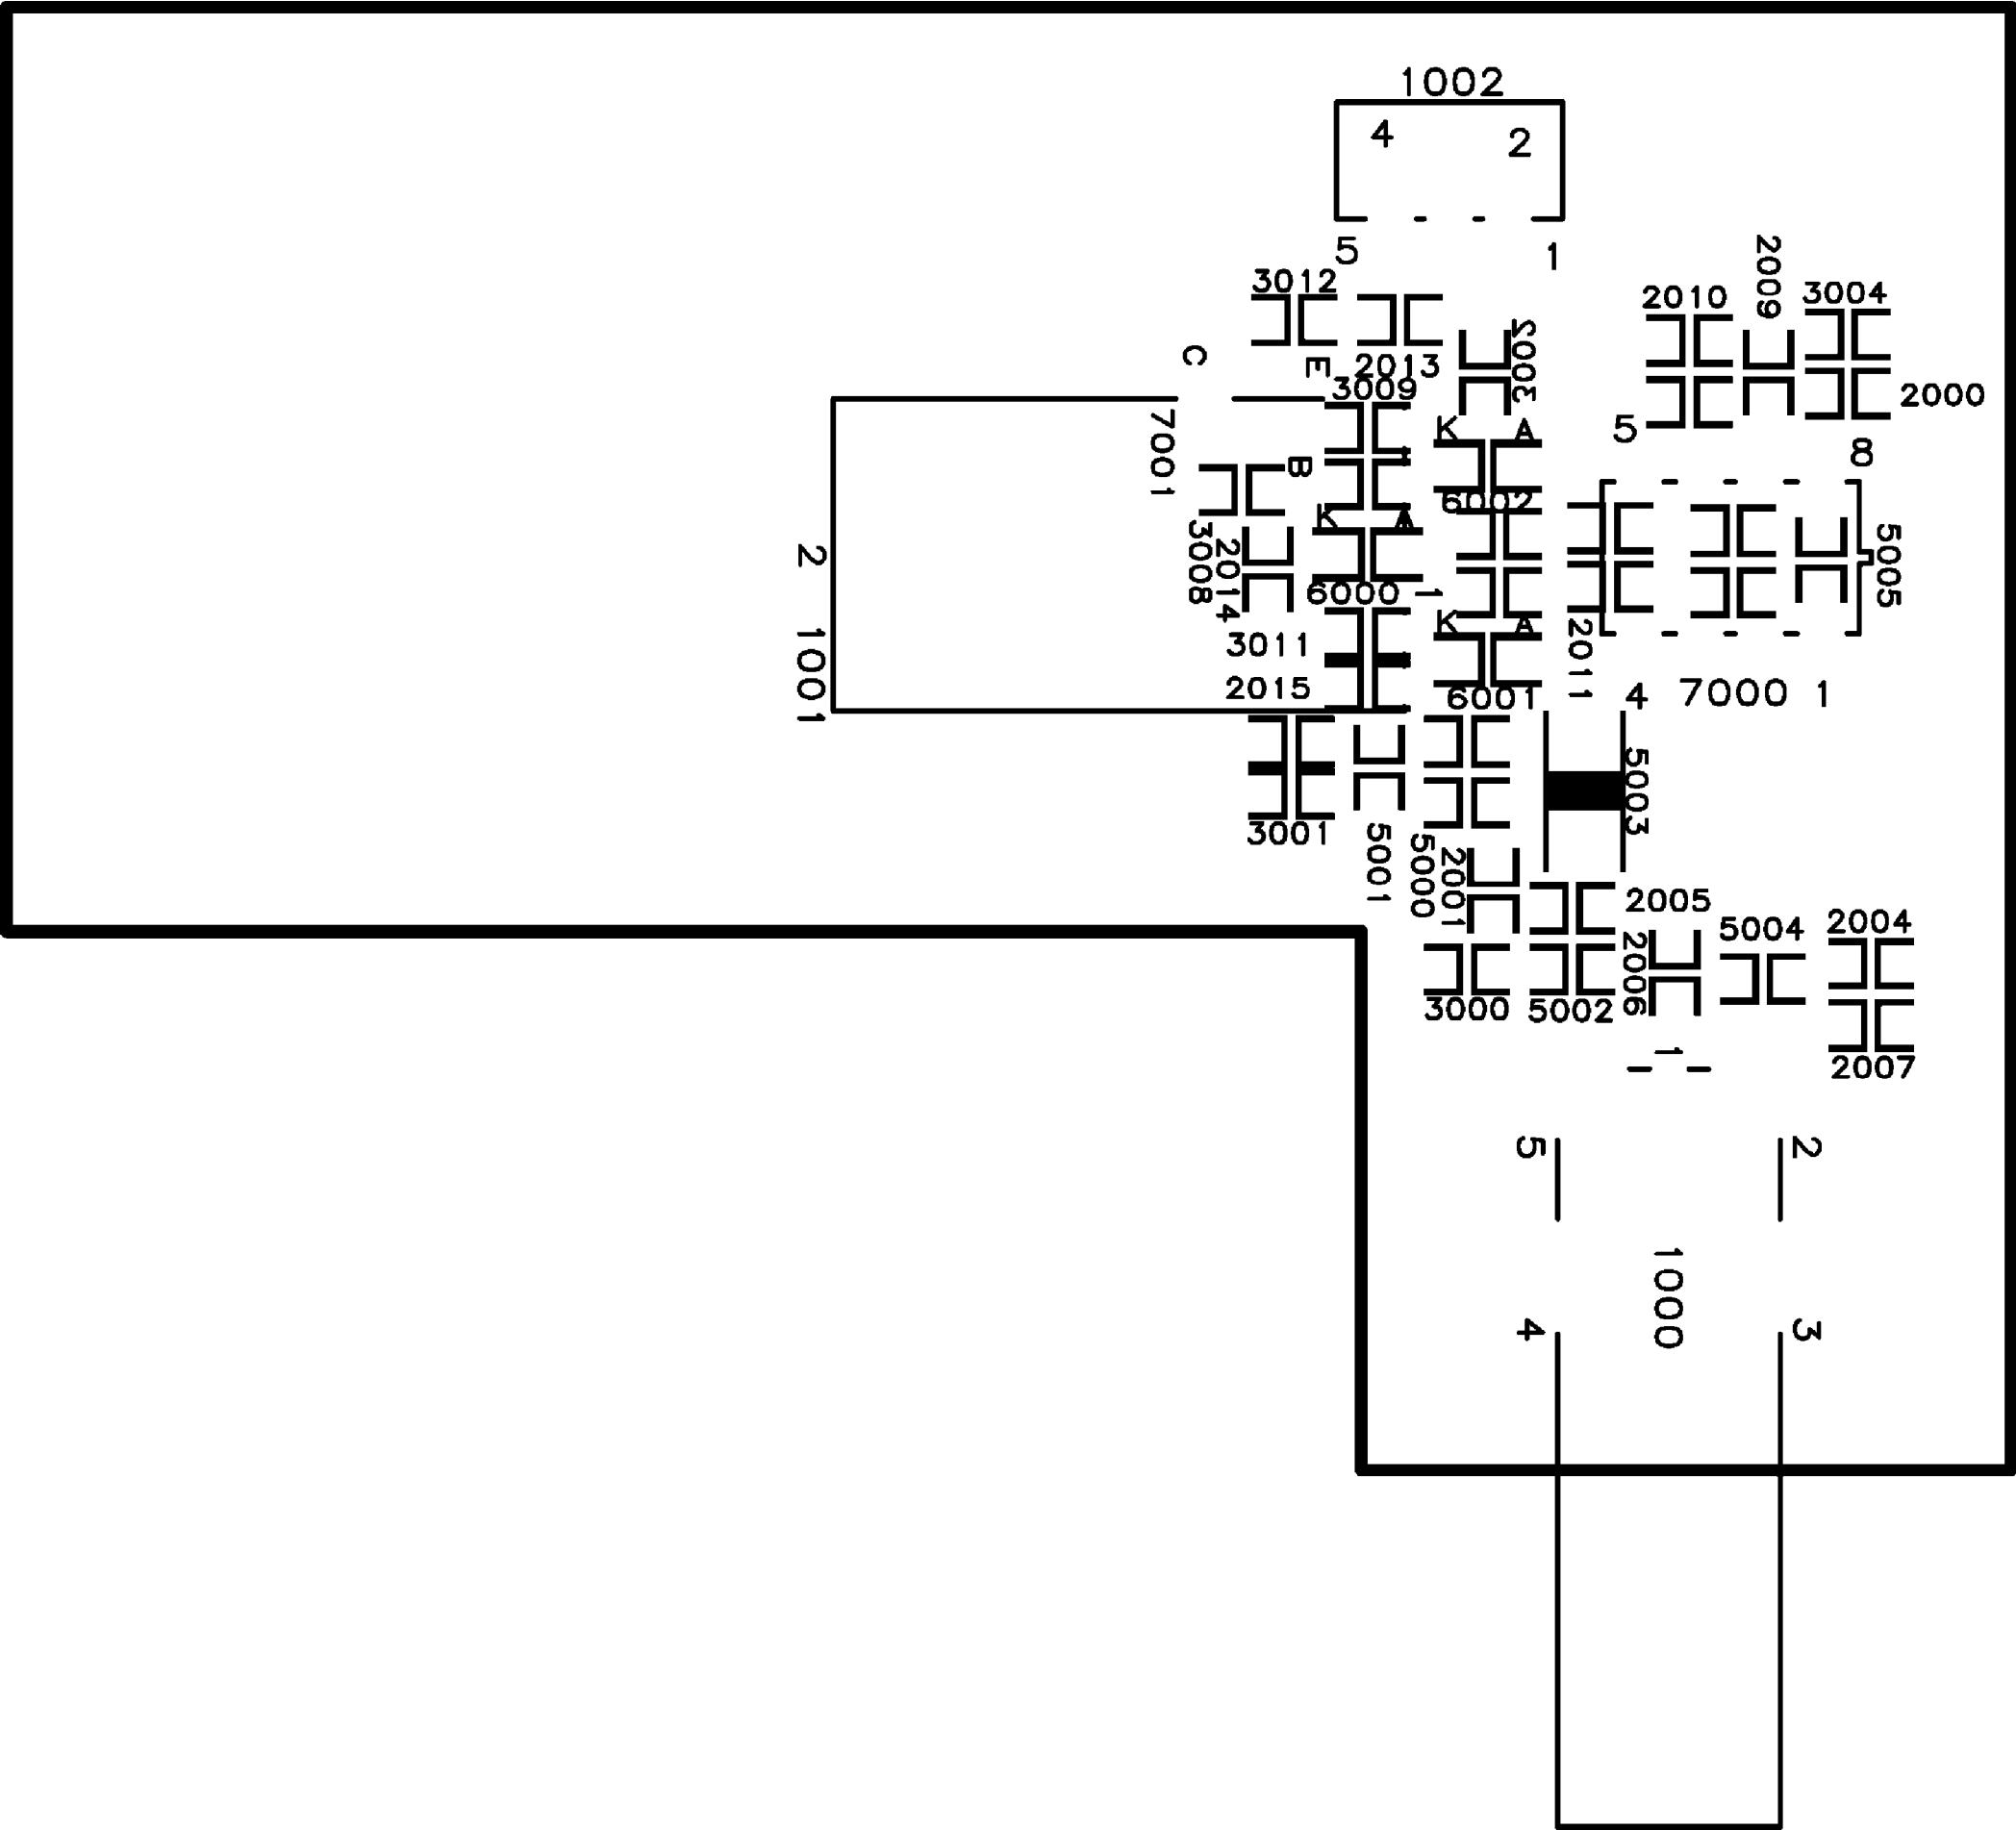


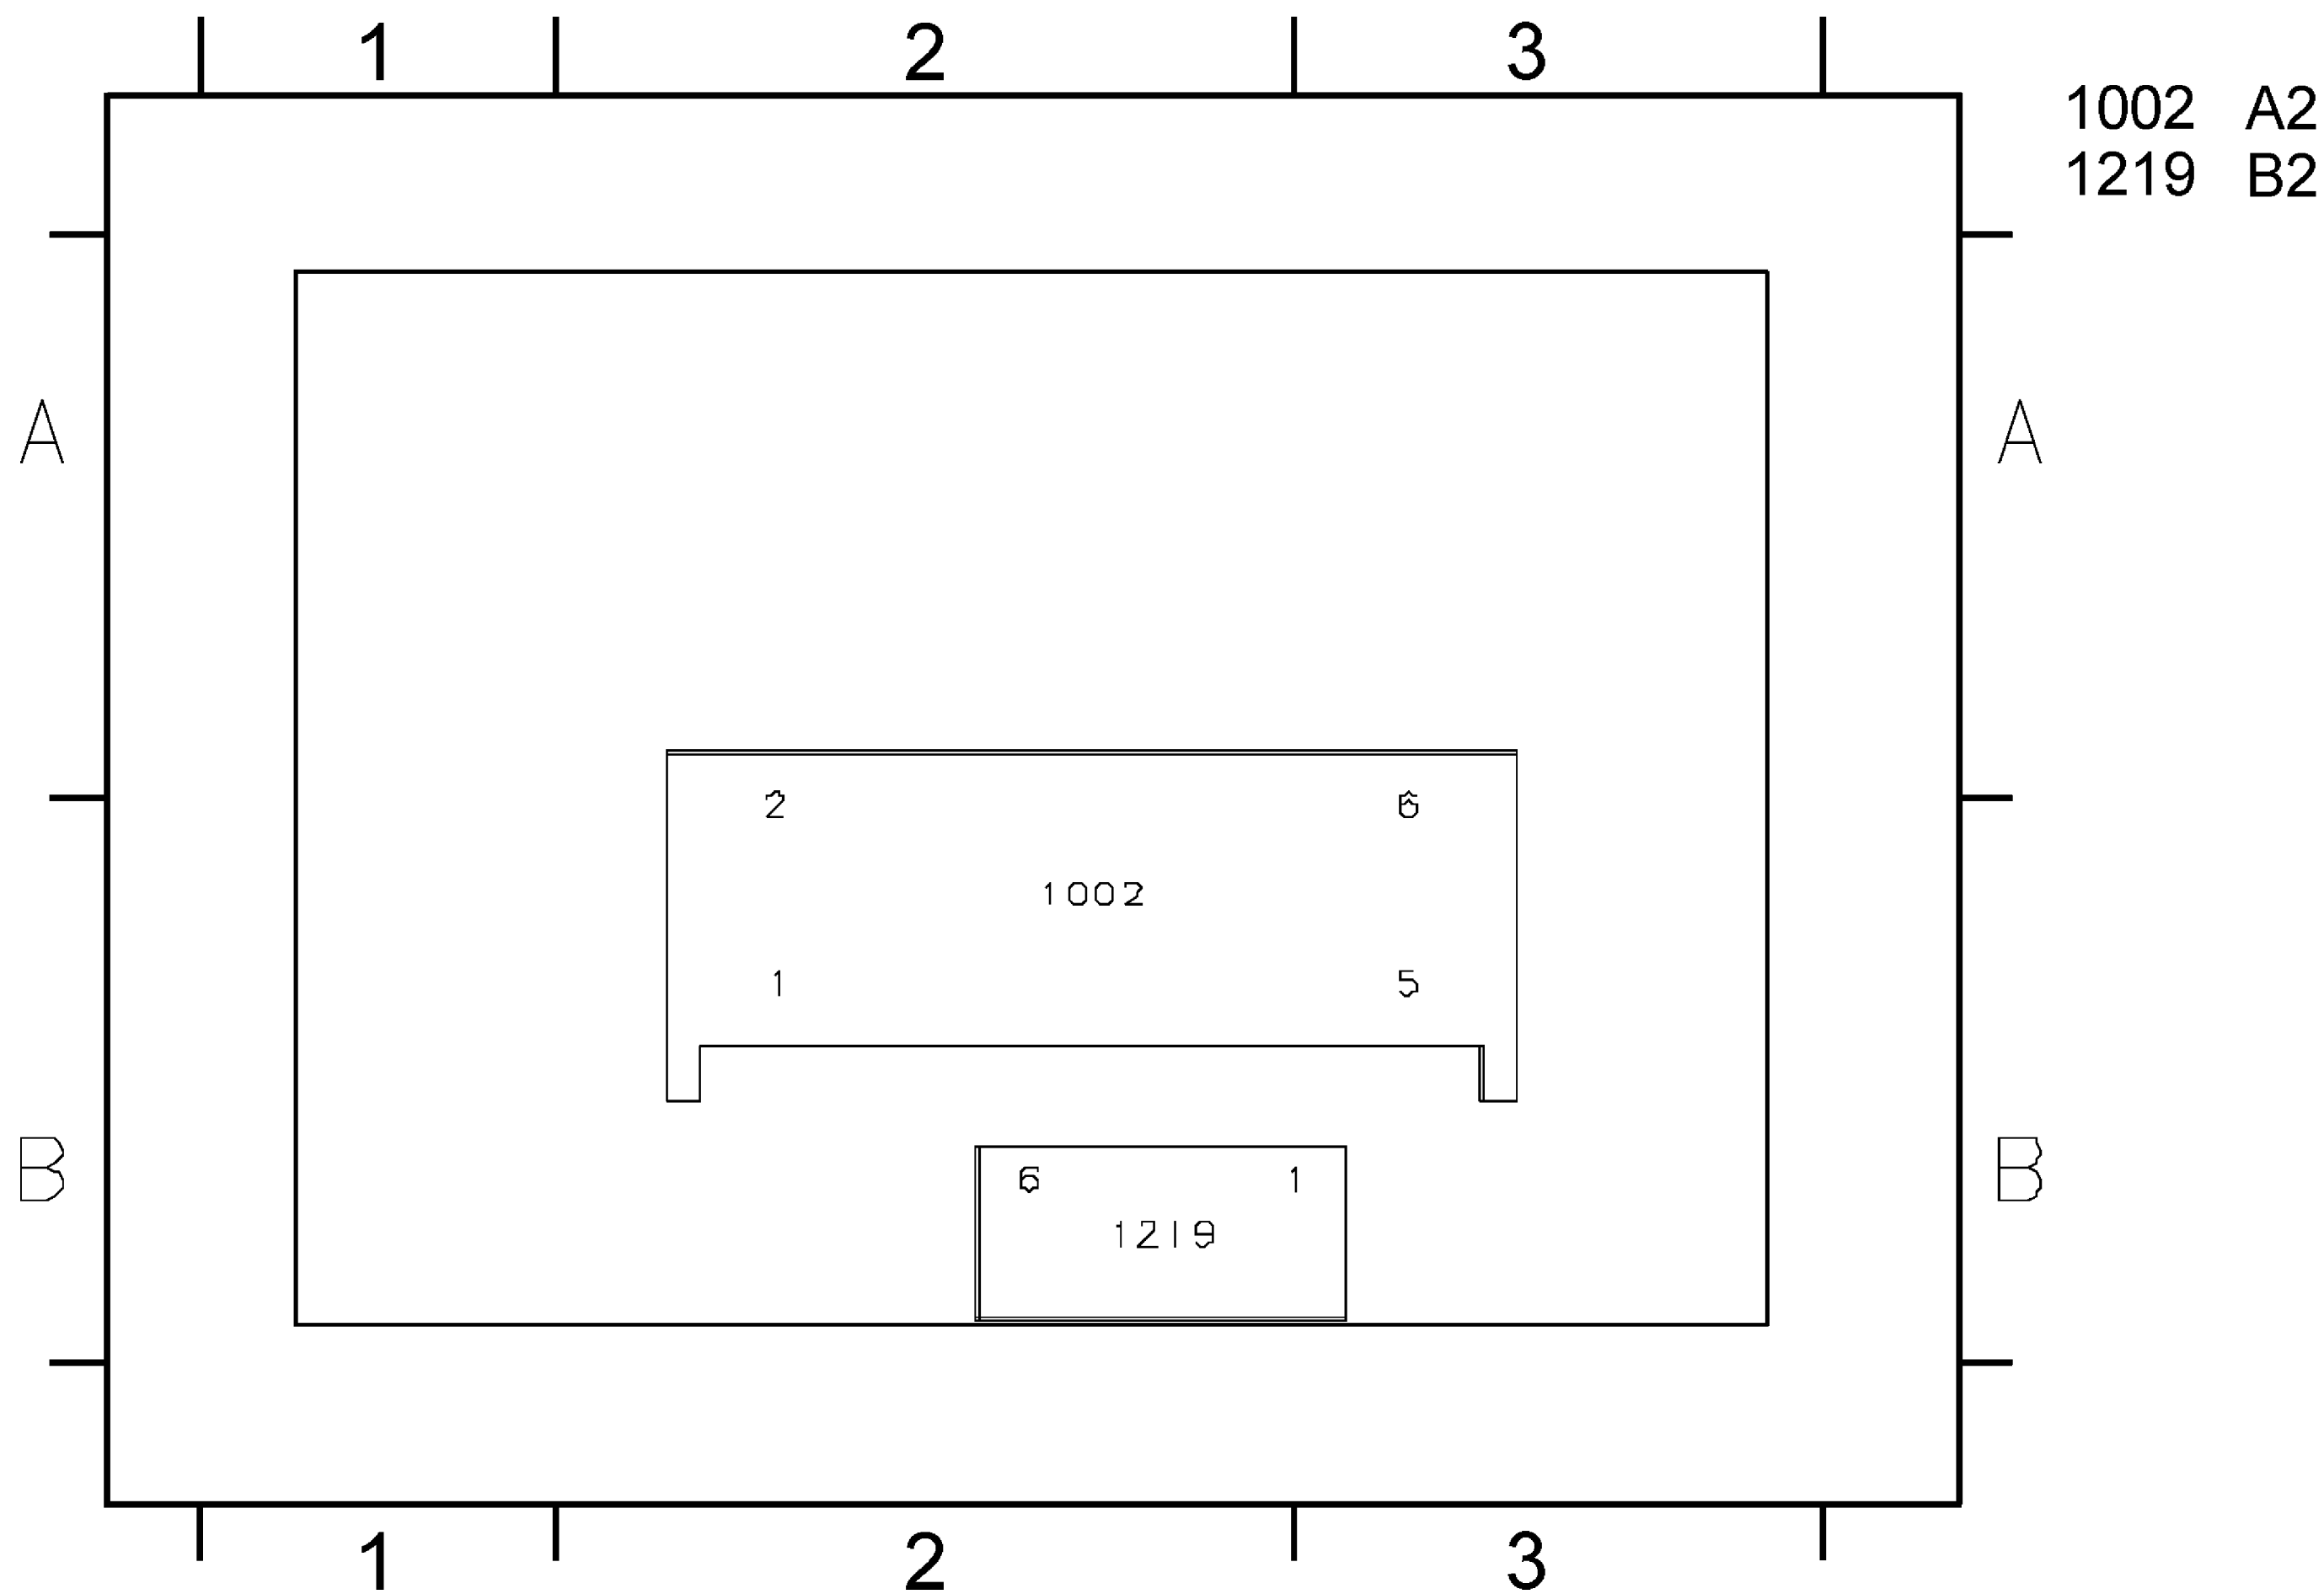


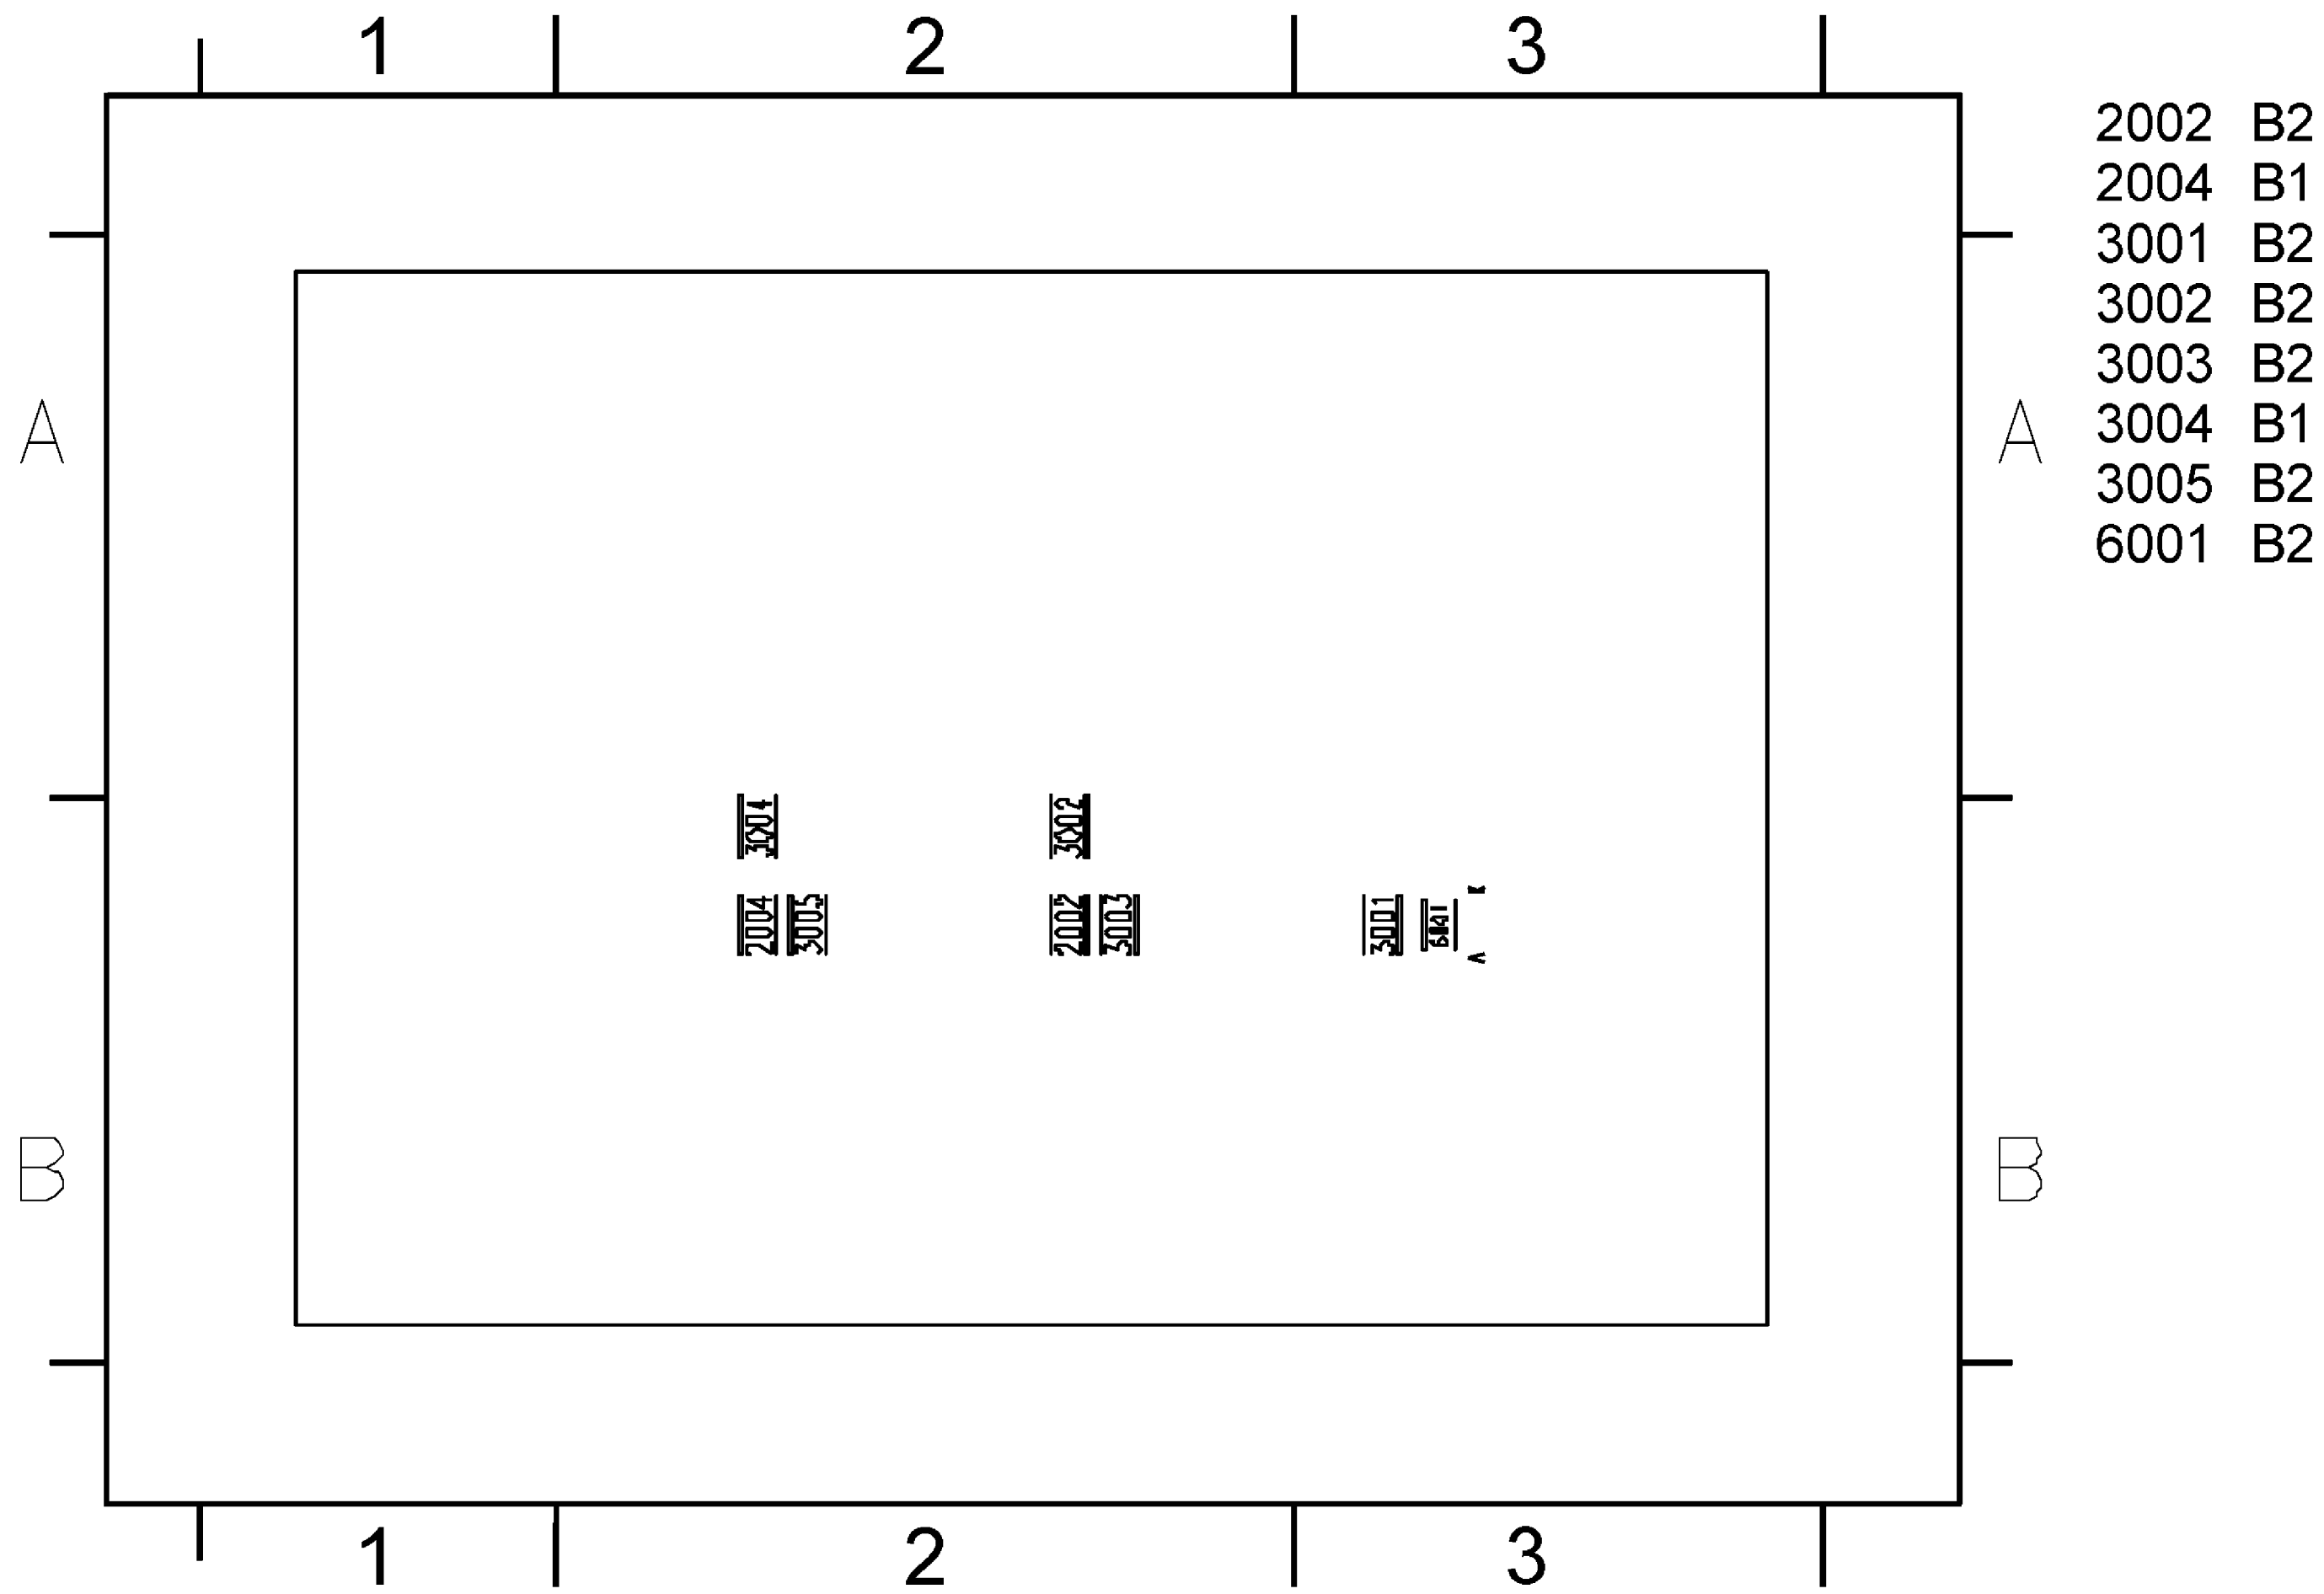


| Pin | Description |
|-----|--------------|
| 1 | +5 V Output |
| 2 | Ground |
| 3 | +12 V Output |

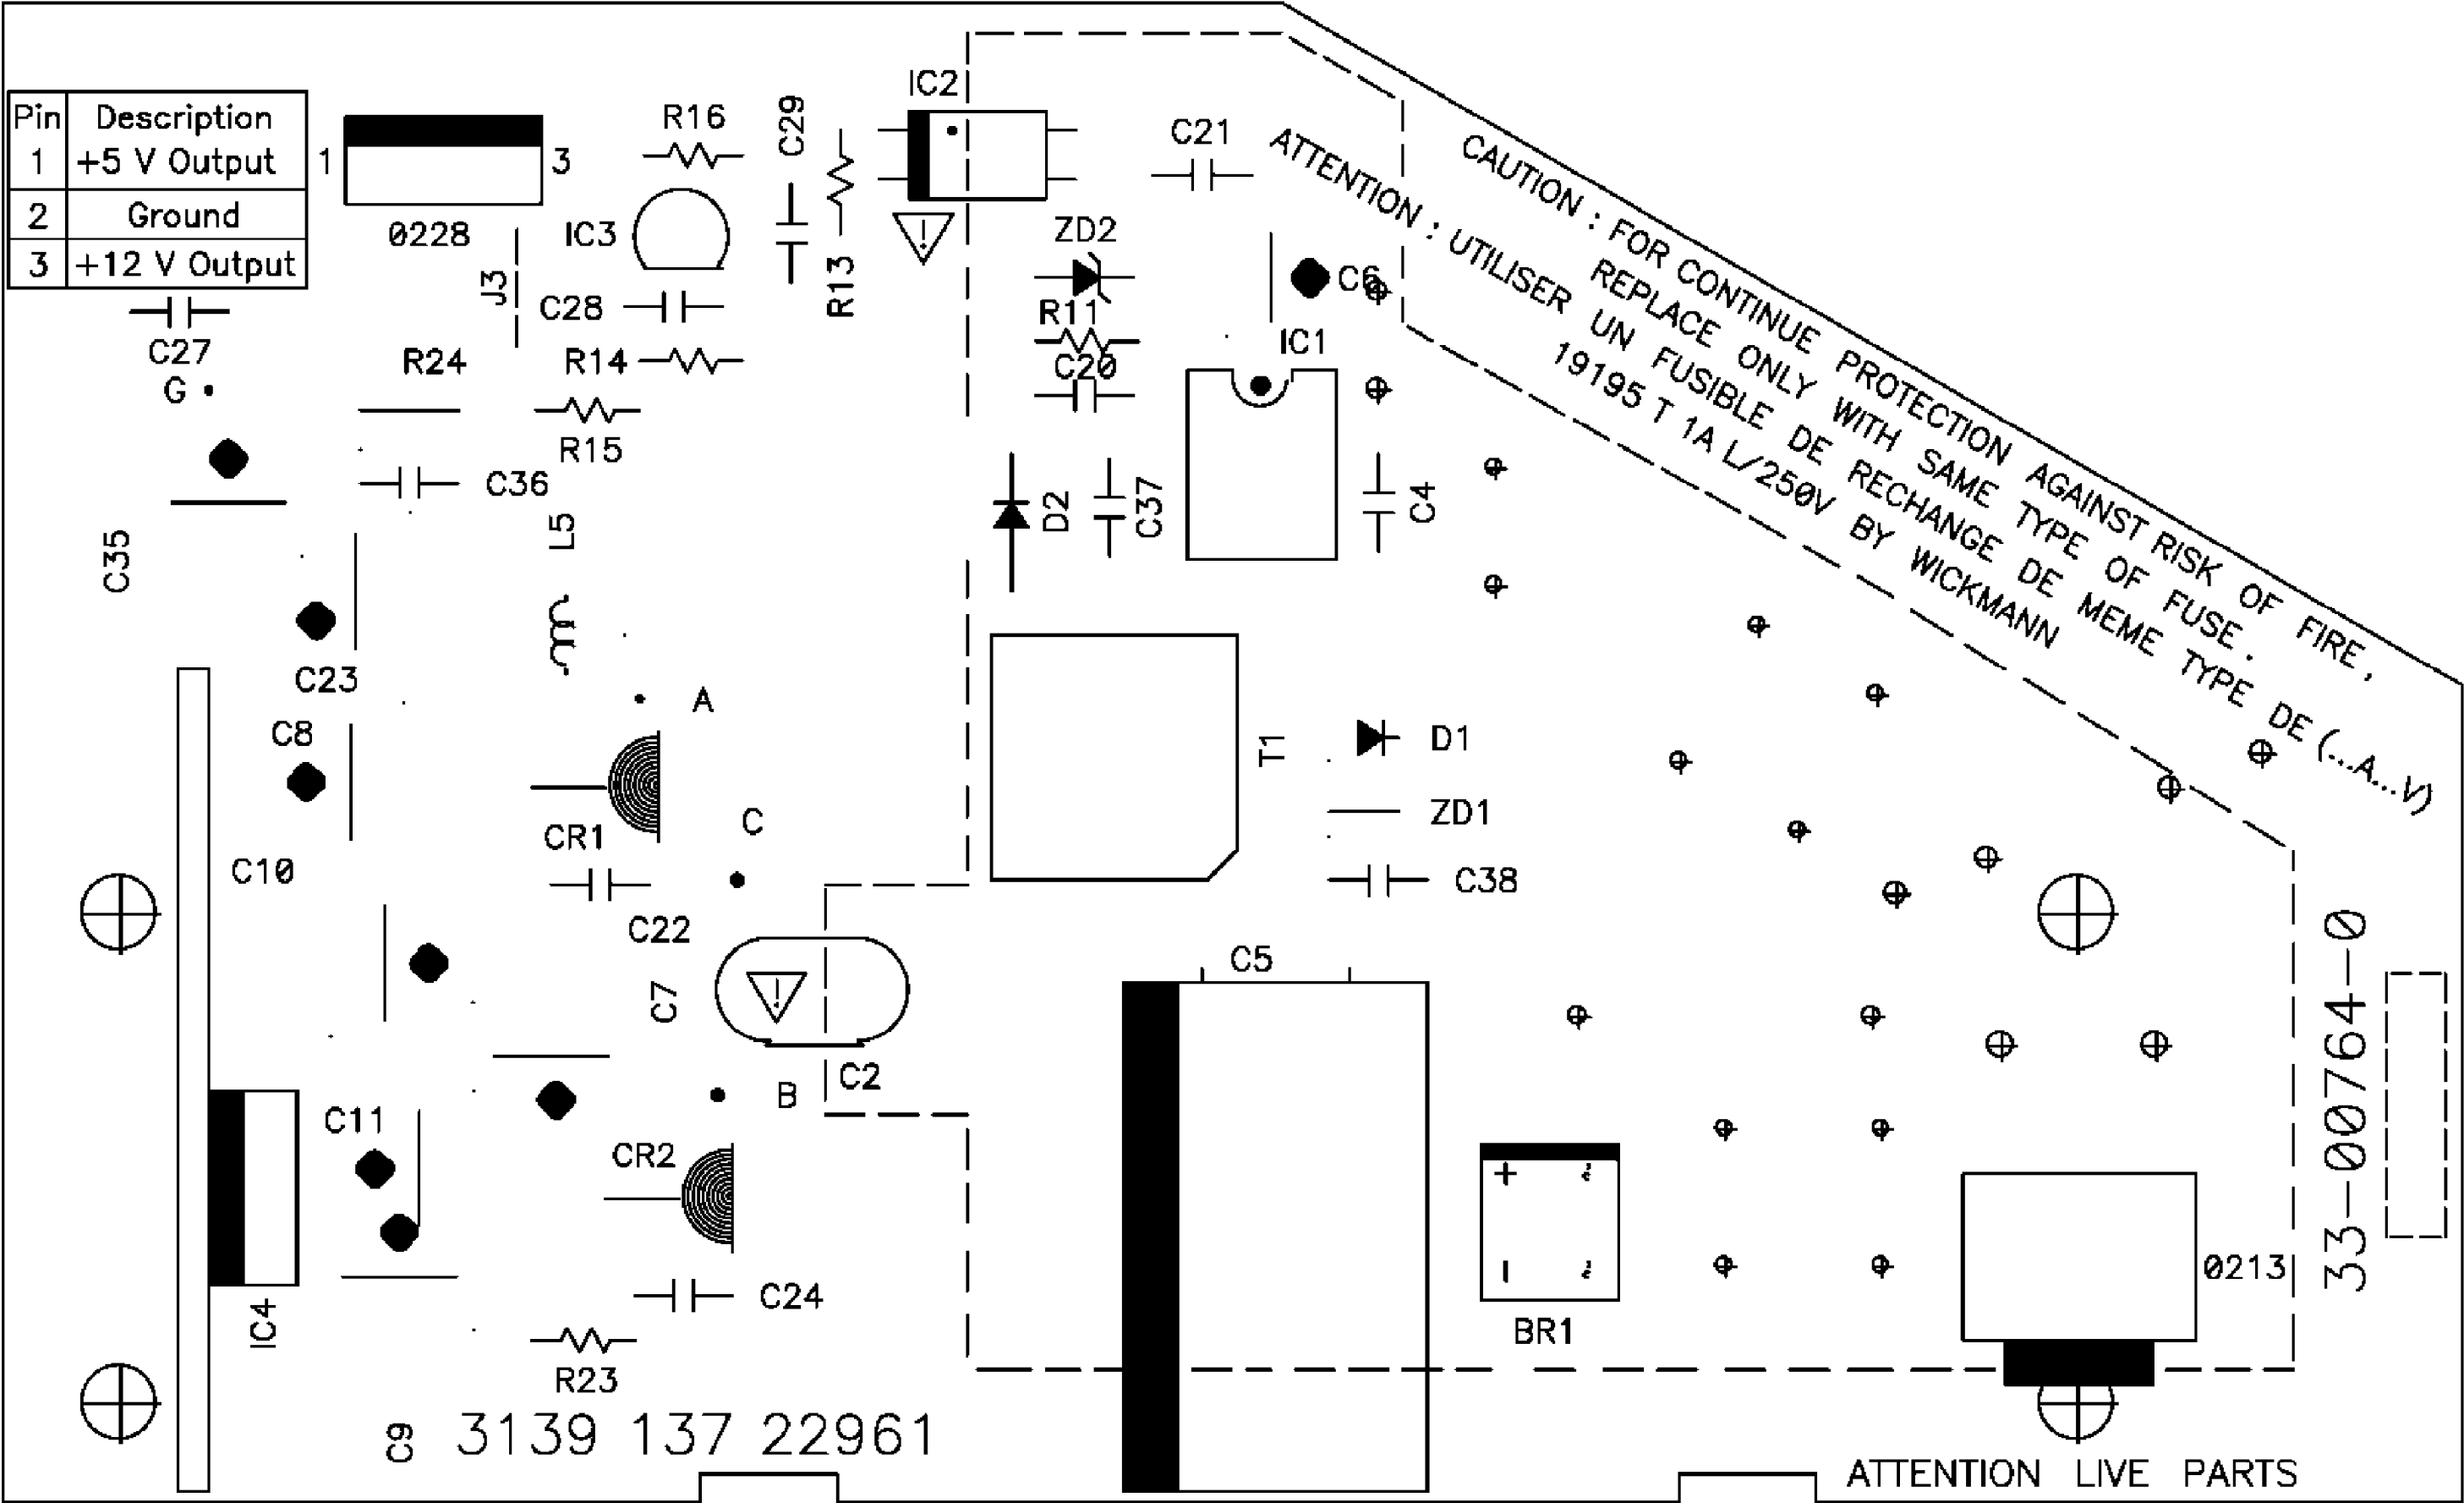

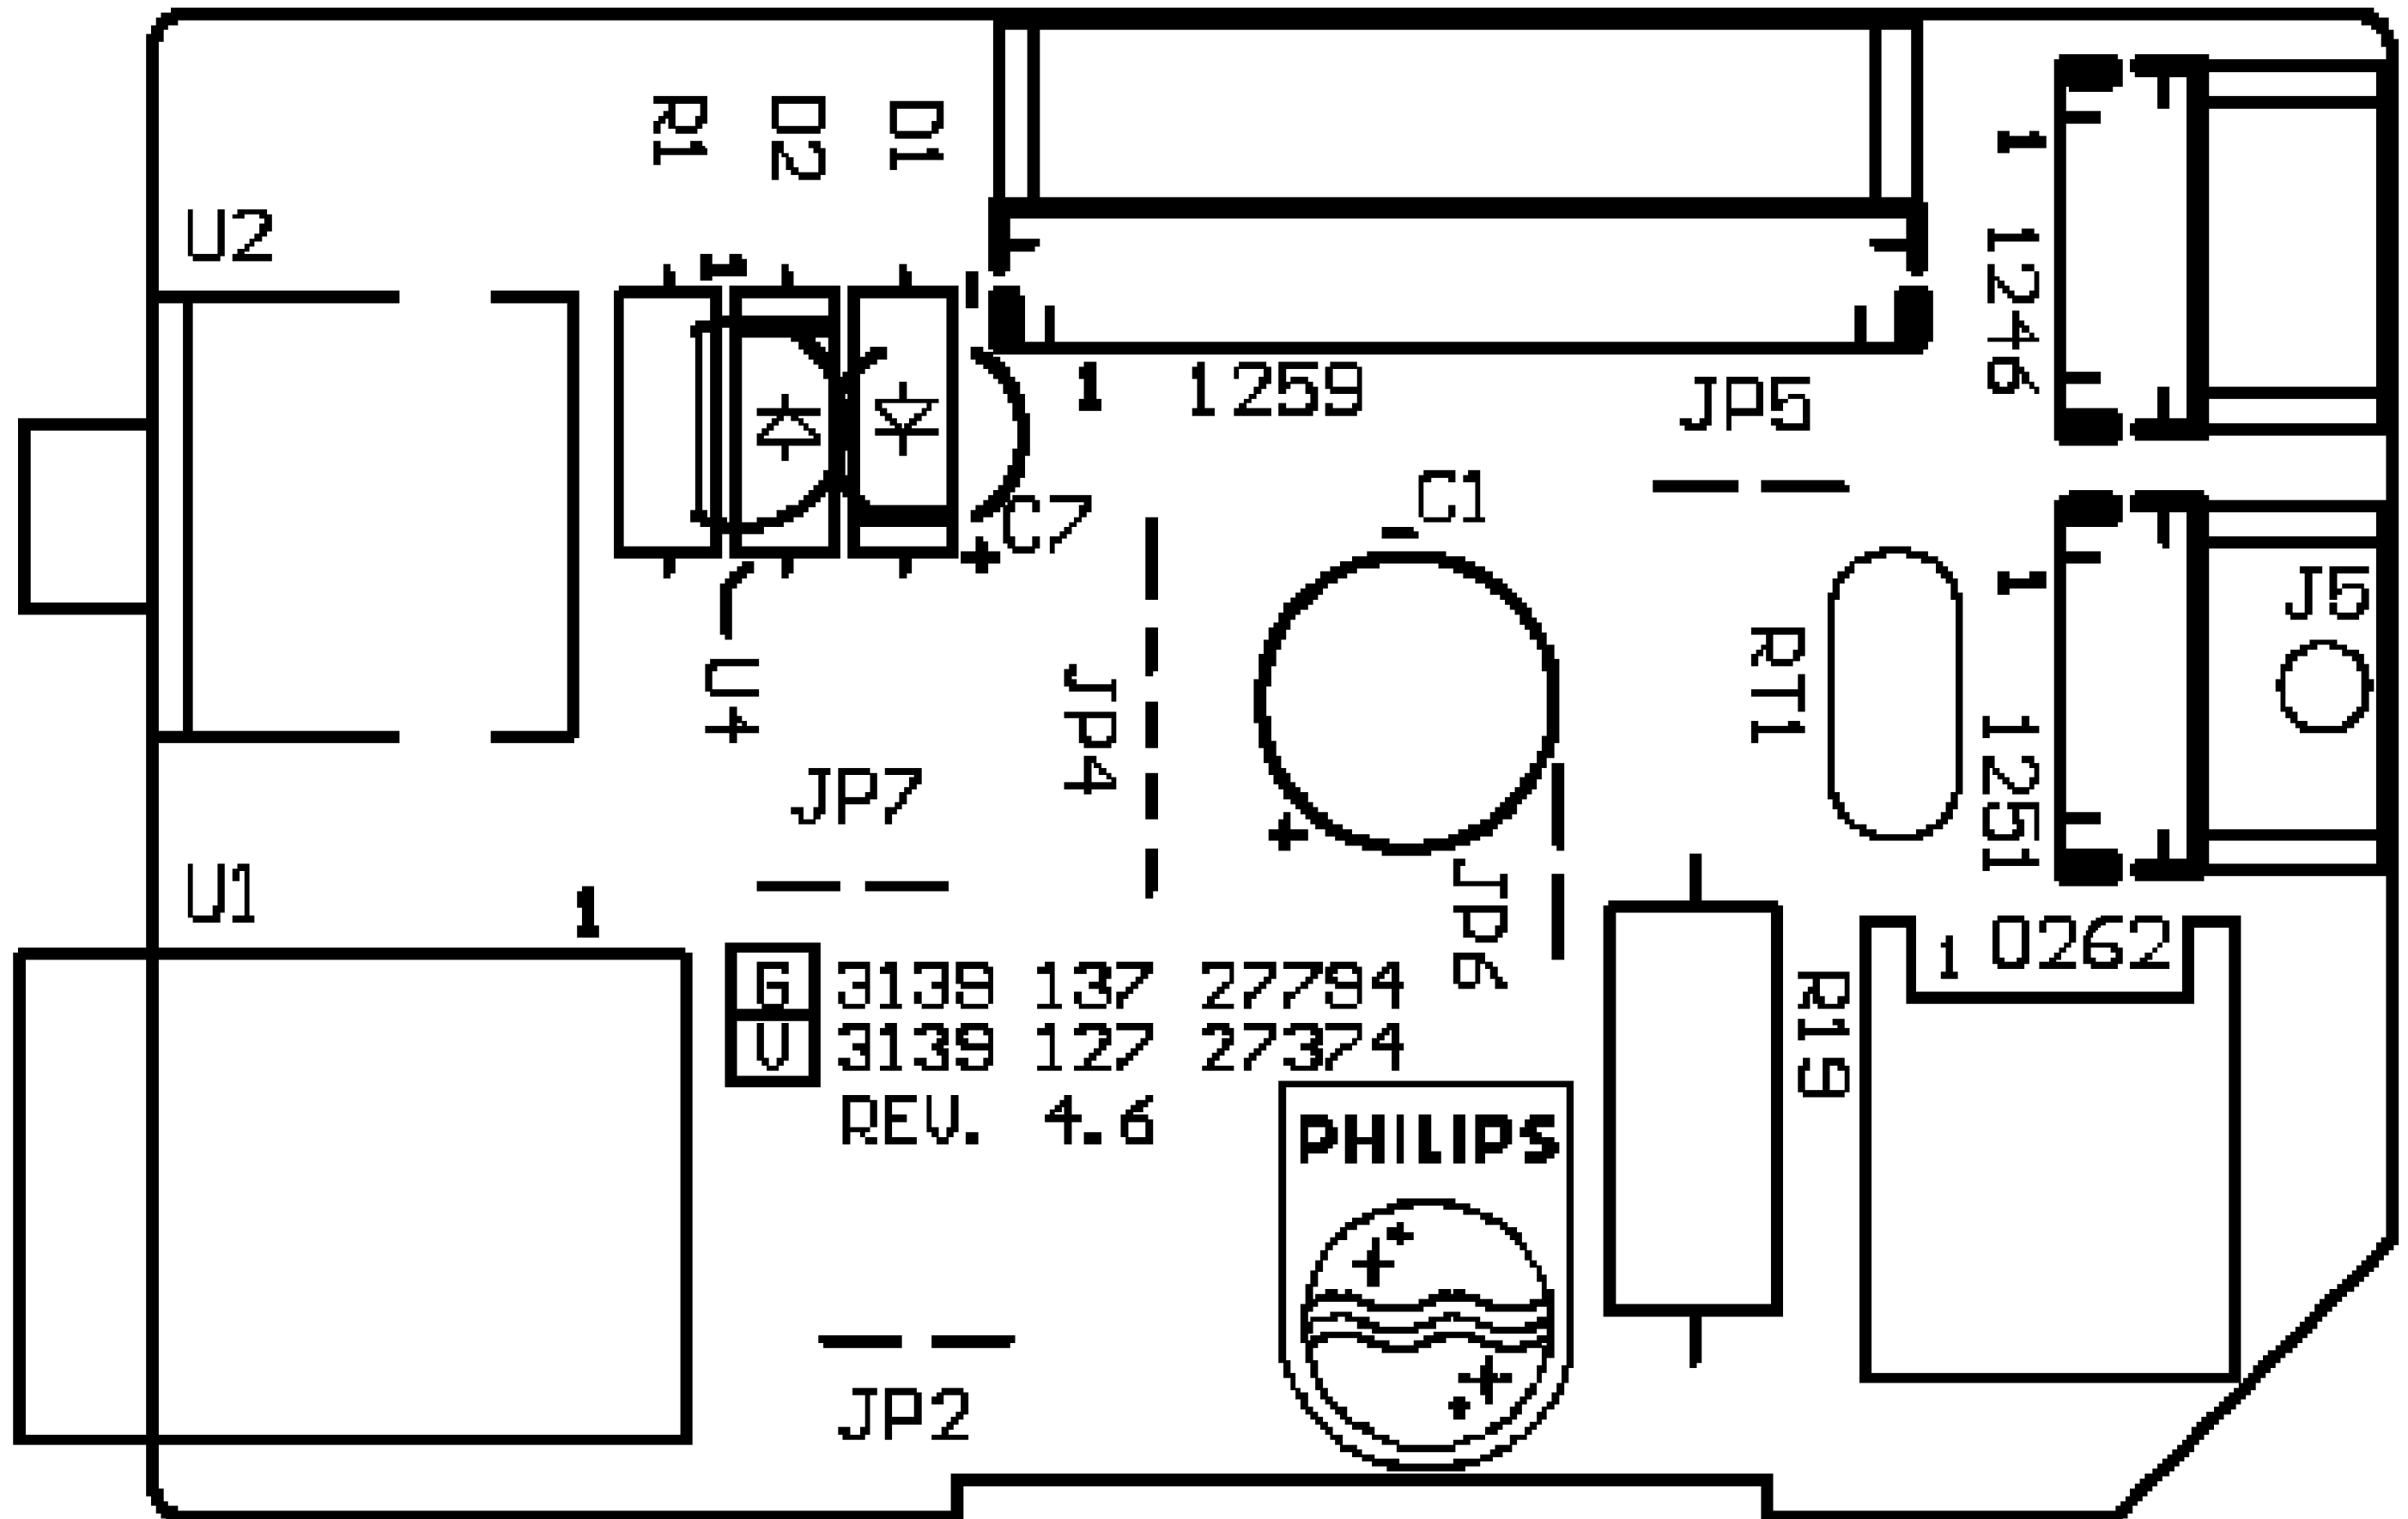

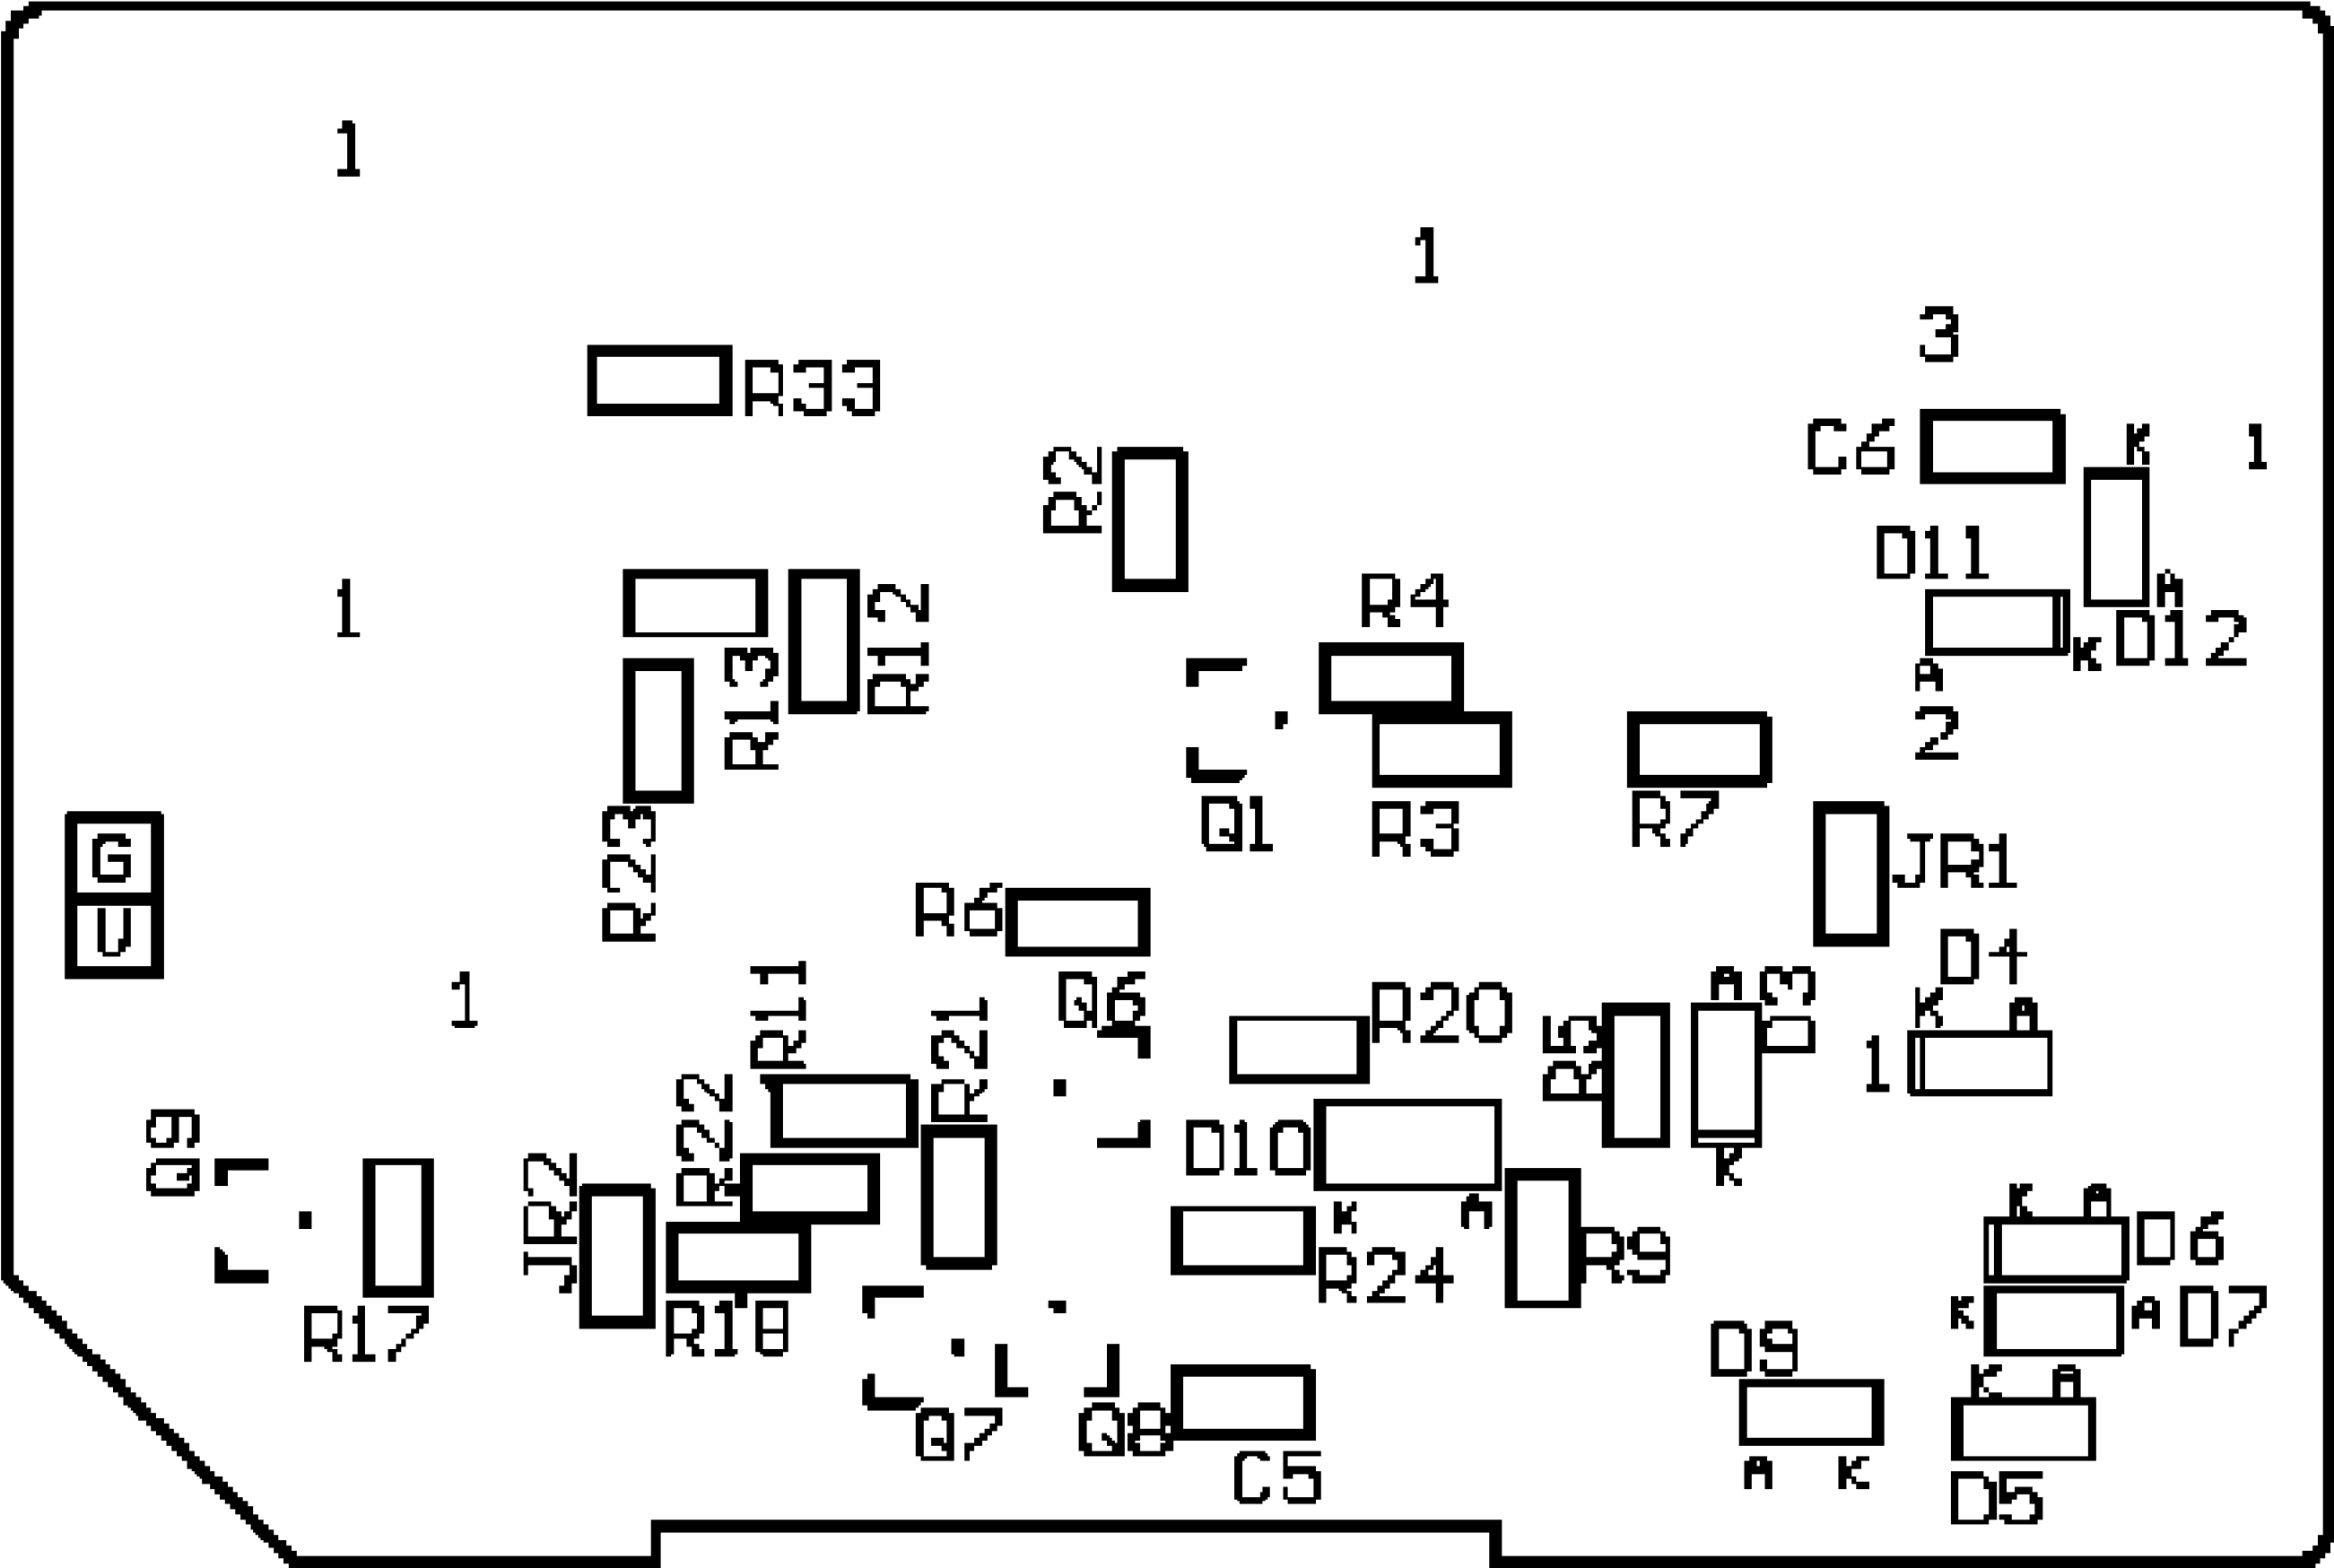


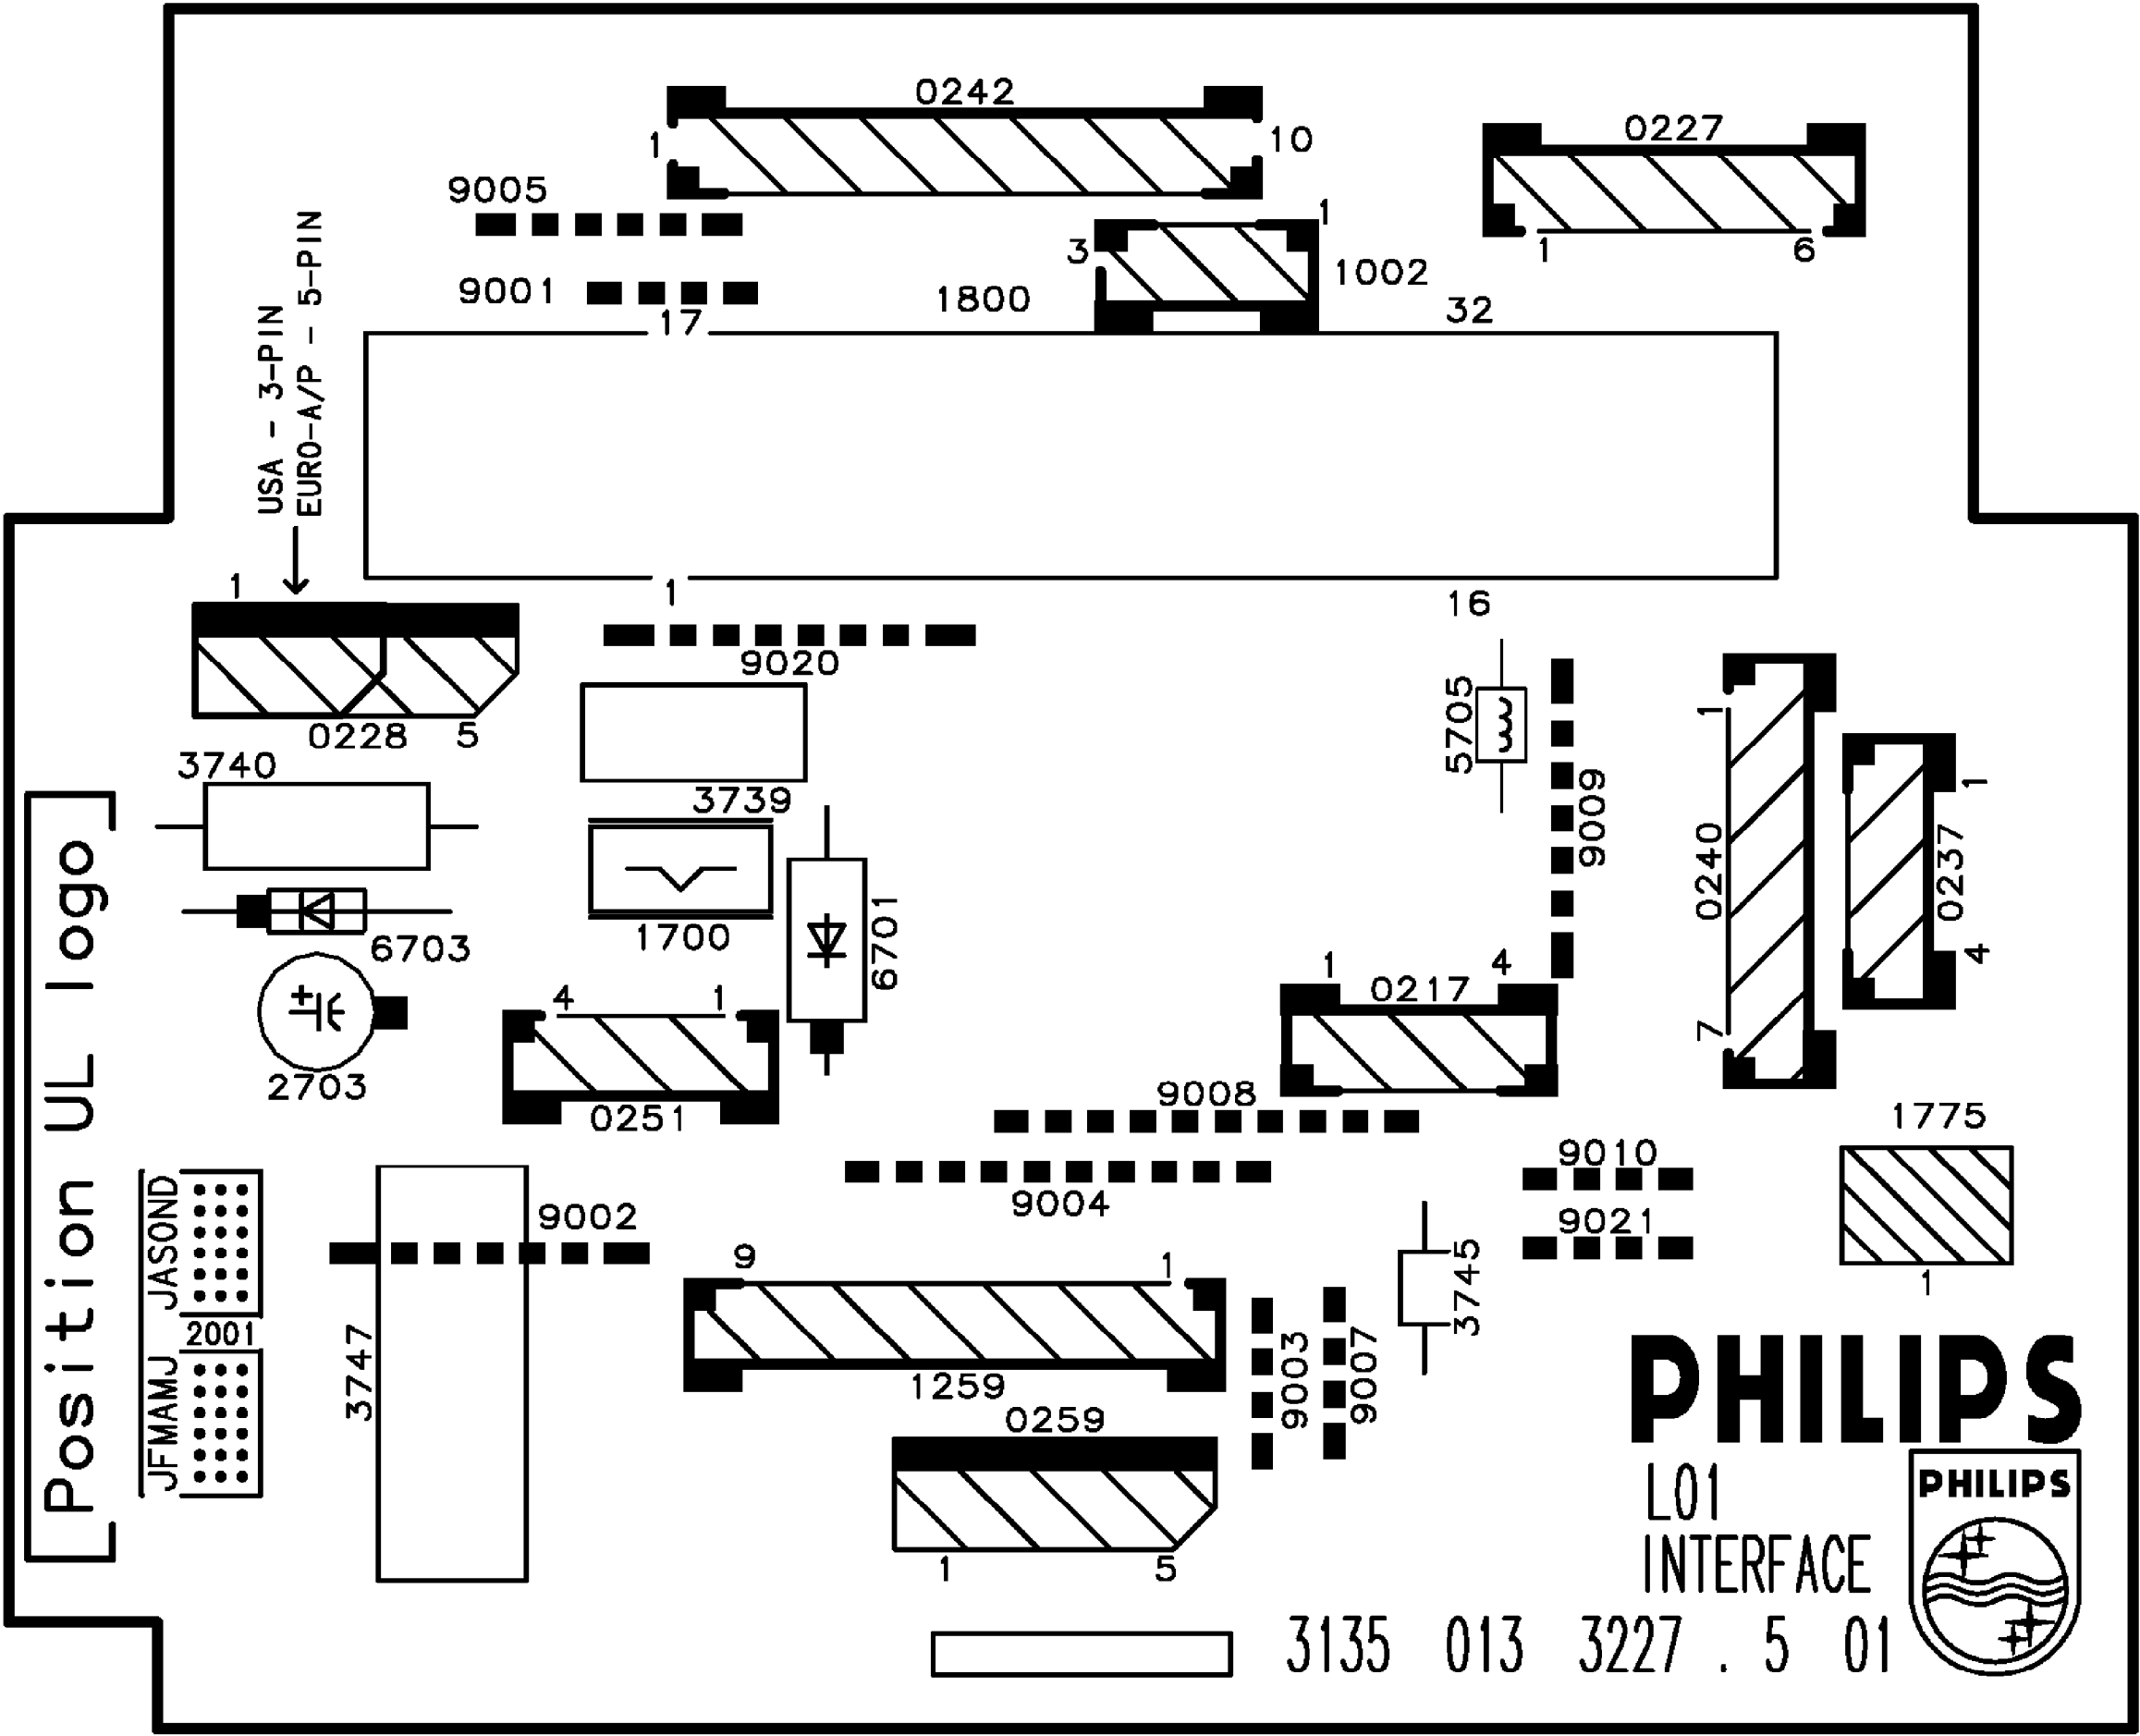

TYPICAL TABLE MODEL EXPLODED VIEW

AC01 AC Cord
 AC02 AC Cord Strain Relief (Not Shown)
 AC03 Anode Lead Spacer (Not Shown)
 AC04 Batteries for Remote Control
 AC05 Cabinet Back
 AC06 Cabinet Back Screw Cover (Not Shown)
 AC07 Canceller Coil (Not Shown)
 AC08 Chassis Tray
 AC09 CRT
 AC10 Customer Control Buttons
 AC11 DAF Panel Bracket (Not Shown)
 AC12 Degaussing Coil
 AC13 Front Interface Panel Bracket (Not Shown)
 AC14 Front Main PCB Bracket (Not Shown)
 AC15 Holder, Degaussing Coil (4 Used)
 AC16 Jack Panel Bracket
 AC17 Owner's Manual
 AC18 Quick Use Guide (Not Shown)
 AC19 Side Jack Panel Bracket
 AC20 Cabinet Front Assembly (Shown Exploded)
 AC20A Cabinet Front
 AC20B Chassis Guide
 AC20C Light Guide
 AC20D Nameplate
 AC20E Power Button
 AC20F Power Button Cover (Not Shown)
 AC20G Power Button Shaft (Not Shown)

AC20H Speaker (2 Used)
 AC20J Top Control Assembly (Shown Exploded)
 AC20J1 Top Control Bracket
 AC20J2 Top Control Buttons
 AC20J3 Top Control Cover
 AC20J4 Top Control Rubber (Not Shown)
 AC20J5 Top Control Button Assembly (Shown Exploded)
 AC21 Card Door (Not Shown)
 AC22 Cinch Cover (Not Shown)
 AC23 DVD Door (Not Shown)
 AC24 DVD Interface Panel Bracket (Not Shown)
 AC25 DVD PIP Bracket (Not Shown)
 AC26 EPS Bracket (Not Shown)
 AC27 ITV Card Bracket (Not Shown)
 AC28 ITV Card Slot Cover (Not Shown)
 AC29 Plastic Facade (Not Shown)
 AC30 Scan 3 VGA Adapter (Not Shown)
 AC31 Scan 4 Card Cover (Not Shown)
 AC32 Yoke Wedge (Not Shown)
 REMOTE Remote Control Transmitter

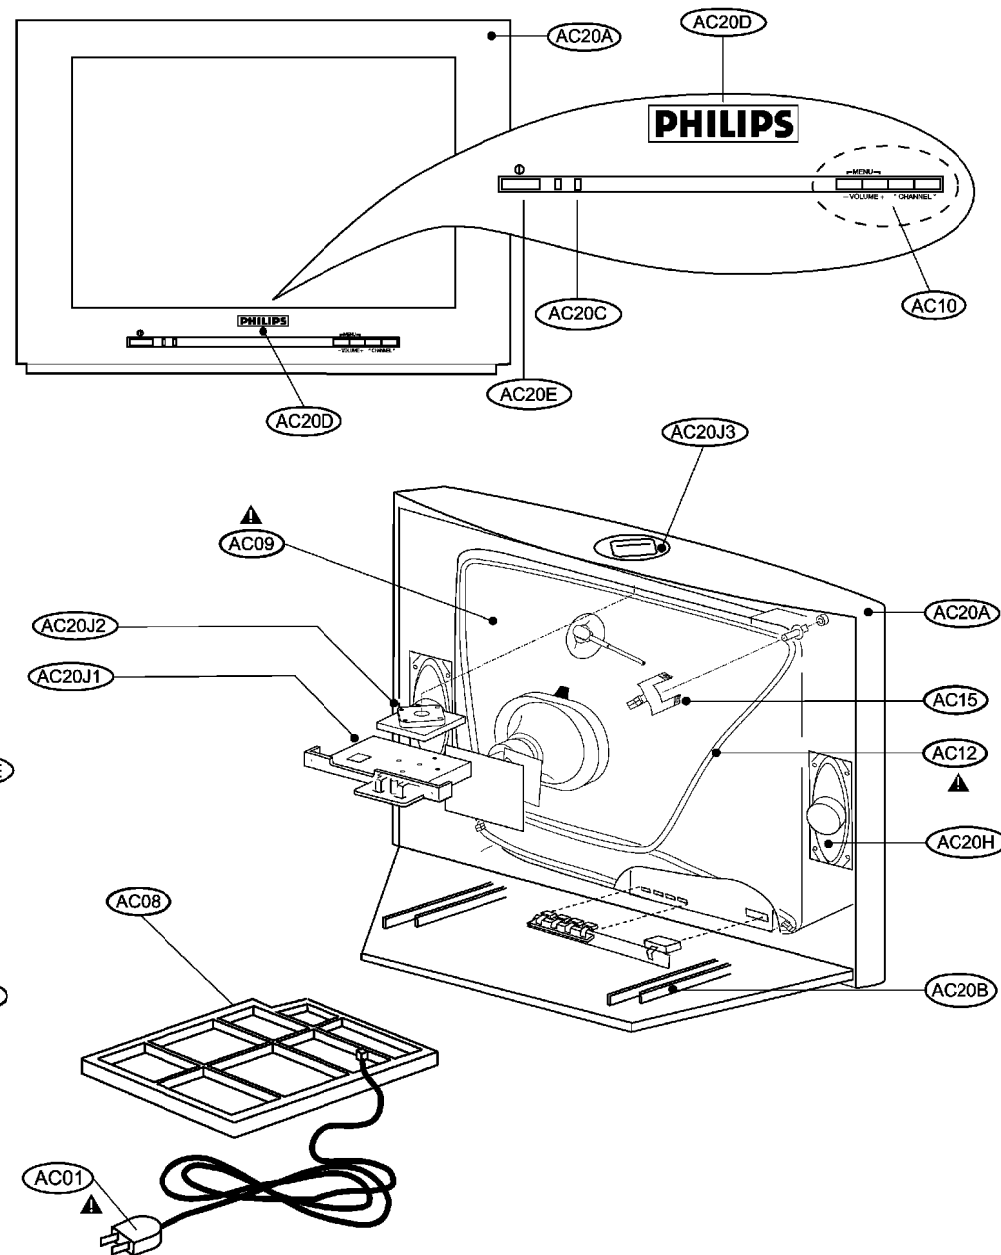

20DV6932/37R - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | |
|--------------------|--|----------------|--|
| | 2 Pin Connector. | 2422 025 16374 | |
| 0212 | 2 Pin Connector. | 2422 025 16375 | |
| 0214 | 5 Pin Connector. | 2422 025 12481 | |
| 0217 | 3 Pin Connector. | 2412 020 00725 | |
| 0219 | 6 Pin Connector. | 2422 025 12482 | |
| 0220 | 5 Pin Connector. | 2422 025 04853 | |
| 0221 | 2 Pin Connector. | 2422 025 15503 | |
| 0222 | 2 Pin Connector. | 2422 025 10646 | |
| 0223 | A/V Jack. | 2422 026 05236 | |
| 0225 | SVHS Jack. | 2422 026 04926 | |
| 0227 | 3 Pin Connector. | 2422 025 16382 | |
| 0229 | 7 Pin Connector. | 2422 025 11244 | |
| 0239 | 3 Pin Connector. | 2422 025 16382 | |
| 0240 | 4 Pin Connector. | 2422 025 12479 | |
| 0243 | 6 Pin Connector. | 2422 025 04854 | |
| 0244 | 5 Pin Connector. | 2422 025 04853 | |
| 0245 | 6 Pin Connector. | 2422 025 04854 | |
| 0246 | 5 Pin Connector. | 2422 025 12481 | |
| 0251 | 4 Pin Connector. | 2422 025 15847 | |
| S 0254 | 9 Pin CRT Socket. | 2422 500 80076 | |
| 0267 | 3 Pin Connector. | 2412 020 00725 | |
| 0269 | Jack. | 2422 026 05182 | |
| S 1000 | Tuner, V+U, PLL. | 2422 542 90108 | |
| 1002 | SAW Filter, 45.75MHz. | 2422 549 45818 | |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 549 40807 | |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07467 | |
| 1660 | Crystal, 12MHz000. | 2422 543 01203 | |
| 1810 | 6 Pin Connector. | 2422 025 15849 | |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 543 00842 | |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 014 04740 | |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 370 76104 | |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | |

| | | | |
|--------|---|----------------|--|
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyest er. | 2222 368 90177 | |
| 2331 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 | |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 | |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 | |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 | |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 | |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 | |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 | |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 | |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 017 24730 | |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2022 031 00103 | |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 | |
| 2457 | Cap, 270n, 5%, 250v, Metalized Polyprop ylene. | 2222 479 90016 | |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2022 031 00138 | |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 | |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 | |
| 2463 | Cap, 680p, 10%, 2000v, Ceramic. | 2020 558 90485 | |
| 2465 | Cap, 9n1, 5%, 1600v, Polypropylene. | 2222 375 90153 | |
| 2467 | Cap, 68n, 10%, 250v, Polyester. | 2222 347 90234 | |
| 2468 | Cap, 33n, 10%, 400v, Polyester. | 2222 347 90227 | |
| 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 | |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 | |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 | |
| 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 | |
| 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 | |
| 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 | |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2038 035 13301 | |
| 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 | |
| 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 347 90234 | |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2022 031 00137 | |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2022 031 00139 | |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2038 035 13508 | |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2022 031 00144 | |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2022 031 00139 | |
| 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 | |
| 2500 | Cap, 470n, 20%, 275v, Metalized Polypro pylene. | 2222 336 29148 | |
| 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 | |
| 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 | |
| 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 024 90626 | |
| 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 | |
| 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 | |
| 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 | |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90128 | |
| 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | |
| 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 | |
| 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 | |
| S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 | |
| 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 | |
| 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 | |
| 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 | |
| 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | |
| 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 | |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 021 91654 | |
| 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 | |
| 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 | |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91353 | |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 | |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 | |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 | |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 | |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 | |
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | |
| 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | |
| 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 | |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | |

20DV6932/37R (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03108 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03108 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . | 3198 013 01520 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03390 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glass | 3198 021 51010 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. . | 3198 021 51050 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . | 3198 011 01530 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . | 3198 011 05620 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08180 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2910 | Cap, 3n3, 10%, 63v, Ceramic. | 3198 017 03320 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06890 |
| 2911 | Cap, 3n3, 10%, 63v, Ceramic. | 3198 017 03320 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03390 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3452 | Res, 3K6, 1%, 3/5W, Metal Film. . . . | 2312 915 13602 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3454 | Res, 1K5, 1%, 3/5W, Metal Film. . . . | 2312 915 11502 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . | 3198 012 26880 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3456 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3457 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . | 3198 012 21530 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. . . . | 2312 915 12703 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3470 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 730 61274 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film. . . . | 2312 915 13908 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3472 | Res, 6R8, 1%, 3/5W, Metal Film. . . . | 2312 915 16808 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3473 | Res, 6R8, 1%, 3/5W, Metal Film. . . . | 2312 915 16808 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. . . . | 2312 915 12202 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. . . . | 2312 915 12202 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3481 | Res, 18K, 1%, 3/5W, Metal Film. . . . | 2312 915 11803 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3482 | Res, 12K, 1%, 3/5W, Metal Film. . . . | 2312 915 11203 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. . . . | 2306 207 03478 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3491 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. . . . | 2306 204 03688 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. . . . | 2306 207 03478 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass. . | 3198 021 52230 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 021 51040 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 021 51040 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass. . | 3198 021 51230 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3507 | Surge Protector. | 2422 549 43073 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . | 3198 021 51220 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glass | 3198 021 32210 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03101 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 021 55630 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glass | 3198 021 34710 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film. . . . | 3198 012 11070 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 | 3528 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. . | 3198 021 54720 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film. . . . | 2306 204 03222 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glass | 3198 021 35610 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glass | 3198 021 54710 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. . | 3198 021 51520 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 | 3543 | Res, 82K, 1%, 3/5W, Metal Film. . . . | 2312 915 18203 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 730 61274 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. . | 3198 021 51530 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3247 | Res, 270K, 5%, 1/16W, Metalized Glass. . | 2322 702 60274 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. . | 3198 021 51230 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. . | 3198 021 55620 |

S = Safety Part Be sure to use exact replacement part.

20DV6932/37R (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass.. | 3198 021 52240 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass.. | 3198 021 52240 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 5445 | Transformer, LOT | 2422 531 02519 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5453 | Coil, 22u, 5% | 3198 018 12290 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5457 | Coil, Linear Correction, 82u | 2422 536 00425 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 5480 | Coil, 22u. | 2422 535 97333 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | S 5501 | Mains Filter | 2422 549 43432 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 021 31040 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 021 31040 | 5521 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 021 31040 | 5560 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 021 31040 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 021 31040 | 5562 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 021 31040 | 5564 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 021 31040 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 021 31040 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 5831 | Coil, 6u8, 5% | 3198 018 16880 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5832 | Coil, 6u8, 5% | 3198 018 16880 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5833 | Coil, 6u8, 5% | 3198 018 16880 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5835 | Coil, 12u, 10% | 3198 018 31290 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6331 | Diode, Signal, BAV21. | 3198 010 10070 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6333 | Diode, Signal, BAV21. | 3198 010 10070 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 6335 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6453 | Zener Diode, 5.6 volt. | 3198 020 55680 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6460 | Diode, Rect, BY228/24. | 9340 559 50112 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6463 | Zener Diode, 8.2 volt. | 3198 020 58280 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6465 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6466 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6467 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6468 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6470 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6476 | Zener Diode, 15 volt | 3198 010 21590 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6485 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6487 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6500 | Diode, Bridge Rect, GBU6UL-7002. . . . | 9322 138 08667 |
| 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6520 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6523 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6524 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6525 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6526 | Zener Diode, 22 volt | 3198 020 52290 |
| 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6541 | Zener Diode, 10 volt | 3198 020 51090 |
| 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 |
| 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6563 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6565 | Diode, Signal, BAV70 | 9331 849 10215 |

20DV6932/37R (continued)

| | | | | | | | | | |
|--|--|------|-----|-------|------|--|------|-----|-------|
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 2127 | Cap, 10n, 10%, 50V, Ceramic. | 3198 | 017 | 31030 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 2128 | Cap, 10u, 20%, 50V, Electrolytic. | 3198 | 025 | 51090 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 2140 | Cap, 100u, 20%, 16V, Electrolytic. | 3198 | 029 | 21010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 2141 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 2142 | Cap, 100u, 20%, 16V, Electrolytic. | 3198 | 029 | 21010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 2143 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 2165 | Cap, 10n, 10%, 50V, Ceramic. | 3198 | 017 | 31030 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 2169 | Cap, 10n, 10%, 50V, Ceramic. | 3198 | 017 | 31030 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2184 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 2185 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 |
| 7200 | IC, TDA9569H/N1/4I/1161. | 9352 | 733 | 51557 | 2200 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 2201 | Cap, 10u, 20%, 16v, Electrolytic. | 3198 | 028 | 21090 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2211 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2261 | Cap, 10n, 10%, 50V, Ceramic. | 3198 | 017 | 31030 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 2262 | Cap, 10n, 10%, 50V, Ceramic. | 3198 | 017 | 31030 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2263 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 2264 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 7450 | Transistor, PNP, PDTA114ET | 3198 | 010 | 44010 | 2265 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 2266 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 2267 | Cap, 10u, 20%, 50V, Electrolytic. | 3198 | 025 | 51090 |
| 7462 | Transistor, NPN, PDC143ZT | 9340 | 547 | 00215 | 2268 | Cap, 10u, 20%, 50V, Electrolytic. | 3198 | 025 | 51090 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 2280 | Cap, 10u, 20%, 16v, Electrolytic. | 3198 | 028 | 21090 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 2281 | Cap, 10u, 20%, 16v, Electrolytic. | 3198 | 028 | 21090 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 2300 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 | 93495 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 2301 | Cap, 22n, 10%, 400v, Metalized Polyester | 2222 | 365 | 55223 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 2302 | Cap, 33p, 10%, 1KV, Ceramic. | 3198 | 019 | 53310 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 2310 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 | 31040 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 2311 | Cap, 470n, 10%, 25v, Ceramic. | 2020 | 552 | 96465 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 2313 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 2315 | Cap, 220p, 10%, 1KV, Ceramic. | 3198 | 019 | 62210 |
| 7541 | Transistor, NPN, PDC114ET | 9340 | 310 | 10215 | 2316 | Cap, 33n, 10%, 16v, Ceramic. | 3198 | 017 | 33330 |
| 7542 | Transistor, PNP, PDC143ZT | 3198 | 010 | 42150 | 2330 | Cap, 2u2, 20%, 25v, Electrolytic. | 3198 | 026 | 32220 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 | 2331 | Cap, 470u, 20%, 10v, Electrolytic. | 3198 | 025 | 14710 |
| 7561 | Transistor, NPN, PDC143ZT | 9340 | 547 | 00215 | 2332 | Cap, 2u2, 20%, 25v, Electrolytic. | 3198 | 026 | 32220 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2333 | Cap, 470u, 20%, 10v, Electrolytic. | 3198 | 025 | 14710 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 | 2335 | Cap, 220u, 20%, 25V, Electrolytic. | 3198 | 025 | 32210 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 2337 | Cap, 1000u, 20%, 25v, Electrolytic. | 3198 | 026 | 31020 |
| 7803 | IC, HEF4053BT. | 9333 | 729 | 60653 | 2338 | Cap, 1000u, 20%, 25v, Electrolytic. | 3198 | 026 | 31020 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 | 187 | 89682 | 2341 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 7901 | IC, AN7522N PH | 9322 | 181 | 41682 | 2350 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 | 31020 |
| 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 | 2351 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 | 31020 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 | 2353 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 | 31020 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 | 3101 | Res, 100 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31010 |
| CBA | Main Chassis Assembly. | 3139 | 188 | 04071 | 3102 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36890 |
| CBA | DVD Module SD3.1 | 3139 | 248 | 71141 | 3110 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| Channel One Card Parts | | | | | 3111 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| Channel One Card Parts | | | | | 3112 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 2D 3 Line Comb Filter Parts | | | | | 3113 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 2D 3 Line Comb Filter Parts | | | | | 3114 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| DAF Panel Parts | | | | | 3115 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| DAF Panel Parts | | | | | 3116 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| DVD Eject Panel Parts | | | | | 3117 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| DVD Eject Panel Parts | | | | | 3120 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 0267 | 3 Pin Board Connector. | 2422 | 025 | 09191 | 3121 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 |
| 0361 | Eject Button | 3139 | 138 | 11271 | 3122 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 1110 | Tact Switch. | 2422 | 128 | 02742 | 3123 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| CBA | DVD Eject Panel Assembly | 3139 | 188 | 03391 | 3124 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 |
| DVD Interface Panel Parts | | | | | 3125 | Res, 5K6, 5%, 1/16W, Metalized Glass | 3198 | 021 | 35620 |
| DVD Interface Panel Parts | | | | | 3126 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 0226 | Connector, 6 Pin | 2422 | 025 | 12482 | 3130 | Res, 47 ohm, 5%, 1/6W, Carbon Film | 3198 | 011 | 04790 |
| 0251 | Connector, 4 Pin | 2422 | 025 | 15847 | 3140 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 0253 | Connector, 7 Pin | 2422 | 025 | 11244 | 3141 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 0254 | Connector, 22 Pin. | 2422 | 025 | 16526 | 3142 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 |
| 0255 | Connector, 16 Pin. | 2422 | 025 | 16525 | 3143 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 0265 | Connector, 12 Pin. | 2422 | 025 | 08333 | 3145 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 0266 | Connector, 6 Pin | 2422 | 025 | 15849 | 3146 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 1100 | Socket, Cinch, 1 Pin | 2422 | 026 | 04425 | 3147 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 |
| S 1330 | Fuse, 2.5A, 250V | 2422 | 086 | 10784 | 3148 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| S 1331 | Fuse, 2.5A, 250V | 2422 | 086 | 10784 | 3180 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| S 1332 | Fuse, 2A, 250V IEC | 2422 | 086 | 10783 | 3182 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 1619 | Connector, 4 Pin | 2422 | 025 | 15847 | 3200 | Res, 270 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32710 |
| 2101 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 | 3201 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 2102 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 | 3202 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 2103 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 | 3203 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36820 |
| 2104 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 3204 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 2110 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 3205 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 |
| 2111 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 | 3206 | Res, 680 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 36810 |
| 2112 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 | 3207 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 |
| 2113 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 | 3208 | Res, 75 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 37590 |
| 2115 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 | 3209 | Res, 75 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 37590 |
| 2120 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 3210 | Res, 270 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32710 |
| 2121 | Cap, 47u, 20%, 25V, Electrolytic | 3198 | 025 | 34790 | 3211 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 2122 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 3212 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 2123 | Cap, 10u, 20%, 50V, Electrolytic | 3198 | 025 | 51090 | 3213 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36820 |
| 2124 | Cap, 10n, 10%, 50V, Ceramic. | 3198 | 017 | 31030 | 3214 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 2125 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 | 3215 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 |
| 2126 | Cap, 47u, 20%, 25V, Electrolytic | 3198 | 025 | 34790 | 3216 | Res, 680 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 36810 |
| S = Safety Part Be sure to use exact replacement part. | | | | | 3217 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 |
| | | | | | 3218 | Res, 75 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 37590 |
| | | | | | 3219 | Res, 75 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 37590 |
| | | | | | 3230 | Res, 22K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32230 |
| | | | | | 3231 | Res, 24K, 1%, 1/16W, Metalized Glass | 2322 | 704 | 62403 |

20DV6932/37R (continued)

| | | |
|--------|--|----------------|
| 3232 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3233 | Res, 24K, 1%, 1/16W, Metalized Glass . | 2322 704 62403 |
| S 3300 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| S 3301 | Power Resistor, 68K, 5%, 2W. | 3198 012 26830 |
| 3308 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 3309 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 3310 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 3311 | Res, 180 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31810 |
| 3312 | Res, 10 ohm, 5%, 1/16W, Metalized Glass | 3198 021 31090 |
| 3313 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 3314 | Res, 1 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01080 |
| 3315 | Res, 1 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01080 |
| 3317 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 3318 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3319 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 3320 | Res, 75K, 1%, 1/16W, Metalized Glass . | 2322 704 67503 |
| 3330 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| S 3331 | Res, 10 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 31090 |
| 3339 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 3340 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 |
| 3342 | Res, 1K5, 1%, 1/16W, Metalized Glass . | 2322 704 61502 |
| 3344 | Res, 4K7, 1%, 1/16W, Metalized Glass . | 2322 704 64702 |
| 3350 | Res, 18K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01830 |
| 3351 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 3360 | Res, 4R7, 5%, 1/16W, Metalized Glass . | 3198 021 34780 |
| 3406 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 3466 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 4100 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90030 |
| 4102 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90030 |
| 4103 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90030 |
| 4142 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90030 |
| 4150 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90030 |
| 4162 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90030 |
| 4185 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90030 |
| 4336 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90030 |
| 4407 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90030 |
| 4463 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90030 |
| 4466 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90030 |
| 5100 | Inductor, Variable, 100uH, 10% | 2422 549 41663 |
| 5110 | Coil, 220n | 3198 018 12270 |
| 5120 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 5140 | Coil, 220n | 3198 018 12270 |
| 5141 | Coil, 220n | 3198 018 12270 |
| 5200 | Coil, 6u8. | 3198 018 16880 |
| 5300 | Coil, 56u. | 3198 018 25690 |
| S 5301 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| S 5315 | Transformer, SS25105-02. | 2422 531 02521 |
| 5331 | Coil, 10u, 5%. | 2422 535 95363 |
| 5333 | Coil, 10u, 5%. | 2422 535 95363 |
| 5337 | Coil, 10u. | 2422 535 95363 |
| 6120 | Diode, Signal, BAS316. | 3198 010 10630 |
| 6300 | Diode, Rect, BYD33J | 9337 234 20133 |
| 6311 | Diode, Signal, BAS316. | 3198 010 10630 |
| 6312 | Zener Diode, 22 volt | 3198 020 52290 |
| 6330 | Diode, Rect, EGP20DL-5100 | 9322 164 42682 |
| 6332 | Diode, Rect, SB340L-7024. | 9322 161 76682 |
| 6334 | Diode, Rect, BYD33D | 9337 234 00133 |
| 6336 | Diode, Rect, BYV27-200. | 9335 526 80133 |
| 6350 | Zener Diode, 12 volt | 3198 020 51290 |
| 7110 | IC, HEF4053BT. | 9333 729 60653 |
| 7120 | IC, UDA1334BT/N2 | 9352 703 94118 |
| 7140 | Transistor, NPN, BC847B. | 3198 010 42030 |
| 7142 | Transistor, NPN, BC847B. | 3198 010 42030 |
| 7200 | Transistor, NPN, BC847B. | 3198 010 42030 |
| 7201 | Transistor, PNP, BC857B. | 3198 010 42150 |
| 7202 | Transistor, NPN, BC847B. | 3198 010 42030 |
| 7210 | Transistor, NPN, BC847B. | 3198 010 42030 |
| 7211 | Transistor, PNP, BC857B. | 3198 010 42150 |
| 7212 | Transistor, NPN, BC847B. | 3198 010 42030 |
| 7262 | Transistor, NPN, PDTCL14ET | 9340 310 20215 |
| 7280 | IC, L78L08ACZ. | 9322 130 67676 |
| 7310 | Transistor, NPN, PDTCL14ET | 3198 010 44110 |
| 7311 | Transistor, PNP, PDTA114ET | 3198 010 44010 |
| 7312 | Transistor, PNP, BC857B. | 3198 010 42150 |
| 7313 | Transistor, NPN, BC847B. | 3198 010 42030 |
| 7315 | IC, TEA1523P/N2. | 9352 699 68112 |
| S 7340 | Optical Coupler, TCET1103(G) | 9322 140 14667 |
| 7341 | IC, TL431CLP | 9337 711 00676 |
| 7350 | Transistor, FET, ST2306DS. | 9322 163 75685 |
| 7351 | Transistor, NPN, PDTCL144ET | 3198 010 44130 |
| CBA | DVD Interface Panel Assembly | 3139 188 03291 |

Front Interface Panel Parts

| | | |
|-----------------------------|--|----------------|
| Front Interface Panel Parts | | |
| S 0211 | 2 Pin Connector. | 2422 025 16268 |
| S 0212 | 2 Pin Connector. | 2422 025 16559 |
| 0214 | 5 Pin Connector. | 2422 025 06353 |
| 1606 | Tact Switch. | 2422 128 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 025 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |

| | | |
|--------|--|----------------|
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 127 54667 |
| 9001 | Wire Jumper. | 3198 036 90010 |
| 9002 | Wire Jumper. | 3198 036 90010 |
| CBA | Front Interface Panel Assembly | 3139 177 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | |
|------|--|----------------|
| 0232 | Headphone Jack | 2422 026 04747 |
| 0250 | A/V Jack | 2422 026 04815 |
| 0251 | 6 Pin Connector. | 2422 025 15849 |
| 0254 | 5 Pin Connector. | 2422 025 12481 |
| 0255 | 4 Pin Connector. | 2422 025 12479 |
| 2171 | Cap, 470p, 5%, 50v, Ceramic. | 3198 019 14710 |
| 2172 | Cap, 470p, 5%, 50v, Ceramic. | 3198 019 14710 |
| 2173 | Cap, 470p, 5%, 50v, Ceramic. | 3198 019 14710 |
| 2174 | Cap, 470p, 5%, 50v, Ceramic. | 3198 019 14710 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 019 14710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 019 14710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 |
| 3150 | Res, 47k, 5%, 1/6W, Carbon | 3198 011 04730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 011 01510 |
| 3152 | Res, 47k, 5%, 1/6W, Carbon | 3198 011 04730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 011 01510 |
| 3156 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01210 |
| 3157 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01210 |
| 6161 | Zener Diode, 6.8 volt. | 3198 010 26880 |
| 9153 | Wire Jumper. | 3198 036 90010 |
| 9170 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 |
| CBA | Side Jack Panel Assembly | 3139 188 03541 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | |
|------|---|----------------|
| 0215 | 3 Pin Connector. | 2422 025 16601 |
| 1091 | Tact Switch. | 2422 128 02742 |
| 1092 | Tact Switch. | 2422 128 02742 |
| 1093 | Tact Switch. | 2422 128 02742 |
| 1094 | Tact Switch. | 2422 128 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 021 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 021 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 6091 | Diode, Signal. | 9340 453 90115 |
| CBA | Top Control Panel Assembly | 3139 187 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | |
|--------|--|----------------|
| S AC01 | AC Cord. | 3135 010 03831 |
| AC04 | Batteries for Remote Control Transmitter | 9299 000 65263 |
| AC05 | Cabinet Back | 3139 124 45831 |
| AC06 | Cabinet Back Screw Cover (2 Used). . . | 3139 124 42891 |
| S AC09 | CRT, A51ERF135X82. | 9301 903 81343 |
| S AC12 | Degaussing Coil. | 3141 058 20131 |
| AC13 | Front Interface Panel Bracket. | 3139 124 32891 |
| AC14 | Front Main PCB Bracket | 3139 124 45641 |
| AC17 | Owner's Manual | 3139 125 31451 |
| AC18 | Quick Use Guide. | 3141 055 52361 |
| AC19 | Side Jack Panel Bracket. | 3139 124 37061 |
| AC20A | Cabinet Front. | 3139 177 53981 |
| AC20B | Chassis Guide. | 3139 124 25893 |
| AC20B | Chassis Guide. | 3139 124 45661 |
| AC20C | Light Guide. | 3139 124 41421 |
| AC20D | Nameplate. | 3139 120 01371 |
| AC20E | Power Button | 3139 177 58491 |

20DV6932/37R (continued)

| | | | | | |
|--------|---|-----------|------|-----|-------|
| AC20H | Speaker, 16 ohm, 5W (2 Used) | | 2422 | 264 | 00411 |
| AC20J | Top Control Assembly | | 3139 | 138 | 11451 |
| AC23 | DVD Door | | 3139 | 138 | 11281 |
| AC25 | DVD PIP Bracket | | 3139 | 124 | 35571 |
| REMOTE | Remote Control Transmitter, RC19042007/ | | | | |
| | 01. | | 3128 | 147 | 14521 |

20DV693R01 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|---|------|-----|-------|--------|---|--------------------------------|
| | Socket Fuse. | 2422 | 088 | 00271 | 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 |
| 0127 | NTC Holder. | 3139 | 120 | 10151 | 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 |
| 0130 | Bead, Ferrite, 100MHz. | 2422 | 549 | 45808 | 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 |
| 0136 | IC-Spring. | 3104 | 301 | 22081 | 2247 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 |
| 0137 | Spring. | 3139 | 121 | 24583 | 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0138 | IC-Spring. | 3104 | 301 | 22081 | 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0139 | Spring for Bracket. | 3122 | 121 | 24786 | 2250 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 |
| 0141 | IC-Spring. | 3104 | 301 | 22081 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0152 | Cable, DIPMate, 6 Pin. | 3139 | 121 | 08841 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0153 | Cable, DIPMate, 5 Pin, 480mm. | 3139 | 121 | 07951 | 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 0211 | 2 Pin Connector. | 2422 | 025 | 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | er. 2222 368 90177 |
| 0212 | 2 Pin Connector. | 2422 | 025 | 16375 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . | 2020 558 90445 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 12481 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. . . | 2020 012 93495 |
| 0217 | 3 Pin Connector. | 2412 | 020 | 00725 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 |
| 0219 | 6 Pin Connector. | 2422 | 025 | 12482 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0220 | 5 Pin Connector. | 2422 | 025 | 04853 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0221 | 2 Pin Connector. | 2422 | 025 | 15503 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 21040 |
| 0222 | 2 Pin Connector. | 2422 | 025 | 10646 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. . . | 2020 558 90445 |
| 0223 | A/V Jack. | 2422 | 026 | 05236 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 025 32210 |
| 0225 | SVHS Jack. | 2422 | 026 | 04926 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0229 | 7 Pin Connector. | 2422 | 025 | 11244 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. . . | 3198 017 24730 |
| 0239 | 3 Pin Connector. | 2422 | 025 | 16382 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0240 | 4 Pin Connector. | 2422 | 025 | 12479 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. . . | 2022 031 00103 |
| 0243 | 6 Pin Connector. | 2422 | 025 | 04854 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. . . | 3198 025 34790 |
| 0244 | 5 Pin Connector. | 2422 | 025 | 04853 | 2457 | Cap, 270n, 5%, 250v, Metalized Polyprop | ylene. 2222 479 90016 |
| 0245 | 6 Pin Connector. | 2422 | 025 | 04854 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. . . | 2022 031 00138 |
| 0246 | 5 Pin Connector. | 2422 | 025 | 12481 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 0251 | 4 Pin Connector. | 2422 | 025 | 15847 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| S 0254 | 9 Pin CRT Socket. | 2422 | 500 | 80076 | 2463 | Cap, 680p, 10%, 2000v, Ceramic. | 2020 558 90485 |
| 0267 | 3 Pin Connector. | 2412 | 020 | 00725 | 2465 | Cap, 9n1, 5%, 1600v, Polypropylene. . . | 2222 375 90153 |
| 0269 | Jack. | 2422 | 026 | 05182 | 2467 | Cap, 68n, 10%, 250v, Polyester. | 2222 347 90234 |
| S 1000 | Tuner, V+U, PLL. | 2422 | 542 | 90108 | 2468 | Cap, 33n, 10%, 400v, Polyester. | 2222 347 90227 |
| 1002 | SAW Filter, 45.75MHz. | 2422 | 549 | 44518 | 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 | 549 | 40807 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 | 10914 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 | 07467 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 1660 | Crystal, 12MHz000. | 2422 | 543 | 01203 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 1810 | 6 Pin Connector. | 2422 | 025 | 15849 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | 2422 | 543 | 00842 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2038 035 13301 |
| | C49/U A. | 2422 | 025 | 00842 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 | 44730 | 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 347 90234 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2022 031 00137 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 | 24710 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2022 031 00139 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2038 035 13508 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2022 031 00144 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2022 031 00139 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 24740 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene. 2222 336 29148 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 024 90626 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90128 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | S 2516 | Cap, 470p, 20%, 50v, Ceramic. | 2020 554 90148 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 021 91654 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 | 19852 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91353 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 023 | 41040 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 | 54780 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 | 41050 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 | 44740 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 | 21020 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 | 04740 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 | 31520 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 | 41050 | | | |

S = Safety Part Be sure to use exact replacement part.

20DV693R01 (continued)

| | | | | | |
|------|--|----------------|--------|---|----------------|
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic | 3198 016 34710 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic | 3198 016 32210 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic | 3198 017 31520 | 3247 | Res, 270K, 5%, 1/16W, Metalized Glass. | 2322 702 60274 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. . | 3198 021 51050 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2910 | Cap, 3n3, 10%, 63v, Ceramic. | 3198 017 03320 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 2911 | Cap, 3n3, 10%, 63v, Ceramic. | 3198 017 03320 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3452 | Res, 3K6, 1%, 3/5W, Metal Film | 2312 915 13602 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3454 | Res, 1K5, 1%, 3/5W, Metal Film | 2312 915 11502 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3457 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3470 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3472 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 915 16808 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3473 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 915 16808 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3481 | Res, 18K, 1%, 3/5W, Metal Film | 2312 915 11803 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3491 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 021 51040 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 021 51040 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3507 | Surge Protector. | 2422 549 43073 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |

S = Safety Part Be sure to use exact replacement part.

20DV693R01 (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|--|------|-----|-------|
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass . . | 2322 | 734 | 64702 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . . | 2322 | 730 | 61274 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51530 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51030 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51020 | 4842 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51230 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 55620 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 52220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 55620 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 54730 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 52240 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 52240 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 08220 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 02220 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 02220 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 04710 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film | 3198 | 011 | 06820 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31030 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32220 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51020 | S 5445 | Transformer, LOT | 2422 | 531 | 02519 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5453 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 08220 | 5457 | Coil, Linear Correction, 82u | 2422 | 536 | 00425 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5480 | Coil, 22u. | 2422 | 535 | 97333 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | 5521 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | 5560 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | 5562 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | 5564 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5831 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5832 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5833 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32220 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 33320 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 33320 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 33320 | 6331 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 38220 | 6333 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6453 | Zener Diode, 5.6 volt. | 3198 | 020 | 55680 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6463 | Zener Diode, 8.2 volt. | 3198 | 020 | 58280 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6465 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6466 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 |
| 4826 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6500 | Diode, Bridge Rect, GBU6JL-7002. . . . | 9322 | 138 | 08667 |

S = Safety Part Be sure to use exact replacement part.

20DV693R01 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|---|------|-----|-------|
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 2103 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 2104 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 41040 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 2110 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 41040 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 2111 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 2112 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 2113 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 2114 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 2185 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 2263 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 41040 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 2300 | Cap, 10u, 20%, 250v, Electrolytic. . . | 2020 | 012 | 93495 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 2301 | Cap, 22n, 10%, 400v, Metalized Polyeste | 2222 | 365 | 55223 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 2302 | Cap, 100p, 10%, 1KV, Ceramic | 3198 | 019 | 51010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 2310 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 2311 | Cap, 470n, 10%, 25v, Ceramic | 2020 | 552 | 96465 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 2313 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 2315 | Cap, 220p, 10%, 1KV, Ceramic | 3198 | 019 | 62210 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 2316 | Cap, 33n, 10%, 16v, Ceramic. | 3198 | 017 | 33330 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 2319 | Cap, 220n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 22240 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2330 | Cap, 2u2, 20%, 25v, Electrolytic . . . | 3198 | 026 | 32220 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 2331 | Cap, 470u, 20%, 10v, Electrolytic. . . | 3198 | 025 | 14710 |
| 7200 | IC, TDA9569H/N1/4I/1313. | 9352 | 743 | 94557 | 2332 | Cap, 2u2, 20%, 25v, Electrolytic . . . | 3198 | 026 | 32220 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 2333 | Cap, 1000u, 20%, 10v, Electrolytic . . | 2020 | 021 | 91631 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2337 | Cap, 1000u, 20%, 25v, Electrolytic . . | 3198 | 026 | 31020 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2338 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 | 025 | 24710 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 2339 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 | 025 | 24710 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2341 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 | 42240 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 2342 | Cap, 47u, 20%, 16v, Electrolytic. . . | 3198 | 028 | 24790 |
| 7450 | Transistor, PNP, PBT114ET | 3198 | 010 | 44010 | 2350 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 2351 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 2353 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 3101 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 3102 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36890 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 3110 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 3111 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 3112 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 3113 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 3114 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 3115 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 3116 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 3117 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 | 310 | 10215 | 3118 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 3180 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 | 3182 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 3262 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 3266 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 | S 3300 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 | 204 | 03108 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | S 3301 | Power Resistor, 68K, 5%, 2W. | 3198 | 012 | 26830 |
| 7803 | IC, HEF4053BT. | 9333 | 729 | 60653 | 3308 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 | 187 | 89682 | 3309 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 7901 | IC, AN7522N PH | 9322 | 181 | 41682 | 3310 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 | 3311 | Res, 180 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31810 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 | 3312 | Res, 10 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31090 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 | 3313 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 21771 | 3314 | Res, 1 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01080 |
| CBA | DVD Loader SD5.12. | 3139 | 188 | 55471 | 3315 | Res, 1 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01080 |
| CBA | DVD MPEG Assembly SD5.12 | 3139 | 188 | 55481 | 3317 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| CBA | DVD Module SD5.12 (contains Loader and MPEG Assembly) | 4835 | 310 | 57599 | 3318 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| | | | | | 3319 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| | | | | | 3320 | Res, 100K, 1%, 1/16W, Metalized Glass. | 2322 | 704 | 61004 |
| | | | | | 3339 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 |
| | | | | | 3340 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| | | | | | 3342 | Res, 4K7, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 64702 |
| | | | | | 3344 | Res, 4K7, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 64702 |
| | | | | | 3360 | Res, 4R7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34780 |
| | | | | | 3361 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 |
| | | | | | 4105 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| | | | | | 4106 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| | | | | | 4185 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| | | | | | 4226 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| | | | | | 4261 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| | | | | | 4265 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| | | | | | 4266 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| | | | | | 4316 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| | | | | | 4342 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| | | | | | 4343 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| | | | | | 4361 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| | | | | | 4363 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| | | | | | 4364 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| | | | | | 5100 | Inductor, Variable, 100uH, 10% | 2422 | 549 | 41663 |
| | | | | | 5110 | Coil, 220n | 3198 | 018 | 12270 |
| | | | | | 5300 | Coil, 27u. | 3198 | 018 | 22790 |
| | | | | | 5301 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| | | | | | S 5315 | Transformer, SS25113-00. | 2422 | 531 | 02596 |
| | | | | | 5331 | Coil, 10u, 5%. | 2422 | 535 | 95363 |
| | | | | | 5333 | Coil, 10u, 5%. | 2422 | 535 | 95363 |
| | | | | | 5337 | Coil, 10u, 10% | 2422 | 535 | 97328 |
| | | | | | 5339 | Coil, 10u, 10% | 2422 | 535 | 97328 |
| | | | | | 6100 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| | | | | | 6101 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| | | | | | 6300 | Diode, Rect, BYD33J | 9337 | 234 | 20133 |
| | | | | | 6311 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |

S = Safety Part Be sure to use exact replacement part.

20DV693R01 (continued)

| | | | | |
|--------|--|------|-----|-------|
| 6312 | Zener Diode, 22 volt | 3198 | 020 | 52290 |
| 6330 | Diode, Rect, EGP20DL-5100 | 9322 | 164 | 42682 |
| 6332 | Diode, Rect, SB340L-7024 | 9322 | 161 | 76682 |
| 6336 | Diode, Rect, BYV27-200 | 9335 | 526 | 80133 |
| 7110 | IC, HEF4053BT | 9333 | 729 | 60653 |
| 7262 | Transistor, NPN, PDTCl24ET | 9340 | 310 | 20215 |
| 7310 | Transistor, NPN, PDTCl14ET | 3198 | 010 | 44110 |
| 7311 | Transistor, PNP, PDTAl14ET | 3198 | 010 | 44010 |
| 7312 | Transistor, PNP, BC857B | 3198 | 010 | 42150 |
| 7313 | Transistor, NPN, BC847B | 3198 | 010 | 42030 |
| 7315 | IC, TEA1523P/N2 | 9352 | 699 | 68112 |
| S 7340 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 |
| 7341 | IC, TL431CLP | 9337 | 711 | 00676 |
| 9110 | Wire Jumper | 3198 | 036 | 90010 |
| 9111 | Wire Jumper | 3198 | 036 | 90010 |
| 9183 | Wire Jumper | 3198 | 036 | 90010 |
| 9266 | Wire Jumper | 3198 | 036 | 90010 |
| 9315 | Wire Jumper | 3198 | 036 | 90010 |
| 9350 | Wire Jumper | 3198 | 036 | 90010 |
| 9351 | Wire Jumper | 3198 | 036 | 90010 |
| 9352 | Wire Jumper | 3198 | 036 | 90010 |
| 9355 | Wire Jumper | 3198 | 036 | 90010 |
| 9357 | Wire Jumper | 3198 | 036 | 90010 |
| CBA | DVD Interface Panel Assembly | 3139 | 187 | 20761 |

Front Interface Panel Parts

| | | | | |
|-----------------------------|---|------|-----|-------|
| Front Interface Panel Parts | | | | |
| S 0211 | 2 Pin Connector | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector | 2422 | 025 | 06353 |
| 1606 | Tact Switch | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V | 9322 | 127 | 54667 |
| 9001 | Wire Jumper | 3198 | 036 | 90010 |
| 9002 | Wire Jumper | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

| | | | | |
|-----------------------|---|------|-----|-------|
| Side Jack Panel Parts | | | | |
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector | 2422 | 025 | 15849 |
| 0254 | 5 Pin Connector | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector | 2422 | 025 | 12479 |
| 2171 | Cap, 470p, 5%, 50v, Ceramic | 3198 | 019 | 14710 |
| 2172 | Cap, 470p, 5%, 50v, Ceramic | 3198 | 019 | 14710 |
| 2173 | Cap, 470p, 5%, 50v, Ceramic | 3198 | 019 | 14710 |
| 2174 | Cap, 470p, 5%, 50v, Ceramic | 3198 | 019 | 14710 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic | 3198 | 019 | 14710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic | 3198 | 019 | 14710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/6W, Carbon Film | 3198 | 011 | 01210 |
| 3157 | Res, 120 ohm, 5%, 1/6W, Carbon Film | 3198 | 011 | 01210 |
| 6161 | Zener Diode, 6.8 volt | 3198 | 010 | 26880 |
| 9153 | Wire Jumper | 3198 | 036 | 90010 |
| 9170 | Wire Jumper | 3198 | 036 | 90010 |
| 9171 | Wire Jumper | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 188 | 03541 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

| | | | | |
|-------------------------|---------------------------|------|-----|-------|
| Top Control Panel Parts | | | | |
| 0215 | 3 Pin Connector | 2422 | 025 | 16601 |

S = Safety Part Be sure to use exact replacement part.

| | | | | |
|------|--|------|-----|-------|
| 1091 | Tact Switch | 2422 | 128 | 02742 |
| 1092 | Tact Switch | 2422 | 128 | 02742 |
| 1093 | Tact Switch | 2422 | 128 | 02742 |
| 1094 | Tact Switch | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

| | | | | |
|---------------------------|---|------|-----|-------|
| Cabinet & Accessory Parts | | | | |
| S AC01 | AC Cord | 3139 | 177 | 25821 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 45831 |
| AC06 | Cabinet Back Screw Cover (2 Used) | 3139 | 124 | 42891 |
| S AC09 | CRT, A51ERF135X82 | 9301 | 903 | 81343 |
| S AC12 | Degaussing Coil | 3141 | 058 | 20131 |
| AC13 | Front Interface Panel Bracket | 3139 | 124 | 32891 |
| AC14 | Front Main PCB Bracket | 3139 | 124 | 45641 |
| AC17 | Owner's Manual | 3141 | 055 | 22221 |
| AC17 | Owner's Manual, French | 3141 | 055 | 22251 |
| AC19 | Side Jack Panel Bracket | 3139 | 124 | 37061 |
| AC20A | Cabinet Front | 3139 | 177 | 53981 |
| AC20B | Chassis Guide | 3139 | 124 | 25893 |
| AC20B | Chassis Guide | 3139 | 124 | 45661 |
| AC20C | Light Guide | 3139 | 124 | 41421 |
| AC20D | Nameplate | 3139 | 120 | 01371 |
| AC20E | Power Button | 3139 | 177 | 58491 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| AC20J | Top Control Assembly | 3139 | 177 | 56381 |
| AC20J1 | Top Control Bracket | 3139 | 124 | 39172 |
| AC20J2 | Top Control Buttons | 3139 | 124 | 39182 |
| AC23 | DVD Door | 3139 | 177 | 63441 |
| AC24 | DVD Interface Panel Bracket | 3139 | 124 | 43291 |
| REMOTE | Remote Control Transmitter, RC19042007/01 | 3128 | 147 | 14521 |

20DV693R02 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | |
|--------------------|--|----------------|--|
| 0211 | 2 Pin Connector. | 2422 025 16374 | |
| 0212 | 2 Pin Connector. | 2422 025 16375 | |
| 0214 | 5 Pin Connector. | 2422 025 12481 | |
| 0217 | 3 Pin Connector. | 2412 020 00725 | |
| 0219 | 6 Pin Connector. | 2422 025 12482 | |
| 0220 | 5 Pin Connector. | 2422 025 04853 | |
| 0221 | 2 Pin Connector. | 2422 025 15503 | |
| 0222 | 2 Pin Connector. | 2422 025 10646 | |
| 0223 | A/V Jack | 2422 026 05236 | |
| 0225 | SVHS Jack. | 2422 026 04926 | |
| 0227 | 3 Pin Connector. | 2422 025 16382 | |
| 0229 | 7 Pin Connector. | 2422 025 11244 | |
| 0239 | 3 Pin Connector. | 2422 025 16382 | |
| 0240 | 4 Pin Connector. | 2422 025 12479 | |
| 0243 | 6 Pin Connector. | 2422 025 04854 | |
| 0244 | 5 Pin Connector. | 2422 025 04853 | |
| 0245 | 6 Pin Connector. | 2422 025 04854 | |
| 0246 | 5 Pin Connector. | 2422 025 12481 | |
| 0251 | 4 Pin Connector. | 2422 025 15847 | |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | |
| 0267 | 3 Pin Connector. | 2412 020 00725 | |
| 0269 | Jack | 2422 026 05182 | |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07467 | |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | |
| 1810 | 6 Pin Connector. | 2422 025 15849 | |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 543 00842 | |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | |

S = Safety Part Be sure to use exact replacement part.

| | | |
|--------|--|----------------|
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyest er. | 2222 368 90177 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2022 031 00103 |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2457 | Cap, 270n, 5%, 250v, Metalized Polyprop ylene. | 2222 479 90016 |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2022 031 00138 |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2020 558 90485 |
| 2465 | Cap, 9n1, 5%, 1600v, Polypropylene | 2222 375 90153 |
| 2467 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2468 | Cap, 33n, 10%, 400v, Polyester | 2222 347 90227 |
| 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2038 035 13301 |
| 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2022 031 00137 |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2022 031 00139 |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2038 035 13508 |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2022 031 00144 |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2022 031 00139 |
| 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2500 | Cap, 470n, 20%, 275v, Metalized Polypro pylene | 2222 336 29148 |
| 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90626 |
| 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90128 |
| 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 |

20DV693R02 (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03108 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03108 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . | 3198 013 01520 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03390 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glass | 3198 021 51010 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. . | 3198 021 51050 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . | 3198 011 01530 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . | 3198 011 05620 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08180 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2910 | Cap, 3n3, 10%, 63v, Ceramic. | 3198 017 03320 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06890 |
| 2911 | Cap, 3n3, 10%, 63v, Ceramic. | 3198 017 03320 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03390 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3452 | Res, 3K6, 1%, 3/5W, Metal Film. . . . | 2312 915 13602 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3454 | Res, 1K5, 1%, 3/5W, Metal Film. . . . | 2312 915 11502 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . | 3198 012 26880 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3456 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3457 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . | 3198 012 21530 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . | 3198 011 03920 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. . . . | 2312 915 12703 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . | 3198 011 03320 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3470 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 730 61274 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film. . . . | 2312 915 13908 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3472 | Res, 6R8, 1%, 3/5W, Metal Film. . . . | 2312 915 16808 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3473 | Res, 6R8, 1%, 3/5W, Metal Film. . . . | 2312 915 16808 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. . . . | 2312 915 12202 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. . . . | 2312 915 12202 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3481 | Res, 18K, 1%, 3/5W, Metal Film. . . . | 2312 915 11803 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3482 | Res, 12K, 1%, 3/5W, Metal Film. . . . | 2312 915 11203 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. . . . | 2306 207 03478 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3491 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. . . . | 2306 204 03688 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. . . . | 2306 207 03478 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass. . | 3198 021 52230 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 021 51040 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 021 51040 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass. . | 3198 021 51230 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3507 | Surge Protector. | 2422 549 43073 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . | 3198 021 51220 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glass | 3198 021 32210 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03101 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 021 55630 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glass | 3198 021 34710 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film. . . . | 3198 012 11070 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 | 3528 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. . | 3198 021 54720 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film. . . . | 2306 204 03222 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glass | 3198 021 35610 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glass | 3198 021 54710 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. . | 3198 021 51520 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 | 3543 | Res, 82K, 1%, 3/5W, Metal Film. . . . | 2312 915 18203 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 734 64702 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 730 61274 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. . | 3198 021 51530 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3247 | Res, 270K, 5%, 1/16W, Metalized Glass. . | 2322 702 60274 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. . | 3198 021 51230 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. . | 3198 021 55620 |

S = Safety Part Be sure to use exact replacement part.

20DV693R02 (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 5445 | Transformer, LOT | 2422 531 02519 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5453 | Coil, 22u, 5% | 3198 018 12290 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5457 | Coil, Linear Correction, 82u | 2422 536 00425 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5480 | Coil, 22u. | 2422 535 97333 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | S 5501 | Mains Filter | 2422 549 43432 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5521 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5560 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5562 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5564 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 5831 | Coil, 6u8, 5% | 3198 018 16880 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5832 | Coil, 6u8, 5% | 3198 018 16880 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5833 | Coil, 6u8, 5% | 3198 018 16880 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5835 | Coil, 12u, 10% | 3198 018 31290 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6331 | Diode, Signal, BAV21. | 3198 010 10070 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6333 | Diode, Signal, BAV21. | 3198 010 10070 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 6335 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6453 | Zener Diode, 5.6 volt. | 3198 020 55680 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6460 | Diode, Rect, BY228/24. | 9340 559 50112 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6463 | Zener Diode, 8.2 volt. | 3198 020 58280 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6465 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6466 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6467 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6468 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6470 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6476 | Zener Diode, 15 volt | 3198 010 21590 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6485 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6487 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6500 | Diode, Bridge Rect, GBU6UL-7002. . . . | 9322 138 08667 |
| 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6520 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6523 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6524 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6525 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6526 | Zener Diode, 22 volt | 3198 020 52290 |
| 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6541 | Zener Diode, 10 volt | 3198 020 51090 |
| 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 |
| 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6563 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6565 | Diode, Signal, BAV70 | 9331 849 10215 |

20DV693R02 (continued)

| | | | | | | | | | |
|--|--|------|-----|-------|------|--|------|-----|-------|
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 2127 | Cap, 10n, 10%, 50V, Ceramic. | 3198 | 017 | 31030 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 2128 | Cap, 10u, 20%, 50V, Electrolytic. | 3198 | 025 | 51090 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 2140 | Cap, 100u, 20%, 16V, Electrolytic. | 3198 | 029 | 21010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 2141 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 2142 | Cap, 100u, 20%, 16V, Electrolytic. | 3198 | 029 | 21010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 2143 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 2165 | Cap, 10n, 10%, 50V, Ceramic. | 3198 | 017 | 31030 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 2169 | Cap, 10n, 10%, 50V, Ceramic. | 3198 | 017 | 31030 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2184 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 2185 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 |
| 7200 | IC, TDA9569H/N1/4I/1161. | 9352 | 733 | 51557 | 2200 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 2201 | Cap, 10u, 20%, 16v, Electrolytic. | 3198 | 028 | 21090 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2211 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2261 | Cap, 10n, 10%, 50V, Ceramic. | 3198 | 017 | 31030 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 2262 | Cap, 10n, 10%, 50V, Ceramic. | 3198 | 017 | 31030 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2263 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 2264 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 7450 | Transistor, PNP, PDTA114ET | 3198 | 010 | 44010 | 2265 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 2266 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 2267 | Cap, 10u, 20%, 50V, Electrolytic. | 3198 | 025 | 51090 |
| 7462 | Transistor, NPN, PDMC143ZT | 9340 | 547 | 00215 | 2268 | Cap, 10u, 20%, 50V, Electrolytic. | 3198 | 025 | 51090 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 2280 | Cap, 10u, 20%, 16v, Electrolytic. | 3198 | 028 | 21090 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 2281 | Cap, 10u, 20%, 16v, Electrolytic. | 3198 | 028 | 21090 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 2300 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 | 93495 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 2301 | Cap, 22n, 10%, 400v, Metalized Polyester | 2222 | 365 | 55223 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 2302 | Cap, 33p, 10%, 1KV, Ceramic. | 3198 | 019 | 53310 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 2310 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 | 31040 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 2311 | Cap, 470n, 10%, 25v, Ceramic. | 2020 | 552 | 96465 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 2313 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 2315 | Cap, 220p, 10%, 1KV, Ceramic. | 3198 | 019 | 62210 |
| 7541 | Transistor, NPN, PDMC114ET | 9340 | 310 | 10215 | 2316 | Cap, 33n, 10%, 16v, Ceramic. | 3198 | 017 | 33330 |
| 7542 | Transistor, PNP, PDMC143ZT | 3198 | 010 | 42150 | 2330 | Cap, 2u2, 20%, 25v, Electrolytic. | 3198 | 026 | 32220 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 | 2331 | Cap, 470u, 20%, 10v, Electrolytic. | 3198 | 025 | 14710 |
| 7561 | Transistor, NPN, PDMC143ZT | 9340 | 547 | 00215 | 2332 | Cap, 2u2, 20%, 25v, Electrolytic. | 3198 | 026 | 32220 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 2333 | Cap, 470u, 20%, 10v, Electrolytic. | 3198 | 025 | 14710 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 | 2335 | Cap, 220u, 20%, 25V, Electrolytic. | 3198 | 025 | 32210 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 2337 | Cap, 1000u, 20%, 25v, Electrolytic. | 3198 | 026 | 31020 |
| 7803 | IC, HEF4053BT. | 9333 | 729 | 60653 | 2338 | Cap, 1000u, 20%, 25v, Electrolytic. | 3198 | 026 | 31020 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 | 187 | 89682 | 2341 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 7901 | IC, AN7522N PH | 9322 | 181 | 41682 | 2350 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 | 31020 |
| 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 | 2351 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 | 31020 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 | 2353 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 | 31020 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 | 3101 | Res, 100 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31010 |
| CBA | Main Chassis Assembly. | 3139 | 188 | 04071 | 3102 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36890 |
| CBA | DVD Module SD3.1 | 3139 | 248 | 71141 | 3110 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| Channel One Card Parts | | | | | 3111 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| Channel One Card Parts | | | | | 3112 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 2D 3 Line Comb Filter Parts | | | | | 3113 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 2D 3 Line Comb Filter Parts | | | | | 3114 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| DAF Panel Parts | | | | | 3115 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| DAF Panel Parts | | | | | 3116 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| DVD Eject Panel Parts | | | | | 3117 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| DVD Eject Panel Parts | | | | | 3120 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 0267 | 3 Pin Board Connector. | 2422 | 025 | 09191 | 3121 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 |
| 0361 | Eject Button | 3139 | 138 | 11271 | 3122 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 1110 | Tact Switch. | 2422 | 128 | 02742 | 3123 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| CBA | DVD Eject Panel Assembly | 3139 | 188 | 03391 | 3124 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 |
| DVD Interface Panel Parts | | | | | 3125 | Res, 5K6, 5%, 1/16W, Metalized Glass | 3198 | 021 | 35620 |
| DVD Interface Panel Parts | | | | | 3126 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 0226 | Connector, 6 Pin | 2422 | 025 | 12482 | 3130 | Res, 47 ohm, 5%, 1/6W, Carbon Film | 3198 | 011 | 04790 |
| 0251 | Connector, 4 Pin | 2422 | 025 | 15847 | 3140 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 0253 | Connector, 7 Pin | 2422 | 025 | 11244 | 3141 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 0254 | Connector, 22 Pin. | 2422 | 025 | 16526 | 3142 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 |
| 0255 | Connector, 16 Pin. | 2422 | 025 | 16525 | 3143 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 0265 | Connector, 12 Pin. | 2422 | 025 | 08333 | 3145 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 0266 | Connector, 6 Pin | 2422 | 025 | 15849 | 3146 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 1100 | Socket, Cinch, 1 Pin | 2422 | 026 | 04425 | 3147 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 |
| S 1330 | Fuse, 2.5A, 250V | 2422 | 086 | 10784 | 3148 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| S 1331 | Fuse, 2.5A, 250V | 2422 | 086 | 10784 | 3180 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| S 1332 | Fuse, 2A, 250V IEC | 2422 | 086 | 10783 | 3182 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 1619 | Connector, 4 Pin | 2422 | 025 | 15847 | 3200 | Res, 270 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32710 |
| 2101 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 | 3201 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 2102 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 | 3202 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 2103 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 | 3203 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36820 |
| 2104 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 3204 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 2110 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 3205 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 |
| 2111 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 | 3206 | Res, 680 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 36810 |
| 2112 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 | 3207 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 |
| 2113 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 | 3208 | Res, 75 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 37590 |
| 2115 | Cap, 1u, +80/-20%, 10V, Ceramic. | 3198 | 017 | 41050 | 3209 | Res, 75 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 37590 |
| 2120 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 3210 | Res, 270 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32710 |
| 2121 | Cap, 47u, 20%, 25V, Electrolytic | 3198 | 025 | 34790 | 3211 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 2122 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 3212 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 2123 | Cap, 10u, 20%, 50V, Electrolytic | 3198 | 025 | 51090 | 3213 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36820 |
| 2124 | Cap, 10n, 10%, 50V, Ceramic. | 3198 | 017 | 31030 | 3214 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 2125 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 | 3215 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 |
| 2126 | Cap, 47u, 20%, 25V, Electrolytic | 3198 | 025 | 34790 | 3216 | Res, 680 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 36810 |
| S = Safety Part Be sure to use exact replacement part. | | | | | 3217 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 |
| | | | | | 3218 | Res, 75 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 37590 |
| | | | | | 3219 | Res, 75 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 37590 |
| | | | | | 3230 | Res, 22K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32230 |
| | | | | | 3231 | Res, 24K, 1%, 1/16W, Metalized Glass | 2322 | 704 | 62403 |

20DV693R02 (continued)

| | | | | |
|--------|---|------|-----|-------|
| 3232 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32230 |
| 3233 | Res, 24K, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 62403 |
| S 3300 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 | 204 | 03108 |
| S 3301 | Power Resistor, 68K, 5%, 2W. | 3198 | 012 | 26830 |
| 3308 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3309 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3310 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3311 | Res, 180 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31810 |
| 3312 | Res, 10 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31090 |
| 3313 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3314 | Res, 1 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01080 |
| 3315 | Res, 1 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01080 |
| 3317 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3318 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| 3319 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3320 | Res, 75K, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 67503 |
| 3330 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01510 |
| S 3331 | Res, 10 ohm, 5%, 2 1/2W, Metal Film. . | 3198 | 012 | 31090 |
| 3339 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 |
| 3340 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3342 | Res, 1K5, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 61502 |
| 3344 | Res, 4K7, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 64702 |
| 3350 | Res, 18K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01830 |
| 3351 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 |
| 3360 | Res, 4R7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34780 |
| 3406 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3466 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| 4100 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4102 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4103 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4142 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4150 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4162 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4185 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4336 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4407 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4463 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4466 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 5100 | Inductor, Variable, 100uH, 10% | 2422 | 549 | 41663 |
| 5110 | Coil, 220n | 3198 | 018 | 12270 |
| 5120 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 5140 | Coil, 220n | 3198 | 018 | 12270 |
| 5141 | Coil, 220n | 3198 | 018 | 12270 |
| 5200 | Coil, 6u8. | 3198 | 018 | 16880 |
| 5300 | Coil, 56u. | 3198 | 018 | 25690 |
| S 5301 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| S 5315 | Transformer, SS25105-02. | 2422 | 531 | 02521 |
| 5331 | Coil, 10u, 5%. | 2422 | 535 | 95363 |
| 5333 | Coil, 10u, 5%. | 2422 | 535 | 95363 |
| 5337 | Coil, 10u. | 2422 | 535 | 95363 |
| 6120 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6300 | Diode, Rect, BYD33J | 9337 | 234 | 20133 |
| 6311 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6312 | Zener Diode, 22 volt | 3198 | 020 | 52290 |
| 6330 | Diode, Rect, EGP20DL-5100 | 9322 | 164 | 42682 |
| 6332 | Diode, Rect, SB340L-7024. | 9322 | 161 | 76682 |
| 6334 | Diode, Rect, BYD33D | 9337 | 234 | 00133 |
| 6336 | Diode, Rect, BYV27-200. | 9335 | 526 | 80133 |
| 6350 | Zener Diode, 12 volt | 3198 | 020 | 51290 |
| 7110 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 7120 | IC, UDA1334BT/N2 | 9352 | 703 | 94118 |
| 7140 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 7142 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 7200 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 7201 | Transistor, PNP, BC857B. | 3198 | 010 | 42150 |
| 7202 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 7210 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 7211 | Transistor, PNP, BC857B. | 3198 | 010 | 42150 |
| 7212 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 7262 | Transistor, NPN, PDTCL14ET | 9340 | 310 | 20215 |
| 7280 | IC, L78L08ACZ. | 9322 | 130 | 67676 |
| 7310 | Transistor, NPN, PDTCL14ET | 3198 | 010 | 44110 |
| 7311 | Transistor, PNP, PDTA114ET | 3198 | 010 | 44010 |
| 7312 | Transistor, PNP, BC857B. | 3198 | 010 | 42150 |
| 7313 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 7315 | IC, TEA1523P/N2. | 9352 | 699 | 68112 |
| S 7340 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 |
| 7341 | IC, TL431CLP | 9337 | 711 | 00676 |
| 7350 | Transistor, FET, ST2306DS. | 9322 | 163 | 75685 |
| 7351 | Transistor, NPN, PDTCL14ET | 3198 | 010 | 44130 |
| CBA | DVD Interface Panel Assembly | 3139 | 188 | 03291 |

Front Interface Panel Parts

| | | | | |
|-----------------------------|--|------|-----|-------|
| Front Interface Panel Parts | | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |

| | | | | |
|--------|--|------|-----|-------|
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 15849 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2172 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2173 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2174 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 | 51090 |
| 3150 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01210 |
| 3157 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01210 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 188 | 03541 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 45831 |
| AC06 | Cabinet Back Screw Cover (2 Used). . . | 3139 | 124 | 42891 |
| S AC09 | CRT, A51ERF135X82. | 9301 | 903 | 81343 |
| S AC12 | Degaussing Coil. | 3141 | 058 | 20131 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC14 | Front Main PCB Bracket | 3139 | 124 | 45641 |
| AC17 | Owner's Manual | 3139 | 125 | 31451 |
| AC18 | Quick Use Guide. | 3141 | 055 | 52361 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20A | Cabinet Front. | 3139 | 177 | 53981 |
| AC20B | Chassis Guide. | 3139 | 124 | 25893 |
| AC20B | Chassis Guide. | 3139 | 124 | 45661 |
| AC20C | Light Guide. | 3139 | 124 | 41421 |
| AC20D | Nameplate. | 3139 | 120 | 01371 |
| AC20E | Power Button | 3139 | 177 | 58491 |

20DV693R02 (continued)

| | | | | | |
|--------|---|-----------|------|-----|-------|
| AC20H | Speaker, 16 ohm, 5W (2 Used) | | 2422 | 264 | 00411 |
| AC20J | Top Control Assembly | | 3139 | 138 | 11451 |
| AC23 | DVD Door | | 3139 | 138 | 11281 |
| AC25 | DVD PIP Bracket | | 3139 | 124 | 35571 |
| REMOTE | Remote Control Transmitter, RC19042007/ | | | | |
| | 01. | | 3128 | 147 | 14521 |

20MS334R/37 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|---|------|-----------|--------|--|------|-----------|
| | Main Chassis Parts | | | | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 16269 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 0218 | A/V Jack | 2422 | 026 04742 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2038 | 035 13301 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 |
| 0232 | Headphone Jack | 2422 | 026 04747 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2022 | 031 00137 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2022 | 031 00139 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2038 | 035 13508 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2022 | 031 00144 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2022 | 031 00139 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 0280 | 4 Pin Connector. | 2422 | 025 12479 | 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2222 | 336 29148 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90626 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07467 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 1600 | Tact Switch. | 2422 | 128 02742 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| 1601 | Tact Switch. | 2422 | 128 02742 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90128 |
| 1602 | Tact Switch. | 2422 | 128 02742 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 1603 | Tact Switch. | 2422 | 128 02742 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 1606 | Tact Switch. | 2422 | 128 02742 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91353 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 31020 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 21050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 | 370 76104 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2864 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2865 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 | 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 15626 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | | 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |
| | er. | 2222 | 368 90177 | 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 15626 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 | 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 | 2874 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 | 2875 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 | 2876 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 | 2877 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 | 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 | 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 | 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 | 2883 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 | 2884 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 | 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 | 014 02240 |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2022 | 031 00103 | 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 | 2902 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 |
| 2457 | Cap, 270n, 5%, 250v, Metalized Polypropylene. | 2222 | 479 90016 | 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2022 | 031 00138 | 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 | 580 15642 |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 | 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 | 580 15624 |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 | 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 | 580 15642 |
| 2463 | Cap, 680p, 10%, 2000v, Ceramic. | 2020 | 558 90485 | 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 | 580 15624 |
| 2465 | Cap, 9n1, 5%, 1600v, Polypropylene. | 2222 | 375 90153 | 2908 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2467 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 | 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2468 | Cap, 33n, 10%, 400v, Polyester. | 2222 | 347 90227 | 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 | 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 33310 |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 | 2981 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 | 2982 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 34710 |
| | | | | 2983 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| | | | | 2984 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 34710 |

S = Safety Part Be sure to use exact replacement part.

20MS334R/37 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|---|------|-----|-------|
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 | 204 | 03688 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 | 207 | 03478 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52230 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass . . | 2322 | 242 | 13335 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01510 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass . . | 2322 | 242 | 13335 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 | 663 | 00019 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01510 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13155 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 03910 | 3507 | Surge Protector. | 2422 | 549 | 43073 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 | 013 | 02210 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 | 612 | 00056 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02710 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02230 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51220 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33330 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 04780 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01020 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53340 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 | 204 | 03101 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36890 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55630 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 05610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33340 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 | 012 | 13370 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38230 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32230 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32730 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 08210 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 63903 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 | 734 | 64702 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 |
| 3247 | Res, 270K, 5%, 1/16W, Metalized Glass. | 2322 | 702 | 60274 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33330 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 08210 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 |
| 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31060 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 |
| 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 | 012 | 13310 |
| 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34740 | 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 |
| 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 |
| 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 | 013 | 01020 | 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 |
| 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 |
| 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 | 013 | 01020 | 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 |
| 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 |
| 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 | 013 | 01020 | 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 | 207 | 03109 | 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 | 204 | 03108 | 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 | 204 | 03108 | 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 |
| 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 | 013 | 01520 | 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 |
| 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03390 | 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 |
| S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 | 593 | 13507 | 3609 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01020 |
| 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03390 | 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 |
| 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3442 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 |
| 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51050 | 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01530 | 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 05620 | 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01810 | 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 08210 | 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 06890 | 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03390 | 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 | 204 | 03109 | 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 |
| 3452 | Res, 3K6, 1%, 3/5W, Metal Film | 2312 | 915 | 13602 | 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3453 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01020 | 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 |
| 3454 | Res, 1K5, 1%, 3/5W, Metal Film | 2312 | 915 | 11502 | 3637 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 |
| S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 | 012 | 26880 | 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 |
| 3457 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 |
| 3458 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01020 | 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 53320 |
| S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 | 012 | 21530 | 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 |
| 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 03920 | 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 |
| 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03390 | 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 |
| 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 | 915 | 12703 | 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 |
| 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 03320 | 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 |
| 3470 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 | 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 |
| 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 | 915 | 13908 | 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| 3472 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 | 915 | 16808 | 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3473 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 | 915 | 16808 | 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 |
| 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 | 915 | 12202 | 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 |
| 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 | 915 | 12202 | 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01510 | 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01510 | 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52720 | 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 | 101 | 02083 | 3901 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 |
| 3481 | Res, 18K, 1%, 3/5W, Metal Film | 2312 | 915 | 11803 | 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 | 915 | 11203 | 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 03920 | 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 | 207 | 03478 | 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3491 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 |
| 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 3981 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01210 |

S = Safety Part Be sure to use exact replacement part.

20MS334R/37 (continued)

| | | | | | |
|--------|--|----------------|--------|---|----------------|
| 3982 | Res, 120 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01210 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6485 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6487 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6520 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6523 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6524 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6525 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6526 | Zener Diode, 22 volt | 3198 020 52290 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6541 | Zener Diode, 10 volt | 3198 020 51090 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6563 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6565 | Diode, Signal, BAV70 | 9331 849 10215 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6566 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6569 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6580 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6681 | Diode, Signal, BAT85 | 9336 247 60133 |
| 4696 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6691 | LED, LTL-10234WHCR | 9322 185 69682 |
| 4808 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6692 | IR Receiver. | 9322 127 54667 |
| 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7200 | IC, TDA9587H/N1/31/1136. | 9352 731 64557 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7330 | IC, TDA6107JF/N3 | 9352 713 37112 |
| 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 |
| 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7450 | Transistor, PNP, PDA114ET | 3198 010 44010 |
| 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 |
| 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 |
| 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7462 | Transistor, NPN, PDTCL43ZT | 9340 547 00215 |
| 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 |
| 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7471 | IC, TDA8359J/N2. | 9352 701 64112 |
| 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7480 | Transistor, NPN, BD135 | 3198 020 41010 |
| 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7482 | Transistor, NPN, BD135 | 3198 020 41010 |
| 5001 | Coil, 27u, 10% | 3198 018 22790 | S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 |
| 5002 | Coil, 820n, 10% | 3198 018 18270 | 7520 | IC, TEA1507P/N1. | 9352 673 56112 |
| 5201 | Coil, 6u8, 5% | 3198 018 16880 | 7521 | Power FET, FQPF9N50. | 9322 187 16687 |
| 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 |
| 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7541 | Transistor, NPN, PDTCL14ET | 9340 310 10215 |
| 5242 | Coil, 10u, 5% | 3198 018 11090 | 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5342 | Coil, 22u. | 2422 535 97333 | 7560 | IC, L78L33ACZ. | 9322 134 92676 |
| S 5445 | Transformer, LOT | 2422 531 02519 | 7561 | Transistor, NPN, PDTCL43ZT | 9340 547 00215 |
| 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5453 | Coil, 22u, 5% | 3198 018 12290 | 7602 | IC, M24C08-WBN6. | 9322 154 38682 |
| 5457 | Coil, Linear Correction, 82u | 2422 536 00425 | 7861 | IC, TDA9853H/V1. | 9352 671 19557 |
| 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 | 7901 | IC, AN7522N PH | 9322 181 41682 |
| 5471 | Coil, 6u8, 20% | 3198 018 76880 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 5472 | Coil, 3u3, 10% | 3198 018 23380 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 5480 | Coil, 22u. | 2422 535 97333 | 9678 | Coil, 22u, 10% | 3198 018 22290 |
| S 5501 | Mains Filter | 2422 549 43432 | CBA | Main Chassis Assembly. | 3141 058 59121 |
| S 5520 | Transformer, SS39009-04. | 2422 531 02459 | | | |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | | Channel One Card Parts | |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | | Channel One Card Parts | |
| 5561 | Coil, 27u, 5% | 2422 535 95366 | | 2D 3 Line Comb Filter Parts | |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | | 2D 3 Line Comb Filter Parts | |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | | DAF Panel Parts | |
| 5602 | Coil, 5u6, 5% | 3198 018 15680 | | DAF Panel Parts | |
| 5603 | Coil, 5u6, 5% | 3198 018 15680 | | DVD Eject Panel Parts | |
| 5604 | Coil, 5u6, 5% | 3198 018 15680 | | DVD Eject Panel Parts | |
| 5861 | Coil, 10u, 5% | 3198 018 11090 | | DVD Interface Panel Parts | |
| 6001 | Zener Diode, 33 volt | 3198 010 23390 | | DVD Interface Panel Parts | |
| 6181 | Zener Diode, 6.8 volt. | 3198 020 56880 | | Front Interface Panel Parts | |
| 6201 | Diode, Signal, BAS316. | 3198 010 10630 | | Front Interface Panel Parts | |
| 6202 | Diode, Signal, BAS316. | 3198 010 10630 | | ITV Front Jack Panel Parts | |
| 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 | | ITV Front Jack Panel Parts | |
| 6331 | Diode, Signal, BAV21 | 3198 010 10070 | | Net 1 Panel (part of Scan 4 Card Assembly) | |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | | Net 1 Panel (part of Scan 4 Card Assembly) | |
| 6333 | Diode, Signal, BAV21 | 3198 010 10070 | | Scan 4 Card (part of Scan 4 Card Assembly) | |
| 6335 | Diode, Signal, BAV21 | 3198 010 10070 | | Scan 4 Card (part of Scan 4 Card Assembly) | |
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | | Side Jack Panel Parts | |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | | Side Jack Panel Parts | |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | | Subwoofer Panel Parts | |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | | Subwoofer Panel Parts | |
| 6453 | Zener Diode, 5.6 volt. | 3198 020 55680 | | | |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | | | |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | | | |
| 6463 | Zener Diode, 8.2 volt. | 3198 020 58280 | | | |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | | | |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | | | |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | | | |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | | | |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | | | |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | | | |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | | | |

20MS334R/37 (continued)

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| | Cabinet & Accessory Parts | | | |
| S AC01 | AC Cord. | 3139 | 128 | 76161 |
| AC04 | Batteries for Remote Control Transmitter | 9082 | 100 | 90002 |
| AC05 | Cabinet Back | 3139 | 124 | 46481 |
| S AC09 | CRT, A51ERF135X82. | 9301 | 903 | 81343 |
| AC10 | Customer Control Buttons | 3139 | 137 | 94241 |
| S AC12 | Degaussing Coil. | 3141 | 058 | 20131 |
| AC17 | Owner's Manual | 3141 | 055 | 21471 |
| AC20A | Cabinet Front. | 3139 | 177 | 67451 |
| AC20B | Chassis Guide. | 3139 | 124 | 30812 |
| AC20C | Light Guide. | 3139 | 124 | 32221 |
| AC20D | Nameplate. | 3141 | 050 | 00331 |
| AC20E | Power Button | 3139 | 137 | 94231 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| AC22 | Cinch Cover. | 3139 | 124 | 25551 |
| REMOTE | Remote Control Transmitter, RC1112917/1 | | | |
| | 7A. | 3139 | 238 | 04701 |

20MS334R01 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|---|------|-----------|--------|--|------|-----------|
| | Main Chassis Parts | | | | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 16269 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 0218 | A/V Jack | 2422 | 026 04742 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2038 | 035 13301 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 |
| 0232 | Headphone Jack | 2422 | 026 04747 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2022 | 031 00137 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2022 | 031 00139 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2038 | 035 13508 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2022 | 031 00144 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2022 | 031 00139 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 0280 | 4 Pin Connector. | 2422 | 025 12479 | 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2222 | 336 29148 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90626 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07467 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 1600 | Tact Switch. | 2422 | 128 02742 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| 1601 | Tact Switch. | 2422 | 128 02742 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90128 |
| 1602 | Tact Switch. | 2422 | 128 02742 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 1603 | Tact Switch. | 2422 | 128 02742 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 1606 | Tact Switch. | 2422 | 128 02742 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91353 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 31020 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 21050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 | 370 76104 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2864 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2865 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 | 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 15626 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | | 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |
| | er. | 2222 | 368 90177 | 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 15626 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 | 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 | 2874 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 | 2875 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 | 2876 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 | 2877 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 | 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 | 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 | 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 | 2883 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 | 2884 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 | 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 | 014 02240 |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2022 | 031 00103 | 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 | 2902 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 |
| 2457 | Cap, 270n, 5%, 250v, Metalized Polypropylene. | 2222 | 479 90016 | 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2022 | 031 00138 | 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 | 580 15642 |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 | 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 | 580 15624 |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 | 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 | 580 15642 |
| 2463 | Cap, 680p, 10%, 2000v, Ceramic. | 2020 | 558 90485 | 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 | 580 15624 |
| 2465 | Cap, 9n1, 5%, 1600v, Polypropylene. | 2222 | 375 90153 | 2908 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2467 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 | 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2468 | Cap, 33n, 10%, 400v, Polyester. | 2222 | 347 90227 | 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 | 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 33310 |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 | 2981 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 | 2982 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 34710 |
| | | | | 2983 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| | | | | 2984 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 34710 |

S = Safety Part Be sure to use exact replacement part.

20MS334R01 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 | 204 | 03688 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 | 207 | 03478 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 52230 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 38220 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51230 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass | 2322 | 242 | 13335 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01510 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 | 663 | 00019 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01510 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13155 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03910 | 3507 | Surge Protector. | 2422 | 549 | 43073 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film | 3198 | 013 | 02210 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 | 612 | 00056 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02710 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02230 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51220 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33330 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04780 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53340 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film | 2306 | 204 | 03101 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36890 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55630 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33340 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 | 012 | 13370 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 38230 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32230 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32730 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08210 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass | 2322 | 704 | 63903 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 | 730 | 61274 |
| 3247 | Res, 270K, 5%, 1/16W, Metalized Glass. | 2322 | 702 | 60274 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51530 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33330 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08210 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51230 |
| 3257 | Res, 10M, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31060 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 |
| 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 |
| 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34740 | 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 | 021 | 52220 |
| 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 |
| 3332 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 | 013 | 01020 | 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 |
| 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 |
| 3334 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 | 013 | 01020 | 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 |
| 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 |
| 3336 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 | 013 | 01020 | 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 |
| 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. | 2306 | 207 | 03109 | 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 |
| S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 | 204 | 03108 | 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 |
| S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 | 204 | 03108 | 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 |
| 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 | 013 | 01520 | 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 |
| 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film | 3198 | 011 | 03390 | 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 |
| S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 | 593 | 13507 | 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 |
| 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film | 3198 | 011 | 03390 | 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 |
| 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3442 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 |
| 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51050 | 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01530 | 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 |
| 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05620 | 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 |
| 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01810 | 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 |
| 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08210 | 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 |
| 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film | 3198 | 011 | 06890 | 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 |
| 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film | 3198 | 011 | 03390 | 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. | 2306 | 204 | 03109 | 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 |
| 3452 | Res, 3K6, 1%, 3/5W, Metal Film | 2312 | 915 | 13602 | 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 |
| 3454 | Res, 1K5, 1%, 3/5W, Metal Film | 2312 | 915 | 11502 | 3637 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 |
| S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 | 012 | 26880 | 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 |
| 3457 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 |
| 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass | 3198 | 021 | 53320 |
| S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 | 012 | 21530 | 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 |
| 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03920 | 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 |
| 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film | 3198 | 011 | 03390 | 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 |
| 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 | 915 | 12703 | 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 |
| 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03320 | 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 |
| 3470 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 | 730 | 61274 | 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 |
| 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 | 915 | 13908 | 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 |
| 3472 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 | 915 | 16808 | 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3473 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 | 915 | 16808 | 3862 | Res, 15K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31530 |
| 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 | 915 | 12202 | 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31220 |
| 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 | 915 | 12202 | 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01510 | 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 |
| 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01510 | 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 |
| 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 52720 | 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 | 101 | 02083 | 3901 | Res, 1K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31020 |
| 3481 | Res, 18K, 1%, 3/5W, Metal Film | 2312 | 915 | 11803 | 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 | 915 | 11203 | 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03920 | 3904 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 | 207 | 03478 | 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3491 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 38220 |
| 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 510 | | | | | |

20MS334R01 (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 3982 | Res, 120 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01210 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6485 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6487 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6520 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6523 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6524 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6525 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6526 | Zener Diode, 22 volt | 3198 020 52290 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6541 | Zener Diode, 10 volt | 3198 020 51090 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6563 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6565 | Diode, Signal, BAV70 | 9331 849 10215 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6566 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6569 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6580 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6681 | Diode, Signal, BAT85 | 9336 247 60133 |
| 4696 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6691 | LED, LTL-10234WHCR | 9322 185 69682 |
| 4808 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6692 | IR Receiver. | 9322 127 54667 |
| 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7200 | IC, TDA9587H/N1/31/1136. | 9352 731 64557 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7330 | IC, TDA6107JF/N3 | 9352 713 37112 |
| 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 |
| 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7450 | Transistor, PNP, PDA114ET | 3198 010 44010 |
| 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 |
| 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 |
| 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7462 | Transistor, NPN, PDTCL43ZT | 9340 547 00215 |
| 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 |
| 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7471 | IC, TDA8359J/N2. | 9352 701 64112 |
| 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7480 | Transistor, NPN, BD135 | 3198 020 41010 |
| 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7482 | Transistor, NPN, BD135 | 3198 020 41010 |
| 5001 | Coil, 27u, 10% | 3198 018 22790 | S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 |
| 5002 | Coil, 820n, 10% | 3198 018 18270 | 7520 | IC, TEA1507P/N1. | 9352 673 56112 |
| 5201 | Coil, 6u8, 5% | 3198 018 16880 | 7521 | Power FET, FQPF9N50. | 9322 187 16687 |
| 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 |
| 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7541 | Transistor, NPN, PDTCL14ET | 9340 310 10215 |
| 5242 | Coil, 10u, 5% | 3198 018 11090 | 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5342 | Coil, 22u. | 2422 535 97333 | 7560 | IC, L78L33ACZ. | 9322 134 92676 |
| S 5445 | Transformer, LOT | 2422 531 02519 | 7561 | Transistor, NPN, PDTCL43ZT | 9340 547 00215 |
| 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5453 | Coil, 22u, 5% | 3198 018 12290 | 7602 | IC, M24C08-WBN6. | 9322 154 38682 |
| 5457 | Coil, Linear Correction, 82u | 2422 536 00425 | 7861 | IC, TDA9853H/V1. | 9352 671 19557 |
| 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 | 7901 | IC, AN7522N PH | 9322 181 41682 |
| 5471 | Coil, 6u8, 20% | 3198 018 76880 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 5472 | Coil, 3u3, 10% | 3198 018 23380 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 5480 | Coil, 22u. | 2422 535 97333 | 9678 | Coil, 22u, 10% | 3198 018 22290 |
| S 5501 | Mains Filter | 2422 549 43432 | CBA | Main Chassis Assembly. | 3141 058 59121 |
| S 5520 | Transformer, SS39009-04. | 2422 531 02459 | | | |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | | | |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | | | |
| 5561 | Coil, 27u, 5% | 2422 535 95366 | | | |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | | | |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | | | |
| 5602 | Coil, 5u6, 5% | 3198 018 15680 | | | |
| 5603 | Coil, 5u6, 5% | 3198 018 15680 | | | |
| 5604 | Coil, 5u6, 5% | 3198 018 15680 | | | |
| 5861 | Coil, 10u, 5% | 3198 018 11090 | | | |
| 6001 | Zener Diode, 33 volt | 3198 010 23390 | | | |
| 6181 | Zener Diode, 6.8 volt. | 3198 020 56880 | | | |
| 6201 | Diode, Signal, BAS316. | 3198 010 10630 | | | |
| 6202 | Diode, Signal, BAS316. | 3198 010 10630 | | | |
| 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 | | | |
| 6331 | Diode, Signal, BAV21 | 3198 010 10070 | | | |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | | | |
| 6333 | Diode, Signal, BAV21 | 3198 010 10070 | | | |
| 6335 | Diode, Signal, BAV21 | 3198 010 10070 | | | |
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | | | |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | | | |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | | | |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | | | |
| 6453 | Zener Diode, 5.6 volt. | 3198 020 55680 | | | |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | | | |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | | | |
| 6463 | Zener Diode, 8.2 volt. | 3198 020 58280 | | | |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | | | |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | | | |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | | | |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | | | |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | | | |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | | | |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | | | |

20MS334R01 (continued)

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| | Cabinet & Accessory Parts | | | |
| S AC01 | AC Cord. | 3139 | 128 | 76161 |
| AC04 | Batteries for Remote Control Transmitter | 9082 | 100 | 90002 |
| AC05 | Cabinet Back | 3139 | 124 | 46481 |
| S AC09 | CRT, A51ERF135X82. | 9301 | 903 | 81343 |
| AC10 | Customer Control Buttons | 3139 | 137 | 94241 |
| S AC12 | Degaussing Coil. | 3141 | 058 | 20131 |
| AC17 | Owner's Manual | 3141 | 055 | 21471 |
| AC20A | Cabinet Front. | 3139 | 177 | 67451 |
| AC20B | Chassis Guide. | 3139 | 124 | 30812 |
| AC20C | Light Guide. | 3139 | 124 | 32221 |
| AC20D | Nameplate. | 3141 | 050 | 00331 |
| AC20E | Power Button | 3139 | 137 | 94231 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| AC22 | Cinch Cover. | 3139 | 124 | 25551 |
| REMOTE | Remote Control Transmitter, RC1112917/1 | | | |
| | 7A. | 3139 | 238 | 04701 |

20PT633R/37 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|---|------|-----------|--------|--|------|-----------|
| | Main Chassis Parts | | | | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 16269 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 0218 | A/V Jack | 2422 | 026 04742 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 90586 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 |
| 0232 | Headphone Jack | 2422 | 026 04747 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 91049 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 0280 | 4 Pin Connector. | 2422 | 025 12479 | 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2222 | 336 29148 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90626 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07467 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 1600 | Tact Switch. | 2422 | 128 02742 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| 1601 | Tact Switch. | 2422 | 128 02742 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90128 |
| 1602 | Tact Switch. | 2422 | 128 02742 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 1603 | Tact Switch. | 2422 | 128 02742 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 1606 | Tact Switch. | 2422 | 128 02742 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91353 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 | 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 31020 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 21050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 | 370 76104 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2862 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2865 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 15626 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 | 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | | 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 15626 |
| | er. | 2222 | 368 90177 | 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 | 2874 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 | 2875 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 | 2876 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 | 2877 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 | 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 | 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 | 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 | 2883 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 | 2884 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 | 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 | 014 02240 |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 | 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 | 2902 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 | 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2457 | Cap, 270n, 5%, 250v, Metalized Polypropylene. | 2222 | 479 90016 | 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 | 580 15642 |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 | 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 | 580 15624 |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 | 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 | 580 15642 |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 | 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 | 580 15624 |
| 2463 | Cap, 680p, 10%, 2000v, Ceramic. | 2020 | 558 90485 | 2908 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2465 | Cap, 9n1, 5%, 1600v, Polypropylene. | 2222 | 375 90153 | 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2467 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 | 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2468 | Cap, 33n, 10%, 400v, Polyester. | 2222 | 347 90227 | 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 33310 |
| 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 | 2981 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 | 2982 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 34710 |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 | 2983 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| | | | | 2984 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 34710 |

S = Safety Part Be sure to use exact replacement part.

20PT633R/37 (continued)

| | | | | | |
|--------|--|----------------|--------|---|----------------|
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 021 51040 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 021 51040 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass . . | 2322 242 13335 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass . . | 2322 242 13335 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3507 | Surge Protector. | 2422 549 43073 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3247 | Res, 270K, 5%, 1/16W, Metalized Glass. | 2322 702 60274 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 |
| 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 |
| 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 |
| 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 |
| 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 |
| 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 |
| 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 |
| 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 | 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3341 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 | 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3342 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 | 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 |
| 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 | 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 |
| 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 |
| S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 | 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 |
| 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 |
| 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. . | 3198 021 51050 | 3622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 | 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 | 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 | 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 3452 | Res, 3K6, 1%, 3/5W, Metal Film | 2312 915 13602 | 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3454 | Res, 1K5, 1%, 3/5W, Metal Film | 2312 915 11502 | 3637 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 | 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3457 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 3681 | Res, 180 ohm, 1%, 1/8W, Metalized Glass | 2322 734 61801 |
| 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3682 | Res, 270 ohm, 1%, 1/8W, Metalized Glass | 2322 734 62701 |
| S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 | 3683 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 734 63901 |
| 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | 3684 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 734 63901 |
| 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | 3686 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 | 3687 | Res, 75 ohm, 1%, 1/8W, Metalized Glass | 2322 734 67509 |
| 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 | 3688 | Res, 68 ohm, 1%, 1/8W, Metalized Glass | 2322 734 66809 |
| 3470 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 3689 | Res, 2K7, 1%, 1/8W, Metalized Glass. . | 2322 734 62702 |
| 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 |
| 3472 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 915 16808 | 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 3473 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 915 16808 | 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 021 31530 |
| 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 021 31220 |
| 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 |
| 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 | 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 | 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3481 | Res, 18K, 1%, 3/5W, Metal Film | 2312 915 11803 | 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 |
| 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 |
| 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 |
| 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 3491 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 |
| 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |

S = Safety Part Be sure to use exact replacement part.

| | | | | |
|------|--|--------|-----|-------|
| 3907 | Res, 8K2,5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 |
| 3981 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01210 |
| 3982 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01210 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4808 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 5445 | Transformer, LOT | 2422 | 531 | 02519 |
| 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 5453 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 5457 | Coil, Linear Correction, 82u | 2422 | 536 | 00425 |
| 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 |
| 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 5480 | Coil, 22u. | 2422 | 535 | 97333 |
| 5501 | Mains Filter | 2422 | 549 | 43432 |
| 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 5603 | Coil, 5u6, 5% | 3198</ | | |

| | | | | |
|--------|---|------|-----|-------|
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 20390 |
| 6485 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 6487 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 |
| 6520 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 7200 | IC, TDA9577H/N1/AI/1130. | 9352 | 731 | 51557 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 |
| 7441 | Transistor, NPN, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 |
| 7450 | Transistor, PNP, PDTA114ET | 3198 | 010 | 44010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 |
| 7462 | Transistor, NPN, PDTC143ZT | 9340 | 547 | 00215 |
| 7463 | Transistor, NPN, BC327-25(COL) | 3198 | 020 | 43430 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 |
| 7521 | Power FET, FQFP9N50. | 9322 | 187 | 16687 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 |
| 7541 | Transistor, NPN, PDTC114ET | 9340 | 310 | 10215 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 |
| 7561 | Transistor, NPN, PDTC143ZT | 9340 | 547 | 00215 |
| 7580 | Transistor, NPN, BC857B(COL) | 3198 | 010 | 42150 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 |
| 7901 | IC, AN7522N PH | 9322 | 181 | 41682 |
| 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 23221 |

Subwoofer Panel Parts

S = Safety Part Be sure to use exact replacement part.

20PT633R/37 (continued)

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | | |
|--------|-------|--|------|-----|-------|
| S | AC01 | AC Cord. | 3139 | 128 | 76161 |
| | AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| | AC05 | Cabinet Back | 3139 | 124 | 46001 |
| S | AC09 | CRT, A51ERF135X82. | 9301 | 903 | 81301 |
| | AC10 | Customer Control Buttons | 3139 | 177 | 65681 |
| S | AC12 | Degaussing Coil. | 3141 | 058 | 20131 |
| | AC17 | Owner's Manual | 3121 | 235 | 20611 |
| | AC20A | Cabinet Front. | 3139 | 177 | 59721 |
| | AC20B | Chassis Guide. | 3139 | 124 | 30811 |
| | AC20C | Light Guide. | 3139 | 124 | 32221 |
| | AC20D | Nameplate. | 3139 | 120 | 01371 |
| | AC20E | Power Button | 3139 | 177 | 65691 |
| | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| REMOTE | | Remote Control Transmitter, RC19335004/ | | | |
| | | 01. | 3139 | 228 | 86463 |

20PT643F/35R - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|---|----------------|--------|---|----------------|
| | Holder, Fuse, 2 Pin. | 4822 265 11253 | 2247 | Cap, 1000u, 20%, 16v, Electrolytic . . | 4822 124 81144 |
| 0127 | NTC Holder | 3139 120 10151 | 2248 | Cap, 22n, 10%, 25v, Ceramic. | 2238 916 15641 |
| 0136 | Spring, IC | 4822 492 70788 | 2249 | Cap, 22n, 10%, 25v, Ceramic. | 2238 916 15641 |
| 0137 | SPRING | 4822 492 70289 | 2250 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 4822 124 22652 |
| 0138 | Spring, IC | 4822 492 70788 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0139 | Spring, Transistor | 4822 492 62076 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0141 | Spring, IC | 4822 492 70788 | 2254 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 0152 | Cable, DIPMate, 6 Pin. | 3139 121 08841 | 2330 | Cap, 470nF, 20%, 63V, Film | 4822 121 51473 |
| 0153 | Cable, DIPMate, 5 Pin, 480mm | 3139 121 07951 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. . . | 4822 124 11565 |
| 0211 | Connector, Printed Circuit, B2P3-VH. . | 4822 265 20723 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 4822 126 13599 |
| 0212 | Connector, Printed Circuit, 2 Pin, Male , (RED). | 4822 267 10774 | 2342 | Cap, 560pF, 5%, 63V, Ceramic | 5322 116 80853 |
| 0220 | Connector, Printed Circuit, 5 Pin. . . . | 4822 265 30735 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 4822 126 13451 |
| 0221 | Connector, Printed Circuit, 2 Pin. . . . | 4822 267 10966 | 2344 | Cap, 100n, 10%, 50v, Ceramic | 4822 126 14585 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2345 | Cap, 1nF, 10%, 500V, Ceramic | 4822 122 31175 |
| 0223 | A/V Jack | 2422 026 05236 | 2405 | Cap, 220u, 25V, Electrolytic | 4822 124 12379 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2441 | Cap, 1uF, 20%, 63V, Electrolytic | 4822 124 21913 |
| 0229 | Connector, Printed Circuit | 4822 267 10735 | 2443 | Cap, 47n, 10%, 50v, Ceramic. | 4822 126 13751 |
| 0239 | 3 Pin Connector. | 2422 025 16382 | 2444 | Cap, 1uF, 20%, 63V, Electrolytic | 4822 124 21913 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. . . . | 4822 124 11575 |
| 0244 | Connector, Printed Circuit, 5 Pin. . . . | 4822 265 30735 | 2455 | Cap, 47uF, 20%, 25V, Electrolytic. . . . | 4822 124 40433 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2457 | Cap, 270n, 5%, 250v, Metalized Polyprop ylene. | 2222 479 90016 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. . . . | 2022 031 00138 |
| 0267 | Connector, Printed Circuit | 4822 267 10735 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 4822 126 13185 |
| 0269 | Jack | 2422 026 05182 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 5322 122 32531 |
| 0280 | Connector, Printed Circuit, 4 Pin. . . . | 4822 267 10565 | 2463 | Cap, 680p, 10%, 2000v, Ceramic | 4822 126 14138 |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | 2465 | Cap, 9n1, 5%, 1600v, Polypropylene . . . | 4822 121 70649 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2467 | Cap, 68n, 10%, 250v, Polyester | 4822 121 40482 |
| 1200 | Filter, Ceramic. | 4822 242 81978 | 2468 | Cap, 33n, 10%, 400v, Polyester | 5322 121 44151 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2471 | Cap, 100nF, 5%, 63V. | 5322 121 42386 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07467 | 2472 | Cap, 150n, 5%, 63V | 4822 121 41854 |
| 1606 | Switch, Push Button. | 4822 276 13775 | 2473 | Cap, 100nF, 5%, 63V. | 5322 121 42386 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2474 | Cap, 2,2nF, 10%, 63V, Ceramic. | 4822 122 33127 |
| 1811 | Connector, Printed Circuit | 4822 267 10735 | 2475 | Cap, 2,2nF, 10%, 63V, Ceramic. | 4822 122 33127 |
| 1861 | Filter, Ceramic, CSB503F58 | 4822 242 10359 | 2476 | Cap, 4n7, 10%, 63v, Ceramic. | 5322 126 10223 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2480 | Cap, 47u, 20%, 25V, Electrolytic | 4822 124 11965 |
| 2005 | Cap, 10u, 20%, 63V | 4822 124 40248 | 2481 | Cap, 470p, 10%, 500V, Ceramic. | 4822 122 31177 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 4822 124 80791 | 2482 | Cap, 68n, 10%, 250v, Polyester | 4822 121 40482 |
| 2007 | Cap, 100n, +80/-20%, 50v, Ceramic. . . . | 2238 586 59812 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. . . . | 2022 031 00137 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 4822 124 40207 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2022 031 00139 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 2238 916 15641 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2038 035 13508 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 4822 126 13482 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 4822 124 81145 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 4822 122 33761 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2022 031 00139 |
| 2103 | Cap, 330p, 50V, Ceramic. | 4822 126 14241 | 2491 | Cap, 1nF, 10%, 500V, Ceramic | 4822 122 31175 |
| 2104 | Cap, 330p, 50V, Ceramic. | 4822 126 14241 | 2500 | Cap, 470n, 20%, 275v, Metalized Polypro pylene | 4822 126 13589 |
| 2105 | Cap, 10u, 20%, 63V | 4822 124 40248 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 4822 126 14153 |
| 2106 | Cap, 10u, 20%, 63V | 4822 124 40248 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 4822 126 14153 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 4822 122 33761 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90626 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 4822 122 33761 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 4822 126 14153 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 4822 122 33761 | 2507 | Cap, 470pF, 10%, 50V, Ceramic. | 9965 000 09661 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 4822 122 33761 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 4822 122 50116 |
| 2122 | Cap, 330p, 50V, Ceramic. | 4822 126 14241 | S 2515 | Cap, 1n5, 20%, v, Ceramic. | 4822 126 14049 |
| 2123 | Cap, 2u2, 10V, Ceramic | 4822 126 14491 | 2520 | Cap, 10nF, 20%, 50V, Ceramic | 4822 122 33177 |
| 2124 | Cap, 330p, 50V, Ceramic. | 4822 126 14241 | 2521 | Cap, 22u, 50v, Electrolytic Aluminum . . | 4822 124 81151 |
| 2125 | Cap, 2u2, 10V, Ceramic | 4822 126 14491 | 2522 | Cap, 100n, 10%, 50v, Ceramic | 4822 126 14585 |
| 2131 | Cap, 330p, 50V, Ceramic. | 4822 126 14241 | 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 4822 126 13862 |
| 2132 | Cap, 2u2, 10V, Ceramic | 4822 126 14491 | 2525 | Cap, 470pF, 10%, 50V, Ceramic. | 9965 000 09661 |
| 2133 | Cap, 330p, 50V, Ceramic. | 4822 126 14241 | 2527 | Cap, 2,2nF, 10%, 63V, Ceramic. | 4822 122 33127 |
| 2134 | Cap, 2u2, 10V, Ceramic | 4822 126 14491 | 2528 | Cap, 1nF, 10%, 63V, Ceramic. | 5322 122 31647 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 4822 122 33761 | 2540 | Cap, 10nF, 20%, 50V, Ceramic | 4822 122 33177 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 4822 122 33761 | 2541 | Cap, 10nF, 20%, 50V, Ceramic | 4822 122 33177 |
| 2141 | Cap, 330p, 50V, Ceramic. | 4822 126 14241 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 4822 126 14152 |
| 2143 | Cap, 100n, +80/-20%, 50v, Ceramic. . . . | 2238 586 59812 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91496 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. . . . | 2238 786 19852 | 2562 | Cap, 1nF, 10%, 100V, Ceramic | 5322 122 32331 |
| 2201 | Cap, 100n, +80/-20%, 50v, Ceramic. . . . | 2238 586 59812 | 2563 | Cap, 100nF, 5%, 63V. | 5322 121 42386 |
| 2202 | Cap, 100n, +80/-20%, 50v, Ceramic. . . . | 2238 586 59812 | 2564 | Cap, 2200u, 20%, 25V, Electrolytic | 4822 124 12417 |
| 2203 | Cap, 100n, +80/-20%, 50v, Ceramic. . . . | 2238 586 59812 | 2567 | Cap, 47uF, 20%, 25V, Electrolytic. . . . | 4822 124 40433 |
| 2204 | Cap, 100n, +80/-20%, 50v, Ceramic. . . . | 2238 586 59812 | 2568 | Cap, 1uF, 20%, 63V, Electrolytic | 4822 124 21913 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 4822 126 13879 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 4822 124 81286 |
| 2208 | Cap, 100n, +80/-20%, 50v, Ceramic. . . . | 2238 586 59812 | 2581 | Cap, 22u, 50v, Electrolytic Aluminum . . | 4822 124 81151 |
| 2209 | Cap, 4u7, 20%, 100V, Electrolytic. . . . | 4822 124 40769 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. . . . | 2222 910 19856 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2601 | Cap, 220n, +/-80/20, 25v, Ceramic. . . . | 4822 126 14076 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 2020 552 94427 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 2238 916 15641 | 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 2238 916 15641 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 2222 867 15339 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 2238 916 15641 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 4822 124 81144 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 2222 867 15339 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 2238 916 15641 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 4822 126 13879 | 2612 | Cap, 6p8, 7%, 50v, Ceramic | 4822 126 13956 |
| 2220 | Cap, 470n, 5%, 63v, Metalized Polyester | 4822 121 51252 | 2613 | Cap, 6p8, 7%, 50v, Ceramic | 4822 126 13956 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 2238 916 15641 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 5322 126 11578 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 2020 552 94427 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2227 | Cap, 4,7nF, 10%, 63V, Ceramic. | 4822 126 13193 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 4822 126 14043 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2691 | Cap, 220u, 25V, Electrolytic | 4822 124 12379 |
| 2229 | Cap, 10u, 20%, 63V | 4822 124 40248 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 4822 126 13879 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 4822 126 14247 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 4822 126 13879 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2810 | Cap, 2u2, 10V, Ceramic | 4822 126 14491 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 4822 126 14238 | 2813 | Cap, 2u2, 10V, Ceramic | 4822 126 14491 |
| 2244 | Cap, 100nF, 5%, 63V. | 5322 121 42386 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 4822 126 13879 | 2862 | Cap, 2u2, 10V, Ceramic | 4822 126 14491 |
| | | | 2864 | Cap, 2u2, 20%, 50v, Electrolytic | 4822 124 22652 |

S = Safety Part Be sure to use exact replacement part.

20PT643F/35R (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic | 4822 124 22652 | 3245 | Res, 39K, 1%, 0W063. | 5322 117 13064 |
| 2866 | Cap, 2u2, 10V, Ceramic | 4822 126 14491 | 3246 | Res, 10k, 5%, 1/16W. | 4822 051 30103 |
| 2867 | Cap, 1n8, 10%, 50V, Ceramic. | 4822 126 13617 | 3247 | Res, 270K, 1%, 0W063. | 4822 117 12889 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 4822 122 33753 | 3248 | Res, 33k, 5%, 1/16W. | 4822 051 30333 |
| 2869 | Cap, 68nF, 5%, 63V | 5322 121 42465 | 3249 | Res, 820R, 5%, 0.5W. | 4822 116 52231 |
| 2870 | Cap, 68nF, 5%, 63V | 5322 121 42465 | 3251 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 4822 122 33753 | 3256 | Res, 1k, 5%, 1/16W | 4822 051 30102 |
| 2872 | Cap, 1n8, 10%, 50V, Ceramic. | 4822 126 13617 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2873 | Cap, 2u2, 10V, Ceramic | 4822 126 14491 | 3258 | Res, 100k, 1%, 1/16W | 4822 117 13632 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 4822 124 40207 | 3259 | Res, 47k, 5%, 1/16W. | 4822 051 30474 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 4822 124 40207 | 3331 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 |
| 2876 | Cap, 4u7, 20%, 100V, Electrolytic. . . . | 4822 124 40769 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2877 | Cap, 10u, 20%, 63V | 4822 124 40248 | 3333 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 |
| 2878 | Cap, 1uF, 20%, 63V, Electrolytic | 4822 124 21913 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2879 | Cap, 4,7nF, 10%, 63V, Ceramic. | 4822 126 13193 | 3335 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 2238 916 15641 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 4822 124 80791 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 4822 052 11109 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic | 4822 124 22652 | 3341 | Res, 1R, 5%, 0.33W | 4822 052 10108 |
| 2885 | Cap, 220n, 5%, 63v, Metalized Polyester | 4822 121 42408 | 3342 | Res, 1R, 5%, 0.33W | 4822 052 10108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 4822 126 13879 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2892 | Cap, 100n, +80/-20%, 50v, Ceramic. . . . | 2238 586 59812 | 3344 | Res, 33R, 5%, 0.5W | 4822 116 52191 |
| 2893 | Cap, 100n, +80/-20%, 50v, Ceramic. . . . | 2238 586 59812 | S 3345 | Varactor, 1MA/50V, Max 115V. | 4822 117 13016 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic | 4822 124 81144 | 3346 | Res, 33R, 5%, 0.5W | 4822 116 52191 |
| 2903 | Cap, 1uF, 20%, 63V, Electrolytic | 4822 124 21913 | 3441 | Res, 100 ohm, 1%, 1/8W, Metalized Glass | 4822 117 11373 |
| 2904 | Cap, 27nF, 10%, 63V, Ceramic | 4822 122 33735 | 3442 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 2905 | Cap, 1n2, 10%, 63v, Ceramic. | 4822 122 32614 | 3443 | Res, 1M, 5%, 1/8W, Metalized Glass . . . | 4822 051 20105 |
| 2906 | Cap, 27nF, 10%, 63V, Ceramic | 4822 122 33735 | 3445 | Res, 15K, 5%, 1/2W, Metal Film | 4822 116 52244 |
| 2907 | Cap, 1n2, 10%, 63v, Ceramic. | 4822 122 32614 | 3446 | Res, 5K6, 5%, 0.5W | 4822 116 52289 |
| 2908 | Cap, 10u, 20%, 63V | 4822 124 40248 | 3447 | Res, 180R, 5%, 0.5W. | 4822 116 52211 |
| 2910 | Cap, 10nF, 20%, 50V, Ceramic | 4822 122 33177 | 3448 | Res, 820R, 5%, 0.5W. | 4822 116 52231 |
| 2911 | Cap, 10nF, 20%, 50V, Ceramic | 4822 122 33177 | 3449 | Res, 68R, 5%, 0.5W | 4822 116 52199 |
| 2950 | Cap, 330p, 50V, Ceramic. | 4822 126 14241 | 3450 | Res, 33R, 5%, 0.5W | 4822 116 52191 |
| 3000 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 3451 | Res, 10R, 5%, 0.33W. | 4822 052 10109 |
| 3001 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 3452 | Res, 3K6, 1%, 0.6W | 4822 050 23602 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 3453 | Res, 1K0, 1%, 0.4W | 4822 050 11002 |
| 3003 | Res, 1k5, 5%, 1/16W. | 4822 051 30152 | 3454 | Res, 1K5, 1%, 0.6W | 4822 050 21502 |
| 3004 | Res, 8K2, 1%, 1/16W. | 4822 117 12902 | S 3455 | Res, 6R8, 5%, 2W | 4822 053 11688 |
| 3005 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 3456 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 3101 | Res, 68R, 5%, 0.5W | 4822 116 52199 | 3457 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 3102 | Res, 1k, 5%, 1/16W | 4822 051 30102 | 3458 | Res, 1K0, 1%, 0.4W | 4822 050 11002 |
| 3103 | Res, 150R, 5%, 0.5W. | 4822 116 83868 | S 3459 | Res, 15K, 5%, 2W | 4822 053 11153 |
| 3104 | Res, 220K, 1%, 1/16W, Metalized Glass. . | 4822 117 12891 | 3460 | Res, 3K9, 5%, 0.5W | 4822 116 52276 |
| 3105 | Res, 150R, 5%, 0.5W. | 4822 116 83868 | 3463 | Res, 33R, 5%, 0.5W | 4822 116 52191 |
| 3106 | Res, 220K, 1%, 1/16W, Metalized Glass. . | 4822 117 12891 | 3465 | Res, 27K, 1%, 0.6W | 4822 050 22703 |
| 3111 | Res, 75R, 5%, 0.5W | 4822 116 52201 | 3469 | Res, 3K3, 5%, 0.5W | 4822 116 52269 |
| 3112 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 3470 | Res, 270K, 5%, 1/8W, Metalized Glass . | 4822 051 20274 |
| 3113 | Res, 75R, 5%, 0.5W | 4822 116 52201 | 3471 | Res, 3R9, 1%, 0.6W | 4822 050 23908 |
| 3114 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 3472 | Res, 6R8, 1%, 0.6W | 4822 050 26808 |
| 3115 | Res, 75R, 5%, 0.5W | 4822 116 52201 | 3473 | Res, 6R8, 1%, 0.6W | 4822 050 26808 |
| 3116 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 3474 | Res, 2K2, 1%, 0.6W | 4822 050 22202 |
| 3123 | Res, 150R, 5%, 0.5W. | 4822 116 83868 | 3475 | Res, 2K2, 1%, 0.6W | 4822 050 22202 |
| 3124 | Res, 47k, 1%, 1/16W. | 4822 117 12925 | 3477 | Res, 150R, 5%, 0.5W. | 4822 116 83868 |
| 3125 | Res, 150R, 5%, 0.5W. | 4822 116 83868 | 3478 | Res, 150R, 5%, 0.5W. | 4822 116 83868 |
| 3126 | Res, 47k, 1%, 1/16W. | 4822 117 12925 | 3479 | Res, 2K7, 1%, 1/8W, Metalized Glass. . . | 4822 117 12955 |
| 3131 | Res, 150R, 5%, 0.5W. | 4822 116 83868 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3132 | Res, 47k, 1%, 1/16W. | 4822 117 12925 | 3481 | Res, 18K, 1%, 0.6W | 4822 050 21803 |
| 3133 | Res, 150R, 5%, 0.5W. | 4822 116 83868 | 3482 | Res, 12k, 1%, 0.6W | 4822 050 21203 |
| 3134 | Res, 47k, 1%, 1/16W. | 4822 117 12925 | 3484 | Res, 3K9, 5%, 0.5W | 4822 116 52276 |
| 3135 | Res, 75R, 5%, 0.5W | 4822 116 52201 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 4822 052 11478 |
| 3136 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 3490 | Res, 8K2, 5%, 0.5W | 4822 116 52303 |
| 3141 | Res, 1K0, 1%, 0.4W | 4822 050 11002 | 3491 | Res, 10K, 1%, 1/8W, Metalized Glass. . . | 4822 117 10833 |
| 3149 | Res, 100k, 1%, 1/16W | 4822 117 13632 | 3492 | Res, 1K, 2%, 0.25W | 4822 051 10102 |
| 3150 | Res, 150k, 5%, 1/16W | 4822 051 30154 | 3493 | Res, 6R8, 5%, 0.33W. | 4822 052 10688 |
| 3154 | Res, 5K6, 5%, 0.5W | 4822 116 52289 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 4822 052 11478 |
| 3156 | Res, 10k, 1%, 1/16W | 4822 050 21003 | 3495 | Res, 22K, 5%, 1/8W, Metalized Glass. . . | 4822 051 20223 |
| 3157 | Res, 1k5, 5%, 1/16W. | 4822 051 30152 | 3496 | Res, 100K, 1%, 0.1W. | 4822 117 10837 |
| 3158 | Res, 10k, 5%, 1/16W. | 4822 051 30103 | 3497 | Res, 100K, 1%, 0.1W. | 4822 117 10837 |
| 3159 | Res, 1K2, 5%, 1/8W, Metalized Glass. . . | 4822 051 20122 | 3498 | Res, 12K, 1%, 0.1W | 4822 117 11383 |
| 3200 | Res, 390R, 5%, 0.5W. | 4822 116 83881 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 4822 053 21335 |
| 3201 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 4822 053 21335 |
| 3202 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3203 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 4822 053 21155 |
| 3204 | Res, 22k, 5%, 1/2W | 4822 116 52257 | 3507 | Surge Protector. | 4822 252 11215 |
| 3205 | Res, 1k, 5%, 1/16W | 4822 051 30102 | 3508 | Res, 220R, 5%, 0.5W. | 4822 116 83872 |
| 3206 | Res, 33k, 5%, 1/16W. | 4822 051 30333 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00055 |
| 3207 | Res, 1K0, 1%, 0.4W | 4822 050 11002 | 3519 | Res, 270 ohm, 5%, 1/2W | 4822 116 83876 |
| 3208 | Res, 220 ohm, 5%, 1/16W. | 4822 051 30221 | 3520 | Res, 1K2, 5%, 1/8W, Metalized Glass. . . | 4822 051 20122 |
| 3209 | Res, 68R, 5%, 0.063W | 4822 051 30689 | 3521 | Res, 4R7, 1%, 0.6W | 4822 050 24708 |
| 3212 | Res, 470R, 5%, 0.062W. | 4822 051 30471 | 3522 | Res, 330K, 5%, 1/8W, Metalized Glass . . | 4822 051 20334 |
| 3213 | Res, 560R, 5%, 0.5W. | 4822 116 52226 | 3523 | Res, 100R, 5%, 0.33W | 4822 052 10101 |
| 3217 | Res, 330k, 5%, 1/16W | 4822 051 30334 | 3524 | Res, 56K, 1%, 1/8W, Metalized Glass. . . | 4822 117 11148 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 4822 117 12864 | 3525 | Res, 1K, 2%, 0.25W | 4822 051 10102 |
| 3219 | Res, 2k2, 5%, 1/16W. | 4822 051 30222 | S 3526 | Res, 0R10, 2W. | 4822 116 83303 |
| 3220 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | S 3527 | Res, 0R33, 5%, 2W. | 4822 117 11342 |
| 3221 | Res, 560R, 5%, 0.5W. | 4822 116 52226 | 3528 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 3222 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 3529 | Res, 47K, 1%, 1/8W, Metalized Glass. . . | 4822 117 10834 |
| 3226 | Res, 560 ohm, 5%, 1/16W. | 4822 051 30561 | 3530 | Res, 10K, 1%, 1/8W, Metalized Glass. . . | 4822 117 10833 |
| 3232 | Res, 2k2, 5%, 1/16W. | 4822 051 30222 | 3531 | Res, 4K7, 5%, 1/8W, Metalized Glass. . . | 4822 051 20472 |
| 3235 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 3532 | Res, 2K2, 5%, 0.33W. | 4822 052 10222 |
| 3241 | Res, 22k, 5%, 1/16W. | 4822 051 30223 | 3541 | Res, 470R, 5%, 0.1W. | 4822 051 20471 |
| 3242 | Res, 27K, 5%, 0.062W | 4822 051 30273 | 3542 | Res, 1K5, 1%, 1/8W, Metalized Glass. . . | 4822 117 11139 |
| 3244 | Res, 820R, 5%, 0.5W. | 4822 116 52231 | 3543 | Res, 82K, 1%, 0.6W | 4822 050 28203 |

S = Safety Part Be sure to use exact replacement part.

20PT643F/35R (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 4822 117 11145 | 4617 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. | 4822 051 20274 | 4619 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3548 | Res, 15K, 1%, 1/8W, Metalized Glass. | 4822 116 83933 | 4622 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3552 | Res, 10K, 1%, 1/8W, Metalized Glass. | 4822 117 10833 | 4623 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 3557 | Res, 1K, 2%, 0.25W | 4822 051 10102 | 4691 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3561 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 4692 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3562 | Res, 12K, 1%, 0.1W | 4822 117 11383 | 4693 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| S 3563 | Res, 5K6, 5%, 1/8W, Metalized Glass. | 4822 051 20562 | 4807 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 4822 053 10331 | 4812 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3566 | Res, 2K2, 1%, 1/8W, Metalized Glass. | 4822 117 11449 | 4814 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3569 | Res, 5K6, 5%, 1/8W, Metalized Glass. | 4822 051 20562 | 4820 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3580 | Res, 47K, 1%, 1/8W, Metalized Glass. | 4822 117 10834 | 4825 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3594 | Res, 330R, 1%, 1.25W | 4822 117 13577 | 4827 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4829 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4830 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3601 | Res, 8K2, 5%, 0.5W | 4822 116 52303 | 4831 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3603 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 4861 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3604 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 4863 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3605 | Res, 4k7, 5%, 1/16W. | 4822 051 30472 | 4865 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3606 | Res, 2k2, 5%, 1/2W | 4822 116 52256 | 4866 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3607 | Res, 2k2, 5%, 1/2W | 4822 116 52256 | 4867 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3608 | Res, 470 ohm, 5%, 1/2W | 4822 116 83883 | 4869 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3609 | Res, 1K0, 1%, 0.4W | 4822 050 11002 | 4870 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3610 | Res, 8K2, 5%, 0.5W | 4822 116 52303 | 4871 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3611 | Res, 100 ohm, 5%, 1/16W. | 4822 051 30101 | 4873 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3618 | Res, 6K8, 5% | 4822 116 83961 | 4876 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 3622 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 4879 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 3623 | Res, 4k7, 5%, 1/16W. | 4822 051 30472 | 4880 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 3624 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 4881 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3625 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 4883 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 3626 | Res, 4k7, 5%, 1/16W. | 4822 051 30472 | 4885 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3627 | Res, 4k7, 5%, 1/16W. | 4822 051 30472 | 4892 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3628 | Res, 10k, 5%, 1/16W. | 4822 051 30103 | 4901 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3630 | Res, 470R, 5%, 0.062W. | 4822 051 30471 | 4903 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 4906 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 3634 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 4924 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 3635 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 4925 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 |
| 3636 | Res, 1K, 2%, 0.25W | 4822 051 10102 | 5001 | Coil, 27u. | 4822 157 52392 |
| 3637 | Res, 75 ohm, 5%, 1/16W | 4822 051 30759 | 5002 | Coil, 820n, 10%. | 3198 018 18270 |
| 3638 | Res, 75 ohm, 5%, 1/16W | 4822 051 30759 | 5201 | Coil, 6u8. | 4822 157 11139 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 5204 | Bead, Ferrite, 100MHz | 4822 157 11411 |
| 3640 | Res, 8K2, 5%, 0.5W | 4822 116 52303 | 5205 | Bead, Ferrite, 100MHz | 4822 157 11411 |
| 3685 | Res, 1K5, 1%, 1/8W, Metalized Glass. | 4822 117 11139 | 5206 | Bead, Ferrite, 100MHz | 4822 157 11411 |
| 3691 | Res, 330 ohm, 5%, 1/16W. | 4822 051 30331 | 5242 | Coil, 10u, 5%. | 4822 157 11706 |
| 3693 | Res, 220 ohm, 5%, 1/16W. | 4822 051 30221 | 5342 | Coil, 22u. | 4822 157 50961 |
| 3694 | Res, 4k7, 5%, 1/16W. | 4822 051 30472 | S 5445 | Transformer, LOT | 2422 531 02519 |
| 3801 | Res, 220 ohm, 5%, 1/16W. | 4822 051 30221 | 5452 | Bead, Ferrite, 100MHz | 4822 157 11411 |
| 3802 | Res, 1k, 5%, 1/16W | 4822 051 30102 | 5453 | Coil, 22u. | 4822 157 11235 |
| 3814 | Res, 100k, 1%, 1/16W | 4822 117 13632 | 5457 | Coil, Linear Correction, 82u | 2422 536 00425 |
| 3815 | Res, 100k, 1%, 1/16W | 4822 117 13632 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3816 | Res, 100k, 1%, 1/16W | 4822 117 13632 | 5471 | Coil, 6u8. | 2422 535 94638 |
| 3817 | Res, 100k, 1%, 1/16W | 4822 117 13632 | 5472 | Coil, 3u3. | 4822 157 51157 |
| 3818 | Res, 100k, 1%, 1/16W | 4822 117 13632 | 5480 | Coil, 22u. | 4822 157 50961 |
| 3819 | Res, 100k, 1%, 1/16W | 4822 117 13632 | S 5501 | Filter, Line Choke, 5mH, 2A. | 4822 157 11523 |
| 3820 | Res, 100k, 1%, 1/16W | 4822 117 13632 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3821 | Res, 100k, 1%, 1/16W | 4822 117 13632 | 5521 | Bead, Ferrite, 100MHz. | 4822 526 10704 |
| 3861 | Res, 100k, 1%, 1/16W | 4822 117 13632 | 5560 | Bead, Ferrite, 100MHz. | 4822 526 10704 |
| 3862 | Res, 15k, 5%, 1/16W | 4822 051 30153 | 5561 | Coil, 27u. | 4822 157 71401 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass | 4822 117 11817 | 5562 | Bead, Ferrite, 100MHz. | 4822 526 10704 |
| 3864 | Res, 100 ohm, 5%, 1/16W. | 4822 051 30101 | 5564 | Bead, Ferrite, 100MHz. | 4822 526 10704 |
| 3865 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 5602 | Coil, 5.6uH, 5%. | 4822 157 11867 |
| 3866 | Res, 100 ohm, 5%, 1/2W | 4822 116 52175 | 5603 | Coil, 5.6uH, 5%. | 4822 157 11867 |
| 3867 | Res, 3k3, 5%, 1/16W. | 4822 051 30332 | 5604 | Coil, 5.6uH, 5%. | 4822 157 11867 |
| 3891 | Res, 100 ohm, 5%, 1/16W. | 4822 051 30101 | 5861 | Coil, 10u, 5%. | 4822 157 11706 |
| 3893 | Res, 330 ohm, 5%, 1/16W. | 4822 051 30331 | 6001 | Zener Diode, 33 volt. | 4822 130 34142 |
| 3894 | Res, 100 ohm, 5%, 1/16W. | 4822 051 30101 | 6150 | Diode, BAS316. | 4822 130 11397 |
| 3896 | Res, 330 ohm, 5%, 1/16W. | 4822 051 30331 | 6201 | Diode, BAS316. | 4822 130 11397 |
| 3901 | Res, 1k, 5%, 1/16W | 4822 051 30102 | 6202 | Diode, BAS316. | 4822 130 11397 |
| 3902 | Res, 3k3, 5%, 1/16W. | 4822 051 30332 | 6206 | Diode, Reference, PDZ6.8B. | 4822 130 11416 |
| 3903 | Res, 3k3, 5%, 1/16W. | 4822 051 30332 | 6331 | Diode, BAV21 | 4822 130 30842 |
| 3904 | Res, 10k, 5%, 1/16W. | 4822 051 30103 | 6332 | Diode, BAS316. | 4822 130 11397 |
| 3905 | Res, 3k3, 5%, 1/16W. | 4822 051 30332 | 6333 | Diode, BAV21 | 4822 130 30842 |
| 3906 | Res, 10k, 5%, 1/16W. | 4822 051 30103 | 6335 | Diode, BAV21 | 4822 130 30842 |
| 3907 | Res, 8K2, 1%, 1/16W. | 4822 117 12902 | 6445 | Diode, Reference, UDZS10B. | 4822 130 11551 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6447 | Diode, 1N4148. | 4822 130 30621 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6448 | Zener Diode, 6.2 volt. | 4822 130 34167 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6449 | Diode, BAV99 | 5322 130 34337 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6453 | Zener Diode, 5.6 volt. | 3198 020 55680 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6460 | Diode, Rect, BY228/24. | 9340 559 50112 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6461 | Diode, Rect, RGP30J-L7004 | 4822 130 80572 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6463 | Zener Diode, 8.2 volt. | 4822 130 10837 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 | 6465 | Diode, BAV21 | 4822 130 30842 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 | 6466 | Diode, BAV21 | 4822 130 30842 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 | 6467 | Diode, BAS316. | 4822 130 11397 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 4822 051 20008 | 6468 | Diode, BAS316. | 4822 130 11397 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6470 | Diode, BAV99 | 5322 130 34337 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6476 | Zener Diode, 15 volt. | 4822 130 34281 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6481 | Zener Diode, 5.6 volt. | 4822 130 34173 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6482 | Zener Diode, 9.1 volt. | 4822 130 30862 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6483 | Zener Diode, 33 volt. | 4822 130 34142 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6485 | Diode, Rect, BYV95C. | 4822 130 41487 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 4822 051 30008 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |

S = Safety Part Be sure to use exact replacement part.

20PT643F/35R (continued)

| | | | | |
|------|---------------------------------------|------|-----|-------|
| 6487 | Diode, Rect, BYV95A. | 4822 | 130 | 41601 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 6500 | Diode, Bridge Rect. | 4822 | 130 | 10741 |
| 6520 | Diode, Rect, BYV95A. | 4822 | 130 | 41601 |
| 6523 | Diode, 1N4148. | 4822 | 130 | 30621 |
| 6524 | Diode, Rect, 1N5062. | 4822 | 130 | 31083 |
| 6525 | Diode, Rect, 1N5062. | 4822 | 130 | 31083 |
| 6526 | Zener Diode, 22 volt. | 9340 | 548 | 67115 |
| 6540 | Zener Diode, 6.2 volt. | 4822 | 130 | 34167 |
| 6541 | Diode, Reference, UDZS10B. | 4822 | 130 | 11551 |
| 6560 | Diode, Rect, BYV29X-500. | 3139 | 120 | 52021 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 6563 | Diode, BAS316. | 4822 | 130 | 11397 |
| 6565 | Diode, BAV70. | 5322 | 130 | 34331 |
| 6566 | Diode, 1N4148. | 4822 | 130 | 30621 |
| 6569 | Diode, BAS316. | 4822 | 130 | 11397 |
| 6570 | Diode, Reference, PDZ6.8B. | 4822 | 130 | 11416 |
| 6580 | Diode, BAS316. | 4822 | 130 | 11397 |
| 6691 | LED, LTL-10234WHCR. | 9322 | 185 | 69682 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 4822 | 051 | 20008 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 4822 | 051 | 20008 |
| 7101 | Transistor, NPN, BC846B. | 5322 | 130 | 60159 |
| 7102 | Transistor, PNP, BC856B. | 4822 | 130 | 60373 |
| 7103 | Transistor, NPN, BC846B. | 5322 | 130 | 60159 |
| 7200 | IC, TDA9577H/N1/AI/1130. | 9352 | 731 | 51557 |
| 7201 | Transistor, NPN, BC846B. | 5322 | 130 | 60159 |
| 7204 | Transistor, PNP, BC856B. | 4822 | 130 | 60373 |
| 7205 | Transistor, PNP, BC856B. | 4822 | 130 | 60373 |
| 7330 | IC, TDA6107JF/N3. | 9352 | 713 | 37112 |
| 7441 | Transistor, PNP, BC856B. | 4822 | 130 | 60373 |
| 7443 | Transistor, BC557B. | 4822 | 130 | 44568 |
| 7450 | Transistor, PNP, PDTA114ET. | 3198 | 010 | 44010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 |
| 7461 | Transistor, BC337-25. | 4822 | 130 | 40981 |
| 7462 | Transistor, NPN, PDTCL43ZT. | 9340 | 547 | 00215 |
| 7463 | Transistor, BC327-25. | 4822 | 130 | 41246 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 |
| 7480 | Transistor, NPN, BD135. | 4822 | 130 | 40823 |
| 7482 | Transistor, NPN, BD135. | 4822 | 130 | 40823 |
| 7515 | Coupler, Optic, TCET1103G. | 8238 | 274 | 02070 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 |
| 7522 | Transistor, NPN, BC846B. | 5322 | 130 | 60159 |
| 7540 | Transistor, BC547B. | 4822 | 130 | 40959 |
| 7541 | Transistor, NPN, PDTCL14ET. | 4822 | 130 | 11155 |
| 7542 | Transistor, PNP, BC856B. | 4822 | 130 | 60373 |
| 7560 | IC, LF33CV. | 4822 | 209 | 16978 |
| 7561 | Transistor, NPN, PDTCL43ZT. | 9340 | 547 | 00215 |
| 7580 | Transistor, PNP, BC856B. | 4822 | 130 | 60373 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 |
| 7802 | IC, Digital, MOS, HEF4053BT. | 5322 | 209 | 14481 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 |
| 7891 | Transistor, NPN, BC846B. | 5322 | 130 | 60159 |
| 7892 | Transistor, NPN, BC846B. | 5322 | 130 | 60159 |
| 7901 | IC, AN7522N PH. | 9322 | 181 | 41682 |
| 9611 | Coil, 27u. | 4822 | 157 | 52392 |
| 9672 | Coil, 22u. | 4822 | 157 | 50961 |
| 9678 | Coil, 22u. | 4822 | 157 | 50961 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 59191 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

| | | | | |
|-------------------------|--|------|-----|-------|
| Top Control Panel Parts | | | | |
| 0215 | 3 Pin Connector. | 2422 | 025 | 09191 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3088 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3089 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3093 | Res, 390 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 63901 |
| 3094 | Res, 180 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 61801 |
| 3095 | Res, 270 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 62701 |
| 3096 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3097 | Res, 2K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 62702 |
| 3098 | Res, 75 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 67509 |
| 3099 | Res, 68 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 66809 |
| 4091 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| CBA | Top Control Panel Assembly. | 3139 | 177 | 26241 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|---------------------------|--|------|-----|-------|
| Cabinet & Accessory Parts | | | | |
| S AC01 | AC Cord. | 3139 | 128 | 76161 |
| AC04 | Batteries for Remote Control Transmitter. | 9299 | 000 | 65263 |
| AC05 | Cabinet Back. | 3139 | 124 | 45991 |
| S AC09 | CRT, A51ERF135X82. | 9301 | 903 | 81343 |
| S AC12 | Degaussing Coil. | 3141 | 058 | 20131 |
| AC17 | Owner's Manual. | 3121 | 235 | 20621 |
| AC17 | Owner's Manual, French. | 3139 | 125 | 31601 |
| AC20A | Cabinet Front. | 3139 | 177 | 65671 |
| AC20B | Chassis Guide. | 3139 | 124 | 30812 |
| AC20C | Light Guide. | 3139 | 124 | 32221 |
| AC20D | Nameplate. | 3139 | 120 | 01371 |
| AC20E | Power Button. | 3139 | 177 | 65691 |
| AC20H | Speaker, 16 ohm, 5W (2 Used). | 2422 | 264 | 00411 |
| AC20J1 | Top Control Bracket. | 3139 | 124 | 30381 |
| AC20J3 | Top Control Cover. | 3139 | 124 | 31131 |
| AC20J4 | Top Control Rubber. | 3139 | 124 | 30391 |
| AC20J5 | Top Control Button Assembly. | 3139 | 137 | 66921 |
| REMOTE | Remote Control Transmitter, RC19335004/01. | 3139 | 228 | 86464 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

S = Safety Part Be sure to use exact replacement part.

20PT643R01 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|---|----------------|
| | 2 Pin Connector. | 2422 025 16269 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0211 | 2 Pin Connector. | 2422 025 16375 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0212 | 5 Pin Connector. | 2422 025 04853 | 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 016 05610 |
| 0220 | 2 Pin Connector. | 2422 025 15503 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic | 2020 558 90559 |
| 0221 | 2 Pin Connector. | 2422 025 10646 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 21040 |
| 0222 | A/V Jack | 2422 026 05236 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 |
| 0223 | SVHS Jack. | 2422 026 04926 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0225 | 3 Pin Connector. | 2412 020 00725 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0229 | 3 Pin Connector. | 2422 025 16382 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 0239 | 6 Pin Connector. | 2422 025 04854 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0243 | 5 Pin Connector. | 2422 025 04853 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| 0244 | 6 Pin Connector. | 2422 025 04854 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 0245 | 9 Pin CRT Socket | 2422 500 80076 | 2457 | Cap, 270n, 5%, 250v, Metalized Polypropylene. | 2222 479 90016 |
| S 0254 | 3 Pin Connector. | 2412 020 00725 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 0267 | Jack | 2422 026 05182 | 2459 | Cap, 680p, 10%, 500v, Ceramic | 3198 019 46810 |
| 0269 | 4 Pin Connector. | 2422 025 12479 | 2460 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 01010 |
| 0280 | Tuner, V+U, PLL | 2422 542 90108 | 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2020 558 90485 |
| S 1000 | SAW Filter, 45.75MHz | 2422 549 44518 | 2465 | Cap, 9n1, 5%, 1600v, Polypropylene | 2222 375 90153 |
| 1002 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2467 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 1200 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2468 | Cap, 33n, 10%, 400v, Polyester | 2222 347 90227 |
| S 1500 | Relay, 5 Amp, 12V. | 2422 132 07467 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| S 1515 | Tact Switch. | 2422 128 02742 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 1606 | Crystal, 12MHz000 | 2422 543 01203 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 1660 | 3 Pin Connector. | 2412 020 00725 | 2474 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 |
| 1811 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2475 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 024 44730 | 2476 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 04720 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2481 | Cap, 470p, 10%, 500v, Ceramic | 3198 019 44710 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2491 | Cap, 1n, 10%, 500v, Ceramic | 3198 019 41020 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene | 2222 336 29148 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90626 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic | 2020 554 90128 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 558 90489 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2527 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2540 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2541 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 31010 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 31010 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2864 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2865 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 368 90177 | 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 | 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 |
| | | | 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 |

S = Safety Part Be sure to use exact replacement part.

20PT643R01 (continued)

| | | | | | |
|------|--|----------------|--------|---|----------------|
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic . . . | 3198 025 51080 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic . . . | 3198 025 24710 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film . . . | 2306 207 03109 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3341 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | 3342 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic . . . | 3198 017 42240 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | S 3345 | Varactor, 1MA/50V, Max 115V | 2322 593 13507 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic | 2238 580 15624 | 3443 | Res, 1M, 5%, 1/10W, Metalized Glass . . | 3198 021 51050 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film | 3198 011 01530 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic | 2238 580 15624 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film | 3198 011 05620 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01810 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 08210 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic | 3198 016 33310 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03109 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3452 | Res, 3K6, 1%, 3/5W, Metal Film | 2312 915 13602 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3454 | Res, 1K5, 1%, 3/5W, Metal Film | 2312 915 11502 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . . | 3198 021 38220 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3457 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass . . . | 3198 021 31020 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01510 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass . . | 3198 021 32240 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass . . | 3198 021 32240 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film | 3198 011 03320 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01010 | 3470 | Res, 270K, 5%, 1/8W, Metalized Glass . . | 2322 730 61274 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01010 | 3472 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 915 16808 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3473 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 915 16808 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01010 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01510 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01510 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01510 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film | 2122 101 02083 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3481 | Res, 18K, 1%, 3/5W, Metal Film | 2312 915 11803 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01510 | 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3491 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 021 31040 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass . . . | 3198 021 51020 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass . . | 3198 021 31540 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film | 3198 011 05620 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film | 3198 011 01030 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass . . | 3198 021 52230 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass . . | 3198 021 51040 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass . . | 3198 021 51040 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass . . . | 2322 734 61202 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . . | 3198 021 51230 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03910 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass . . . | 2322 242 13335 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01010 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass . . . | 2322 242 13335 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01010 | S 3504 | Res, PTC, 3 ohm, 144V | 2122 663 00019 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass . . . | 2322 242 13155 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film | 3198 011 02230 | 3507 | Surge Protector | 2422 549 43073 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass . . . | 3198 021 31020 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . . | 3198 013 02210 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | S 3510 | Res, NTC, 4R7, 20%, 3W1 | 2122 612 00056 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 02710 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film | 3198 011 04780 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass . . | 3198 021 53340 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 05610 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass . . | 3198 021 33340 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . . | 3198 021 38230 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass . . . | 3198 021 51020 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . . | 3198 021 32220 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01010 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film | 3198 012 13370 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 05610 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01010 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . . | 3198 021 54720 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 021 32730 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . . | 3198 021 51520 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 08210 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . . | 2322 704 63903 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass . . . | 2322 734 64702 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . . | 2322 730 61274 |
| 3247 | Res, 270K, 5%, 1/16W, Metalized Glass . . | 2322 702 60274 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . . | 3198 021 51530 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . . . | 3198 021 33330 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 08210 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass . . . | 3198 021 51020 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01010 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass . . . | 3198 021 31020 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . . | 3198 021 51230 |
| 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . . | 3198 021 31060 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 021 55620 |

S = Safety Part Be sure to use exact replacement part.

20PT643R01 (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4829 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3637 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3685 | Res, 1K5, 1%, 1/8W, Metalized Glass. . . | 2322 734 61502 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | S 5445 | Transformer, LOT | 2422 531 02519 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 5453 | Coil, 22u, 5% | 3198 018 12290 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5457 | Coil, Linear Correction, 82u | 2422 536 00425 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5480 | Coil, 22u. | 2422 535 97333 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5501 | Mains Filter | 2422 549 43432 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 021 31530 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 021 31220 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6335 | Diode, Signal, BAV21 | 3198 010 10070 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6453 | Zener Diode, 5.6 volt. | 3198 020 55680 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6460 | Diode, Rect, BY228/24. | 9340 559 50112 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6463 | Zener Diode, 8.2 volt. | 3198 020 58280 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6465 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6466 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6467 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6468 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6470 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6476 | Zener Diode, 15 volt | 3198 010 21590 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6485 | Diode, Rect, BYD33J. | 9337 234 20133 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6487 | Diode, Rect, BYD33D. | 9337 234 00133 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6500 | Diode, Bridge Rect, GBU6JL-7002. . . . | 9322 138 08667 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6520 | Diode, Rect, BYD33D. | 9337 234 00133 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6523 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6524 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6525 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4807 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6526 | Zener Diode, 22 volt | 3198 020 52290 |

20PT643R01 (continued)

| | | | | |
|--------|---|------|-----|-------|
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 6541 | Zener Diode, 10 volt. | 3198 | 020 | 51090 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6565 | Diode, Signal, BAV70. | 9331 | 849 | 10215 |
| 6566 | Diode, Signal, BAS316. | 3198 | 010 | 10010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6691 | LED, LTL-10234WHCR. | 9322 | 185 | 69682 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 |
| 7200 | IC, TDA9577H/N1/AI/1130. | 9352 | 731 | 51557 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 |
| 7330 | IC, TDA6107JF/N3. | 9352 | 713 | 37112 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 | 020 | 40110 |
| 7450 | Transistor, PNP, PDTA114ET. | 3198 | 010 | 44010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 | 020 | 43530 |
| 7462 | Transistor, NPN, PDTA143ZT. | 9340 | 547 | 00215 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 | 020 | 43430 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 |
| 7480 | Transistor, NPN, BD135. | 3198 | 020 | 41010 |
| 7482 | Transistor, NPN, BD135. | 3198 | 020 | 41010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 | 140 | 14667 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 | 020 | 40030 |
| 7541 | Transistor, NPN, PDTA114ET. | 9340 | 310 | 10215 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 |
| 7561 | Transistor, NPN, PDTA143ZT. | 9340 | 547 | 00215 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 |
| 7901 | IC, AN7522N PH. | 9322 | 181 | 41682 |
| 9611 | Coil, 27u, 10%. | 3198 | 018 | 22790 |
| 9672 | Coil, 22u, 10%. | 3198 | 018 | 22290 |
| 9678 | Coil, 22u, 10%. | 3198 | 018 | 22290 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 23211 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|--------------------------|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 09191 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |

S = Safety Part Be sure to use exact replacement part.

| | | | | |
|------|--|------|-----|-------|
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3088 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3089 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3093 | Res, 390 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 63901 |
| 3094 | Res, 180 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 61801 |
| 3095 | Res, 270 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 62701 |
| 3096 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3097 | Res, 2K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 62702 |
| 3098 | Res, 75 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 67509 |
| 3099 | Res, 68 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 66809 |
| 4091 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| CBA | Top Control Panel Assembly. | 3139 | 177 | 26241 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3139 | 128 | 76161 |
| AC03 | Anode Lead Spacer. | 3139 | 124 | 17541 |
| AC04 | Batteries for Remote Control Transmitter. | 9299 | 000 | 65263 |
| AC05 | Cabinet Back. | 3139 | 124 | 45991 |
| S AC09 | CRT, A51ERF135X82. | 9301 | 903 | 81301 |
| S AC12 | Degaussing Coil. | 3141 | 058 | 20131 |
| AC17 | Owner's Manual. | 3121 | 235 | 20621 |
| AC20A | Cabinet Front. | 3139 | 177 | 65671 |
| AC20B | Chassis Guide. | 3139 | 124 | 30812 |
| AC20C | Light Guide. | 3139 | 124 | 32221 |
| AC20D | Nameplate. | 3139 | 120 | 01371 |
| AC20E | Power Button. | 3139 | 177 | 65691 |
| AC20H | Speaker, 16 ohm, 5W (2 Used). | 2422 | 264 | 00411 |
| AC20J1 | Top Control Bracket. | 3139 | 124 | 30381 |
| AC20J3 | Top Control Cover. | 3139 | 124 | 31131 |
| AC20J4 | Top Control Rubber. | 3139 | 124 | 30391 |
| AC20J5 | Top Control Button Assembly. | 3139 | 137 | 66921 |
| REMOTE | Remote Control Transmitter, RC19335004/01. | 3139 | 228 | 86463 |

20PT653R/37 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | Main Chassis Parts | | | |
|--------------------|--|------|-----------|--------------------|--|------|-----------|
| 0211 | 2 Pin Connector. | 2422 | 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 | 368 90177 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2340 | er. | 2020 | 012 93495 |
| 0214 | 5 Pin Connector. | 2422 | 025 12481 | 2341 | Cap, 10u, 20%, 250v, Electrolytic. | 3198 | 019 43320 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 | 2342 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 016 05610 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2343 | Cap, 560p, 5%, 50v, Ceramic. | 2020 | 558 90559 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2344 | Cap, 2n2, 10%, 2000v, Ceramic. | 3198 | 023 21040 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2345 | Cap, 100n, +80/-20%, 25v, Ceramic. | 2020 | 558 90445 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2405 | Cap, 10n, +80/-20%, 1000v, Ceramic | 3198 | 025 32210 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0229 | 3 Pin Connector. | 2412 | 020 00725 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| 0239 | 3 Pin Connector. | 2422 | 025 16382 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 2020 | 021 91139 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 3198 | 025 34790 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 2222 | 479 90016 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2457 | Cap, 270n, 5%, 250v, Metalized Polyprop | 2020 | 021 91331 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 | 2458 | ylene. | 3198 | 019 46810 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2459 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 558 90485 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2460 | Cap, 680p, 10%, 500v, Ceramic. | 2222 | 375 90153 |
| 0269 | Jack | 2422 | 026 05182 | 2463 | Cap, 100p, 5%, 50v, Ceramic. | 2222 | 347 90234 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2465 | Cap, 680p, 10%, 2000v, Ceramic | 2222 | 347 90227 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2467 | Cap, 9n1, 5%, 1600v, Polypropylene | 3198 | 014 01040 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2468 | Cap, 68n, 10%, 250v, Polyester | 2222 | 365 75154 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2471 | Cap, 33n, 10%, 400v, Polyester | 2222 | 365 75104 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07467 | 2472 | Cap, 100n, 10%, 50v, Polyester | 3198 | 017 02220 |
| 1600 | Crystal, 12MHz000 | 2422 | 543 01203 | 2473 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 347 90234 |
| 1811 | 3 Pin Connector. | 2412 | 020 00725 | 2474 | Cap, 100n, 10%, 63v, Metalized Polyeste | 3198 | 017 02220 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2476 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2480 | Cap, 4n7, 10%, 50v, Ceramic. | 2020 | 021 90586 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2481 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 019 44710 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2482 | Cap, 470p, 10%, 500v, Ceramic. | 2222 | 347 90234 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2485 | Cap, 68n, 10%, 250v, Polyester | 2020 | 021 90856 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2486 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 91577 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 | 2487 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2488 | Cap, 47u, 20%, 50v, Electrolytic | 2020 | 021 91049 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2489 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2491 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 019 41020 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2500 | Cap, 1n, 10%, 500v, Ceramic. | 2222 | 336 29148 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2501 | Cap, 470n, 20%, 275v, Metalized Polypro | 3198 | 019 52220 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2502 | pylene | 3198 | 019 52220 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2503 | Cap, 2n2, 10%, 1000v, Ceramic. | 2020 | 024 90626 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2505 | Cap, 470u, 20%, 200v, Electrolytic | 3198 | 019 52220 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2507 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 017 04710 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2508 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 019 64710 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | S 2515 | Cap, 470p, 10%, 1000v, Ceramic | 2020 | 554 90128 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2520 | Cap, 1n5, 20%, 50v, Ceramic. | 3198 | 017 01030 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2521 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 025 52290 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2522 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 017 01040 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | S 2523 | Cap, 100n, 10%, 16v, Ceramic | 2020 | 558 90489 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2525 | Cap, 1n5, 10%, 2000v, Ceramic. | 3198 | 017 04710 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2527 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2528 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2540 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 2238 | 786 19852 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 3198 | 017 22250 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 3198 | 019 11020 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 014 01040 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 023 41040 | 2563 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91353 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 2222 | 910 19856 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 023 41040 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2601 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 54780 | 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 31020 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 21050 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2864 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2865 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 15626 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 | 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | | | | |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | | | | |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | | | | |

S = Safety Part Be sure to use exact replacement part.

20PT653R/37 (continued)

| | | | | | | | | | |
|------|---|------|-----|-------|--------|---|------|-----|-------|
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 | 15626 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31060 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 | 017 | 22250 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34740 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. . . . | 3198 | 025 | 54780 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 | 013 | 01020 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 | 025 | 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 | 51080 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 | 013 | 01020 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 | 34720 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 | 013 | 01020 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 | 025 | 24710 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 | 207 | 03109 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. . . . | 3198 | 025 | 52280 | 3341 | Res, 4R7, 5%, 1/3W, Metal Film. . . . | 2306 | 204 | 03478 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 | 014 | 02240 | 3342 | Res, 4R7, 5%, 1/3W, Metal Film. . . . | 2306 | 204 | 03478 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 | 42240 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 | 013 | 01520 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03390 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 41040 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 | 593 | 13507 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 | 026 | 21020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03390 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 | 51080 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 | 580 | 15642 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 | 580 | 15624 | 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51050 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 | 580 | 15642 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01530 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 | 580 | 15624 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 05620 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 | 025 | 51090 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01810 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 01030 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 08210 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 01030 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 06890 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 | 33310 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03390 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 | 204 | 03109 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 3452 | Res, 3K6, 1%, 3/5W, Metal Film. | 2312 | 915 | 13602 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31520 | 3454 | Res, 1K5, 1%, 3/5W, Metal Film. | 2312 | 915 | 11502 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 38220 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 | 012 | 26880 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 3456 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 06890 | 3457 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 | 012 | 21530 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 32240 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03920 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03390 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 32240 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 | 915 | 12703 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 07590 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03320 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3470 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 | 730 | 61274 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 07590 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 | 915 | 13908 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3472 | Res, 6R8, 1%, 3/5W, Metal Film. | 2312 | 915 | 16808 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 07590 | 3473 | Res, 6R8, 1%, 3/5W, Metal Film. | 2312 | 915 | 16808 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 | 915 | 12202 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 | 915 | 12202 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34730 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34730 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52720 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 | 101 | 02083 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34730 | 3481 | Res, 18K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11803 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3482 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11203 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34730 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03920 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 07590 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 | 207 | 03478 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 3491 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51030 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31540 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 | 204 | 03688 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05620 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 | 207 | 03478 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01030 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52230 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31520 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51040 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31030 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51040 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 | 734 | 61202 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51230 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03910 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 | 663 | 00019 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 | 242 | 13155 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3507 | Surge Protector. | 2422 | 549 | 43073 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 | 013 | 02210 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02230 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 | 612 | 00056 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 02710 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 33330 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51220 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04780 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 53340 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36890 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . | 2306 | 204 | 03101 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 55630 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 05610 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 33340 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 | 012 | 11070 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 38230 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 | 012 | 13370 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 32220 | 3528 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 54730 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 05610 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51030 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 54720 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film. | 2306 | 204 | 03222 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 32220 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51520 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 32230 | 3543 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 | 915 | 18203 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 32730 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 | 734 | 64702 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 08210 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 | 730 | 61274 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . . | 2322 | 704 | 63903 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51530 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31030 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51030 |
| 3247 | Res, 270K, 5%, 1/16W, Metalized Glass. . | 2322 | 702 | 60274 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 33330 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 08210 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51230 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 55620 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | S 3565 | Res, 330 ohm, 5%, 1W, Metal Film. . . . | 3198 | 012 | 13310 |

S = Safety Part Be sure to use exact replacement part.

20PT653R/37 (continued)

| | | | | | | | | | |
|------|---|------|-----|-------|--------|--|------|-----|-------|
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51020 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | S 5445 | Transformer, LOT | 2422 | 531 | 02519 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31020 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5453 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5457 | Coil, Linear Correction, 82u | 2422 | 536 | 00425 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5480 | Coil, 22u. | 2422 | 535 | 97333 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5520 | Transformer, SS90009-04. | 2422 | 531 | 02459 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31020 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6453 | Zener Diode, 5.6 volt. | 3198 | 020 | 55680 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6463 | Zener Diode, 8.2 volt. | 3198 | 020 | 58280 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 | 020 | 25680 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6485 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6487 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6500 | Diode, Bridge Rect, GBU6JL-7002. . . . | 9322 | 138 | 08667 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6520 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 |
| 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 |
| 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |

S = Safety Part Be sure to use exact replacement part.

20PT653R/37 (continued)

| | | | | |
|--------|--|------|-----|-------|
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6565 | Diode, Signal, BAV70. | 9331 | 849 | 10215 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7200 | IC, TDA9577H/N1/AI/1130. | 9352 | 731 | 51557 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7330 | IC, TDA6107JF/N3. | 9352 | 713 | 37112 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 |
| 7450 | Transistor, PNP, PPTA114ET. | 3198 | 010 | 44010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 | 547 | 00215 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 |
| 7480 | Transistor, NPN, BD135. | 3198 | 020 | 41010 |
| 7482 | Transistor, NPN, BD135. | 3198 | 020 | 41010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 | 310 | 10215 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 | 547 | 00215 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7901 | IC, AN7522N PH. | 9322 | 181 | 41682 |
| 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 21091 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR. | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| CBA | Front Interface Panel Assembly. | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

S = Safety Part Be sure to use exact replacement part.

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack. | 2422 | 026 | 04747 |
| 0250 | A/V Jack. | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| CBA | Side Jack Panel Assembly. | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3013 | Res, 2K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 62702 |
| 3084 | Res, 75 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 67509 |
| 3085 | Res, 68 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 66809 |
| 3093 | Res, 390 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 63901 |
| 3094 | Res, 180 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 61801 |
| 3095 | Res, 270 ohm, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 62701 |
| 4086 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 4087 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 4090 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| CBA | Top Control Panel Assembly. | 3139 | 187 | 20701 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3139 | 128 | 76161 |
| AC03 | Anode Lead Spacer. | 3139 | 124 | 17541 |
| AC04 | Batteries for Remote Control Transmitter. | 9299 | 000 | 65263 |
| AC05 | Cabinet Back. | 3139 | 124 | 43531 |
| S AC09 | CRT, A51ERF135X82. | 9301 | 903 | 81301 |
| S AC12 | Degaussing Coil. | 3141 | 058 | 20131 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32892 |
| AC14 | Front Main PCB Bracket. | 3139 | 124 | 45641 |
| AC17 | Owner's Manual. | 3139 | 125 | 30831 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20A | Cabinet Front. | 3139 | 177 | 53181 |
| AC20B | Chassis Guide. | 3139 | 124 | 25893 |
| AC20B | Chassis Guide. | 3139 | 124 | 45661 |
| AC20C | Light Guide. | 3139 | 124 | 41421 |
| AC20D | Nameplate. | 3139 | 120 | 01371 |
| AC20E | Power Button. | 3139 | 177 | 58491 |
| AC20H | Speaker, 16 ohm, 5W (2 Used). | 2422 | 264 | 00411 |
| AC20J | Top Control Assembly. | 3139 | 177 | 56381 |
| AC20J1 | Top Control Bracket. | 3139 | 124 | 39172 |
| AC20J2 | Top Control Buttons. | 3139 | 124 | 39182 |
| REMOTE | Remote Control Transmitter, RC19036001/01. | 3139 | 228 | 86493 |

21PT6331/44R - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|----------------|
| | Bracket | 3139 124 44421 | 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0022 | Cover, 3 Pin Cinch | 3139 124 25551 | 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 |
| 0040 | U-Cooling Plate. | 3139 121 26731 | 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0118 | Heatsink | 3139 121 62214 | 2883 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 |
| 0122 | Heatsink, Audio. | 3139 121 62501 | 2884 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 |
| 0123 | Socket Fuse. | 2422 088 00271 | 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 014 02240 |
| 0127 | NTC Holder | 3139 120 10151 | 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 0129 | IC-Spring | 3104 301 22081 | 2902 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 |
| 0136 | Spring | 3139 121 24583 | 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 |
| 0137 | IC-Spring. | 3104 301 22081 | 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 |
| 0138 | Spring | 3135 011 01041 | 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 |
| 0139 | IC-Spring. | 3104 301 22081 | 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 |
| 0141 | Cable, DIPMate, 6 Pin. | 3139 121 08841 | 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 0152 | Cable, DIPMate, 5 Pin, 480mm | 3139 121 07951 | 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 |
| 0218 | A/V Jack | 2422 026 04742 | 2981 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 |
| 0232 | Headphone Jack | 2422 026 04747 | 2982 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 34710 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2983 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 |
| 0280 | 4 Pin Connector. | 2422 025 12479 | 2984 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 34710 |
| 0320 | Factory Plate. | 3122 120 01701 | 3182 | Wire Jumper. | 3198 036 90010 |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | 3184 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 021 34730 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01510 |
| 1600 | Tact Switch. | 2422 128 02742 | 3186 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 021 34730 |
| 1601 | Tact Switch. | 2422 128 02742 | 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01510 |
| 1602 | Tact Switch. | 2422 128 02742 | 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. | 3198 021 33330 |
| 1603 | Tact Switch. | 2422 128 02742 | 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. | 3198 021 32220 |
| 1606 | Tact Switch. | 2422 128 02742 | 3247 | Res, 270K, 5%, 1/16W, Metalized Glass. | 2322 702 60274 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 3258 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 |
| 2004 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 024 44730 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. | 2306 204 03108 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. | 2306 204 03108 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. | 3198 021 51050 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 3447 | Res, 56 ohm, 5%, 1/4W, Carbon Film. | 2122 101 02081 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. | 2306 204 03109 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film. | 2312 915 15102 |
| 2210 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 3457 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 3470 | Res, 270K, 5%, 1/8W, Metalized Glass. | 2322 730 61274 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3471 | Res, 6R8, 1%, 3/5W, Metal Film. | 2312 915 16808 |
| 2243 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3472 | Res, 6R8, 1%, 3/5W, Metal Film. | 2312 915 16808 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 3473 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 915 13908 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 3481 | Res, 18K, 1%, 3/5W, Metal Film. | 2312 915 11803 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 | 3482 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 | 3491 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 021 51030 |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 | 3492 | Res, 820 ohm, 5%, 1/10W, Metalized Glas | 3198 021 58210 |
| 2457 | Cap, 270n, 5%, 250v, Metalized Polypropylene. | 2222 479 90016 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass. | 3198 021 52230 |
| S 2463 | Cap, 390p, 10%, 2000v, Ceramic. | 2020 558 90482 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 021 51040 |
| S 2465 | Cap, 9n1, 5%, 1600v, Polypropylene. | 2020 301 90248 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 021 51040 |
| 2466 | Cap, 15n, 10%, 400v, Polyester. | 2222 347 90219 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass. | 3198 021 51230 |
| 2468 | Cap, 33n, 10%, 400v, Polyester. | 2222 347 90227 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 242 13335 |
| 2472 | Cap, 10n, 10%, 100v, Metalized Polyeste | 2222 365 85103 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 242 13335 |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 | S 3504 | Res, PTC, 9 ohm, 265V. | 2122 663 00021 |
| 2482 | Cap, 33n, 10%, 250v, Polyester. | 2222 347 90213 | 3521 | Res, 22 ohm, 5%, 1/6W, Carbon Film. | 3198 011 02290 |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 | 3522 | Res, 390K, 5%, 1/8W, Metalized Glass. | 2322 730 61394 |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 | S 3523 | Res, 47 ohm, 5%, 1/3W, Metal Film. | 2306 204 03479 |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 021 90854 | 3526 | Res, 0R15, 5%, 3/5W, Metal Film. | 3198 012 11570 |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 021 91049 | 3527 | Res, 0R22, 5%, 3/5W, Metal Film. | 3198 012 12270 |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. | 2322 730 61274 |
| S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 330 00018 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 021 51030 |
| S 2503 | Cap, 330u, 20%, 450v, Electrolytic. | 2020 024 90774 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 021 51020 |
| 2509 | Cap, 100n, 20%, 275v, Metalized Polypropylene. | 2222 336 29144 | 3561 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 011 02210 |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90128 | 3563 | Res, 8K2, 5%, 1/10W, Metalized Glass. | 3198 021 58220 |
| 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | S 3565 | Res, 330 ohm, 5%, 1W, Metal Film. | 3198 012 13310 |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91353 | 3622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 | 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 3637 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 | 3681 | Res, 180 ohm, 1%, 1/8W, Metalized Glass | 2322 734 61801 |
| 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 3682 | Res, 270 ohm, 1%, 1/8W, Metalized Glass | 2322 734 62701 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 3683 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 734 63901 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 3684 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 734 63901 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 3686 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 3687 | Res, 75 ohm, 1%, 1/8W, Metalized Glass | 2322 734 67509 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3688 | Res, 68 ohm, 1%, 1/8W, Metalized Glass | 2322 734 66809 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3689 | Res, 2K7, 1%, 1/8W, Metalized Glass. | 2322 734 62702 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 021 34720 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 3862 | Res, 15K, 5%, 1/16W, Metalized Glass. | 3198 021 31530 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass. | 3198 021 31220 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 |
| | | | 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 021 33320 |
| | | | 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 021 31020 |
| | | | 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 021 33320 |
| | | | 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 021 33320 |
| | | | 3904 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 021 31030 |

S = Safety Part Be sure to use exact replacement part.

21PT6331/44R (continued)

| | | | | | |
|--------|--|----------------|------|----------------------|----------------|
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 9511 | Wire Jumper. | 3198 036 90010 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 9512 | Wire Jumper. | 3198 036 90010 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 9513 | Wire Jumper. | 3198 036 90010 |
| 3981 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01210 | 9514 | Wire Jumper. | 3198 036 90010 |
| 3982 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01210 | 9515 | Wire Jumper. | 3198 036 90010 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9516 | Wire Jumper. | 3198 036 90010 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9521 | Wire Jumper. | 3198 036 90010 |
| 4470 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9522 | Wire Jumper. | 3198 036 90010 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9528 | Wire Jumper. | 3198 036 90010 |
| 4808 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9612 | Wire Jumper. | 3198 036 90010 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9613 | Wire Jumper. | 3198 036 90010 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9614 | Wire Jumper. | 3198 036 90010 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9617 | Wire Jumper. | 3198 036 90010 |
| 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9619 | Wire Jumper. | 3198 036 90010 |
| 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9620 | Wire Jumper. | 3198 036 90010 |
| 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9621 | Wire Jumper. | 3198 036 90010 |
| 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9622 | Wire Jumper. | 3198 036 90010 |
| 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9623 | Wire Jumper. | 3198 036 90010 |
| 5202 | Wire Jumper. | 3198 036 90010 | 9626 | Wire Jumper. | 3198 036 90010 |
| 5241 | Wire Jumper. | 3198 036 90010 | 9627 | Wire Jumper. | 3198 036 90010 |
| 5342 | Coil, 22u. | 2422 535 97333 | 9628 | Wire Jumper. | 3198 036 90010 |
| S 5445 | Transformer, LOT | 2422 531 02519 | 9629 | Wire Jumper. | 3198 036 90010 |
| 5453 | Coil, 22u, 5%. | 3198 018 12290 | 9631 | Wire Jumper. | 3198 036 90010 |
| 5457 | Coil, Linear Correction, 82u | 2422 536 00425 | 9632 | Wire Jumper. | 3198 036 90010 |
| 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 | 9633 | Wire Jumper. | 3198 036 90010 |
| 5471 | Coil, 6u8, 20% | 3198 018 76880 | 9637 | Wire Jumper. | 3198 036 90010 |
| 5480 | Coil, 4u7, 5%. | 2422 535 94213 | 9638 | Wire Jumper. | 3198 036 90010 |
| S 5500 | Mains Filter | 2422 549 43567 | 9639 | Wire Jumper. | 3198 036 90010 |
| S 5520 | Transformer, SS42025-03. | 2422 531 02462 | 9640 | Wire Jumper. | 3198 036 90010 |
| 5861 | Coil, 10u, 5%. | 3198 018 11090 | 9641 | Wire Jumper. | 3198 036 90010 |
| 6181 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9642 | Wire Jumper. | 3198 036 90010 |
| 6453 | Zener Diode, 5.6 volt. | 3198 020 55680 | 9643 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9648 | Wire Jumper. | 3198 036 90010 |
| 6463 | Zener Diode, 9.1 volt. | 9322 150 08685 | 9650 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 010 21590 | 9654 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9657 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9658 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. . . . | 9322 138 08667 | 9659 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9660 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 9.1 volt. | 9322 150 08685 | 9664 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9665 | Wire Jumper. | 3198 036 90010 |
| 6567 | Zener Diode, 4.7 volt. | 3198 020 54780 | 9666 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.2 volt. | 9322 163 91685 | 9668 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 | 9669 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9670 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9577H/N1/AI/1130. | 9352 731 51557 | 9671 | Wire Jumper. | 3198 036 90010 |
| 7450 | Transistor, PNP, PDTA114ET | 3198 010 44010 | 9674 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1104(G) | 9322 175 72667 | 9675 | Wire Jumper. | 3198 036 90010 |
| 7521 | Transistor, FET, STP10NK80ZFP. | 9322 196 57687 | 9676 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9679 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9680 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9686 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9690 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9691 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9695 | Wire Jumper. | 3198 036 90010 |
| 9184 | Wire Jumper. | 3198 036 90010 | 9697 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9698 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9699 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9821 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9822 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9825 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9828 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9829 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9831 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9832 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9837 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9838 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9839 | Wire Jumper. | 3198 036 90010 |
| 9415 | Wire Jumper. | 3198 036 90010 | 9846 | Wire Jumper. | 3198 036 90010 |
| 9416 | Wire Jumper. | 3198 036 90010 | 9847 | Wire Jumper. | 3198 036 90010 |
| 9417 | Wire Jumper. | 3198 036 90010 | 9849 | Wire Jumper. | 3198 036 90010 |
| 9418 | Wire Jumper. | 3198 036 90010 | 9850 | Wire Jumper. | 3198 036 90010 |
| 9419 | Wire Jumper. | 3198 036 90010 | 9851 | Wire Jumper. | 3198 036 90010 |
| 9421 | Wire Jumper. | 3198 036 90010 | 9852 | Wire Jumper. | 3198 036 90010 |
| 9422 | Wire Jumper. | 3198 036 90010 | 9853 | Wire Jumper. | 3198 036 90010 |
| 9423 | Wire Jumper. | 3198 036 90010 | 9856 | Wire Jumper. | 3198 036 90010 |
| 9425 | Wire Jumper. | 3198 036 90010 | 9860 | Wire Jumper. | 3198 036 90010 |
| 9427 | Wire Jumper. | 3198 036 90010 | 9861 | Wire Jumper. | 3198 036 90010 |
| 9451 | Wire Jumper. | 3198 036 90010 | 9862 | Wire Jumper. | 3198 036 90010 |
| 9453 | Wire Jumper. | 3198 036 90010 | 9864 | Wire Jumper. | 3198 036 90010 |
| 9460 | Wire Jumper. | 3198 036 90010 | 9865 | Wire Jumper. | 3198 036 90010 |
| 9472 | Wire Jumper. | 3198 036 90010 | 9868 | Wire Jumper. | 3198 036 90010 |
| 9500 | Wire Jumper. | 3198 036 90010 | 9873 | Wire Jumper. | 3198 036 90010 |
| 9501 | Wire Jumper. | 3198 036 90010 | 9877 | Wire Jumper. | 3198 036 90010 |
| 9503 | Wire Jumper. | 3198 036 90010 | 9903 | Wire Jumper. | 3198 036 90010 |
| 9510 | Wire Jumper. | 3198 036 90010 | 9904 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

21PT6331/44R (continued)

| | | | | |
|------|------------------------|------|-----|-------|
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9912 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9916 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9919 | Wire Jumper. | 3198 | 036 | 90010 |
| 9920 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis | 3141 | 058 | 58201 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3121 | 231 | 00081 |
| AC04 | Batteries for Remote Control Transmitter. | 9299 | 000 | 65263 |
| AC05 | Cabinet Back. | 3139 | 124 | 40813 |
| AC09 | CRT, A51QDX992X003 | 9322 | 182 | 97682 |
| AC10 | Customer Control Buttons | 3139 | 177 | 60291 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 45507 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 20942 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53042 |
| AC20A | Cabinet Front. | 3139 | 177 | 60311 |
| AC20B | Chassis Guide. | 3139 | 124 | 37561 |
| AC20C | Light Guide. | 3139 | 124 | 41241 |
| AC20D | Nameplate. | 3139 | 120 | 01371 |
| AC20E | Power Button | 3139 | 177 | 60301 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| AC32 | Yoke Wedge (2 Used). | 3135 | 013 | 00311 |
| REMOTE | Remote Control Transmitter, RC19335004/01. | 3139 | 228 | 86464 |

21PT633R85C - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|---|------|-----------|--------|---|------|-----------|
| | Main Chassis Parts | | | | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 16269 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 0218 | A/V Jack | 2422 | 026 04742 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2482 | Cap, 33n, 10%, 250v, Polyester | 2222 | 347 90213 |
| 0232 | Headphone Jack | 2422 | 026 04747 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 | 021 90854 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91049 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 0280 | 4 Pin Connector. | 2422 | 025 12479 | 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene | 2222 | 336 29148 |
| S 1000 | Tuner, V+U PLL | 2422 | 542 90098 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 | 024 90647 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 1600 | Tact Switch. | 2422 | 128 02742 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 1601 | Tact Switch. | 2422 | 128 02742 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 1602 | Tact Switch. | 2422 | 128 02742 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 1603 | Tact Switch. | 2422 | 128 02742 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 1606 | Tact Switch. | 2422 | 128 02742 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 | 021 91654 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91353 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2210 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 31020 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 21050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2243 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2864 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2865 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 | 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 15626 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | | 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |
| | er. | 2222 | 368 90177 | 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 15626 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 | 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 | 2874 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 | 2875 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 | 2876 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 54780 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 | 2877 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 | 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 | 558 90445 | 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 | 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 | 2883 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 | 2884 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 | 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 | 014 02240 |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 | 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 | 2902 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 |
| 2457 | Cap, 270n, 5%, 250v, Metalized Polypropylene. | 2222 | 479 90016 | 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 | 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 | 580 15642 |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 | 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 | 586 15624 |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 | 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 | 580 15642 |
| S 2463 | Cap, 390p, 10%, 2000v, Ceramic | 2020 | 558 90482 | 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 | 586 15624 |
| 2465 | Cap, 9n1, 5%, 1600v, Polypropylene | 2222 | 375 90153 | 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 | 347 90219 | 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2468 | Cap, 33n, 10%, 400v, Polyester | 2222 | 347 90227 | 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 | 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 33310 |
| 2472 | Cap, 10n, 10%, 100v, Metalized Polyeste | 2222 | 365 85103 | 2981 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 | 2982 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 34710 |
| | | | | 2983 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| | | | | 2984 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 34710 |

S = Safety Part Be sure to use exact replacement part.

21PT633R85C (continued)

| | | | | | |
|--------|---|----------------|--------|---|----------------|
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3492 | Res, 820 ohm, 5%, 1/10W, Metalized Glas | 3198 021 58210 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass . . | 3198 021 52230 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . . | 3198 021 38220 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 021 51040 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 021 51040 |
| 3182 | Wire Jumper. | 3198 036 90010 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . . | 3198 021 51230 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3507 | Surge Protector. | 2422 549 43073 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . . | 3198 013 02210 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . . | 3198 021 54720 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 021 32730 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . . | 3198 021 51520 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . . | 2322 704 63903 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 734 64702 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . . | 2322 730 61274 |
| 3247 | Res, 270K, 5%, 1/16W, Metalized Glass. . | 2322 702 60274 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . . | 3198 021 51530 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . . | 3198 021 51230 |
| 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . . | 3198 021 31060 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 021 55620 |
| 3258 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 |
| 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 | 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . . | 3198 021 52220 |
| 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 021 55620 |
| 3332 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 | 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 |
| 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 |
| 3334 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 | 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 |
| 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 |
| 3336 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 | 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 | 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 | 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 |
| 3341 | Res, 1R, 5%, 0.33W | 4822 052 10108 | 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 |
| S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 | 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 |
| 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 | 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 04710 |
| 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 | 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 | 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 |
| 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 011 06820 |
| 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 3622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. . . | 3198 021 51050 | 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 |
| 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 | 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3447 | Res, 56 ohm, 5%, 1/4W, Carbon Film . . . | 2122 101 02081 | 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 |
| 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 |
| 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 |
| 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 | 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film | 2306 204 03109 | 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 | 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3637 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3454 | Res, 2K, 1%, 3/5W, Metal Film | 2312 915 12002 | 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 | 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 3681 | Res, 180 ohm, 1%, 1/8W, Metalized Glass | 2322 734 61801 |
| 3457 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 3682 | Res, 270 ohm, 1%, 1/8W, Metalized Glass | 2322 734 62701 |
| 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3683 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 734 63901 |
| S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 | 3684 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 734 63901 |
| 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | 3686 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | 3687 | Res, 75 ohm, 1%, 1/8W, Metalized Glass | 2322 734 67509 |
| 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 | 3688 | Res, 68 ohm, 1%, 1/8W, Metalized Glass | 2322 734 66809 |
| 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 | 3689 | Res, 2K7, 1%, 1/8W, Metalized Glass. . . | 2322 734 62702 |
| 3470 | Res, 270K, 5%, 1/8W, Metalized Glass . . | 2322 730 61274 | 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 |
| 3471 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 915 16808 | 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 3472 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 915 16808 | 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 |
| 3473 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . . | 3198 021 31530 |
| 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . . | 3198 021 31220 |
| 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 |
| 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 | 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3481 | Res, 18K, 1%, 3/5W, Metal Film | 2312 915 11803 | 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 |
| 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | 3901 | Res, 1K, 5%, 1/16W, Metalized Glass . . . | 3198 021 31020 |
| 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 |
| 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 |
| 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 |
| 3491 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 | 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 |

S = Safety Part Be sure to use exact replacement part.

21PT633R85C (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6468 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 6470 | Diode, Signal, BAV99 | 3198 010 10620 |
| 3981 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01210 | 6476 | Zener Diode, 15 volt | 3198 010 21590 |
| 3982 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01210 | 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6485 | Diode, Rect, BYD33J. | 9337 234 20133 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6487 | Diode, Rect, BYD33D. | 9337 234 00133 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 |
| 4470 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6520 | Diode, Rect, BYD33D. | 9337 234 00133 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6523 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6524 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6525 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6526 | Zener Diode, 22 volt | 3198 020 52290 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6541 | Zener Diode, 10 volt | 3198 020 51090 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6563 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6565 | Diode, Signal, BAV70 | 9331 849 10215 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6566 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6569 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6580 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4808 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6691 | LED, LTL-10234WHCR | 9322 185 69682 |
| 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6692 | IR Receiver. | 9322 127 54667 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7200 | IC, TDA9577H/N1/AI/1130. | 9352 731 51557 |
| 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7330 | IC, TDA6107JF/N3 | 9352 713 37112 |
| 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7443 | Transistor, PNP, BC857B(COL) | 3198 020 40110 |
| 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7450 | Transistor, PNP, PDTA114ET | 3198 010 44010 |
| 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 |
| 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 |
| 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7462 | Transistor, NPN, PDTCL143ZT | 9340 547 00215 |
| 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 |
| 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7471 | IC, TDA8359J/N2. | 9352 701 64112 |
| 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 7480 | Transistor, NPN, BD135 | 3198 020 41010 |
| 5001 | Coil, 27u, 10% | 3198 018 22790 | 7482 | Transistor, NPN, BD135 | 3198 020 41010 |
| 5002 | Coil, 820n, 10% | 3198 018 18270 | S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 |
| 5201 | Coil, 6u8, 5% | 3198 018 16880 | 7520 | IC, TEA1507P/N1. | 9352 673 56112 |
| 5202 | Wire Jumper. | 3198 036 90010 | 7521 | Power FET, FQPF9N50. | 9322 187 16687 |
| 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 |
| 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7541 | Transistor, NPN, PDTCL14ET | 9340 310 10215 |
| 5241 | Wire Jumper. | 3198 036 90010 | 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5242 | Coil, 10u, 5% | 3198 018 11090 | 7560 | IC, L78L33ACZ. | 9322 134 92676 |
| 5342 | Coil, 22u. | 2422 535 97333 | 7561 | Transistor, NPN, PDTCL143ZT | 9340 547 00215 |
| S 5445 | Transformer, LOT | 2422 531 02519 | 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7602 | IC, M24C08-WBN6. | 9322 154 38682 |
| 5453 | Coil, 22u, 5% | 3198 018 12290 | 7861 | IC, TDA9853H/V1. | 9352 671 19557 |
| 5457 | Coil, Linear Correction, 82u | 2422 536 00425 | 7901 | IC, AN7522N PH | 9322 181 41682 |
| 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 | 9001 | Wire Jumper. | 3198 036 90010 |
| 5471 | Coil, 6u8, 20% | 3198 018 76880 | 9181 | Wire Jumper. | 3198 036 90010 |
| 5472 | Coil, 3u3, 10% | 3198 018 23380 | 9182 | Wire Jumper. | 3198 036 90010 |
| 5480 | Coil, 4u7, 5% | 2422 535 94213 | 9183 | Wire Jumper. | 3198 036 90010 |
| S 5501 | Mains Filter | 2422 549 43432 | 9184 | Wire Jumper. | 3198 036 90010 |
| S 5520 | Transformer, SS39009-04. | 2422 531 02459 | 9192 | Wire Jumper. | 3198 036 90010 |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 9193 | Wire Jumper. | 3198 036 90010 |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 9311 | Wire Jumper. | 3198 036 90010 |
| 5561 | Coil, 27u, 5% | 2422 535 95366 | 9312 | Wire Jumper. | 3198 036 90010 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 9406 | Wire Jumper. | 3198 036 90010 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 9407 | Wire Jumper. | 3198 036 90010 |
| 5602 | Coil, 5u6, 5% | 3198 018 15680 | 9408 | Wire Jumper. | 3198 036 90010 |
| 5603 | Coil, 5u6, 5% | 3198 018 15680 | 9409 | Wire Jumper. | 3198 036 90010 |
| 5604 | Coil, 5u6, 5% | 3198 018 15680 | 9410 | Wire Jumper. | 3198 036 90010 |
| 5861 | Coil, 10u, 5% | 3198 018 11090 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6001 | Zener Diode, 33 volt | 3198 010 23390 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6181 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6201 | Diode, Signal, BAS316. | 3198 010 10630 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6202 | Diode, Signal, BAS316. | 3198 010 10630 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6331 | Diode, Signal, BAV21 | 3198 010 10070 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6333 | Diode, Signal, BAV21 | 3198 010 10070 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6335 | Diode, Signal, BAV21 | 3198 010 10070 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9451 | Wire Jumper. | 3198 036 90010 |
| 6453 | Zener Diode, 5.6 volt. | 3198 020 55680 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9472 | Wire Jumper. | 3198 036 90010 |
| 6463 | Zener Diode, 9.1 volt. | 9322 150 08685 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9506 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

21PT633R85C (continued)

| | | | | | |
|------|--------------------------|----------------|---|--|----------------|
| 9507 | Wire Jumper. | 3198 036 90010 | 9868 | Wire Jumper. | 3198 036 90010 |
| 9510 | Wire Jumper. | 3198 036 90010 | 9873 | Wire Jumper. | 3198 036 90010 |
| 9511 | Wire Jumper. | 3198 036 90010 | 9877 | Wire Jumper. | 3198 036 90010 |
| 9512 | Wire Jumper. | 3198 036 90010 | 9901 | Wire Jumper. | 3198 036 90010 |
| 9513 | Wire Jumper. | 3198 036 90010 | 9902 | Wire Jumper. | 3198 036 90010 |
| 9514 | Wire Jumper. | 3198 036 90010 | 9903 | Wire Jumper. | 3198 036 90010 |
| 9515 | Wire Jumper. | 3198 036 90010 | 9904 | Wire Jumper. | 3198 036 90010 |
| 9516 | Wire Jumper. | 3198 036 90010 | 9905 | Wire Jumper. | 3198 036 90010 |
| 9518 | Wire Jumper. | 3198 036 90010 | 9911 | Wire Jumper. | 3198 036 90010 |
| 9520 | Wire Jumper. | 3198 036 90010 | 9912 | Wire Jumper. | 3198 036 90010 |
| 9521 | Wire Jumper. | 3198 036 90010 | 9913 | Wire Jumper. | 3198 036 90010 |
| 9522 | Wire Jumper. | 3198 036 90010 | 9914 | Wire Jumper. | 3198 036 90010 |
| 9524 | Wire Jumper. | 3198 036 90010 | 9915 | Wire Jumper. | 3198 036 90010 |
| 9528 | Wire Jumper. | 3198 036 90010 | 9916 | Wire Jumper. | 3198 036 90010 |
| 9530 | Wire Jumper. | 3198 036 90010 | 9918 | Wire Jumper. | 3198 036 90010 |
| 9611 | Coil, 27u, 10% | 3198 018 22790 | 9919 | Wire Jumper. | 3198 036 90010 |
| 9612 | Wire Jumper. | 3198 036 90010 | 9920 | Wire Jumper. | 3198 036 90010 |
| 9613 | Wire Jumper. | 3198 036 90010 | 9991 | Wire Jumper. | 3198 036 90010 |
| 9614 | Wire Jumper. | 3198 036 90010 | 9993 | Wire Jumper. | 3198 036 90010 |
| 9617 | Wire Jumper. | 3198 036 90010 | 9994 | Wire Jumper. | 3198 036 90010 |
| 9619 | Wire Jumper. | 3198 036 90010 | 9996 | Wire Jumper. | 3198 036 90010 |
| 9620 | Wire Jumper. | 3198 036 90010 | 9997 | Wire Jumper. | 3198 036 90010 |
| 9621 | Wire Jumper. | 3198 036 90010 | CBA | Main Chassis Assembly. | 3141 058 57931 |
| 9622 | Wire Jumper. | 3198 036 90010 | Channel One Card Parts | | |
| 9623 | Wire Jumper. | 3198 036 90010 | Channel One Card Parts | | |
| 9626 | Wire Jumper. | 3198 036 90010 | 2D 3 Line Comb Filter Parts | | |
| 9627 | Wire Jumper. | 3198 036 90010 | 2D 3 Line Comb Filter Parts | | |
| 9628 | Wire Jumper. | 3198 036 90010 | DAF Panel Parts | | |
| 9629 | Wire Jumper. | 3198 036 90010 | DAF Panel Parts | | |
| 9631 | Wire Jumper. | 3198 036 90010 | DVD Eject Panel Parts | | |
| 9632 | Wire Jumper. | 3198 036 90010 | DVD Eject Panel Parts | | |
| 9633 | Wire Jumper. | 3198 036 90010 | DVD Interface Panel Parts | | |
| 9637 | Wire Jumper. | 3198 036 90010 | DVD Interface Panel Parts | | |
| 9638 | Wire Jumper. | 3198 036 90010 | Front Interface Panel Parts | | |
| 9639 | Wire Jumper. | 3198 036 90010 | Front Interface Panel Parts | | |
| 9640 | Wire Jumper. | 3198 036 90010 | ITV Front Jack Panel Parts | | |
| 9641 | Wire Jumper. | 3198 036 90010 | ITV Front Jack Panel Parts | | |
| 9642 | Wire Jumper. | 3198 036 90010 | Net 1 Panel (part of Scan 4 Card Assembly) | | |
| 9643 | Wire Jumper. | 3198 036 90010 | Net 1 Panel (part of Scan 4 Card Assemb ly) | | |
| 9648 | Wire Jumper. | 3198 036 90010 | Scan 4 Card (part of Scan 4 Card Assembly) | | |
| 9650 | Wire Jumper. | 3198 036 90010 | Scan 4 Card (part of Scan 4 Card Assemb ly) | | |
| 9654 | Wire Jumper. | 3198 036 90010 | Side Jack Panel Parts | | |
| 9657 | Wire Jumper. | 3198 036 90010 | Side Jack Panel Parts | | |
| 9658 | Wire Jumper. | 3198 036 90010 | Subwoofer Panel Parts | | |
| 9659 | Wire Jumper. | 3198 036 90010 | Subwoofer Panel Parts | | |
| 9660 | Wire Jumper. | 3198 036 90010 | Top Control Panel Parts | | |
| 9664 | Wire Jumper. | 3198 036 90010 | Top Control Panel Parts | | |
| 9665 | Wire Jumper. | 3198 036 90010 | Cabinet & Accessory Parts | | |
| 9666 | Wire Jumper. | 3198 036 90010 | Cabinet & Accessory Parts | | |
| 9668 | Wire Jumper. | 3198 036 90010 | S AC01 | AC Cord. | 3135 010 03831 |
| 9669 | Wire Jumper. | 3198 036 90010 | AC03 | Anode Lead Spacer (3 Used) | 3135 014 04471 |
| 9670 | Wire Jumper. | 3198 036 90010 | AC04 | Batteries for Remote Control Transmitt | 9299 000 65263 |
| 9671 | Wire Jumper. | 3198 036 90010 | AC05 | Cabinet Back | 3139 124 40813 |
| 9672 | Coil, 22u, 10% | 3198 018 22290 | S AC09 | CRT, A51QDX992X001 | 9322 182 96682 |
| 9674 | Wire Jumper. | 3198 036 90010 | AC10 | Customer Control Buttons | 3139 177 60291 |
| 9675 | Wire Jumper. | 3198 036 90010 | S AC12 | Degaussing Coil. | 3139 128 23841 |
| 9676 | Wire Jumper. | 3198 036 90010 | AC17 | Owner's Manual | 3121 235 20731 |
| 9678 | Coil, 22u, 10% | 3198 018 22290 | AC20 | Cabinet Front Assembly | 3121 237 53041 |
| 9679 | Wire Jumper. | 3198 036 90010 | AC20A | Cabinet Front. | 3139 177 60311 |
| 9680 | Wire Jumper. | 3198 036 90010 | AC20B | Chassis Guide. | 3139 124 37561 |
| 9686 | Wire Jumper. | 3198 036 90010 | AC20C | Light Guide. | 3139 124 41241 |
| 9687 | Wire Jumper. | 3198 036 90010 | AC20D | Nameplate. | 3139 120 01371 |
| 9688 | Wire Jumper. | 3198 036 90010 | AC20E | Power Button | 3139 177 60301 |
| 9690 | Wire Jumper. | 3198 036 90010 | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 264 00411 |
| 9691 | Wire Jumper. | 3198 036 90010 | REMOTE | Remote Control Transmitter, RC19335004/ 01. | 3139 228 86463 |
| 9695 | Wire Jumper. | 3198 036 90010 | | | |
| 9697 | Wire Jumper. | 3198 036 90010 | | | |
| 9698 | Wire Jumper. | 3198 036 90010 | | | |
| 9699 | Wire Jumper. | 3198 036 90010 | | | |
| 9821 | Wire Jumper. | 3198 036 90010 | | | |
| 9822 | Wire Jumper. | 3198 036 90010 | | | |
| 9825 | Wire Jumper. | 3198 036 90010 | | | |
| 9828 | Wire Jumper. | 3198 036 90010 | | | |
| 9829 | Wire Jumper. | 3198 036 90010 | | | |
| 9831 | Wire Jumper. | 3198 036 90010 | | | |
| 9832 | Wire Jumper. | 3198 036 90010 | | | |
| 9837 | Wire Jumper. | 3198 036 90010 | | | |
| 9838 | Wire Jumper. | 3198 036 90010 | | | |
| 9839 | Wire Jumper. | 3198 036 90010 | | | |
| 9846 | Wire Jumper. | 3198 036 90010 | | | |
| 9847 | Wire Jumper. | 3198 036 90010 | | | |
| 9849 | Wire Jumper. | 3198 036 90010 | | | |
| 9850 | Wire Jumper. | 3198 036 90010 | | | |
| 9851 | Wire Jumper. | 3198 036 90010 | | | |
| 9852 | Wire Jumper. | 3198 036 90010 | | | |
| 9853 | Wire Jumper. | 3198 036 90010 | | | |
| 9856 | Wire Jumper. | 3198 036 90010 | | | |
| 9860 | Wire Jumper. | 3198 036 90010 | | | |
| 9861 | Wire Jumper. | 3198 036 90010 | | | |
| 9862 | Wire Jumper. | 3198 036 90010 | | | |
| 9864 | Wire Jumper. | 3198 036 90010 | | | |
| 9865 | Wire Jumper. | 3198 036 90010 | | | |

S = Safety Part. Be sure to use exact replacement part.

21PT6431/44R - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | |
|--------------------|---|------|-----------|
| 0122 | Heatsink | 3139 | 121 62214 |
| 0123 | Heatsink, Audio. | 3139 | 121 62501 |
| 0127 | Socket Fuse. | 2422 | 088 00271 |
| 0129 | NTC Holder | 3139 | 120 10151 |
| 0136 | IC-Spring. | 3104 | 301 22081 |
| 0137 | Spring | 3139 | 121 24583 |
| 0138 | IC-Spring. | 3104 | 301 22081 |
| 0139 | Spring for Bracket | 3122 | 121 24786 |
| 0141 | IC-Spring. | 3104 | 301 22081 |
| 0152 | Cable, DIPMate, 6 Pin. | 3139 | 121 08841 |
| 0153 | Cable, DIPMate, 5 Pin, 480mm | 3139 | 121 07951 |
| 0211 | 2 Pin Connector. | 2422 | 025 16269 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 |
| 0223 | A/V Jack | 2422 | 026 05236 |
| 0225 | SVHS Jack. | 2422 | 026 04926 |
| 0229 | 3 Pin Connector. | 2412 | 020 00725 |
| 0239 | 3 Pin Connector. | 2422 | 025 16382 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 |
| 0269 | Jack | 2422 | 026 05182 |
| 0280 | 4 Pin Connector. | 2422 | 025 12479 |
| 0320 | Factory Plate. | 3122 | 120 01701 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 |
| 1606 | Tact Switch. | 2422 | 128 02742 |
| 1811 | 3 Pin Connector. | 2412 | 020 00725 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503P58. | 2422 | 540 98344 |
| 2004 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 024 44730 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2210 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 |
| 2243 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester | 2222 | 368 90177 |

S = Safety Part. Be sure to use exact replacement part.

| | | | |
|--------|---|------|-----------|
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 | 558 90445 |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 03310 |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2457 | Cap, 270n, 5%, 250v, Metalized Polypropylene. | 2222 | 479 90016 |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| S 2463 | Cap, 390p, 10%, 2000v, Ceramic | 2020 | 558 90482 |
| S 2465 | Cap, 9n1, 5%, 1600v, Polypropylene | 2020 | 301 90248 |
| 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 | 347 90219 |
| 2468 | Cap, 33n, 10%, 400v, Polyester | 2222 | 347 90227 |
| 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2472 | Cap, 10n, 10%, 100v, Metalized Polyester | 2222 | 365 85103 |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyester | 2222 | 365 75104 |
| 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2482 | Cap, 33n, 10%, 250v, Polyester | 2222 | 347 90213 |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91049 |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene | 2022 | 330 00018 |
| 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| S 2503 | Cap, 330u, 20%, 450v, Electrolytic | 2020 | 024 90774 |
| 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 2509 | Cap, 100n, 20%, 275v, Metalized Polypropylene | 2222 | 336 29144 |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90128 |
| 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 | 021 91654 |
| 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91353 |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 31020 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 21050 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 15626 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |

21PT6431/44R (continued)

| | | | | | | | | | |
|------|---|------|-----|-------|--------|---|------|-----|-------|
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 | 15626 | 3258 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33340 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 | 22250 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34740 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 | 025 | 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 | 025 | 31010 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 | 54780 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 | 207 | 03109 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 | 51080 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . | 2306 | 204 | 03108 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 | 34720 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . | 2306 | 204 | 03108 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03390 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 | 025 | 24710 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 | 593 | 13507 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 | 52280 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03390 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 | 014 | 02240 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 | 42240 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 | 41040 | 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51050 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 | 41040 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01530 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . . | 3198 | 026 | 21020 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 05620 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 | 51080 | 3447 | Res, 56 ohm, 5%, 1/4W, Carbon Film. . . | 2122 | 101 | 02081 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 | 580 | 15642 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 08210 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 | 586 | 15624 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 06890 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 | 580 | 15642 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03390 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 | 586 | 15624 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 | 204 | 03109 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film. | 2312 | 915 | 15102 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 | 915 | 12002 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 | 33310 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 | 012 | 26880 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3456 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3457 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31520 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 | 012 | 21530 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 38220 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03920 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03390 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 06890 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 | 915 | 12703 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03320 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3470 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 | 730 | 61274 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 32240 | 3471 | Res, 6R8, 1%, 3/5W, Metal Film. | 2312 | 915 | 16808 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3472 | Res, 6R8, 1%, 3/5W, Metal Film. | 2312 | 915 | 16808 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 32240 | 3473 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 | 915 | 13908 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 | 915 | 12202 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 | 915 | 12202 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 07590 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 07590 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52720 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3481 | Res, 18K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11803 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3482 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11203 |
| 3124 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 54730 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03920 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 | 207 | 03478 |
| 3126 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 54730 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3491 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51030 |
| 3132 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 54730 | 3492 | Res, 820 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 58210 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 | 204 | 03688 |
| 3134 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 54730 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 | 207 | 03478 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 07590 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52230 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51040 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51040 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51230 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31540 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 | 242 | 13335 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05620 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 | 242 | 13335 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01030 | S 3504 | Res, PTC, 9R 220V. | 2120 | 661 | 00024 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31520 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 | 242 | 13155 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31030 | 3507 | Surge Protector. | 2422 | 549 | 43073 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 | 734 | 61202 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 | 013 | 02210 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03910 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 | 612 | 00056 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02710 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51220 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3521 | Res, 22 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 02290 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02230 | 3522 | Res, 390K, 5%, 1/8W, Metalized Glass. . | 2322 | 730 | 61394 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | S 3523 | Res, 47 ohm, 5%, 1/3W, Metal Film. . . . | 2306 | 204 | 03479 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 33330 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 55630 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 3526 | Res, 0R15, 5%, 3/5W, Metal Film. | 3198 | 012 | 11570 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36890 | 3527 | Res, 0R22, 5%, 3/5W, Metal Film. | 3198 | 012 | 12270 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 3528 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 05610 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 54730 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 33340 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51030 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 38230 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 54720 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 32220 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film. | 2306 | 204 | 03222 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 05610 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51520 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3543 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 | 915 | 18203 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 | 734 | 64702 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 32220 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 | 730 | 61274 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51530 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 32230 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51030 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 32730 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 08210 | 3561 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02210 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . . | 2322 | 704 | 63903 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51230 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31030 | 3563 | Res, 8K2, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 58220 |
| 3247 | Res, 270K, 5%, 1/16W, Metalized Glass. . | 2322 | 702 | 60274 | S 3565 | Res, 330 ohm, 5%, 1W, Metal Film. | 3198 | 012 | 13310 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 33330 | 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52220 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 08210 | 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 55620 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3580 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 54730 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 |

S = Safety Part Be sure to use exact replacement part.

21PT6431/44R (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3637 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3685 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 5445 | Transformer, LOT | 2422 531 02519 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5453 | Coil, 22u, 5% | 3198 018 12290 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5457 | Coil, Linear Correction, 82u | 2422 536 00425 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5480 | Coil, 4u7, 5% | 2422 535 94213 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5500 | Mains Filter | 2422 549 43567 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5501 | Mains Filter | 2422 549 43432 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5520 | Transformer, SS42025-03. | 2422 531 02462 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass. . | 3198 021 31530 | 5521 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass. . | 3198 021 31220 | 5560 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5562 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5564 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass. . | 3198 021 33320 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass. . | 3198 021 33320 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass. . | 3198 021 33320 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass. . | 3198 021 33320 | 6331 | Diode, Signal, BAV21. | 3198 010 10070 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 6333 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6453 | Zener Diode, 5.6 volt. | 3198 020 55680 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6460 | Diode, Rect, BY228/24. | 9340 559 50112 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6463 | Zener Diode, 9.1 volt. | 9322 150 08685 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6465 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4470 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6466 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6467 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6468 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6470 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6476 | Zener Diode, 15 volt | 3198 010 21590 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6485 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6487 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6500 | Diode, Bridge Rect, GBU6JL-7002. . . . | 9322 138 08667 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6520 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6523 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6524 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6525 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4807 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6526 | Zener Diode, 22 volt | 3198 020 52290 |
| 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6541 | Zener Diode, 9.1 volt. | 9322 150 08685 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 |
| 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6563 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4829 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6565 | Diode, Signal, BAV70 | 9331 849 10215 |
| 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6566 | Diode, Signal, 1N4148. | 3198 010 10010 |

S = Safety Part Be sure to use exact replacement part.

21PT6431/44R (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6567 | Zener Diode, 4.7 volt. | 3198 020 54780 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9528 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.2 volt. | 9322 163 91685 | 9530 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 | 9612 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9613 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9614 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9577H/N1/AI/1130. | 9352 731 51557 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7450 | Transistor, PNP, PDTA114ET | 3198 010 44010 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9637 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1104(G) | 9322 175 72667 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7521 | Transistor, FET, STP10NK80ZFP. | 9322 196 57687 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PDTCL14ET | 9340 310 10215 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9657 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9658 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9659 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9681 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9689 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9690 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9691 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9694 | Wire Jumper. | 3198 036 90010 |
| 9415 | Wire Jumper. | 3198 036 90010 | 9695 | Wire Jumper. | 3198 036 90010 |
| 9416 | Wire Jumper. | 3198 036 90010 | 9697 | Wire Jumper. | 3198 036 90010 |
| 9417 | Wire Jumper. | 3198 036 90010 | 9698 | Wire Jumper. | 3198 036 90010 |
| 9418 | Wire Jumper. | 3198 036 90010 | 9810 | Wire Jumper. | 3198 036 90010 |
| 9419 | Wire Jumper. | 3198 036 90010 | 9821 | Wire Jumper. | 3198 036 90010 |
| 9421 | Wire Jumper. | 3198 036 90010 | 9822 | Wire Jumper. | 3198 036 90010 |
| 9422 | Wire Jumper. | 3198 036 90010 | 9825 | Wire Jumper. | 3198 036 90010 |
| 9423 | Wire Jumper. | 3198 036 90010 | 9828 | Wire Jumper. | 3198 036 90010 |
| 9425 | Wire Jumper. | 3198 036 90010 | 9829 | Wire Jumper. | 3198 036 90010 |
| 9427 | Wire Jumper. | 3198 036 90010 | 9831 | Wire Jumper. | 3198 036 90010 |
| 9451 | Wire Jumper. | 3198 036 90010 | 9832 | Wire Jumper. | 3198 036 90010 |
| 9453 | Wire Jumper. | 3198 036 90010 | 9837 | Wire Jumper. | 3198 036 90010 |
| 9460 | Wire Jumper. | 3198 036 90010 | 9838 | Wire Jumper. | 3198 036 90010 |
| 9472 | Wire Jumper. | 3198 036 90010 | 9839 | Wire Jumper. | 3198 036 90010 |
| 9500 | Wire Jumper. | 3198 036 90010 | 9846 | Wire Jumper. | 3198 036 90010 |
| 9501 | Wire Jumper. | 3198 036 90010 | 9847 | Wire Jumper. | 3198 036 90010 |
| 9503 | Wire Jumper. | 3198 036 90010 | 9849 | Wire Jumper. | 3198 036 90010 |
| 9510 | Wire Jumper. | 3198 036 90010 | 9850 | Wire Jumper. | 3198 036 90010 |
| 9511 | Wire Jumper. | 3198 036 90010 | 9851 | Wire Jumper. | 3198 036 90010 |
| 9512 | Wire Jumper. | 3198 036 90010 | 9852 | Wire Jumper. | 3198 036 90010 |
| 9513 | Wire Jumper. | 3198 036 90010 | 9853 | Wire Jumper. | 3198 036 90010 |
| 9514 | Wire Jumper. | 3198 036 90010 | 9856 | Wire Jumper. | 3198 036 90010 |
| 9515 | Wire Jumper. | 3198 036 90010 | 9860 | Wire Jumper. | 3198 036 90010 |
| 9516 | Wire Jumper. | 3198 036 90010 | 9861 | Wire Jumper. | 3198 036 90010 |
| 9518 | Wire Jumper. | 3198 036 90010 | 9862 | Wire Jumper. | 3198 036 90010 |
| 9520 | Wire Jumper. | 3198 036 90010 | 9864 | Wire Jumper. | 3198 036 90010 |
| 9521 | Wire Jumper. | 3198 036 90010 | 9865 | Wire Jumper. | 3198 036 90010 |
| 9522 | Wire Jumper. | 3198 036 90010 | 9868 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

21PT6431/44R (continued)

| | | | | |
|------|------------------------|------|-----|-------|
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9919 | Wire Jumper. | 3198 | 036 | 90010 |
| 9920 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis | 3141 | 058 | 58191 |

| | | | | |
|--------|--|------|-----|-------|
| AC20D | Nameplate. | 3139 | 120 | 01371 |
| AC20E | Power Button | 3139 | 177 | 60301 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| AC20J1 | Top Control Bracket. | 3139 | 124 | 30381 |
| AC20J3 | Top Control Cover. | 3139 | 124 | 31131 |
| AC20J4 | Top Control Rubber | 3139 | 124 | 30391 |
| AC20J5 | Top Control Button Assembly. | 3139 | 137 | 66921 |
| REMOTE | Remote Control Transmitter, RC19335004/01. | 3139 | 228 | 86464 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 09191 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3088 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3093 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 63901 |
| 3094 | Res, 180 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 61801 |
| 3095 | Res, 270 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 62701 |
| 3096 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3097 | Res, 2K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 62702 |
| 3098 | Res, 75 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 67509 |
| 3099 | Res, 68 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 66809 |
| 4091 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| CBA | Top Control Panel Assembly | 3139 | 177 | 26241 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3121 | 231 | 00081 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44701 |
| AC09 | CRT, A51QDX992X003 | 9322 | 182 | 97682 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 45507 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 20942 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53291 |
| AC20A | Cabinet Front. | 3139 | 177 | 59711 |
| AC20B | Chassis Guide. | 3139 | 124 | 37561 |
| AC20C | Light Guide. | 3139 | 124 | 41241 |

S = Safety Part Be sure to use exact replacement part.

21PT643R85C - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | Main Chassis Parts | | | |
|--------------------|--|------|-----------|--------------------|--|------|-----------|
| 0211 | 2 Pin Connector. | 2422 | 025 16269 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. . . | 2020 | 012 93495 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 | 016 05610 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. . . . | 2020 | 558 90559 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 21040 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . | 2020 | 558 90445 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 | 025 32210 |
| 0229 | 3 Pin Connector. | 2412 | 020 00725 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 | 025 51080 |
| 0239 | 3 Pin Connector. | 2422 | 025 16382 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic . . . | 3198 | 017 24730 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 | 025 51080 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. . . . | 2020 | 021 91139 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. . . . | 3198 | 025 34790 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2457 | Cap, 270n, 5%, 250v, Metalized Polyprop | | |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | | ylene. | 2222 | 479 90016 |
| 0269 | Jack | 2422 | 026 05182 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. . . . | 2020 | 021 91331 |
| 0280 | 4 Pin Connector. | 2422 | 025 12479 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| S 1000 | Tuner, V+U PLL | 2422 | 542 90098 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | S 2463 | Cap, 390p, 10%, 2000v, Ceramic | 2020 | 558 90482 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | S 2465 | Cap, 9n1, 5%, 1600v, Polypropylene . . | 2020 | 301 90248 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 | 347 90219 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2468 | Cap, 33n, 10%, 400v, Polyester | 2222 | 347 90227 |
| 1606 | Tact Switch. | 2422 | 128 02742 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | 2472 | Cap, 10n, 10%, 100v, Metalized Polyeste | 2222 | 365 85103 |
| 1811 | 3 Pin Connector. | 2412 | 020 00725 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 | 025 51090 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 | 025 24710 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. . . . | 2020 | 021 90586 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 41040 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 | 025 31010 | 2482 | Cap, 33n, 10%, 250v, Polyester | 2222 | 347 90213 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. . . . | 2020 | 021 90856 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 24740 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 | 021 91577 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. . . . | 2020 | 021 90854 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 2020 | 021 91049 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 | 021 91577 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | | |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | | pylene | 2022 | 330 00018 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2503 | Cap, 470u, 20%, 200v, Electrolytic . . . | 2020 | 024 90647 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | S 2523 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2522 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. . . . | 2238 | 786 19852 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic . . . | 2020 | 021 91654 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 42240 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91353 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2210 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 42240 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 44740 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. . . . | 2222 | 910 19856 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 22240 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 44740 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 42240 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 31020 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 21050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . . | 3198 | 025 32210 |
| 2243 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 42240 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 42240 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 42240 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 44740 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 | 2864 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2865 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 15626 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | | 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |
| | er. | 2222 | 368 90177 | 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . . | 2020 | 558 90445 | 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 | 014 06830 |
| | | | | 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 31510 |
| | | | | 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 15626 |

S = Safety Part Be sure to use exact replacement part.

21PT643R85C (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3258 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic . . . | 3198 025 51080 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic . . . | 3198 025 24710 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film . . . | 2306 207 03109 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | 3341 | Res, 1R, 5%, 0,33W | 4822 052 10108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic . . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic | 2238 586 15624 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. . | 3198 021 51050 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic | 2238 586 15624 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film . . . | 3198 011 01530 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film . . . | 3198 011 05620 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 | 3447 | Res, 56 ohm, 5%, 1/4W, Carbon Film . . | 2122 101 02081 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 08210 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic | 3198 016 33310 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03109 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3454 | Res, 2K, 1%, 3/5W, Metal Film | 2312 915 12002 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3457 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film | 3198 011 03320 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3470 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3471 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 915 16808 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3472 | Res, 6R8, 1%, 3/5W, Metal Film | 2312 915 16808 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3473 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3481 | Res, 18K, 1%, 3/5W, Metal Film | 2312 915 11803 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3491 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3492 | Res, 820 ohm, 5%, 1/10W, Metalized Glas | 3198 021 58210 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film | 3198 011 05620 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film | 3198 011 01030 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 021 51040 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 021 51040 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass . . | 2322 734 61202 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03910 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film | 3198 011 02230 | 3507 | Surge Protector. | 2422 549 43073 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 02710 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film | 3198 011 04780 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 05610 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 05610 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 08210 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3247 | Res, 270K, 5%, 1/16W, Metalized Glass. . | 2322 702 60274 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 08210 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 |

S = Safety Part Be sure to use exact replacement part.

21PT643R85C (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4829 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3637 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3685 | Res, 1K5, 1%, 1/8W, Metalized Glass. . . | 2322 734 61502 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | S 5445 | Transformer, LOT | 2422 531 02519 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5453 | Coil, 22u, 5% | 3198 018 12290 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5457 | Coil, Linear Correction, 82u | 2422 536 00425 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5480 | Coil, 4u7, 5% | 2422 535 94213 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5501 | Mains Filter | 2422 549 43432 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 021 31530 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 021 31220 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6453 | Zener Diode, 5.6 volt. | 3198 020 55680 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6460 | Diode, Rect, BY228/24. | 9340 559 50112 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6463 | Zener Diode, 9.1 volt. | 9322 150 08685 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6465 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4470 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6466 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6467 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6468 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6470 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6476 | Zener Diode, 15 volt | 3198 010 21590 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6485 | Diode, Rect, BYD33J. | 9337 234 20133 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6487 | Diode, Rect, BYD33D. | 9337 234 00133 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6500 | Diode, Bridge Rect, GBU6JL-7002. . . . | 9322 138 08667 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6520 | Diode, Rect, BYD33D. | 9337 234 00133 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6523 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4807 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6524 | Diode, Rect, 1N5062. | 3198 010 10120 |

21PT643R85C (continued)

| | | | | | |
|--------|---|----------------|------|-------------------------|----------------|
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 185 69682 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9522 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9611 | Coil, 27u, 10%. | 3198 018 22790 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9577H/N1/AI/1130. | 9352 731 51557 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7450 | Transistor, PNP, PDTA114ET. | 3198 010 44010 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PDTCL43ZT. | 9340 547 00215 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9629 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PDTCL14ET. | 9340 310 10215 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PDTCL43ZT. | 9340 547 00215 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9657 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH. | 9322 181 41682 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10%. | 3198 018 22290 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10%. | 3198 018 22290 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9681 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9689 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9690 | Wire Jumper. | 3198 036 90010 |
| 9415 | Wire Jumper. | 3198 036 90010 | 9691 | Wire Jumper. | 3198 036 90010 |
| 9416 | Wire Jumper. | 3198 036 90010 | 9694 | Wire Jumper. | 3198 036 90010 |
| 9417 | Wire Jumper. | 3198 036 90010 | 9695 | Wire Jumper. | 3198 036 90010 |
| 9418 | Wire Jumper. | 3198 036 90010 | 9697 | Wire Jumper. | 3198 036 90010 |
| 9419 | Wire Jumper. | 3198 036 90010 | 9698 | Wire Jumper. | 3198 036 90010 |
| 9421 | Wire Jumper. | 3198 036 90010 | 9810 | Wire Jumper. | 3198 036 90010 |
| 9422 | Wire Jumper. | 3198 036 90010 | 9821 | Wire Jumper. | 3198 036 90010 |
| 9423 | Wire Jumper. | 3198 036 90010 | 9822 | Wire Jumper. | 3198 036 90010 |
| 9425 | Wire Jumper. | 3198 036 90010 | 9825 | Wire Jumper. | 3198 036 90010 |
| 9427 | Wire Jumper. | 3198 036 90010 | 9828 | Wire Jumper. | 3198 036 90010 |
| 9451 | Wire Jumper. | 3198 036 90010 | 9829 | Wire Jumper. | 3198 036 90010 |
| 9453 | Wire Jumper. | 3198 036 90010 | 9831 | Wire Jumper. | 3198 036 90010 |
| 9460 | Wire Jumper. | 3198 036 90010 | 9832 | Wire Jumper. | 3198 036 90010 |
| 9472 | Wire Jumper. | 3198 036 90010 | 9837 | Wire Jumper. | 3198 036 90010 |
| 9500 | Wire Jumper. | 3198 036 90010 | 9838 | Wire Jumper. | 3198 036 90010 |
| 9501 | Wire Jumper. | 3198 036 90010 | 9839 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

21PT643R85C (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9919 | Wire Jumper. | 3198 | 036 | 90010 |
| 9920 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9994 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 57941 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 09191 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3088 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3093 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 63901 |
| 3094 | Res, 180 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 61801 |
| 3095 | Res, 270 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 62701 |
| 3096 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3097 | Res, 2K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 62702 |
| 3098 | Res, 75 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 67509 |
| 3099 | Res, 68 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 66809 |
| 4091 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |

S = Safety Part Be sure to use exact replacement part.

| | | | | |
|-----|--------------------------------------|------|-----|-------|
| CBA | Top Control Panel Assembly | 3139 | 177 | 26241 |
|-----|--------------------------------------|------|-----|-------|

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44701 |
| S AC09 | CRT, A51QDX992X001 | 9322 | 182 | 96682 |
| S AC12 | Degaussing Coil. | 3139 | 128 | 23841 |
| AC17 | Owner's Manual | 3121 | 235 | 20941 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53291 |
| AC20A | Cabinet Front. | 3139 | 177 | 59711 |
| AC20B | Chassis Guide. | 3139 | 124 | 37561 |
| AC20C | Light Guide. | 3139 | 124 | 41241 |
| AC20D | Nameplate. | 3139 | 120 | 01371 |
| AC20E | Power Button | 3139 | 177 | 60301 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| AC20J1 | Top Control Bracket. | 3139 | 124 | 30381 |
| AC20J3 | Top Control Cover. | 3139 | 124 | 31131 |
| AC20J4 | Top Control Rubber | 3139 | 124 | 30391 |
| AC20J5 | Top Control Button Assembly. | 3139 | 137 | 66921 |
| REMOTE | Remote Control Transmitter, RC19335004/01. | 3139 | 228 | 86463 |

24PT633F/35R - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | |
|--------------------|--|----------------|--|
| 0127 | Socket Fuse. | 2422 088 00271 | |
| 0129 | NTC Holder. | 3139 120 10151 | |
| 0136 | IC-Spring. | 3104 301 22081 | |
| 0137 | Spring. | 3139 121 24583 | |
| 0138 | IC-Spring. | 3104 301 22081 | |
| 0139 | Spring for Bracket. | 3122 121 24786 | |
| 0140 | Spring. | 3139 121 24583 | |
| 0141 | IC-Spring. | 3104 301 22081 | |
| 0152 | Cable, DIP, 6 Pin, 400mm. | 3104 301 09421 | |
| 0153 | Cable, DIPMate. | 3104 301 08381 | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | |
| 0212 | 2 Pin Connector. | 2422 025 16375 | |
| 0219 | 6 Pin Connector. | 2422 025 12482 | |
| 0220 | 5 Pin Connector. | 2422 025 04853 | |
| 0221 | 2 Pin Connector. | 2422 025 15503 | |
| 0222 | 2 Pin Connector. | 2422 025 10646 | |
| 0223 | A/V Jack. | 2422 026 05236 | |
| 0225 | SVHS Jack. | 2422 026 04926 | |
| 0229 | 3 Pin Connector. | 2412 020 00725 | |
| 0243 | 6 Pin Connector. | 2422 025 04854 | |
| 0244 | 5 Pin Connector. | 2422 025 04853 | |
| 0245 | 6 Pin Connector. | 2422 025 04854 | |
| 0246 | 5 Pin Connector. | 2422 025 12481 | |
| S 0254 | 9 Pin CRT Socket. | 2422 500 80076 | |
| 0267 | 3 Pin Connector. | 2412 020 00725 | |
| 0269 | Jack. | 2422 026 05182 | |
| S 1000 | Tuner, V+U, PLL. | 2422 542 90108 | |
| 1002 | SAW Filter, 45.75MHz. | 2422 549 44518 | |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 549 40807 | |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07467 | |
| 1600 | Tact Switch. | 2422 128 02742 | |
| 1601 | Tact Switch. | 2422 128 02742 | |
| 1602 | Tact Switch. | 2422 128 02742 | |
| 1603 | Tact Switch. | 2422 128 02742 | |
| 1606 | Tact Switch. | 2422 128 02742 | |
| 1660 | Crystal, 12MHz000. | 2422 543 01203 | |
| 1811 | 3 Pin Connector. | 2412 020 00725 | |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 014 04740 | |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 370 76104 | |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 368 90177 | |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 | |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 | |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 | |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 | |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 | |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 | |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 | |
| 2401 | Cap, 2u2, 20%, 50v, Electrolytic. | 2038 035 13503 | |
| 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 | |
| 2404 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 025 54790 | |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 | |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 017 24730 | |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | |
| 2448 | Cap, 100p, 10%, 1000v, Ceramic. | 3198 019 51010 | |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2022 031 00103 | |
| 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 | |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 | |
| 2457 | Cap, 390n, 5%, 250v, Metalized Polypropylene. | 2222 479 90021 | |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2022 031 00138 | |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 | |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 | |
| 2463 | Cap, 220p, 10%, 2000v, Ceramic. | 2020 558 90478 | |
| 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 479 90042 | |
| 2465 | Cap, 15n, 5%, 1600v, Polypropylene. | 2222 375 90158 | |
| 2466 | Cap, 15n, 10%, 400v, Polyester. | 2222 347 90219 | |
| 2468 | Cap, 18n, 10%, 400v, Polyester. | 2222 347 90222 | |
| 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 | |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 365 75154 | |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 365 75104 | |
| 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 | |
| 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 | |
| 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 | |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2038 035 13301 | |
| 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 | |
| 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 347 90234 | |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2022 031 00137 | |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2022 031 00139 | |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2038 035 13508 | |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2022 031 00144 | |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2022 031 00139 | |
| 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 | |
| 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2222 336 29148 | |
| 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 | |
| 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 | |
| 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 024 90626 | |
| 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 | |
| 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 | |
| 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 | |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90128 | |
| 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | |
| 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 | |
| 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 | |
| S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 | |
| 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 | |
| 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 | |
| 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 | |
| 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | |
| 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 | |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 021 91654 | |
| 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 | |
| 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 | |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91353 | |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 | |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 | |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 | |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 | |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 | |
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |

24PT633F/35R (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glass | 3198 021 35610 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 580 15624 | 3401 | Res, 220K, 5%, 1/6W, Carbon Film | 3198 011 02240 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3403 | Res, 82K, 5%, 1/6W, Carbon Film. | 3198 011 08230 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 580 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3405 | Res, 10 ohm, 5%, 1/6W, Carbon Film | 3198 011 01090 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | 3406 | Res, 10 ohm, 5%, 1/6W, Carbon Film | 3198 011 01090 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . . . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. . . . | 3198 021 51050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . . . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 08180 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . . | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 | 3451 | Res, 2R7, 5%, 1/3W, Metal Film | 2306 204 03278 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . . | 3198 021 32240 | 3452 | Res, 4K7, 1%, 3/5W, Metal Film | 2312 915 14702 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3454 | Res, 1K8, 1%, 3/5W, Metal Film | 2312 915 11802 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 08180 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 | 3470 | Res, 470K, 5%, 1/10W, Metalized Glass. . . | 3198 021 54740 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . . | 3198 021 34730 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . . | 3198 021 34730 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31040 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31540 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . . | 3198 021 52720 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3481 | Res, 15K, 1%, 3/5W, Metal Film | 2312 915 11503 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . . | 3198 021 31520 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . . | 3198 021 31030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . . | 2322 734 61202 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . . | 3198 012 33390 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03910 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3491 | Res, 10K, 5%, 1/10W, Metalized Glass . . . | 3198 021 51030 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . . | 3198 021 51020 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 31020 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . . | 3198 021 33330 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass . . . | 3198 021 52230 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51040 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51040 |

S = Safety Part Be sure to use exact replacement part.

24PT633F/35R (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|---|------|-----|-------|
| 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 |
| 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 | 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 | 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| S 3504 | Res, PTC, 3 ohm, 144V. | 2122 | 663 | 00019 | 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13155 | 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3507 | Surge Protector. | 2422 | 549 | 43073 | 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 | 013 | 02210 | 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 | 612 | 00056 | 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02710 | 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51220 | 3904 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 04780 | 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 33320 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 53340 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . | 2306 | 204 | 03101 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 38220 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 55630 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3526 | Res, OR1, 5%, 3/5W, Metal Film. | 3198 | 012 | 11070 | 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3527 | Res, OR33, 5%, 3/5W, Metal Film. . . . | 3198 | 012 | 13370 | 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 54730 | 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51030 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 54720 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film. | 2306 | 204 | 03222 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51520 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 | 915 | 18203 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/10W, Metalized Glass. . | 2322 | 734 | 64702 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 | 730 | 61274 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51530 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51030 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51230 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 55620 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film. . . . | 3198 | 012 | 13310 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52220 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 55620 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 54730 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34720 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34720 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 32220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 53320 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51520 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34720 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5341 | Coil, 22u. | 2422 | 535 | 97333 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | 5342 | Coil, 15u. | 2422 | 535 | 97331 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5445 | Transformer, LOT AT2078. | 3128 | 138 | 21401 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5457 | Coil, Linear Correction. | 2422 | 536 | 00511 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31530 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31220 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |

S = Safety Part Be sure to use exact replacement part.

24PT633F/35R (continued)

| | | |
|--------|--|----------------|
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 5602 | Coil, 5u6, 5%. | 3198 018 15680 |
| 5603 | Coil, 5u6, 5%. | 3198 018 15680 |
| 5604 | Coil, 5u6, 5%. | 3198 018 15680 |
| 5861 | Coil, 10u, 5%. | 3198 018 11090 |
| 6001 | Zener Diode, 33 volt. | 3198 010 23390 |
| 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 6331 | Diode, Signal, BAV21. | 3198 010 10070 |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 6333 | Diode, Signal, BAV21. | 3198 010 10070 |
| 6335 | Diode, Signal, BAV21. | 3198 010 10070 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 |
| 6401 | Zener Diode, 47 volt. | 3198 010 24790 |
| 6445 | Zener Diode, 10 volt. | 3198 020 51090 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 6449 | Diode, Signal, BAV99. | 3198 010 10620 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 |
| 6462 | Zener Diode, 10 volt. | 3198 010 21090 |
| 6465 | Diode, Signal, BAV21. | 3198 010 10070 |
| 6466 | Diode, Signal, BAV21. | 3198 010 10070 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 |
| 6476 | Zener Diode, 15 volt. | 3198 010 21590 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 |
| 6681 | Diode, Signal, BAT85. | 9336 247 60133 |
| 6691 | LED, LTL-10234WHCR. | 9322 185 69682 |
| 6692 | IR Receiver. | 9322 127 54667 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 010 42150 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 010 42030 |
| 7200 | IC, TDA9588H/N1/3I/1129. | 9352 731 49557 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 310 10215 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 010 42150 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 |
| 7580 | Transistor, NPN, BC857B(COL). | 3198 010 42150 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 |
| 7606 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 010 42030 |

| | | |
|------|---------------------------------------|----------------|
| 7892 | Transistor, NPN, BC847B(COL). | 3198 010 42030 |
| 7901 | IC, AN7522N PH. | 9322 181 41682 |
| 9611 | Coil, 27u, 10%. | 3198 018 22790 |
| 9672 | Coil, 22u, 10%. | 3198 018 22290 |
| 9678 | Coil, 22u, 10%. | 3198 018 22290 |
| CBA | Main Chassis Assembly. | 3141 058 59231 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | |
|------|--|----------------|
| 0232 | Headphone Jack. | 2422 026 04747 |
| 0250 | A/V Jack. | 2422 026 04815 |
| 0251 | 6 Pin Connector. | 2422 025 12482 |
| 0254 | 5 Pin Connector. | 2422 025 12481 |
| 0255 | 4 Pin Connector. | 2422 025 12479 |
| 1810 | 3 Pin Connector. | 2412 020 00725 |
| 1811 | 3 Pin Connector. | 2412 020 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 021 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 011 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 021 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 011 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas. | 3198 021 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas. | 3198 021 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 021 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 4823 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 4824 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 010 26880 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 |
| 9150 | Wire Jumper. | 3198 036 90010 |
| 9151 | Wire Jumper. | 3198 036 90010 |
| 9152 | Wire Jumper. | 3198 036 90010 |
| 9153 | Wire Jumper. | 3198 036 90010 |
| 9154 | Wire Jumper. | 3198 036 90010 |
| 9155 | Wire Jumper. | 3198 036 90010 |
| 9170 | Wire Jumper. | 3198 036 90010 |
| CBA | Side Jack Panel Assembly. | 3139 187 28121 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

24PT633F/35R (continued)

| | | | | | |
|--------|-------|--|------|-----|-------|
| S | AC01 | AC Cord. | 2422 | 070 | 98202 |
| | AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| | AC05 | Cabinet Back | 3139 | 124 | 35181 |
| S | AC09 | CRT, A59QDF891X001(L). | 9322 | 163 | 87682 |
| | AC10 | Customer Control Buttons | 3139 | 177 | 65681 |
| S | AC12 | Degaussing Coil. | 3139 | 128 | 76341 |
| | AC15 | Holder, Degaussing Coil (4 Used) | 3139 | 124 | 21802 |
| | AC17 | Owner's Manual | 3139 | 125 | 30822 |
| | AC17 | Owner's Manual, French | 3139 | 125 | 31591 |
| | AC18 | Quick Use Guide. | 3139 | 125 | 31611 |
| | AC19 | Side Jack Panel Bracket. | 3139 | 124 | 39111 |
| | AC20A | Cabinet Front. | 3139 | 177 | 60691 |
| | AC20B | Chassis Guide. | 3139 | 124 | 25893 |
| | AC20C | Light Guide. | 3139 | 124 | 32221 |
| | AC20D | Nameplate. | 3141 | 050 | 00161 |
| | AC20E | Power Button | 3139 | 177 | 65691 |
| | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| REMOTE | | Remote Control Transmitter, RC19036001/ | | | |
| | | 01A. | 3139 | 238 | 04303 |

24PT633R37 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | |
|--------------------|--|----------------|--|
| 0211 | 2 Pin Connector. | 2422 025 16269 | |
| 0212 | 2 Pin Connector. | 2422 025 16375 | |
| 0219 | 6 Pin Connector. | 2422 025 12482 | |
| 0220 | 5 Pin Connector. | 2422 025 04853 | |
| 0221 | 2 Pin Connector. | 2422 025 15503 | |
| 0222 | 2 Pin Connector. | 2422 025 10646 | |
| 0223 | A/V Jack | 2422 026 05236 | |
| 0225 | SVHS Jack. | 2422 026 04926 | |
| 0229 | 3 Pin Connector. | 2412 020 00725 | |
| 0243 | 6 Pin Connector. | 2422 025 04854 | |
| 0244 | 5 Pin Connector. | 2422 025 04853 | |
| 0245 | 6 Pin Connector. | 2422 025 04854 | |
| 0246 | 5 Pin Connector. | 2422 025 12481 | |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | |
| 0267 | 3 Pin Connector. | 2412 020 00725 | |
| 0269 | Jack | 2422 026 05182 | |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07467 | |
| 1600 | Tact Switch. | 2422 128 02742 | |
| 1601 | Tact Switch. | 2422 128 02742 | |
| 1602 | Tact Switch. | 2422 128 02742 | |
| 1603 | Tact Switch. | 2422 128 02742 | |
| 1606 | Tact Switch. | 2422 128 02742 | |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | |
| 1811 | 3 Pin Connector. | 2412 020 00725 | |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 368 90177 | |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 | |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 | |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 | |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 | |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 | |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 | |
| 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 | |
| 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 | |
| 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 | |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 | |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 | |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | |
| 2448 | Cap, 100p, 10%, 1000v, Ceramic | 3198 019 51010 | |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 | |
| 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 | |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 | |
| 2457 | Cap, 390n, 5%, 250v, Metalized Polypropylene. | 2222 479 90021 | |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 | |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 | |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 | |
| 2463 | Cap, 220p, 10%, 2000v, Ceramic | 2020 558 90478 | |
| 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 479 90042 | |
| 2465 | Cap, 15n, 5%, 1600v, Polypropylene | 2222 375 90158 | |
| 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 | |
| 2468 | Cap, 18n, 10%, 400v, Polyester | 2222 347 90222 | |
| 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 | |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 | |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 | |
| 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 | |
| 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 | |
| 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 | |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 | |
| 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 | |
| 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 | |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 | |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 | |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 | |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 | |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 | |
| 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 | |
| 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2222 336 29148 | |
| 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 | |
| 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 | |
| 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90626 | |
| 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 | |
| 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 | |
| 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 | |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90128 | |
| 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | |
| 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 | |
| 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | |
| S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 | |
| 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 | |
| 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 | |
| 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 | |
| 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | |
| 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 | |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 | |
| 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 | |
| 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 | |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 | |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 | |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 | |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 | |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 | |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 | |
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | |
| 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 | |
| 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 | |
| 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 | |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 | |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |

24PT633R37 (continued)

| | | | | | |
|------|---|----------------|--------|---|----------------|
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 | 3401 | Res, 220K, 5%, 1/6W, Carbon Film . . . | 3198 011 02240 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3403 | Res, 82K, 5%, 1/6W, Carbon Film. . . . | 3198 011 08230 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 580 15624 | 3405 | Res, 10 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01090 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3406 | Res, 10 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01090 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 580 15624 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. . | 3198 021 51050 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3451 | Res, 2R7, 5%, 1/3W, Metal Film | 2306 204 03278 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3452 | Res, 4K7, 1%, 3/5W, Metal Film | 2312 915 14702 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3454 | Res, 1K8, 1%, 3/5W, Metal Film | 2312 915 11802 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3470 | Res, 470K, 5%, 1/10W, Metalized Glass. | 3198 021 54740 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3481 | Res, 15K, 1%, 3/5W, Metal Film | 2312 915 11503 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 33390 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | 3491 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3495 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 021 51040 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 021 51040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3507 | Surge Protector. | 2422 549 43073 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |

S = Safety Part Be sure to use exact replacement part.

24PT633R37 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 | 012 | 13370 | 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 | 730 | 61274 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51530 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51230 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 | 021 | 52220 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass | 3198 | 021 | 53320 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5341 | Coil, 22u. | 2422 | 535 | 97333 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT AT2078. | 3128 | 138 | 21401 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5453 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5457 | Coil, Linear Correction. | 2422 | 536 | 00511 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5480 | Coil, 56u. | 2422 | 535 | 97338 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31530 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31220 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 38220 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |

S = Safety Part Be sure to use exact replacement part.

24PT633R37 (continued)

| | | | | |
|--------|--|------|-----|-------|
| 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 |
| 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 |
| 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 |
| 6462 | Zener Diode, 10 volt | 3198 | 010 | 21090 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 6485 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 6487 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 |
| 6520 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6681 | Diode, Signal, BAT85 | 9336 | 247 | 60133 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 | 728 | 40557 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 |
| 7400 | Power FET, STP3NC60FP. | 9322 | 157 | 37687 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 | 310 | 10215 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7901 | IC, AN7522N PH | 9322 | 181 | 41682 |
| 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 15171 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

S = Safety Part Be sure to use exact replacement part.

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4823 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 28121 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 2422 | 070 | 98202 |
| AC03 | Anode Lead Spacer. | 3139 | 124 | 17541 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 35181 |
| S AC09 | CRT, A59QDF891X001(L). | 9322 | 163 | 87682 |
| AC10 | Customer Control Buttons | 3139 | 177 | 60711 |
| S AC12 | Degaussing Coil. | 3139 | 128 | 76341 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 39111 |
| AC20A | Cabinet Front. | 3139 | 177 | 60691 |
| AC20B | Chassis Guide. | 3139 | 124 | 25893 |
| AC20C | Light Guide. | 3139 | 124 | 32221 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 177 | 60701 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| REMOTE | Remote Control Transmitter, RC19036001/01. | 3139 | 228 | 86493 |

25LT220L/17 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | Main Chassis Parts | | | |
|--------------------|---|------|-----------|--------------------|--|------|-----------|
| 0211 | 2 Pin Connector. | 2422 | 025 16269 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | |
| 0218 | A/V Jack | 2422 | 026 04742 | 2331 | er. | 2222 | 368 90177 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2340 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2341 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2342 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2343 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2344 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 0240 | 7 Pin Connector. | 2422 | 025 11244 | 2345 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2405 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2415 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2441 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 03310 |
| 0251 | 3 Pin Connector. | 2412 | 020 00725 | 2443 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2444 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 |
| 0259 | 5 Pin Connector. | 2422 | 025 15848 | 2450 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0262 | 3 Pin Connector. | 2422 | 025 16937 | 2455 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | 3198 | 025 34790 |
| 0280 | 4 Pin Connector. | 2422 | 025 12479 | | ylene. | 2022 | 333 00086 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 | 333 00084 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | S 2463 | Cap, 470p, 10%, 2000v, Ceramic. | 2020 | 558 90483 |
| 1600 | Tact Switch. | 2422 | 128 02742 | S 2465 | Cap, 13n, 5%, 1600v, Polypropylene | 2020 | 301 90254 |
| 1601 | Tact Switch. | 2422 | 128 02742 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 1602 | Tact Switch. | 2422 | 128 02742 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 |
| 1603 | Tact Switch. | 2422 | 128 02742 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| 1606 | Tact Switch. | 2422 | 128 02742 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 90586 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 91049 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | | |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | | pylene | 2022 | 330 00018 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90647 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2125 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91353 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 04740 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 31020 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 | 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 21050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 | 2864 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2865 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| | | | | 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 | 586 15626 |

S = Safety Part Be sure to use exact replacement part.

25LT220L/17 (continued)

| | | | | | |
|------|---|----------------|--------|--|----------------|
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. . . . | 3198 025 54780 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. . . . | 3198 025 52280 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 014 02240 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . . | 3198 026 21020 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film. | 2312 915 15602 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3454 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 |
| 3123 | Wire Jumper. | 3198 036 90010 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3124 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3481 | Res, 8K2, 1%, 3/5W, Metal Film. | 2312 915 18202 |
| 3125 | Wire Jumper. | 3198 036 90010 | 3482 | Res, 22K, 1%, 3/5W, Metal Film. | 2312 915 12203 |
| 3126 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 3182 | Wire Jumper. | 3198 036 90010 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass. . | 3198 021 31230 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3507 | Surge Protector. | 2422 549 43073 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . | 3198 021 51220 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03101 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 021 55630 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 012 11070 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3528 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. . | 3198 021 54720 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film. | 2306 204 03222 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. . | 3198 021 51520 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 | 3543 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 915 18203 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 734 64702 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 730 61274 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. . | 3198 021 51530 |
| 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. . | 3198 021 36840 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. . | 3198 021 51230 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. . | 3198 021 55620 |
| 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 | S 3565 | Res, 330 ohm, 5%, 1W, Metal Film. . . . | 3198 012 13310 |

S = Safety Part Be sure to use exact replacement part.

25LT220L/17 (continued)

| | | | | | | | | | |
|------|--|------|-----|-------|--------|--|------|-----|-------|
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 53320 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5342 | Coil, 12u, 10% | 3198 | 018 | 12190 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5445 | Transformer, LOT | 2422 | 531 | 02519 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5457 | Coil, Linear Correction. | 3128 | 138 | 56801 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5480 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 | 5521 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5560 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5562 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5564 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6181 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4128 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6460 | Diode, Rect, DG3-7005L | 9336 | 436 | 10682 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6462 | Zener Diode, 8.2 volt. | 3198 | 010 | 28280 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 |
| 4604 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6500 | Diode, Bridge Rect, GBU6JL-7002. . . . | 9322 | 138 | 08667 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 |

S = Safety Part Be sure to use exact replacement part.

25LT220L/17 (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|------|--------------------------|------|-----|-------|
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 | 020 | 52290 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 | 020 | 51090 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 | 849 | 10215 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 | 247 | 60133 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 | 185 | 69682 | 9617 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I. | 4835 | 310 | 57622 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 | 713 | 37112 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 | 020 | 40110 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 | 020 | 43530 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 | 547 | 00215 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 | 020 | 43430 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | 9647 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 | 140 | 14667 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 | 020 | 40030 | 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 | 310 | 10215 | 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, LE33CZ. | 9322 | 106 | 11676 | 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 | 547 | 00215 | 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C16-WBN6. | 9322 | 147 | 25682 | 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 | 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 7901 | IC, AN7522N PH. | 9322 | 181 | 41682 | 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9104 | Wire Jumper. | 3198 | 036 | 90010 | 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9123 | Wire Jumper. | 3198 | 036 | 90010 | 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 | 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9173 | Wire Jumper. | 3198 | 036 | 90010 | 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9181 | Wire Jumper. | 3198 | 036 | 90010 | 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9182 | Wire Jumper. | 3198 | 036 | 90010 | 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9192 | Wire Jumper. | 3198 | 036 | 90010 | 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9193 | Wire Jumper. | 3198 | 036 | 90010 | 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9311 | Wire Jumper. | 3198 | 036 | 90010 | 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9312 | Wire Jumper. | 3198 | 036 | 90010 | 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9406 | Wire Jumper. | 3198 | 036 | 90010 | 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9407 | Wire Jumper. | 3198 | 036 | 90010 | 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9408 | Wire Jumper. | 3198 | 036 | 90010 | 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9409 | Wire Jumper. | 3198 | 036 | 90010 | 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9410 | Wire Jumper. | 3198 | 036 | 90010 | 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9411 | Wire Jumper. | 3198 | 036 | 90010 | 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9412 | Wire Jumper. | 3198 | 036 | 90010 | 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9413 | Wire Jumper. | 3198 | 036 | 90010 | 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9415 | Wire Jumper. | 3198 | 036 | 90010 | 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9416 | Wire Jumper. | 3198 | 036 | 90010 | 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9417 | Wire Jumper. | 3198 | 036 | 90010 | 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9418 | Wire Jumper. | 3198 | 036 | 90010 | 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9419 | Wire Jumper. | 3198 | 036 | 90010 | 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9421 | Wire Jumper. | 3198 | 036 | 90010 | 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9422 | Wire Jumper. | 3198 | 036 | 90010 | 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9423 | Wire Jumper. | 3198 | 036 | 90010 | 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9425 | Wire Jumper. | 3198 | 036 | 90010 | 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9427 | Wire Jumper. | 3198 | 036 | 90010 | 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9451 | Wire Jumper. | 3198 | 036 | 90010 | 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9453 | Wire Jumper. | 3198 | 036 | 90010 | 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9460 | Wire Jumper. | 3198 | 036 | 90010 | 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9500 | Wire Jumper. | 3198 | 036 | 90010 | 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9501 | Wire Jumper. | 3198 | 036 | 90010 | 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9503 | Wire Jumper. | 3198 | 036 | 90010 | 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9506 | Wire Jumper. | 3198 | 036 | 90010 | 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9507 | Wire Jumper. | 3198 | 036 | 90010 | 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9510 | Wire Jumper. | 3198 | 036 | 90010 | 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9511 | Wire Jumper. | 3198 | 036 | 90010 | 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9512 | Wire Jumper. | 3198 | 036 | 90010 | 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9513 | Wire Jumper. | 3198 | 036 | 90010 | 9860 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part. Be sure to use exact replacement part.

25LT220L/17 (continued)

| | | | | |
|------|--|------|-----|-------|
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9919 | Wire Jumper. | 3198 | 036 | 90010 |
| 9920 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 | 127 | 27372 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 26771 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

| | | | | |
|---------------------------|--|------|-----|-------|
| Cabinet & Accessory Parts | | | | |
| S AC01 | AC Cord. | 3135 | 010 | 07161 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC05 | Cabinet Back | 3139 | 124 | 45291 |
| S AC09 | CRT, A63QDB891X01. | 9322 | 151 | 39682 |
| AC10 | Customer Control Buttons | 3139 | 124 | 27351 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 44489 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53351 |
| AC20A | Cabinet Front. | 3139 | 177 | 62031 |
| AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| AC20C | Light Guide. | 3139 | 124 | 26461 |
| AC20D | Nameplate. | 3135 | 015 | 03571 |
| AC20E | Power Button | 3139 | 124 | 26444 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| AC22 | Cinch Cover. | 3139 | 124 | 25551 |

25LT421L/17 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|--|------|-----------|--------|--|------|-----------|
| | Main Chassis Parts | | | | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 16269 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 03310 |
| 0223 | A/V Jack. | 2422 | 026 05236 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 |
| 0240 | 7 Pin Connector. | 2422 | 025 11244 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2457 | Cap, 470n, 5%, 250v, Metalized Polypropylene. | 2022 | 333 00086 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 0251 | 3 Pin Connector. | 2412 | 020 00725 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| S 0254 | 9 Pin CRT Socket. | 2422 | 500 80076 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 0259 | 5 Pin Connector. | 2422 | 025 15848 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 | 333 00084 |
| 0262 | 3 Pin Connector. | 2422 | 025 16937 | S 2463 | Cap, 470p, 10%, 2000v, Ceramic. | 2020 | 558 90483 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | S 2465 | Cap, 13n, 5%, 1600v, Polypropylene. | 2020 | 301 90254 |
| S 1000 | Tuner, V+U, PLL. | 2422 | 542 90108 | 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 1002 | SAW Filter, 45.75MHz. | 2422 | 549 44518 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 | 365 75154 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 | 549 40807 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 | 365 75104 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 1600 | Tact Switch. | 2422 | 128 02742 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 1601 | Tact Switch. | 2422 | 128 02742 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 90586 |
| 1602 | Tact Switch. | 2422 | 128 02742 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 1603 | Tact Switch. | 2422 | 128 02742 | 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 |
| 1606 | Tact Switch. | 2422 | 128 02742 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 1660 | Crystal, 12MHz000. | 2422 | 543 01203 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 | 543 00842 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 91049 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 | 330 00018 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90647 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2123 | Res, Zero ohm, 'Chip' Jumper. | 3198 | 021 90020 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2125 | Res, Zero ohm, 'Chip' Jumper. | 3198 | 021 90020 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91353 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 31020 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 04740 | 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 21050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 | 370 76104 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 | 016 31080 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 | 016 31080 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 | 016 34790 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 | 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 34710 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 32210 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 |
| 2254 | Res, Zero ohm, 'Chip' Jumper. | 3198 | 021 90020 | 2837 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 | 368 90177 | 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2331 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 | 2841 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 | 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 | 2843 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| | | | | 2844 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| | | | | 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |

S = Safety Part Be sure to use exact replacement part.

25LT421L/17 (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glass | 3198 021 51010 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film | 2312 915 15602 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3454 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 2910 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2911 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3481 | Res, 8K2, 1%, 3/5W, Metal Film | 2312 915 18202 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3482 | Res, 22K, 1%, 3/5W, Metal Film | 2312 915 12203 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3123 | Wire Jumper. | 3198 036 90010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3124 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3125 | Wire Jumper. | 3198 036 90010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3126 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3507 | Surge Protector. | 2422 549 43073 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 |
| 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 |
| 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 |
| 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 |
| 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 |
| 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 |
| 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 |
| 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 |
| 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 | 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 | 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 |
| S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 | 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 |
| 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 | 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 |

S = Safety Part Be sure to use exact replacement part.

25LT421L/17 (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 021 53320 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 5342 | Coil, 12u, 10% | 3198 018 12290 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | S 5445 | Transformer, LOT | 2422 531 02519 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5457 | Coil, Linear Correction. | 3128 138 56801 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5471 | Coil, 3u3, 20% | 3198 018 73380 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5480 | Coil, 27u, 10% | 3198 018 22790 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5501 | Mains Filter | 2422 549 43432 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5521 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5560 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5562 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5564 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5831 | Coil, 6u8, 5% | 3198 018 16880 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5832 | Coil, 6u8, 5% | 3198 018 16880 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 5833 | Coil, 6u8, 5% | 3198 018 16880 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5835 | Coil, 12u, 10% | 3198 018 31290 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4128 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6460 | Diode, Rect, DG3-7005L | 9336 436 10682 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6462 | Zener Diode, 8.2 volt. | 3198 010 28280 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6465 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6466 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6467 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6468 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6469 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4604 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6470 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6476 | Zener Diode, 15 volt | 3198 010 21590 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6485 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6487 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6500 | Diode, Bridge Rect, GBU6JL-7002. . . . | 9322 138 08667 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6520 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6523 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6524 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4696 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6525 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6526 | Zener Diode, 22 volt | 3198 020 52290 |
| 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6541 | Zener Diode, 10 volt | 3198 020 51090 |
| 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 |
| 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6563 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6565 | Diode, Signal, BAV70 | 9331 849 10215 |
| 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6566 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6569 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6580 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6681 | Diode, Signal, BAT85 | 9336 247 60133 |
| 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6691 | LED, LTL-10234WHCR | 9322 185 69682 |
| 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6692 | IR Receiver. | 9322 127 54667 |

S = Safety Part Be sure to use exact replacement part.

25LT421L/17 (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9623 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9626 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I | 4835 310 57626 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9647 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9654 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9655 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9657 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9658 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9659 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9660 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9661 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9662 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, LE33CZ | 9322 106 11676 | 9663 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9664 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9665 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C16-WBN6. | 9322 147 25682 | 9666 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9667 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 187 89682 | 9668 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9685 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9689 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9690 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9691 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9694 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9695 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9697 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9698 | Wire Jumper. | 3198 036 90010 |
| 9415 | Wire Jumper. | 3198 036 90010 | 9699 | Wire Jumper. | 3198 036 90010 |
| 9416 | Wire Jumper. | 3198 036 90010 | 9821 | Wire Jumper. | 3198 036 90010 |
| 9417 | Wire Jumper. | 3198 036 90010 | 9822 | Wire Jumper. | 3198 036 90010 |
| 9418 | Wire Jumper. | 3198 036 90010 | 9825 | Wire Jumper. | 3198 036 90010 |
| 9419 | Wire Jumper. | 3198 036 90010 | 9828 | Wire Jumper. | 3198 036 90010 |
| 9421 | Wire Jumper. | 3198 036 90010 | 9829 | Wire Jumper. | 3198 036 90010 |
| 9422 | Wire Jumper. | 3198 036 90010 | 9831 | Wire Jumper. | 3198 036 90010 |
| 9423 | Wire Jumper. | 3198 036 90010 | 9832 | Wire Jumper. | 3198 036 90010 |
| 9425 | Wire Jumper. | 3198 036 90010 | 9837 | Wire Jumper. | 3198 036 90010 |
| 9427 | Wire Jumper. | 3198 036 90010 | 9838 | Wire Jumper. | 3198 036 90010 |
| 9451 | Wire Jumper. | 3198 036 90010 | 9839 | Wire Jumper. | 3198 036 90010 |
| 9453 | Wire Jumper. | 3198 036 90010 | 9846 | Wire Jumper. | 3198 036 90010 |
| 9460 | Wire Jumper. | 3198 036 90010 | 9847 | Wire Jumper. | 3198 036 90010 |
| 9500 | Wire Jumper. | 3198 036 90010 | 9849 | Wire Jumper. | 3198 036 90010 |
| 9501 | Wire Jumper. | 3198 036 90010 | 9851 | Wire Jumper. | 3198 036 90010 |
| 9503 | Wire Jumper. | 3198 036 90010 | 9856 | Wire Jumper. | 3198 036 90010 |
| 9506 | Wire Jumper. | 3198 036 90010 | 9858 | Wire Jumper. | 3198 036 90010 |
| 9507 | Wire Jumper. | 3198 036 90010 | 9859 | Wire Jumper. | 3198 036 90010 |
| 9510 | Wire Jumper. | 3198 036 90010 | 9860 | Wire Jumper. | 3198 036 90010 |
| 9511 | Wire Jumper. | 3198 036 90010 | 9862 | Wire Jumper. | 3198 036 90010 |
| 9512 | Wire Jumper. | 3198 036 90010 | 9864 | Wire Jumper. | 3198 036 90010 |
| 9513 | Wire Jumper. | 3198 036 90010 | 9865 | Wire Jumper. | 3198 036 90010 |
| 9514 | Wire Jumper. | 3198 036 90010 | 9867 | Wire Jumper. | 3198 036 90010 |
| 9515 | Wire Jumper. | 3198 036 90010 | 9868 | Wire Jumper. | 3198 036 90010 |
| 9516 | Wire Jumper. | 3198 036 90010 | 9869 | Wire Jumper. | 3198 036 90010 |
| 9518 | Wire Jumper. | 3198 036 90010 | 9873 | Wire Jumper. | 3198 036 90010 |
| 9520 | Wire Jumper. | 3198 036 90010 | 9874 | Wire Jumper. | 3198 036 90010 |
| 9521 | Wire Jumper. | 3198 036 90010 | 9875 | Wire Jumper. | 3198 036 90010 |
| 9522 | Wire Jumper. | 3198 036 90010 | 9877 | Wire Jumper. | 3198 036 90010 |
| 9524 | Wire Jumper. | 3198 036 90010 | 9901 | Wire Jumper. | 3198 036 90010 |
| 9528 | Wire Jumper. | 3198 036 90010 | 9902 | Wire Jumper. | 3198 036 90010 |
| 9530 | Wire Jumper. | 3198 036 90010 | 9903 | Wire Jumper. | 3198 036 90010 |
| 9611 | Coil, 27u, 10% | 3198 018 22790 | 9904 | Wire Jumper. | 3198 036 90010 |
| 9612 | Wire Jumper. | 3198 036 90010 | 9905 | Wire Jumper. | 3198 036 90010 |
| 9613 | Wire Jumper. | 3198 036 90010 | 9911 | Wire Jumper. | 3198 036 90010 |
| 9614 | Wire Jumper. | 3198 036 90010 | 9913 | Wire Jumper. | 3198 036 90010 |
| 9615 | Wire Jumper. | 3198 036 90010 | 9914 | Wire Jumper. | 3198 036 90010 |
| 9618 | Wire Jumper. | 3198 036 90010 | 9915 | Wire Jumper. | 3198 036 90010 |
| 9619 | Wire Jumper. | 3198 036 90010 | 9991 | Wire Jumper. | 3198 036 90010 |
| 9622 | Wire Jumper. | 3198 036 90010 | 9996 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

25LT421L/17 (continued)

| | | | | |
|------|--|------|-----|-------|
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 | 127 | 27372 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 26781 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 07161 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC05 | Cabinet Back | 3121 | 237 | 52933 |
| S AC09 | CRT, A63QDB891X01. | 9322 | 151 | 39682 |
| AC10 | Customer Control Buttons | 3139 | 177 | 60721 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 44489 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53431 |
| AC20A | Cabinet Front. | 3139 | 177 | 60741 |
| AC20B | Chassis Guide. | 3139 | 124 | 37561 |
| AC20C | Light Guide. | 3139 | 124 | 36551 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 177 | 60731 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |

25PT533S37C - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|---|----------------|--------|--|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 368 90177 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | | er. | |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0223 | A/V Jack | 2422 026 05236 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2415 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 03310 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0269 | Jack | 2422 026 05182 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| S 1000 | Tuner, V+U PLL | 2422 542 90098 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 48087 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | 2022 333 00086 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | | ylene. | |
| 1600 | Tact Switch. | 2422 128 02742 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1601 | Tact Switch. | 2422 128 02742 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1602 | Tact Switch. | 2422 128 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1603 | Tact Switch. | 2422 128 02742 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 333 00084 |
| 1606 | Tact Switch. | 2422 128 02742 | S 2463 | Cap, 470p, 10%, 2000v, Ceramic | 2020 558 90483 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | S 2465 | Cap, 13n, 5%, 1600v, Polypropylene | 2020 301 90254 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | 2022 330 00018 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | | pylene | |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 2864 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 |
| | | | 2865 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 |
| | | | 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |

S = Safety Part Be sure to use exact replacement part.

25PT533S37C (continued)

| | | | | | |
|------|---|----------------|--------|---|----------------|
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 014 02240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . . | 3198 026 21020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film. | 2312 915 15602 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3454 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3481 | Res, 8K2, 1%, 3/5W, Metal Film. | 2312 915 18202 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3482 | Res, 22K, 1%, 3/5W, Metal Film. | 2312 915 12203 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3507 | Surge Protector. | 2422 549 43073 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03101 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass . | 3198 021 51020 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 012 11070 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3528 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film. | 2306 204 03222 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 3543 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 915 18203 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 734 64702 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 |

S = Safety Part Be sure to use exact replacement part.

25PT533S37C (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|--|------|-----|-------|
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 | 012 | 13310 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3681 | Res, 180 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 61801 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3682 | Res, 270 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 62701 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 63901 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 63901 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3686 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3687 | Res, 75 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 67509 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3688 | Res, 68 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 66809 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3689 | Res, 2K7, 1%, 1/8W, Metalized Glass. . | 2322 | 734 | 62702 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 12u. | 2422 | 535 | 97329 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT | 2422 | 531 | 02519 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5457 | Coil, Linear Correction. | 3128 | 138 | 56801 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5480 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6460 | Diode, Rect, DG3-7005L | 9336 | 436 | 10682 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6462 | Zener Diode, 8.2 volt. | 3198 | 010 | 28280 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6469 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 |

S = Safety Part Be sure to use exact replacement part.

25PT533S37C (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9451 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9522 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9577H/N1/AI/1130. | 9352 731 51557 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9628 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9184 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9681 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9685 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9689 | Wire Jumper. | 3198 036 90010 |
| 9415 | Wire Jumper. | 3198 036 90010 | 9690 | Wire Jumper. | 3198 036 90010 |
| 9416 | Wire Jumper. | 3198 036 90010 | 9691 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

25PT533S37C (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 14431 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |

S = Safety Part Be sure to use exact replacement part.

| | | | | |
|------|---|------|-----|-------|
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3121 | 237 | 53311 |
| S AC09 | CRT, A63QDB891X01. | 9322 | 151 | 39682 |
| AC10 | Customer Control Buttons | 3139 | 177 | 60721 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 44489 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01651 |
| AC17 | Owner's Manual | 3121 | 235 | 20631 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53061 |
| AC20A | Cabinet Front. | 3139 | 177 | 60741 |
| AC20B | Chassis Guide. | 3139 | 124 | 37561 |
| AC20C | Light Guide. | 3139 | 124 | 36551 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 177 | 60731 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| REMOTE | Remote Control Transmitter, RC19335004/01. | 3139 | 228 | 86463 |

25PT633R85C - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|---|----------------|--------|--|---|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | er. 2222 368 90177 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0223 | A/V Jack | 2422 026 05236 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 |
| 0246 | 5 Pin Connector. | 2422 025 15848 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0269 | Jack | 2422 026 05182 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| S 1000 | Tuner, V+U PLL | 2422 542 90098 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2448 | Cap, 100p, 10%, 1000v, Ceramic | 3198 019 51010 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| 1600 | Tact Switch. | 2422 128 02742 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 1601 | Tact Switch. | 2422 128 02742 | 2457 | Cap, 390n, 5%, 250v, Metalized Polyprop | ylene. 2022 333 00085 |
| 1602 | Tact Switch. | 2422 128 02742 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1603 | Tact Switch. | 2422 128 02742 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1606 | Tact Switch. | 2422 128 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2463 | Cap, 1n5, 10%, 2000v, Ceramic Only with | 5445 (JF0501-21835) Layer Wound. 2020 558 90489 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | 2464 | Cap, 220p, 10%, 2000v, Ceramic | 2020 558 90478 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | S 2465 | Cap, 2u2, 5%, 160v, Metalized Polypropy | lene 2222 479 90042 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2466 | Cap, 15n, 5%, 1600v, Polypropylene | 2020 301 90255 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2468 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90222 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2471 | Cap, 18n, 10%, 400v, Polyester | 2222 347 90222 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2472 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2473 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2474 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2476 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2480 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2481 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2482 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2483 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene 2022 330 00018 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | | | |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | | | |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | | | |

S = Safety Part Be sure to use exact replacement part.

25PT633R85C (continued)

| | | | | | |
|------|---|----------------|--------|--|----------------|
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. . | 3198 021 36840 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. . . . | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. . . . | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3401 | Res, 220K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02240 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3403 | Res, 82K, 5%, 1/6W, Carbon Film. . . . | 3198 011 08230 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3405 | Res, 10 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01090 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3406 | Res, 10 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01090 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3451 | Res, 2R7, 5%, 1/3W, Metal Film. | 2306 204 03278 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3452 | Res, 5K6, 1%, 3/5W, Metal Film Only wit | |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | | h 5445 (JF0501-21835) Layer Wound. . . | 2312 915 15602 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3452 | Res, 4K7, 1%, 3/5W, Metal Film. | 2312 915 14702 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 1K8, 1%, 3/5W, Metal Film. | 2312 915 11802 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3454 | Res, 2K, 1%, 3/5W, Metal Film Only with | |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | | 5445 (JF0501-21835) Layer Wound. . . . | 2312 915 12002 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3470 | Res, 470K, 5%, 1/10W, Metalized Glass. . | 3198 021 54740 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3481 | Res, 15K, 1%, 3/5W, Metal Film. | 2312 915 11503 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3482 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 33390 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3491 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass. . | 3198 021 31230 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |

S = Safety Part Be sure to use exact replacement part.

25PT633R85C (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|---|------|-----|-------|
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13155 | 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3507 | Surge Protector. | 2422 | 549 | 43073 | 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. | 3198 | 013 | 02210 | 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 | 612 | 00056 | 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02710 | 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51220 | 3904 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04780 | 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53340 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. | 2306 | 204 | 03101 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 38220 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55630 | 4001 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4002 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 | 012 | 11070 | 4122 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 | 012 | 13370 | 4123 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 4127 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | 4214 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51030 | 4216 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54720 | 4388 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film. | 2306 | 204 | 03222 | 4401 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4402 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51520 | 4431 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 | 915 | 18203 | 4601 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 | 4608 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. | 2322 | 730 | 61274 | 4609 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51530 | 4613 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51030 | 4614 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4615 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4616 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51230 | 4617 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4619 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film. | 3198 | 012 | 13310 | 4622 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52220 | 4623 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4691 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | 4692 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4693 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4696 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4812 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4814 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4820 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4825 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4827 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4830 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4831 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4861 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 4863 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4865 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4866 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4867 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4869 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4870 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4871 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4873 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4876 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 4880 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32220 | 4881 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 | 4883 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4885 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4892 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4901 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4903 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 | 4906 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4924 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4925 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53320 | 4982 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 5001 | Coil, 27u, 10%. | 3198 | 018 | 22790 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5002 | Coil, 820n, 10%. | 3198 | 018 | 18270 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5201 | Coil, 6u8, 5%. | 3198 | 018 | 16880 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51520 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5242 | Coil, 10u, 5%. | 3198 | 018 | 11090 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5341 | Coil, 22u. | 2422 | 535 | 97333 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 15u. | 2422 | 535 | 97331 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5401 | Coil, 1mH, 10%. | 3198 | 018 | 71020 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (JF0501-21835) Layer W | | | |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | | ound. | 2422 | 531 | 02611 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT AT2078. | 3128 | 138 | 21401 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10%. | 3198 | 018 | 73390 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5453 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | S 5457 | Coil, 33u. | 2422 | 535 | 91021 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31530 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31220 | 5471 | Coil, 3u3, 20%. | 3198 | 018 | 73380 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5472 | Coil, 3u3, 10%. | 3198 | 018 | 23380 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5480 | Coil, 47u, 10%. | 2422 | 535 | 97337 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | S 5501 | Mains Filter. | 2422 | 549 | 43432 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |

S = Safety Part Be sure to use exact replacement part.

25PT633R85C (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|--|------|-----|-------|
| 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 | 7892 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7901 | IC, AN7522N PH | 9322 | 181 | 41682 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 | 9101 | Wire Jumper. | 3198 | 036 | 90010 |
| 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 | 9102 | Wire Jumper. | 3198 | 036 | 90010 |
| 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 | 9103 | Wire Jumper. | 3198 | 036 | 90010 |
| 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 | 9104 | Wire Jumper. | 3198 | 036 | 90010 |
| 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9123 | Wire Jumper. | 3198 | 036 | 90010 |
| 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9173 | Wire Jumper. | 3198 | 036 | 90010 |
| 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9175 | Wire Jumper. | 3198 | 036 | 90010 |
| 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9176 | Wire Jumper. | 3198 | 036 | 90010 |
| 6331 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9178 | Wire Jumper. | 3198 | 036 | 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9179 | Wire Jumper. | 3198 | 036 | 90010 |
| 6333 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9181 | Wire Jumper. | 3198 | 036 | 90010 |
| 6335 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9182 | Wire Jumper. | 3198 | 036 | 90010 |
| 6400 | Res, 1K, 1%, 3/SW, Metal Film. | 2312 | 915 | 11002 | 9183 | Wire Jumper. | 3198 | 036 | 90010 |
| 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 | 9192 | Wire Jumper. | 3198 | 036 | 90010 |
| 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9193 | Wire Jumper. | 3198 | 036 | 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9311 | Wire Jumper. | 3198 | 036 | 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9312 | Wire Jumper. | 3198 | 036 | 90010 |
| 6449 | Diode, Signal, BAV99. | 3198 | 010 | 10620 | 9406 | Wire Jumper. | 3198 | 036 | 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 | 9407 | Wire Jumper. | 3198 | 036 | 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9408 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 10 volt | 3198 | 010 | 21090 | 9409 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9410 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 | 010 | 10620 | 9414 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9423 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9424 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9426 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9463 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 | 849 | 10215 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 | 247 | 60133 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 | 728 | 40557 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 | 157 | 37687 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9617 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PDTCL43ZT | 9340 | 547 | 00215 | 9620 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9621 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PDTCL14ET | 9340 | 310 | 10215 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9633 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PDTCL43ZT | 9340 | 547 | 00215 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9639 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7606 | Transistor, NPN, PDTCL43ZT | 9340 | 547 | 00215 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part Be sure to use exact replacement part.

25PT633R85C (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 9651 | Wire Jumper. | 3198 | 036 | 90010 |
| 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 9656 | Wire Jumper. | 3198 | 036 | 90010 |
| 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 57961 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4823 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9155 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 28121 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3139 | 128 | 75281 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 35181 |
| S AC09 | CRT, A59QDF891X001(L). | 9322 | 163 | 87682 |
| AC10 | Customer Control Buttons | 3139 | 138 | 13911 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 44489 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 20951 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 39111 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53161 |
| AC20A | Cabinet Front. | 3139 | 177 | 60691 |

25PT633R85C (continued)

| | | | | |
|--------|---|------|-----|-------|
| AC20B | Chassis Guide. | 3139 | 124 | 25893 |
| AC20C | Light Guide. | 3139 | 124 | 41241 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 13871 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| REMOTE | Remote Control Transmitter, RC19335004/ | | | |
| | 01. | 3139 | 228 | 86463 |

25ST220L/17 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2247 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0213 | 2 Pin Connector. | 2422 025 16374 | 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0217 | 6 Pin Connector. | 2422 025 12482 | 2250 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 |
| 0218 | A/V Jack | 2422 026 04742 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | |
| 0223 | A/V Jack | 2422 026 05236 | | er. | |
| 0225 | SVHS Jack. | 2422 026 04926 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . | 2222 368 90177 |
| 0227 | 6 Pin Connector. | 2422 025 15849 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. . . | 2020 558 90445 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 2020 012 93495 |
| 0240 | 7 Pin Connector. | 2422 025 11244 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 019 43320 |
| 0242 | 7 Pin Connector. | 2422 025 17042 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 3198 016 05610 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 2020 558 90559 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . | 3198 023 21040 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. . . | 2020 558 90445 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 025 32210 |
| 0259 | 5 Pin Connector. | 2422 025 15848 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 016 03310 |
| 0262 | 3 Pin Connector. | 2422 025 16937 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic . . . | 3198 025 51080 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 017 24730 |
| 0280 | 4 Pin Connector. | 2422 025 12479 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. . . | 3198 025 51080 |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | 2455 | Cap, 47u, 20%, 25v, Electrolytic . . . | 2020 021 91139 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | | ylene. | |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. . . | 2022 333 00086 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 2020 021 91331 |
| 1600 | Tact Switch. | 2422 128 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 019 46810 |
| 1601 | Tact Switch. | 2422 128 02742 | 2462 | Cap, 330n, 10%, 250v, MPP. | 3198 016 01010 |
| 1602 | Tact Switch. | 2422 128 02742 | S 2463 | Cap, 470p, 10%, 2000v, Ceramic | 2022 333 00084 |
| 1603 | Tact Switch. | 2422 128 02742 | S 2465 | Cap, 13n, 5%, 1600v, Polypropylene . . | 2020 558 90483 |
| 1606 | Tact Switch. | 2422 128 02742 | 2471 | Cap, 100n, 10%, 50v, Polyester | 2020 301 90254 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 2222 365 75104 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2480 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 017 02420 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 2020 021 90586 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2482 | Cap, 68n, 10%, 250v, Polyester | 3198 019 44710 |
| 2101 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 24740 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. . . | 2222 347 90234 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. . . | 2020 021 90856 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2487 | Cap, 47u, 20%, 50v, Electrolytic . . . | 2020 021 91577 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 2020 021 90854 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. . . | 2020 021 91049 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 2020 021 91577 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | | pylene | |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 2022 330 00018 |
| 2123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2125 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2503 | Cap, 470u, 20%, 200v, Electrolytic . . . | 3198 019 52220 |
| 2127 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 2020 024 90647 |
| 2128 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 019 52220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 017 04710 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 3198 019 64710 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 2020 554 90172 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 017 01030 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 025 52290 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2523 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2525 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2527 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2528 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 2540 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2560 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2561 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2562 | Cap, 100u, 20%, 160v, Electrolytic . . . | 2020 021 91654 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2563 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 2564 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2567 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2568 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 2581 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. . . | 2222 910 19856 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . | 3198 023 22240 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 021 21050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . . | 3198 025 32210 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 |
| | | | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 |
| | | | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| | | | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |

S = Safety Part Be sure to use exact replacement part.

25ST220L/17 (continued)

| | | | | | |
|------|--|----------------|--------|---|----------------|
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic . . . | 3198 017 44740 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film . | 3198 011 08210 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 021 31020 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic | 2238 586 15626 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic | 3198 016 31510 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2869 | Cap, 68n, 10%, 50v, Polyester | 3198 014 06830 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2870 | Cap, 68n, 10%, 50v, Polyester | 3198 014 06830 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic | 3198 016 31510 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic | 2238 586 15626 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film . . | 2306 207 03109 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . | 3198 011 03390 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic . . . | 3198 025 24710 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic . . . | 3198 017 42240 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass . . | 3198 021 31050 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film . . . | 3198 011 01530 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film . . . | 3198 011 05620 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01810 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film . | 3198 011 08210 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic | 2238 586 15624 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03109 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic | 2238 586 15624 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film | 2312 915 15602 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 | 3454 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic | 3198 016 33310 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film . | 3198 011 02210 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film | 3198 011 03320 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 021 31020 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass . | 3198 021 32240 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass . | 3198 021 32240 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01510 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01510 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film | 2122 101 02083 |
| 3122 | Res, 680 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06810 | 3481 | Res, 8K2, 1%, 3/5W, Metal Film | 2312 915 18202 |
| 3123 | Res, 680 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06810 | 3482 | Res, 22K, 1%, 3/5W, Metal Film | 2312 915 12203 |
| 3125 | Res, 680 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06810 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3182 | Wire Jumper | 3198 036 90010 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass . . | 2322 242 13335 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03910 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass . . | 2322 242 13335 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass . . | 2322 242 13155 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3507 | Surge Protector | 2422 549 43073 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film | 3198 011 02230 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film . | 3198 011 02710 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film | 3198 011 04780 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 05610 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass . | 3198 021 33340 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film | 3198 012 13370 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 05610 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3223 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 08210 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass . . | 2322 734 64702 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . . | 2322 704 63903 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 |
| 3247 | Res, 680K, 5%, 1/16W, Metalized Glass . | 3198 021 36840 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |

S = Safety Part Be sure to use exact replacement part.

25ST220L/17 (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| S 3558 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 021 53320 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5342 | Coil, 12u, 10% | 3198 018 12190 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5445 | Transformer, LOT | 2422 531 02519 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5457 | Coil, Linear Correction. | 3128 138 56801 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5471 | Coil, 3u3, 20% | 3198 018 73380 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 021 31530 | 5480 | Coil, 27u, 10% | 3198 018 22790 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 021 31220 | S 5501 | Mains Filter | 2422 549 43432 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5521 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5560 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5562 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5564 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6181 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4126 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4128 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4181 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6460 | Diode, Rect, DG3-7005L | 9336 436 10682 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6462 | Zener Diode, 8.2 volt. | 3198 010 28280 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6465 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6466 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6467 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6468 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6469 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4604 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6470 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6476 | Zener Diode, 15 volt | 3198 010 21590 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |

25ST220L/17 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|-------------------------|------|-----|-------|
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 | 020 | 52290 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 | 020 | 51090 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 6561 | Diode, Rect, SB340L-7010. | 9322 | 128 | 18682 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 | 849 | 10215 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9611 | Coil, 27u, 10%. | 3198 | 018 | 22790 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 | 247 | 60133 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 | 185 | 69682 | 9616 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9617 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I. | 4835 | 310 | 57622 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 | 713 | 37112 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 | 020 | 40110 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9634 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 | 020 | 43530 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 | 547 | 00215 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 | 020 | 43430 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 | 140 | 14667 | 9647 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 | 020 | 40030 | 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 | 310 | 10215 | 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, LE33CZ. | 9322 | 106 | 11676 | 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 | 547 | 00215 | 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C16-WBN6. | 9322 | 147 | 25682 | 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 | 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 7901 | IC, AN7522N PH. | 9322 | 181 | 41682 | 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9104 | Wire Jumper. | 3198 | 036 | 90010 | 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 | 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9173 | Wire Jumper. | 3198 | 036 | 90010 | 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9175 | Wire Jumper. | 3198 | 036 | 90010 | 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9181 | Wire Jumper. | 3198 | 036 | 90010 | 9672 | Coil, 22u, 10%. | 3198 | 018 | 22290 |
| 9182 | Wire Jumper. | 3198 | 036 | 90010 | 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9192 | Wire Jumper. | 3198 | 036 | 90010 | 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9193 | Wire Jumper. | 3198 | 036 | 90010 | 9678 | Coil, 22u, 10%. | 3198 | 018 | 22290 |
| 9311 | Wire Jumper. | 3198 | 036 | 90010 | 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9312 | Wire Jumper. | 3198 | 036 | 90010 | 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9406 | Wire Jumper. | 3198 | 036 | 90010 | 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9407 | Wire Jumper. | 3198 | 036 | 90010 | 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9408 | Wire Jumper. | 3198 | 036 | 90010 | 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9409 | Wire Jumper. | 3198 | 036 | 90010 | 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9410 | Wire Jumper. | 3198 | 036 | 90010 | 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9411 | Wire Jumper. | 3198 | 036 | 90010 | 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9412 | Wire Jumper. | 3198 | 036 | 90010 | 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9413 | Wire Jumper. | 3198 | 036 | 90010 | 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9415 | Wire Jumper. | 3198 | 036 | 90010 | 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9416 | Wire Jumper. | 3198 | 036 | 90010 | 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9417 | Wire Jumper. | 3198 | 036 | 90010 | 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9418 | Wire Jumper. | 3198 | 036 | 90010 | 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9419 | Wire Jumper. | 3198 | 036 | 90010 | 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9421 | Wire Jumper. | 3198 | 036 | 90010 | 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9422 | Wire Jumper. | 3198 | 036 | 90010 | 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9423 | Wire Jumper. | 3198 | 036 | 90010 | 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9425 | Wire Jumper. | 3198 | 036 | 90010 | 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9427 | Wire Jumper. | 3198 | 036 | 90010 | 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9451 | Wire Jumper. | 3198 | 036 | 90010 | 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9453 | Wire Jumper. | 3198 | 036 | 90010 | 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9460 | Wire Jumper. | 3198 | 036 | 90010 | 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9500 | Wire Jumper. | 3198 | 036 | 90010 | 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9501 | Wire Jumper. | 3198 | 036 | 90010 | 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9503 | Wire Jumper. | 3198 | 036 | 90010 | 9846 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part. Be sure to use exact replacement part.

25ST220L/17 (continued)

| | | | | | | | | | |
|------|--|------|-----|-------|-------|--|------|-----|-------|
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | AC22 | Cinch Cover. | 3139 | 124 | 25551 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 | AC26 | EPS Bracket. | 3119 | 107 | 17241 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | AC27 | ITV Card Bracket | 3139 | 124 | 37933 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 | AC28 | ITV Card Slot Cover. | 3139 | 124 | 30571 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9919 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9920 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 | 127 | 27372 | | | | | |
| CBA | EPS Module (ITV) | 3139 | 137 | 22961 | | | | | |
| CBA | Main Chassis Assembly. | 3139 | 187 | 26791 | | | | | |
| CBA | Interface Panel (ITV). | 3139 | 188 | 04541 | | | | | |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 07161 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC05 | Cabinet Back | 3139 | 124 | 45281 |
| S AC09 | CRT, A63QDB891X01. | 9322 | 151 | 39682 |
| AC10 | Customer Control Buttons | 3139 | 124 | 27351 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 44489 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53351 |
| AC20A | Cabinet Front. | 3139 | 177 | 62031 |
| AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| AC20C | Light Guide. | 3139 | 124 | 26461 |
| AC20D | Nameplate. | 3135 | 015 | 03571 |
| AC20E | Power Button | 3139 | 124 | 26444 |

S = Safety Part Be sure to use exact replacement part.

27DV693R37A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | Main Chassis Parts | | |
|--------------------|---|---------------------------------|--------------------|---|--------------------------------|
| 0211 | 2 Pin Connector. | 2422 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | er. 2222 368 90177 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0214 | 5 Pin Connector. | 2422 025 12481 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0217 | 3 Pin Connector. | 2412 020 00725 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0223 | A/V Jack. | 2422 026 05236 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 021 90552 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 0229 | 7 Pin Connector. | 2422 025 11244 | 2404 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 025 54790 |
| 0239 | 3 Pin Connector. | 2422 025 16382 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0240 | 4 Pin Connector. | 2422 025 12479 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 017 24730 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| 0251 | 4 Pin Connector. | 2422 025 15847 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 014 02230 |
| S 0254 | 9 Pin CRT Socket. | 2422 500 80076 | 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 01810 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 0269 | Jack. | 2422 026 05182 | 2457 | Cap, 360n, 5%, 250v, Metalized Polyprop | ylene. 2022 333 00163 |
| S 1000 | Tuner, V+U, PLL. | 2422 542 90108 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1002 | SAW Filter, 45.75MHz. | 2422 549 44518 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 549 40807 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | S 2463 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | lene. 2222 479 90042 |
| 1660 | Crystal, 12MHz000. | 2422 543 01203 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene. | 2020 301 90255 |
| 1810 | 6 Pin Connector. | 2422 025 15849 | 2466 | Cap, 15n, 10%, 400v, Polyester. | 2222 347 90219 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | C49/U A. 2422 543 00842 | 2468 | Cap, 27n, 10%, 400v, Polyester. | 2222 347 90232 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2482 | Cap, 120n, 5%, 250v, Metalized Polyprop | ylene. 2222 479 90051 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 021 90854 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 021 91049 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene. 2022 330 00018 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 024 90647 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 021 91654 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91374 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2604 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 014 04740 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | | | |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | | | |

S = Safety Part Be sure to use exact replacement part.

27DV693R37A (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03310 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic . . . | 3198 026 31020 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . . | 3198 021 38220 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3454 | Res, 2K, 1%, 3/5W, Metal Film | 2312 915 12002 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2120 101 74158 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 32290 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3507 | Surge Protector. | 2422 549 43073 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 021 32730 | 3526 | Res, OR1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | S 3527 | Res, OR33, 5%, 3/5W, Metal Film. | 3198 012 13370 |

S = Safety Part Be sure to use exact replacement part.

27DV693R37A (continued)

| | | | | | |
|--------|---|----------------|--------|--|----------------|
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 021 54730 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 021 51030 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 021 54720 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 021 51520 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass | 2322 734 64702 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 730 61274 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 021 51530 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 021 54720 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass | 3198 021 51020 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 021 51230 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 021 55620 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 021 52220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 021 55620 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 021 54730 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film | 2306 204 03109 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass | 3198 021 52240 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass | 3198 021 52240 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 011 02220 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 011 02220 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film | 3198 011 04710 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film | 3198 011 06820 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5202 | Wire Jumper | 3198 036 90010 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 021 32220 | 5241 | Wire Jumper | 3198 036 90010 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5341 | Coil, 22u | 2422 535 97333 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5342 | Coil, 3u9, 10% | 2422 535 97323 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass | 3198 021 51020 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | S 5445 | Transformer, LOT | 2422 531 02574 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5451 | Coil, 22u, 10% | 3198 018 72290 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | S 5457 | Coil, 25u | 2422 535 91028 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass | 3198 021 31020 | 5463 | Coil, Choke | 3128 138 37021 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5480 | Coil, 47u, 10% | 2422 535 97337 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | S 5501 | Mains Filter | 2422 549 43432 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | S 5520 | Transformer, SS42202-00 B | 2422 531 02562 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 021 34730 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5831 | Coil, 6u8, 5% | 3198 018 16880 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5832 | Coil, 6u8, 5% | 3198 018 16880 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 021 32220 | 5833 | Coil, 6u8, 5% | 3198 018 16880 |
| 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 021 36820 | 5835 | Coil, 12u, 10% | 3198 018 31290 |
| 3903 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 021 34730 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3905 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 021 34730 | 6150 | Diode, Signal, BAS316 | 3198 010 10630 |
| 3909 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 021 32730 | 6201 | Diode, Signal, BAS316 | 3198 010 10630 |
| 3910 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 021 32730 | 6202 | Diode, Signal, BAS316 | 3198 010 10630 |
| 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film | 3198 011 08210 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316 | 3198 010 10630 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6400 | Res, 1K, 1%, 3/5W, Metal Film | 2312 915 11002 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6401 | Zener Diode, 47 volt | 3198 010 24790 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6447 | Diode, Signal, 1N4148 | 3198 010 10010 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6460 | Diode, Rect, BY228/24 | 9340 559 50112 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6461 | Diode, Rect, RGP30J-L7004 | 9338 617 60682 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6465 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6466 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6467 | Diode, Signal, BAS316 | 3198 010 10630 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6468 | Diode, Signal, BAS316 | 3198 010 10630 |

S = Safety Part Be sure to use exact replacement part.

27DV693R37A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|-------------------------|------|-----|-------|
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9414 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 | 010 | 10620 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 | 010 | 21590 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 | 010 | 23390 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9424 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6490 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9426 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 | 132 | 55667 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9463 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 | 020 | 52290 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 | 020 | 51090 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 | 849 | 10215 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 | 175 | 70667 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9569H/N1/4I/1313. | 9352 | 743 | 94557 | 9611 | Coil, 27u, 10%. | 3198 | 018 | 22790 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 | 713 | 37112 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 7400 | Power FET, IR. | 9322 | 053 | 35687 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 | 020 | 40110 | 9620 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9621 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 | 020 | 43530 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 | 547 | 00215 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 | 020 | 43430 | 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 | 140 | 14667 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9633 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 | 020 | 40030 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 | 310 | 10215 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 | 547 | 00215 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 | 9644 | Wire Jumper. | 3198 | 036 | 90010 |
| 7606 | Transistor, NPN, PPTC143ZT. | 9340 | 547 | 00215 | 9645 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7803 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L. | 9322 | 187 | 89682 | 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 7901 | IC, AN7580. | 9322 | 166 | 29682 | 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 7903 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | 9656 | Wire Jumper. | 3198 | 036 | 90010 |
| 9101 | Wire Jumper. | 3198 | 036 | 90010 | 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 9102 | Wire Jumper. | 3198 | 036 | 90010 | 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 9103 | Wire Jumper. | 3198 | 036 | 90010 | 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 9104 | Wire Jumper. | 3198 | 036 | 90010 | 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9123 | Wire Jumper. | 3198 | 036 | 90010 | 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 | 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 9173 | Wire Jumper. | 3198 | 036 | 90010 | 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9175 | Wire Jumper. | 3198 | 036 | 90010 | 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9176 | Wire Jumper. | 3198 | 036 | 90010 | 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9178 | Wire Jumper. | 3198 | 036 | 90010 | 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9179 | Wire Jumper. | 3198 | 036 | 90010 | 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9181 | Wire Jumper. | 3198 | 036 | 90010 | 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9182 | Wire Jumper. | 3198 | 036 | 90010 | 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9192 | Wire Jumper. | 3198 | 036 | 90010 | 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9193 | Wire Jumper. | 3198 | 036 | 90010 | 9672 | Coil, 22u, 10%. | 3198 | 018 | 22290 |
| 9311 | Wire Jumper. | 3198 | 036 | 90010 | 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9312 | Wire Jumper. | 3198 | 036 | 90010 | 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9406 | Wire Jumper. | 3198 | 036 | 90010 | 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9407 | Wire Jumper. | 3198 | 036 | 90010 | 9678 | Coil, 22u, 10%. | 3198 | 018 | 22290 |
| 9408 | Wire Jumper. | 3198 | 036 | 90010 | 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9409 | Wire Jumper. | 3198 | 036 | 90010 | 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9410 | Wire Jumper. | 3198 | 036 | 90010 | 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9411 | Wire Jumper. | 3198 | 036 | 90010 | 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9412 | Wire Jumper. | 3198 | 036 | 90010 | 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9413 | Wire Jumper. | 3198 | 036 | 90010 | 9687 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part. Be sure to use exact replacement part.

27DV693R37A (continued)

| | | | | |
|------|--|------|-----|-------|
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9923 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 23581 |
| CBA | DVD Loader SD5.12. | 3139 | 188 | 55471 |
| CBA | DVD MPEG Assembly SD5.12 | 3139 | 188 | 55481 |
| CBA | DVD Module SD5.12 (contains Loader and MPEG Assembly) | 4835 | 310 | 57599 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

| | | | | |
|------|------------------------------------|------|-----|-------|
| 0267 | 3 Pin Board Connector. | 2422 | 025 | 09191 |
| 0361 | Eject Button | 3139 | 177 | 63451 |
| 1110 | Tact Switch. | 2422 | 128 | 02742 |
| CBA | DVD Eject Panel Assembly | 3139 | 187 | 23311 |

DVD Interface Panel Parts

DVD Interface Panel Parts

| | | | | |
|--------|---|------|-----|-------|
| 0226 | Connector, 6 Pin | 2422 | 025 | 12482 |
| 0228 | Connector, 3 Pin | 2412 | 020 | 00725 |
| 0251 | Connector, 4 Pin | 2422 | 025 | 15847 |
| 0253 | Connector, 7 Pin | 2422 | 025 | 11244 |
| 0254 | Connector, 3 Pin | 2422 | 025 | 16382 |
| 0266 | Connector, 6 Pin | 2422 | 025 | 15849 |
| 0269 | Connector, 5 Pin | 2422 | 025 | 15848 |
| 1100 | Socket, Cinch, 1 Pin | 2422 | 026 | 04425 |
| 1101 | Connector, 8 Pin | 2422 | 025 | 12483 |
| S 1330 | Fuse, 2A, 250V | 2422 | 086 | 10422 |
| S 1331 | Fuse, 2A, 250V | 2422 | 086 | 10422 |
| S 1332 | Fuse, 2A, 250V | 2422 | 086 | 10421 |
| 2101 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 |
| 2102 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 |
| 2103 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 |
| 2104 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 | 41040 |
| 2110 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 | 41040 |
| 2111 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |

| | | | | |
|--------|--|------|-----|-------|
| 2112 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2113 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2114 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2185 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2260 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 2262 | Cap, 4u7, +80/-20%, 10V, Ceramic | 2020 | 552 | 96305 |
| 2300 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 | 93495 |
| 2301 | Cap, 22n, 10%, 400v, Metalized Polyeste | 2222 | 365 | 55223 |
| 2302 | Cap, 100p, 10%, 1KV, Ceramic | 3198 | 019 | 51010 |
| 2310 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2311 | Cap, 470n, 10%, 25v, Ceramic | 2020 | 552 | 96465 |
| 2313 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2315 | Cap, 220p, 10%, 1KV, Ceramic | 3198 | 019 | 62210 |
| 2316 | Cap, 33n, 10%, 16v, Ceramic. | 3198 | 017 | 33330 |
| 2319 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 22240 |
| 2330 | Cap, 2u2, 20%, 25v, Electrolytic | 3198 | 026 | 32220 |
| 2331 | Cap, 470u, 20%, 10v, Electrolytic. | 3198 | 025 | 14710 |
| 2332 | Cap, 2u2, 20%, 25v, Electrolytic | 3198 | 026 | 32220 |
| 2333 | Cap, 470u, 20%, 10v, Electrolytic. | 3198 | 025 | 14710 |
| 2337 | Cap, 1000u, 20%, 25v, Electrolytic | 3198 | 026 | 31020 |
| 2338 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 | 24710 |
| 2339 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 | 24710 |
| 2341 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 2342 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 | 24790 |
| 2350 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 2351 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 2353 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 3101 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3102 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36890 |
| 3110 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3111 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3112 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3113 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3114 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3115 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3116 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3117 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3118 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3180 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3182 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3262 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3263 | Res, 82K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 38230 |
| 3264 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3265 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32730 |
| 3271 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3272 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 |
| S 3300 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 | 204 | 03108 |
| S 3301 | Power Resistor, 68K, 5%, 2W. | 3198 | 012 | 26830 |
| 3308 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3309 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3310 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3311 | Res, 180 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31810 |
| 3312 | Res, 10 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31090 |
| 3313 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3314 | Res, 1 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01080 |
| 3315 | Res, 1 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01080 |
| 3317 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3318 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 |
| 3319 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3320 | Res, 100K, 1%, 1/16W, Metalized Glass. | 2322 | 704 | 61004 |
| 3339 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 |
| 3340 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3342 | Res, 4K7, 1%, 1/16W, Metalized Glass | 2322 | 704 | 64702 |
| 3344 | Res, 4K7, 1%, 1/16W, Metalized Glass | 2322 | 704 | 64702 |
| 3360 | Res, 4R7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34780 |
| 3361 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 |
| 4105 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4106 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4185 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4226 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4261 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4265 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4316 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4342 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4343 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4361 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4363 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 4364 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 5100 | Inductor, Variable, 100uH, 10% | 2422 | 549 | 41663 |
| 5110 | Coil, 220n | 3198 | 018 | 12270 |
| 5300 | Coil, 27u. | 3198 | 018 | 22790 |
| 5301 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| S 5315 | Transformer, SS25113-00. | 2422 | 531 | 02596 |
| 5331 | Coil, 10u, 5%. | 2422 | 535 | 95363 |
| 5333 | Coil, 10u, 5%. | 2422 | 535 | 95363 |
| 5337 | Coil, 10u, 10%. | 2422 | 535 | 97328 |
| 5339 | Coil, 10u, 10%. | 2422 | 535 | 97328 |
| 6100 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6101 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 6300 | Diode, Rect, BYD33J | 9337 | 234 | 20133 |
| 6311 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |

S = Safety Part Be sure to use exact replacement part.

27DV693R37A (continued)

| | | | | |
|--------|--|------|-----|-------|
| 6312 | Zener Diode, 22 volt | 3198 | 020 | 52290 |
| 6330 | Diode, Rect, EGP20DL-5100 | 9322 | 164 | 42682 |
| 6332 | Diode, Rect, SB340L-7024. | 9322 | 161 | 76682 |
| 6336 | Diode, Rect, BYV27-200. | 9335 | 526 | 80133 |
| 7110 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 7260 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 7261 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 7262 | Transistor, NPN, PDTCl24ET | 9340 | 310 | 20215 |
| 7310 | Transistor, NPN, PDTCl14ET | 3198 | 010 | 44110 |
| 7311 | Transistor, PNP, PDTAl14ET | 3198 | 010 | 44010 |
| 7312 | Transistor, PNP, BC857B. | 3198 | 010 | 42150 |
| 7313 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 7315 | IC, TEAl523P/N2. | 9352 | 699 | 68112 |
| S 7340 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 |
| 7341 | IC, TL431CLP | 9337 | 711 | 00676 |
| 9110 | Wire Jumper. | 3198 | 036 | 90010 |
| 9111 | Wire Jumper. | 3198 | 036 | 90010 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 |
| 9266 | Wire Jumper. | 3198 | 036 | 90010 |
| 9315 | Wire Jumper. | 3198 | 036 | 90010 |
| 9350 | Wire Jumper. | 3198 | 036 | 90010 |
| 9351 | Wire Jumper. | 3198 | 036 | 90010 |
| 9352 | Wire Jumper. | 3198 | 036 | 90010 |
| 9355 | Wire Jumper. | 3198 | 036 | 90010 |
| 9357 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | DVD Interface Panel Assembly | 3139 | 187 | 20761 |

Front Interface Panel Parts

| | | | | |
|-----------------------------|--|------|-----|-------|
| Front Interface Panel Parts | | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

| | | | | |
|-----------------------|--|------|-----|-------|
| Side Jack Panel Parts | | | | |
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 15849 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2172 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2173 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2174 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01210 |
| 3157 | Res, 120 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01210 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 188 | 03541 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts
S = Safety Part Be sure to use exact replacement part.

| | | | | |
|------|--|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

| | | | | |
|---------------------------|--|------|-----|-------|
| Cabinet & Accessory Parts | | | | |
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44931 |
| AC06 | Cabinet Back Screw Cover (2 Used). | 3139 | 124 | 39301 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A68QCU754X73(N) | 9301 | 925 | 60527 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3139 | 124 | 31122 |
| AC17 | Owner's Manual | 3121 | 235 | 21121 |
| AC18 | Quick Use Guide. | 3121 | 233 | 44461 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53502 |
| AC20A | Cabinet Front. | 3139 | 138 | 10391 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76521 |
| AC20J | Top Control Assembly | 3139 | 177 | 56381 |
| AC23 | DVD Door | 3139 | 177 | 63441 |
| AC24 | DVD Interface Panel Bracket. | 3139 | 124 | 43291 |
| REMOTE | Remote Control Transmitter, RC19042007/ | | | |
| 01. | | 3128 | 147 | 14521 |

27LT220L/17 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|---|------|-----------|--------|--|------|-----------|
| | Main Chassis Parts | | | | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 16269 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | |
| 0218 | A/V Jack | 2422 | 026 04742 | | er. | 2222 | 368 90177 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 0240 | 7 Pin Connector. | 2422 | 025 11244 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 03310 |
| 0251 | 3 Pin Connector. | 2412 | 020 00725 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 |
| 0259 | 5 Pin Connector. | 2422 | 025 15848 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0262 | 3 Pin Connector. | 2422 | 025 16937 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 | 014 01530 |
| 0280 | 4 Pin Connector. | 2422 | 025 12479 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | | |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | | ylene. | 2022 | 333 00086 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 1600 | Tact Switch. | 2422 | 128 02742 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 | 333 00084 |
| 1601 | Tact Switch. | 2422 | 128 02742 | 2463 | Cap, 1nf, 10%, 2000v, Ceramic Only with | | |
| 1602 | Tact Switch. | 2422 | 128 02742 | | 5445 (JF0501-21835) Layer Wound. | 2020 | 558 90487 |
| 1603 | Tact Switch. | 2422 | 128 02742 | 2463 | Cap, 680p, 10%, 2000v, Ceramic. | 2020 | 558 90485 |
| 1606 | Tact Switch. | 2422 | 128 02742 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene | 2020 | 301 90251 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | S 2465 | Cap, 12n, 5%, 1600v, Polypropylene Only | | |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 | | with 5445 (JF0501-21835) Layer Wound | 2222 | 375 90156 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 90586 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 91049 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | | |
| 2125 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | | pylene | 2022 | 330 00018 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90647 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91353 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 04740 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 31020 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 21050 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| | | | | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| | | | | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |

S = Safety Part Be sure to use exact replacement part.

27LT220L/17 (continued)

| | | | | | | |
|------|--|----------------|--------|--|--|----------------|
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 | |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 | |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 | |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 | |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 | |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 | |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 | |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 | |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 | |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3452 | Res, 5K6, 1%, 3/5W, Metal Film Only wit | h 5445 (JF0501-21835) Layer Wound. . . | 2312 915 15602 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3452 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 | |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3454 | Res, 2K, 1%, 3/5W, Metal Film Only with | 5445 (JF0501-21835) Layer Wound. . . . | 2312 915 12002 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film | 2312 915 13902 | |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 | |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 | |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 | |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 | |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 | |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 | |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | |
| 3123 | Wire Jumper. | 3198 036 90010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | |
| 3124 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 | |
| 3125 | Wire Jumper. | 3198 036 90010 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 | |
| 3126 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 33390 | |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | |
| 3182 | Wire Jumper. | 3198 036 90010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 | |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 | |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass. . | 3198 021 31230 | |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 | |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 | |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 | |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 | |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3507 | Surge Protector. | 2422 549 43073 | |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 | |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 | |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . | 3198 021 51220 | |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 | |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 | |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 021 55630 | |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 | |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 | |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 | |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 | |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. . | 3198 021 54720 | |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. . | 3198 021 51520 | |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | |
| 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. . | 3198 021 36840 | | | | |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | | | | |

S = Safety Part Be sure to use exact replacement part.

27LT220L/17 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. | 2322 | 730 | 61274 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51530 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51030 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51230 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52220 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53320 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51520 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (JF0501-21835) Layer W | | | |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | | ound | 2422 | 531 | 02611 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (1342.0043B). | 2422 | 531 | 02506 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5457 | Coil, 42u. | 2422 | 535 | 94865 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31530 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31220 | 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 6181 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 38220 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4128 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4604 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |

27LT220L/17 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|-------------------------|------|-----|-------|
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 | 010 | 10620 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 | 010 | 21590 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 | 010 | 23390 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 | 020 | 52290 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 | 020 | 51090 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 | 849 | 10215 | 9611 | Coil, 27u, 10%. | 3198 | 018 | 22790 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 | 247 | 60133 | 9617 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 | 185 | 69682 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I. | 4835 | 310 | 57622 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 | 713 | 37112 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 | 020 | 40110 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 | 020 | 43530 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 | 547 | 00215 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 | 020 | 43430 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9647 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 | 140 | 14667 | 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 | 020 | 40030 | 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 | 310 | 10215 | 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, LE33CZ. | 9322 | 106 | 11676 | 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 | 547 | 00215 | 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C16-WBN6. | 9322 | 147 | 25682 | 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 | 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 7901 | IC, AN7522N PH. | 9322 | 181 | 41682 | 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9104 | Wire Jumper. | 3198 | 036 | 90010 | 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9123 | Wire Jumper. | 3198 | 036 | 90010 | 9672 | Coil, 22u, 10%. | 3198 | 018 | 22290 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 | 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9173 | Wire Jumper. | 3198 | 036 | 90010 | 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9181 | Wire Jumper. | 3198 | 036 | 90010 | 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9182 | Wire Jumper. | 3198 | 036 | 90010 | 9678 | Coil, 22u, 10%. | 3198 | 018 | 22290 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9192 | Wire Jumper. | 3198 | 036 | 90010 | 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9193 | Wire Jumper. | 3198 | 036 | 90010 | 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9311 | Wire Jumper. | 3198 | 036 | 90010 | 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9312 | Wire Jumper. | 3198 | 036 | 90010 | 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9406 | Wire Jumper. | 3198 | 036 | 90010 | 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9407 | Wire Jumper. | 3198 | 036 | 90010 | 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9408 | Wire Jumper. | 3198 | 036 | 90010 | 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9409 | Wire Jumper. | 3198 | 036 | 90010 | 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9410 | Wire Jumper. | 3198 | 036 | 90010 | 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9411 | Wire Jumper. | 3198 | 036 | 90010 | 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9412 | Wire Jumper. | 3198 | 036 | 90010 | 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9413 | Wire Jumper. | 3198 | 036 | 90010 | 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9415 | Wire Jumper. | 3198 | 036 | 90010 | 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9416 | Wire Jumper. | 3198 | 036 | 90010 | 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9417 | Wire Jumper. | 3198 | 036 | 90010 | 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9418 | Wire Jumper. | 3198 | 036 | 90010 | 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9419 | Wire Jumper. | 3198 | 036 | 90010 | 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9421 | Wire Jumper. | 3198 | 036 | 90010 | 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9422 | Wire Jumper. | 3198 | 036 | 90010 | 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9423 | Wire Jumper. | 3198 | 036 | 90010 | 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9425 | Wire Jumper. | 3198 | 036 | 90010 | 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9427 | Wire Jumper. | 3198 | 036 | 90010 | 9837 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part. Be sure to use exact replacement part.

27LT220L/17 (continued)

| | | | | | | | | | |
|------|--|------|-----|-------|-------|--|------|-----|-------|
| 9838 | Wire Jumper. | 3198 | 036 | 90010 | AC20D | Nameplate. | 3135 | 015 | 03571 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 | AC20E | Power Button | 3139 | 124 | 26444 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | AC22 | Cinch Cover. | 3139 | 124 | 25551 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9919 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9920 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 | 127 | 27372 | | | | | |
| CBA | Main Chassis Assembly. | 3139 | 187 | 26841 | | | | | |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | | |
|---|-------|--|------|-----|-------|
| S | AC01 | AC Cord. | 3135 | 010 | 07161 |
| | AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| | AC05 | Cabinet Back | 3139 | 124 | 45271 |
| S | AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| | AC10 | Customer Control Buttons | 3139 | 124 | 30901 |
| S | AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| | AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| | AC20 | Cabinet Front Assembly | 3121 | 237 | 52392 |
| | AC20A | Cabinet Front. | 3135 | 127 | 50011 |
| | AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| | AC20B | Chassis Guide. | 3139 | 124 | 41711 |
| | AC20C | Light Guide. | 3139 | 124 | 26461 |

S = Safety Part Be sure to use exact replacement part.

27LT621L/17 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | Main Chassis Parts | | | |
|--------------------|--|------|-----------|--------------------|--|------|-----------|
| 0211 | 2 Pin Connector. | 2422 | 025 16374 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . . | 2020 | 558 90445 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 2020 | 021 90552 |
| 0214 | 5 Pin Connector. | 2422 | 025 12481 | 2402 | Cap, 470p, 10%, 500v, Ceramic . . . | 3198 | 019 44710 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 | 2404 | Cap, 47u, 20%, 50v, Electrolytic . . . | 3198 | 025 54790 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 | 025 32210 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2415 | Cap, 330p, 5%, 50v, Ceramic | 3198 | 016 03310 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 | 025 51080 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic . . . | 3198 | 017 24730 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 | 025 51080 |
| 0239 | 3 Pin Connector. | 2422 | 025 16382 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. . . | 2020 | 021 91139 |
| 0240 | 7 Pin Connector. | 2422 | 025 11244 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 | 014 02230 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 01810 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2455 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 | 025 34790 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2457 | Cap, 360n, 5%, 250v, Metalized Polypropylene. | 2022 | 333 00163 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. . . | 2020 | 021 91331 |
| 0251 | 3 Pin Connector. | 2422 | 020 00725 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 0259 | 5 Pin Connector. | 2422 | 025 15848 | S 2463 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 0262 | 3 Pin Connector. | 2422 | 025 16937 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 | 479 90042 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene . . | 2020 | 301 90255 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 | 347 90219 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2468 | Cap, 27n, 10%, 400v, Polyester | 2222 | 347 90232 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 | 365 75154 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 | 365 75104 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 | 543 00842 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 51090 | 2480 | Cap, 47u, 20%, 25v, Electrolytic . . . | 2020 | 021 90586 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 | 025 24710 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 41040 | 2482 | Cap, 120n, 5%, 250v, Metalized Polypropylene. | 2222 | 479 90051 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 31010 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. . . | 2020 | 021 90856 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. . . | 2020 | 021 91577 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 24740 | 2487 | Cap, 47u, 20%, 50v, Electrolytic . . . | 2020 | 021 90854 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic . . | 2020 | 021 91049 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. . . | 2020 | 021 91577 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 51090 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 | 330 00018 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 51090 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2503 | Cap, 470u, 20%, 200v, Electrolytic . . | 2020 | 024 90647 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2125 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 22250 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2521 | Cap, 22u, 20%, 50v, Electrolytic . . . | 3198 | 025 52290 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 22250 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 22250 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 22250 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic . . | 2020 | 021 91654 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 42240 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 | 025 54780 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic . . . | 2020 | 021 91353 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 41050 | 2567 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 | 025 34790 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 | 017 44740 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 | 025 51080 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic . . . | 3198 | 028 24790 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic . . . | 3198 | 025 52290 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 22240 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 | 026 21020 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 42240 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 41050 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 41050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 41050 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 31020 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 42240 | 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 | 017 44740 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 | 026 21020 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 41050 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 21050 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 42240 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 | 025 52280 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 22250 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 22250 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 | 016 31080 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 | 016 31080 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 | 368 90177 | 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 34790 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . | 2020 | 558 90445 | 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 34710 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. . . | 2020 | 012 93495 | 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 32210 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 | 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 | 2837 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 | 025 54780 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 | 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 41040 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 21040 | 2841 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 51090 |

S = Safety Part Be sure to use exact replacement part.

27LT621L/17 (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2910 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 2911 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3124 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3126 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2120 101 74158 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 32290 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3507 | Surge Protector. | 2422 549 43073 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 |
| 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 |
| 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 |
| 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 |
| 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 | 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 |

S = Safety Part Be sure to use exact replacement part.

27LT621L/17 (continued)

| | | | | | |
|------|---|----------------|--------|--|----------------|
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 5341 | Coil, 22u, 10% | 2422 535 97333 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5342 | Coil, 3u9, 10% | 2422 535 97323 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | S 5445 | Transformer, LOT | 2422 531 02574 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5451 | Coil, 22u, 10% | 3198 018 72290 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 5457 | Coil, 25u. | 2422 535 91028 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5480 | Coil, 47u, 10% | 2422 535 97337 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | S 5501 | Mains Filter | 2422 549 43432 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5521 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5560 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5562 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 5564 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5831 | Coil, 6u8, 5% | 3198 018 16880 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 5832 | Coil, 6u8, 5% | 3198 018 16880 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5833 | Coil, 6u8, 5% | 3198 018 16880 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5835 | Coil, 12u, 10% | 3198 018 31290 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6401 | Zener Diode, 47 volt | 3198 010 24790 |
| 4128 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6460 | Diode, Rect, BY228/24. | 9340 559 50112 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4604 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6464 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6465 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6466 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6467 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6468 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6469 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6470 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6476 | Zener Diode, 15 volt | 3198 010 21590 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6485 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6487 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6500 | Diode, Bridge Rect, GBU6JL-7002. . . . | 9322 138 08667 |
| 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6520 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6523 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6524 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6525 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6526 | Zener Diode, 22 volt | 3198 020 52290 |
| 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6541 | Zener Diode, 10 volt | 3198 020 51090 |
| 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 |
| 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6563 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6565 | Diode, Signal, BAV70 | 9331 849 10215 |

S = Safety Part Be sure to use exact replacement part.

27LT621L/17 (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9528 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9530 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9612 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9613 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I | 4835 310 57626 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, IR. | 9322 053 35687 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PDTCL43ZT | 9340 547 00215 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9642 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9647 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PDTCL14ET | 9340 310 10215 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9655 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, LE33CZ | 9322 106 11676 | 9656 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PDTCL43ZT | 9340 547 00215 | 9657 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9658 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C16-WBN6. | 9322 147 25682 | 9659 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PDTCL43ZT | 9340 547 00215 | 9660 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9661 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 187 89682 | 9662 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9124 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9125 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9685 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9689 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9690 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9691 | Wire Jumper. | 3198 036 90010 |
| 9414 | Wire Jumper. | 3198 036 90010 | 9694 | Wire Jumper. | 3198 036 90010 |
| 9415 | Wire Jumper. | 3198 036 90010 | 9695 | Wire Jumper. | 3198 036 90010 |
| 9416 | Wire Jumper. | 3198 036 90010 | 9697 | Wire Jumper. | 3198 036 90010 |
| 9417 | Wire Jumper. | 3198 036 90010 | 9698 | Wire Jumper. | 3198 036 90010 |
| 9418 | Wire Jumper. | 3198 036 90010 | 9699 | Wire Jumper. | 3198 036 90010 |
| 9419 | Wire Jumper. | 3198 036 90010 | 9821 | Wire Jumper. | 3198 036 90010 |
| 9421 | Wire Jumper. | 3198 036 90010 | 9822 | Wire Jumper. | 3198 036 90010 |
| 9422 | Wire Jumper. | 3198 036 90010 | 9825 | Wire Jumper. | 3198 036 90010 |
| 9423 | Wire Jumper. | 3198 036 90010 | 9828 | Wire Jumper. | 3198 036 90010 |
| 9424 | Wire Jumper. | 3198 036 90010 | 9829 | Wire Jumper. | 3198 036 90010 |
| 9425 | Wire Jumper. | 3198 036 90010 | 9831 | Wire Jumper. | 3198 036 90010 |
| 9426 | Wire Jumper. | 3198 036 90010 | 9832 | Wire Jumper. | 3198 036 90010 |
| 9427 | Wire Jumper. | 3198 036 90010 | 9837 | Wire Jumper. | 3198 036 90010 |
| 9453 | Wire Jumper. | 3198 036 90010 | 9838 | Wire Jumper. | 3198 036 90010 |
| 9460 | Wire Jumper. | 3198 036 90010 | 9839 | Wire Jumper. | 3198 036 90010 |
| 9463 | Wire Jumper. | 3198 036 90010 | 9846 | Wire Jumper. | 3198 036 90010 |
| 9500 | Wire Jumper. | 3198 036 90010 | 9847 | Wire Jumper. | 3198 036 90010 |
| 9501 | Wire Jumper. | 3198 036 90010 | 9849 | Wire Jumper. | 3198 036 90010 |
| 9503 | Wire Jumper. | 3198 036 90010 | 9851 | Wire Jumper. | 3198 036 90010 |
| 9506 | Wire Jumper. | 3198 036 90010 | 9856 | Wire Jumper. | 3198 036 90010 |
| 9507 | Wire Jumper. | 3198 036 90010 | 9858 | Wire Jumper. | 3198 036 90010 |
| 9510 | Wire Jumper. | 3198 036 90010 | 9859 | Wire Jumper. | 3198 036 90010 |
| 9511 | Wire Jumper. | 3198 036 90010 | 9860 | Wire Jumper. | 3198 036 90010 |
| 9512 | Wire Jumper. | 3198 036 90010 | 9862 | Wire Jumper. | 3198 036 90010 |
| 9513 | Wire Jumper. | 3198 036 90010 | 9864 | Wire Jumper. | 3198 036 90010 |
| 9514 | Wire Jumper. | 3198 036 90010 | 9865 | Wire Jumper. | 3198 036 90010 |
| 9515 | Wire Jumper. | 3198 036 90010 | 9867 | Wire Jumper. | 3198 036 90010 |
| 9516 | Wire Jumper. | 3198 036 90010 | 9868 | Wire Jumper. | 3198 036 90010 |
| 9518 | Wire Jumper. | 3198 036 90010 | 9869 | Wire Jumper. | 3198 036 90010 |
| 9520 | Wire Jumper. | 3198 036 90010 | 9873 | Wire Jumper. | 3198 036 90010 |
| 9521 | Wire Jumper. | 3198 036 90010 | 9874 | Wire Jumper. | 3198 036 90010 |
| 9522 | Wire Jumper. | 3198 036 90010 | 9875 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

27LT621L/17 (continued)

| | | | | |
|------|--|------|-----|-------|
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 | 127 | 27374 |
| CBA | Main Chassis Assembly. | 3139 | 188 | 04101 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR. | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly. | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0232 | Headphone Jack. | 2422 | 026 | 04747 |
| 0250 | A/V Jack. | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part Be sure to use exact replacement part.

| | | | | |
|------|-----------------------------------|------|-----|-------|
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly. | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 09191 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3088 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3089 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31520 |
| 4092 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 6092 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel. | 3139 | 187 | 10251 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|---|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 07161 |
| AC03 | Anode Lead Spacer (3 Used). | 3135 | 014 | 04471 |
| AC05 | Cabinet Back. | 3139 | 124 | 41812 |
| AC08 | Chassis Tray. | 3139 | 124 | 31325 |
| S AC09 | CRT, A68QCU754X73(N). | 9301 | 925 | 60527 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used). | 3139 | 124 | 31122 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly. | 3121 | 237 | 52922 |
| AC20A | Cabinet Front. | 3139 | 177 | 62041 |
| AC20C | Light Guide. | 3139 | 124 | 33811 |
| AC20D | Nameplate. | 3111 | 250 | 00571 |
| AC20F | Power Button Cover. | 3139 | 124 | 32921 |
| AC20G | Power Button Shaft. | 3139 | 124 | 32791 |
| AC20H | Speaker, 16 ohm, 5W (2 Used). | 3139 | 128 | 76071 |
| AC20J1 | Top Control Bracket. | 3139 | 124 | 33941 |
| AC20J3 | Top Control Cover. | 3139 | 124 | 31131 |
| AC20J4 | Top Control Rubber. | 3139 | 124 | 30391 |

27MS3404/17 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|--|------|-----|-------|--------|--|---|
| | Main Chassis Parts | | | | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 | 16269 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0212 | 2 Pin Connector. | 2422 | 025 | 16375 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0219 | 6 Pin Connector. | 2422 | 025 | 12482 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0220 | 5 Pin Connector. | 2422 | 025 | 04853 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | er. 2222 368 90177 |
| 0221 | 2 Pin Connector. | 2422 | 025 | 15503 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0222 | 2 Pin Connector. | 2422 | 025 | 10646 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0223 | A/V Jack | 2422 | 026 | 05236 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0225 | SVHS Jack. | 2422 | 026 | 04926 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0229 | 3 Pin Connector. | 2412 | 020 | 00725 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0243 | 6 Pin Connector. | 2422 | 025 | 04854 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0244 | 5 Pin Connector. | 2422 | 025 | 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0245 | 6 Pin Connector. | 2422 | 025 | 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0246 | 5 Pin Connector. | 2422 | 025 | 12481 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 | 80076 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0267 | 3 Pin Connector. | 2412 | 020 | 00725 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 0269 | Jack | 2422 | 026 | 05182 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| S 1000 | Tuner, V+U PLL | 2422 | 542 | 90141 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 | 44518 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 | 40807 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 | 10914 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | ylene. 2022 333 00086 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 | 07444 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1600 | Tact Switch. | 2422 | 128 | 02742 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1601 | Tact Switch. | 2422 | 128 | 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1602 | Tact Switch. | 2422 | 128 | 02742 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 333 00084 |
| 1603 | Tact Switch. | 2422 | 128 | 02742 | 2463 | Cap, 1nf, 10%, 2000v, Ceramic Only with | 5445 (JF0501-21835) Layer Wound. 2020 558 90487 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 | 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2020 558 90485 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 | 01203 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene | 2020 301 90251 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 | S 2465 | Cap, 12n, 5%, 1600v, Polypropylene Only | with 5445 (JF0501-21835) Layer Wound 2222 375 90156 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 | 98344 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 | 44730 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester | 2222 365 75154 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester | 2222 365 75104 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 | 24710 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 24740 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene 2022 330 00018 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 | 19852 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 | 54780 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 | 41050 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 | 44740 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 | 21020 | 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 | 04740 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 | 31010 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 | 34720 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 | 38210 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 | 31520 | 2619 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 21050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 | 41050 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 | 32220 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 | 76104 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 | 21020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | | | |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | | | |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 | 52280 | | | |

S = Safety Part Be sure to use exact replacement part.

27MS3404/17 (continued)

| | | | | | | |
|------|--|----------------|--------|---|--|----------------|
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 | |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. . . | 3198 025 54780 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 | |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 | |
| 2885 | Cap, 220n, 10%, 50v, Polyester. . . . | 3198 014 02240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 | |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 | |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 | |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 | |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 | |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 | |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 | |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3452 | Res, 5K6, 1%, 3/5W, Metal Film Only wit | h 5445 (JF0501-21835) Layer Wound. . . | 2312 915 15602 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3452 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 | |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3454 | Res, 2K, 1%, 3/5W, Metal Film Only with | 5445 (JF0501-21835) Layer Wound. . . | 2312 915 12002 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film. | 2312 915 13902 | |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 | |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 | |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 | |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 | |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 | |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 | |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 | |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 | |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 | |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 | |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 | |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 | |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 | |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 | |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 | |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3482 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 | |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 | |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 | |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 | |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 | |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 | |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass. . | 3198 021 31230 | |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 | |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 | |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 | |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 | |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3507 | Surge Protector. | 2422 549 43073 | |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 | |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 | |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . | 3198 021 51220 | |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 | |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03101 | |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 021 55630 | |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 012 11070 | |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 | |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | | | | |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | | | | |

S = Safety Part Be sure to use exact replacement part.

27MS3404/17 (continued)

| | | | | | |
|--------|--|----------------|--------|---|----------------|
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4127 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass . . | 2322 734 64702 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3681 | Res, 180 ohm, 1%, 1/8W, Metalized Glass | 2322 734 61801 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3682 | Res, 270 ohm, 1%, 1/8W, Metalized Glass | 2322 734 62701 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3683 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 734 63901 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3684 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 734 63901 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3686 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3687 | Res, 75 ohm, 1%, 1/8W, Metalized Glass | 2322 734 67509 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3688 | Res, 68 ohm, 1%, 1/8W, Metalized Glass | 2322 734 66809 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3689 | Res, 2K7, 1%, 1/8W, Metalized Glass . . | 2322 734 62702 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 021 31020 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5445 | Transformer, LOT (JF0501-21835) Layer W ound | 2422 531 02611 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5445 | Transformer, LOT (1342.0043B). | 2422 531 02506 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5451 | Coil, 33u, 10% | 3198 018 73390 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5457 | Coil, 42u. | 2422 535 94865 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 531 02478 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5471 | Coil, 3u3, 20% | 3198 018 73380 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5480 | Coil, 39u, 10% | 2422 535 97336 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . . | 3198 021 31530 | S 5501 | Mains Filter | 2422 549 43432 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . . | 3198 021 31220 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 021 31020 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . . | 3198 021 38220 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | | | |

S = Safety Part Be sure to use exact replacement part.

27MS3404/17 (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6335 | Diode, Signal, BAV21 | 3198 010 10070 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 001 80133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 | 9522 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9528 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9577H/N1/AI/1130. | 9352 731 51557 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9629 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1 | 9352 673 56112 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9184 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

27MS3404/17 (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 15081 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

S = Safety Part. Be sure to use exact replacement part.

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4823 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9155 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3141 | 058 | 81981 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 40513 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| AC10 | Customer Control Buttons | 3139 | 124 | 32701 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 45709 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 21741 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 40481 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 54861 |
| AC20A | Cabinet Front. | 3139 | 138 | 12621 |
| AC20C | Light Guide. | 3139 | 124 | 32671 |
| AC20D | Nameplate. | 3141 | 050 | 00401 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00371 |
| REMOTE | Remote Control Transmitter, RC1112813/1 | 3139 | 238 | 05781 |

27MS4504/17 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|---|----------------|
| | 2 Pin Connector. | 2422 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | |
| 0211 | 2 Pin Connector. | 2422 025 16375 | 2331 | er. | 2222 368 90177 |
| 0212 | 5 Pin Connector. | 2422 025 12481 | 2340 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0214 | 6 Pin Connector. | 2422 025 12482 | 2341 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0219 | 5 Pin Connector. | 2422 025 04853 | 2342 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 |
| 0220 | 2 Pin Connector. | 2422 025 15503 | 2343 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0221 | 2 Pin Connector. | 2422 025 10646 | 2344 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0222 | A/V Jack. | 2422 026 05236 | 2345 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0223 | SVHS Jack. | 2422 026 04926 | 2401 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2402 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 021 90552 |
| 0239 | 3 Pin Connector. | 2422 025 16382 | 2404 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2405 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 025 54790 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2415 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2416 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| S 0254 | 9 Pin CRT Socket. | 2422 500 80076 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 017 24730 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0269 | Jack. | 2422 026 05182 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| S 1000 | Tuner, V+U PLL. | 2422 542 90098 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 014 02230 |
| 1002 | SAW Filter, 45.75MHz. | 2422 549 44518 | 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 01810 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 549 40807 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2457 | Cap, 360n, 5%, 250v, Metalized Polyprop | |
| S 1510 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2458 | ylene. | 2022 333 00163 |
| 1650 | Crystal, 12MHz000. | 2422 543 01203 | 2459 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | 2460 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2462 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | S 2463 | Cap, 330n, 10%, 250v, MPP. | 2022 333 00084 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2464 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | | Cap, 2u2, 5%, 160v, Metalized Polypropy | |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | S 2465 | lene. | 2222 479 90042 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2466 | Cap, 15n, 5%, 1600v, Polypropylene. | 2020 301 90255 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2468 | Cap, 15n, 10%, 400v, Polyester. | 2222 347 90219 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2471 | Cap, 27n, 10%, 400v, Polyester. | 2222 347 90232 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2472 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2473 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2474 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2476 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2480 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2481 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2482 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | | Cap, 120n, 5%, 250v, Metalized Polyprop | |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2485 | ylene. | 2222 479 90051 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2486 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2487 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2488 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 021 90854 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2489 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 021 91049 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2491 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | S 2500 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | | Cap, 470n, 20%, 275v, Metalized Polypro | |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2501 | pylene. | 2022 330 00018 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2503 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2505 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 024 90647 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2507 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2508 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | S 2515 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2520 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2521 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2522 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | S 2523 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2525 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2527 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 2528 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2540 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 021 91654 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91353 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 014 04740 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 370 76104 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| | | | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |

S = Safety Part Be sure to use exact replacement part.

27MS4504/17 (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. | 3198 011 03330 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1/3W, Metal Film | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1/3W, Metal Film | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2120 101 74158 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . . | 3198 012 32290 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3507 | Surge Protector. | 2422 549 43073 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . . | 3198 013 02210 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 |

S = Safety Part Be sure to use exact replacement part.

27MS4504/17 (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 021 51020 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film | 3198 012 13370 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 021 54730 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 021 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 021 54720 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 021 51520 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 734 64702 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 730 61274 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 021 51530 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 021 51030 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 021 51020 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 021 51230 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 021 55620 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 021 52220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 021 55620 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 021 54730 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 011 04710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 011 06820 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 021 32220 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 021 51020 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 021 31020 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5341 | Coil, 22u. | 2422 535 97333 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | S 5445 | Transformer, LOT | 2422 531 02574 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5451 | Coil, 22u, 10% | 3198 018 72290 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | S 5457 | Coil, 25u. | 2422 535 91028 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass | 3198 021 31530 | 5480 | Coil, 27u, 10% | 3198 018 22790 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass | 3198 021 31220 | S 5501 | Mains Filter | 2422 549 43432 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 021 33320 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 021 31020 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 021 33320 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 021 33320 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass | 3198 021 38220 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6331 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6401 | Zener Diode, 47 volt | 3198 010 24790 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |

S = Safety Part Be sure to use exact replacement part.

27MS4504/17 (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 728 40557 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, IR. | 9322 053 35687 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PDMC143ZT | 9340 547 00215 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9624 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PDMC114ET | 9340 310 10215 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PDMC143ZT | 9340 547 00215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PDMC143ZT | 9340 547 00215 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEP4053BT. | 9333 729 60653 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9651 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9652 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

27MS4504/17 (continued)

| | | | | |
|------|--------------------------|------|-----|-------|
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9994 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis | 3141 | 058 | 58471 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | Front Interface Panel Parts | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |

S = Safety Part. Be sure to use exact replacement part.

| | | | | |
|--------|--|------|-----|-------|
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 09191 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3088 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31520 |
| 4092 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6092 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel. | 3139 | 187 | 10251 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|------------------|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
|--------|------------------|------|-----|-------|

27MS4504/17 (continued)

| | | | | |
|--------|--|------|-----|-------|
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 36763 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A68QCU754X73(N) | 9301 | 925 | 60527 |
| S AC12 | Degaussing Coil | 2422 | 549 | 45709 |
| AC13 | Front Interface Panel Bracket | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 21751 |
| AC19 | Side Jack Panel Bracket | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 54871 |
| AC20A | Cabinet Front | 3139 | 177 | 60011 |
| AC20C | Light Guide | 3139 | 124 | 33811 |
| AC20D | Nameplate | 3141 | 050 | 00391 |
| AC20F | Power Button Cover | 3139 | 124 | 32921 |
| AC20G | Power Button Shaft | 3139 | 124 | 32791 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00371 |
| AC20J1 | Top Control Bracket | 3139 | 124 | 30381 |
| AC20J3 | Top Control Cover | 3139 | 124 | 31131 |
| AC20J4 | Top Control Rubber | 3139 | 124 | 30391 |
| REMOTE | Remote Control Transmitter, RC1112813/1 | 3139 | 238 | 05781 |

27PT541S37A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|---|------|-----|-------|--------|--|---------------------------------|
| | Main Chassis Parts | | | | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 | 16269 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0212 | 2 Pin Connector. | 2422 | 025 | 16375 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0219 | 6 Pin Connector. | 2422 | 025 | 12482 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0220 | 5 Pin Connector. | 2422 | 025 | 04853 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | er. 2222 368 90177 |
| 0221 | 2 Pin Connector. | 2422 | 025 | 15503 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0222 | 2 Pin Connector. | 2422 | 025 | 10646 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0223 | A/V Jack | 2422 | 026 | 05236 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0225 | SVHS Jack. | 2422 | 026 | 04926 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0229 | 3 Pin Connector. | 2412 | 020 | 00725 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0243 | 6 Pin Connector. | 2422 | 025 | 04854 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0244 | 5 Pin Connector. | 2422 | 025 | 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 |
| 0245 | 6 Pin Connector. | 2422 | 025 | 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0246 | 5 Pin Connector. | 2422 | 025 | 12481 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 | 80076 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0267 | 3 Pin Connector. | 2412 | 020 | 00725 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 0269 | Jack | 2422 | 026 | 05182 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| S 1000 | Tuner, V+U PLL | 2422 | 542 | 90141 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 | 44518 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 | 40807 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 | 10914 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | ylene. 2022 333 00086 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 | 07444 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1600 | Tact Switch. | 2422 | 128 | 02742 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1601 | Tact Switch. | 2422 | 128 | 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1602 | Tact Switch. | 2422 | 128 | 02742 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 333 00084 |
| 1603 | Tact Switch. | 2422 | 128 | 02742 | 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2020 558 90485 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene | 2020 301 90251 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 | 01203 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 | 98344 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 | 44730 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 | 24710 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 24740 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene 2022 330 00018 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 | 19852 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 021 | 42240 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 | 54780 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 | 41050 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 | 44740 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 | 21020 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 | 04740 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 | 31010 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 016 | 38210 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 | 38210 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 | 31520 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 | 41050 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 | 32220 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 | 76104 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 | 21020 | 2864 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2865 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 | 52280 | | | |

S = Safety Part Be sure to use exact replacement part.

27PT541S37A (continued)

| | | | | | |
|------|---|----------------|--------|--|----------------|
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 014 02240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . . | 3198 026 21020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3452 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film | 2312 915 13902 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . . | 3198 021 38220 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3507 | Surge Protector. | 2422 549 43073 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . . | 3198 013 02210 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film | 2306 204 03101 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . . | 3198 021 54720 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 021 32730 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . . | 3198 021 51520 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . . | 2322 704 63903 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 734 64702 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . . | 2322 730 61274 |

S = Safety Part Be sure to use exact replacement part.

27PT541S37A (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|--|------|-----|-------|
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 | 012 | 13310 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3681 | Res, 180 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 61801 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3682 | Res, 270 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 62701 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 63901 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 63901 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3686 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3687 | Res, 75 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 67509 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3688 | Res, 68 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 66809 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3689 | Res, 2K7, 1%, 1/8W, Metalized Glass. . | 2322 | 734 | 62702 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (1342.0043B). | 2422 | 531 | 02506 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5457 | Coil, 42u. | 2422 | 535 | 94865 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 | 5521 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5560 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5562 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5564 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |

27PT541S37A (continued)

| | | | | | |
|--------|--|----------------|------|-------------------------|----------------|
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 001 80133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 010 21590 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 185 69682 | 9522 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9528 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9611 | Coil, 27u, 10%. | 3198 018 22790 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9577H/N1/AI/1130. | 9352 731 51557 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9629 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, BC337-25(COL). | 9340 310 10215 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH. | 9322 181 41682 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10%. | 3198 018 22290 |
| 9184 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10%. | 3198 018 22290 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9681 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9685 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9689 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9690 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

27PT541S37A (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 15081 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |

S = Safety Part Be sure to use exact replacement part.

| | | | | |
|------|---|------|-----|-------|
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9082 | 100 | 90002 |
| AC05 | Cabinet Back | 3139 | 124 | 35862 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| AC10 | Customer Control Buttons | 3139 | 124 | 32701 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 21351 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53601 |
| AC20A | Cabinet Front. | 3139 | 137 | 70561 |
| AC20C | Light Guide. | 3139 | 124 | 32671 |
| AC20D | Nameplate. | 3139 | 120 | 01291 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00371 |
| REMOTE | Remote Control Transmitter, RC19335004/01. | 3139 | 228 | 86464 |

27PT543F35A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|--|------|-----|-------|--------|--|--|
| | Main Chassis Parts | | | | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 | 16269 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0212 | 2 Pin Connector. | 2422 | 025 | 16375 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0219 | 6 Pin Connector. | 2422 | 025 | 12482 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0220 | 5 Pin Connector. | 2422 | 025 | 04853 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | er. 2222 368 90177 |
| 0221 | 2 Pin Connector. | 2422 | 025 | 15503 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0222 | 2 Pin Connector. | 2422 | 025 | 10646 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0223 | A/V Jack | 2422 | 026 | 05236 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0225 | SVHS Jack. | 2422 | 026 | 04926 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0229 | 3 Pin Connector. | 2412 | 020 | 00725 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0243 | 6 Pin Connector. | 2422 | 025 | 04854 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0244 | 5 Pin Connector. | 2422 | 025 | 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0245 | 6 Pin Connector. | 2422 | 025 | 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0246 | 5 Pin Connector. | 2422 | 025 | 12481 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 | 80076 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0267 | 3 Pin Connector. | 2412 | 020 | 00725 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 0269 | Jack | 2422 | 026 | 05182 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 | 90108 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 | 44518 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 | 48087 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 | 10914 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | ylene. 2022 333 00086 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 | 07444 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1600 | Tact Switch. | 2422 | 128 | 02742 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1601 | Tact Switch. | 2422 | 128 | 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1602 | Tact Switch. | 2422 | 128 | 02742 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 333 00084 |
| 1603 | Tact Switch. | 2422 | 128 | 02742 | 2463 | Cap, 1nf, 10%, 2000v, Ceramic Only with | 5445 (JF0501-21835) Layer Wound. 2020 558 90487 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 | 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2020 558 90485 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 | 01203 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene | 2020 301 90251 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 | S 2465 | Cap, 12n, 5%, 1600v, Polypropylene Only | with 5445 (JF0501-21835) Layer Wound. 2222 375 90156 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 | 98344 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 | 44730 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester | 2222 365 75154 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester | 2222 365 75104 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 | 24710 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 24740 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene 2022 330 00018 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 | 19852 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 | 54780 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 | 41050 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 | 44740 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 | 21020 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 | 04740 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 | 31010 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 | 34720 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 | 38210 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 | 31520 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 | 41050 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 | 32220 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 | 76104 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 | 21020 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | | | |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | | | |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 | 52280 | | | |

S = Safety Part Be sure to use exact replacement part.

27PT543F35A (continued)

| | | | | | | |
|------|--|----------------|--------|--|--|----------------|
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 | |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 | |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 | |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 | |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 | |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 | |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 | |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 | |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 | |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 | |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3452 | Res, 5K6, 1%, 3/5W, Metal Film Only wit | h 5445 (JF0501-21835) Layer Wound. . . | 2312 915 15602 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3452 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 | |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3454 | Res, 2K, 1%, 3/5W, Metal Film Only with | 5445 (JF0501-21835) Layer Wound. . . | 2312 915 12002 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film | 2312 915 13902 | |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 | |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 | |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 | |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 | |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 | |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 | |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 | |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 | |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 | |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 | |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 | |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 | |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 | |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 | |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 | |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | 3507 | Surge Protector. | 2422 549 43073 | |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 | |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 | |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 | |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 | |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass . | 3198 021 33340 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 | |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 | |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 | |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 | |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 | |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 | |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | | | | |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | | | | |

S = Safety Part Be sure to use exact replacement part.

27PT543F35A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|---|------|-----|-------|
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 | 734 | 64702 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 | 012 | 13310 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3681 | Res, 180 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 61801 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3682 | Res, 270 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 62701 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 63901 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 63901 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3686 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3687 | Res, 75 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 67509 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3688 | Res, 68 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 66809 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3689 | Res, 2K7, 1%, 1/8W, Metalized Glass. . | 2322 | 734 | 62702 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (JF0501-21835) Layer W | | | |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | | ound | 2422 | 531 | 02611 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (1342.0043B). | 2422 | 531 | 02506 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5457 | Coil, 42u. | 2422 | 535 | 94865 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 | 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |

S = Safety Part Be sure to use exact replacement part.

27PT543F35A (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 001 80133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 | 9522 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9528 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9577H/N1/AI | 9352 707 19557 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9629 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9184 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

27PT543F35A (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 59211 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)Net 1 Panel (part of Scan 4 Card Assembly)
ly)**Scan 4 Card (part of Scan 4 Card Assembly)**Scan 4 Card (part of Scan 4 Card Assembly)
ly)**Side Jack Panel Parts**

Side Jack Panel Parts

S = Safety Part Be sure to use exact replacement part.

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3121 | 237 | 52454 |
| S AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| AC10 | Customer Control Buttons | 3139 | 177 | 60751 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual, English. | 3121 | 235 | 20641 |
| AC17 | Owner's Manual, French | 3121 | 235 | 21271 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53071 |
| AC20A | Cabinet Front. | 3139 | 177 | 53551 |
| AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| AC20C | Light Guide. | 3139 | 124 | 35111 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 177 | 60761 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| REMOTE | Remote Control Transmitter, RC19335004/01. | 3139 | 228 | 86464 |

27PT543S37A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|---|------|-----------|--------|--|------|-----------|
| | Main Chassis Parts | | | | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 16269 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | | er. | 2222 | 368 90177 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 |
| 0229 | 3 Pin Connector. | 2412 | 020 00725 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2415 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 03310 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0269 | Jack | 2422 | 026 05182 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| S 1000 | Tuner, V+U PLL | 2422 | 542 90098 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 48087 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 | 014 01530 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | | |
| 1600 | Tact Switch. | 2422 | 128 02742 | | ylene. | 2022 | 333 00086 |
| 1601 | Tact Switch. | 2422 | 128 02742 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 1602 | Tact Switch. | 2422 | 128 02742 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 1603 | Tact Switch. | 2422 | 128 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 1606 | Tact Switch. | 2422 | 128 02742 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 | 333 00084 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | 2463 | Cap, 1nf, 10%, 2000v, Ceramic Only with | | |
| 1811 | 3 Pin Connector. | 2412 | 020 00725 | | 5445 (JF0501-21835) Layer Wound. | 2020 | 558 90487 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 | 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2020 | 558 90485 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene | 2020 | 301 90251 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | S 2465 | Cap, 12n, 5%, 1600v, Polypropylene Only | | |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | | with 5445 (JF0501-21835) Layer Wound | 2222 | 375 90156 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 | 347 90234 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 | 021 90854 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91049 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | | |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | | pylene | 2022 | 330 00018 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 | 024 90647 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 54780 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 | 021 91654 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91353 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 31020 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2619 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 21050 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| | | | | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| | | | | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |

S = Safety Part Be sure to use exact replacement part.

27PT543S37A (continued)

| | | | | | | |
|------|--|----------------|--------|---|--|----------------|
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 | |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. . . | 3198 025 54780 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 | |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 | |
| 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 014 02240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 | |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 | |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 | |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 | |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 | |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 | |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 | |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3452 | Res, 5K6, 1%, 3/5W, Metal Film Only wit | h 5445 (JF0501-21835) Layer Wound. . . | 2312 915 15602 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3452 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 | |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3454 | Res, 2K, 1%, 3/5W, Metal Film Only with | 5445 (JF0501-21835) Layer Wound. . . . | 2312 915 12002 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film. | 2312 915 13902 | |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 | |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 | |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 | |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 | |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 | |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 | |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 | |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 | |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 | |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 | |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 | |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 | |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 | |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 | |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 | |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3482 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 | |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 | |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 | |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 | |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 | |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 | |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 | |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 | |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 | |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3507 | Surge Protector. | 2422 549 43073 | |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 | |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 | |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 | |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 | |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 | |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03101 | |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 | |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 012 11070 | |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 | |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | | | | |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | | | | |

S = Safety Part Be sure to use exact replacement part.

27PT543S37A (continued)

| | | | | | |
|--------|--|----------------|--------|---|----------------|
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4127 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass . . | 2322 734 64702 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3681 | Res, 180 ohm, 1%, 1/8W, Metalized Glass | 2322 734 61801 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3682 | Res, 270 ohm, 1%, 1/8W, Metalized Glass | 2322 734 62701 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3683 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 734 63901 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3684 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 734 63901 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3686 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3687 | Res, 75 ohm, 1%, 1/8W, Metalized Glass | 2322 734 67509 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3688 | Res, 68 ohm, 1%, 1/8W, Metalized Glass | 2322 734 66809 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3689 | Res, 2K7, 1%, 1/8W, Metalized Glass . . | 2322 734 62702 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 021 31020 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5445 | Transformer, LOT (JF0501-21835) Layer W ound | 2422 531 02611 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5445 | Transformer, LOT (1342.0043B). | 2422 531 02506 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5451 | Coil, 33u, 10% | 3198 018 73390 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5457 | Coil, 42u. | 2422 535 94865 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 531 02478 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5471 | Coil, 3u3, 20% | 3198 018 73380 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5480 | Coil, 39u, 10% | 2422 535 97336 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 021 31530 | S 5501 | Mains Filter | 2422 549 43432 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 021 31220 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 021 31020 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | | | |

S = Safety Part Be sure to use exact replacement part.

27PT543S37A (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6335 | Diode, Signal, BAV21 | 3198 010 10070 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 | 9522 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9528 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9577H/N1/AI/1130. | 9352 731 51557 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PDTCL43ZT | 9340 547 00215 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9629 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1 | 9352 673 56112 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PDTCL14ET | 9340 310 10215 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PDTCL43ZT | 9340 547 00215 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9184 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

27PT543S37A (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 15081 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

S = Safety Part. Be sure to use exact replacement part.

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3121 | 237 | 52452 |
| S AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| AC10 | Customer Control Buttons | 3139 | 177 | 60751 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual, English. | 3121 | 235 | 20641 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53071 |
| AC20A | Cabinet Front. | 3139 | 177 | 53551 |
| AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| AC20C | Light Guide. | 3139 | 124 | 35111 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 177 | 60761 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| REMOTE | Remote Control Transmitter, RC19335004/01. | 3139 | 228 | 86463 |

27PT563S37A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|---|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0223 | A/V Jack. | 2422 026 05236 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 017 24730 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| S 0254 | 9 Pin CRT Socket. | 2422 500 80076 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| 0269 | Jack. | 2422 026 05182 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| S 1000 | Tuner, V+U PLL. | 2422 542 90141 | 2457 | Cap, 470n, 5%, 250v, Metalized Polypropylene. | 2022 333 00086 |
| 1002 | SAW Filter, 45.75MHz. | 2422 549 44518 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 549 40807 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 333 00084 |
| 1600 | Tact Switch. | 2422 128 02742 | 2463 | Cap, 1n, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound. | 2020 558 90487 |
| 1601 | Tact Switch. | 2422 128 02742 | 2463 | Cap, 680p, 10%, 2000v, Ceramic. | 2020 558 90485 |
| 1602 | Tact Switch. | 2422 128 02742 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene. | 2020 301 90251 |
| 1603 | Tact Switch. | 2422 128 02742 | S 2465 | Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound. | 2222 375 90156 |
| 1606 | Tact Switch. | 2422 128 02742 | 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 1660 | Crystal, 12MHz000. | 2422 543 01203 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 365 75154 |
| 1810 | 6 Pin Connector. | 2422 025 16607 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 365 75104 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 543 00842 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 347 90234 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 021 90854 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 021 91049 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 330 00018 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 024 90647 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 021 91654 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91353 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 014 04740 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 370 76104 | 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 368 90177 | | | |

S = Safety Part Be sure to use exact replacement part.

27PT563S37A (continued)

| | | | | | |
|------|---|----------------|--------|--|----------------|
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2910 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 2911 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3452 | Res, 5K6, 1%, 3/5W, Metal Film Only wit | |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | | h 5445 (JF0501-21835) Layer Wound. . . | 2312 915 15602 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3452 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3454 | Res, 2K, 1%, 3/5W, Metal Film Only with | |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | | 5445 (JF0501-21835) Layer Wound. . . . | 2312 915 12002 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film | 2312 915 13902 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . . | 3198 012 33390 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass . . . | 3198 021 31020 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3507 | Surge Protector. | 2422 549 43073 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 021 32730 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . . | 3198 021 54720 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . . | 2322 704 63903 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |

S = Safety Part Be sure to use exact replacement part.

27PT563S37A (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|---|------|-----|-------|
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass . . | 2322 | 734 | 64702 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51020 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 | 012 | 13310 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 53320 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | S 5445 | Transformer, LOT (JF0501-21835) Layer W | | | |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | | ound | 2422 | 531 | 02611 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (1342.0043B) | 2422 | 531 | 02506 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5457 | Coil, 42u. | 2422 | 535 | 94865 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 5810 | Coil, 10u, 10% | 3198 | 018 | 51090 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5831 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 5832 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 | 5833 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6333 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6335 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |

S = Safety Part Be sure to use exact replacement part.

27PT563S37A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|--------------------------|------|-----|-------|
| 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9312 | Wire Jumper. | 3198 | 036 | 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9406 | Wire Jumper. | 3198 | 036 | 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 | 9407 | Wire Jumper. | 3198 | 036 | 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9408 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9409 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9410 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9423 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9587H/N1/3I/0990. | 9352 | 725 | 47557 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9620 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9621 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 9633 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQFP9N50. | 9322 | 187 | 16687 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 | 310 | 10215 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9651 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 | 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 7803 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 7804 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 | 187 | 89682 | 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 7901 | IC, AN7522N PH | 9322 | 181 | 41682 | 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9101 | Wire Jumper. | 3198 | 036 | 90010 | 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 9102 | Wire Jumper. | 3198 | 036 | 90010 | 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 9103 | Wire Jumper. | 3198 | 036 | 90010 | 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9104 | Wire Jumper. | 3198 | 036 | 90010 | 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9123 | Wire Jumper. | 3198 | 036 | 90010 | 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 | 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9173 | Wire Jumper. | 3198 | 036 | 90010 | 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9175 | Wire Jumper. | 3198 | 036 | 90010 | 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9176 | Wire Jumper. | 3198 | 036 | 90010 | 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9178 | Wire Jumper. | 3198 | 036 | 90010 | 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9179 | Wire Jumper. | 3198 | 036 | 90010 | 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9181 | Wire Jumper. | 3198 | 036 | 90010 | 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9182 | Wire Jumper. | 3198 | 036 | 90010 | 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9192 | Wire Jumper. | 3198 | 036 | 90010 | 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9193 | Wire Jumper. | 3198 | 036 | 90010 | 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9311 | Wire Jumper. | 3198 | 036 | 90010 | 9679 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part Be sure to use exact replacement part.

27PT563S37A (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9682 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9863 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 |
| 9870 | Wire Jumper. | 3198 | 036 | 90010 |
| 9871 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9878 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 21101 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

| | | | | |
|-----------------------------|--|------|-----|-------|
| 2D 3 Line Comb Filter Parts | | | | |
| 0266 | 6 Pin Connector. | 2422 | 025 | 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic . . . | 3198 | 028 | 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 | 017 | 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 | 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 | 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 | 025 | 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2431 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |

S = Safety Part. Be sure to use exact replacement part.

| | | | | |
|------|---|------|-----|-------|
| 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2440 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 21090 |
| 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2450 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 21090 |
| 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31820 |
| 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 36820 |
| 3407 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 |
| 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. | 2122 | 118 | 05951 |
| 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 68202 |
| 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3457 | Wire Jumper. | 3198 | 036 | 90010 |
| 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4403 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 5401 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5407 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 5408 | Coil, 33u, 20% | 3198 | 018 | 33390 |
| 5421 | Inductor, 100 MHz, 120 ohm | 3198 | 018 | 90070 |
| 5425 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5428 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 5429 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5430 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5440 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5442 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 5450 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5452 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 7401 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7402 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7403 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7421 | IC, TC90A53N | 9322 | 182 | 18682 |
| 7440 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7444 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|--------------------------|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |

27PT563S37A (continued)

| | | | | |
|------|---|------|-----|-------|
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3121 | 237 | 53661 |
| S AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 20651 |
| AC18 | Quick Use Guide. | 3121 | 233 | 43471 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53081 |
| AC20A | Cabinet Front. | 3139 | 177 | 55961 |
| AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| AC20C | Light Guide. | 3139 | 124 | 43141 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3121 | 237 | 53341 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| AC29 | Plastic Facade | 3139 | 177 | 60071 |
| REMOTE | Remote Control Transmitter, RC19036001/ | | | |
| 01. | | 3139 | 228 | 86493 |

27PT633R37C - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|---|----------------|
| | 2 Pin Connector. | 2422 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | |
| 0211 | 2 Pin Connector. | 2422 025 16375 | 2331 | er. | 2222 368 90177 |
| 0212 | 5 Pin Connector. | 2422 025 12481 | 2340 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0214 | 6 Pin Connector. | 2422 025 12482 | 2341 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0219 | 5 Pin Connector. | 2422 025 04853 | 2342 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 |
| 0220 | 2 Pin Connector. | 2422 025 15503 | 2343 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2344 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0223 | A/V Jack. | 2422 026 05236 | 2345 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2401 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2402 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 021 90552 |
| 0239 | 3 Pin Connector. | 2422 025 16382 | 2404 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2405 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 025 54790 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2441 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2443 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2444 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 017 24730 |
| S 0254 | 9 Pin CRT Socket. | 2422 500 80076 | 2450 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2451 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| 0269 | Jack. | 2422 026 05182 | 2452 | Cap, 22n, 10%, 50v, Polyester. | 3198 014 02230 |
| S 1000 | Tuner, V+U PLL. | 2422 542 90098 | 2455 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 01810 |
| 1002 | SAW Filter, 45.75MHz. | 2422 549 44518 | 2457 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 549 40807 | 2458 | Cap, 360n, 5%, 250v, Metalized Polyprop | |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2459 | ylene. | 2022 333 00163 |
| S 1510 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2460 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1600 | Crystal, 12MHz000. | 2422 543 01203 | S 2463 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | 2464 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2465 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2466 | Cap, 2u2, 5%, 160v, Metalized Polypropy | |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | S 2465 | lene. | 2222 479 90042 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2466 | Cap, 15n, 5%, 1600v, Polypropylene. | 2020 301 90255 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2468 | Cap, 15n, 10%, 400v, Polyester. | 2222 347 90219 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2471 | Cap, 22n, 10%, 400v, Polyester. | 2222 347 90223 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2472 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2473 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2474 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2476 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2480 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2481 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2482 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2485 | Cap, 120n, 5%, 250v, Metalized Polyprop | |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2486 | ylene. | 2222 479 90051 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2487 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2488 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2489 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 021 90854 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2491 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 021 91049 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | S 2500 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2501 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2502 | Cap, 470n, 20%, 275v, Metalized Polypro | |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2503 | pylene. | 2022 330 00018 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2507 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2508 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 024 90647 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2515 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | S 2515 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2520 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2521 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2522 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | S 2523 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2525 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2527 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2528 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2540 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 2560 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2561 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2562 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 021 91654 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2563 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2564 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2567 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91353 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2568 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2581 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 014 04740 | 2590 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2601 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2602 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2606 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2607 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2608 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2609 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2611 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2612 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 370 76104 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2615 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2618 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2619 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |

S = Safety Part Be sure to use exact replacement part.

27PT633R37C (continued)

| | | | | | |
|------|---|----------------|--------|---|----------------|
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic | 2238 586 15626 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass . | 3198 021 34740 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass . | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic . . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film . . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic . . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic | 2238 586 15624 | 3401 | Res, 220K, 5%, 1/6W, Carbon Film . . . | 3198 011 02240 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass . . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass . | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03109 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass . | 3198 021 32240 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film | 2312 915 12002 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 02210 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film | 3198 011 03320 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass . | 3198 021 34740 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3472 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 021 31040 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass . | 3198 021 31540 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film | 3198 011 05620 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film | 2122 101 02083 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film | 3198 011 01030 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass . . . | 2322 734 61202 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film . . . | 3198 012 32290 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03910 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass . . . | 3198 021 51020 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film | 3198 011 02230 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass . . . | 3198 021 31020 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 021 31040 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | S 3504 | Res, PTC, 3 ohm, 144V | 2122 663 00019 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 05610 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass . . . | 2322 242 13155 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass . | 3198 021 33340 | 3507 | Surge Protector | 2422 549 43073 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . . | 3198 013 02210 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | S 3510 | Res, NTC, 4R7, 20%, 3W1 | 2122 612 00056 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 02710 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 05610 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film | 3198 011 04780 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass . . | 3198 021 53340 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass . . . | 3198 021 51020 |

S = Safety Part Be sure to use exact replacement part.

27PT633R37C (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 018 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 021 31020 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5341 | Coil, 22u. | 2422 535 97333 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5445 | Transformer, LOT | 2422 531 02574 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5451 | Coil, 22u, 10% | 3198 018 72290 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 018 90020 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5457 | Coil, 25u. | 2422 535 91028 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 021 31530 | 5480 | Coil, 47u, 10% | 2422 535 97337 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 021 31220 | S 5501 | Mains Filter | 2422 549 43432 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 018 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 018 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5562 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 018 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5564 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 018 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. . . . | 2312 915 11002 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6401 | Zener Diode, 47 volt | 3198 010 24790 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |

S = Safety Part Be sure to use exact replacement part.

27PT633R37C (continued)

| | | | | | |
|--------|--|----------------|------|-------------------------|----------------|
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 010 10070 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 010 10070 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 010 21590 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 728 40557 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9611 | Coil, 27u, 10%. | 3198 018 22790 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9624 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 310 10215 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEP4053BT. | 9333 729 60653 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH. | 9322 181 41682 | 9651 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9652 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10%. | 3198 018 22290 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

27PT633R37C (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9994 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 23231 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | Front Interface Panel Parts | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |

S = Safety Part. Be sure to use exact replacement part.

| | | | | |
|--------|--|------|-----|-------|
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 09191 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3088 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31520 |
| 4092 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6092 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel. | 3139 | 187 | 10251 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|------------------|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
|--------|------------------|------|-----|-------|

27PT633R37C (continued)

| | | | | |
|--------|--|------|-----|-------|
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 36763 |
| AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S AC09 | CRT, A68QCP893X001 | 9322 | 173 | 75682 |
| S AC12 | Degaussing Coil | 2422 | 549 | 43967 |
| AC13 | Front Interface Panel Bracket | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3139 | 124 | 31122 |
| AC17 | Owner's Manual | 3121 | 235 | 20661 |
| AC18 | Quick Use Guide | 3121 | 233 | 43481 |
| AC19 | Side Jack Panel Bracket | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53091 |
| AC20A | Cabinet Front | 3139 | 177 | 60011 |
| AC20C | Light Guide | 3139 | 124 | 33811 |
| AC20D | Nameplate | 3141 | 050 | 00161 |
| AC20F | Power Button Cover | 3139 | 124 | 32921 |
| AC20G | Power Button Shaft | 3139 | 124 | 32791 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00371 |
| AC20J1 | Top Control Bracket | 3139 | 124 | 33941 |
| AC20J3 | Top Control Cover | 3139 | 124 | 31131 |
| AC20J4 | Top Control Rubber | 3139 | 124 | 30391 |
| REMOTE | Remote Control Transmitter, RC19036002/ | | | |
| | 01. | 3139 | 228 | 88003 |

27PT643F35A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|---|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2331 | er. | 2222 368 90177 |
| 0214 | 5 Pin Connector. | 2422 025 12481 | 2340 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2341 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2342 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2343 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2344 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0223 | A/V Jack. | 2422 026 05236 | 2345 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2401 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2402 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 021 90552 |
| 0239 | 3 Pin Connector. | 2422 025 16382 | 2404 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2405 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 025 54790 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2415 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2416 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| S 0254 | 9 Pin CRT Socket. | 2422 500 80076 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 017 24730 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0269 | Jack. | 2422 026 05182 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| S 1000 | Tuner, V+U, PLL. | 2422 542 90108 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 014 02230 |
| 1002 | SAW Filter, 45.75MHz. | 2422 549 44518 | 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 01810 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 549 40807 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2457 | Cap, 360n, 5%, 250v, Metalized Polyprop | |
| S 1510 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2458 | ylene. | 2022 333 00163 |
| 1660 | Crystal, 12MHz000. | 2422 543 01203 | 2459 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | 2460 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | S 2463 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2464 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | | Cap, 2u2, 5%, 160v, Metalized Polypropy | |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | S 2465 | lene. | 2222 479 90042 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2466 | Cap, 15n, 5%, 1600v, Polypropylene. | 2020 301 90255 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2468 | Cap, 15n, 10%, 400v, Polyester. | 2222 347 90219 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2471 | Cap, 27n, 10%, 400v, Polyester. | 2222 347 90232 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2472 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2473 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2474 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2476 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2480 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2481 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2482 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | | Cap, 120n, 5%, 250v, Metalized Polyprop | |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2485 | ylene. | 2222 479 90051 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2486 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2487 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2488 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 021 90854 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2489 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 021 91049 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2491 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | S 2500 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | | Cap, 470n, 20%, 275v, Metalized Polypro | |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2501 | pylene. | 2022 330 00018 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2503 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2505 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 024 90647 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2507 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2508 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | S 2515 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2520 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2521 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2522 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | S 2523 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2525 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2527 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2528 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 2540 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 021 91654 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91353 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 014 04740 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 370 76104 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 021 21050 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| | | | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |

S = Safety Part Be sure to use exact replacement part.

27PT643F35A (continued)

| | | | | | |
|------|--|----------------|--------|---|----------------|
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic | 2238 586 15626 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass . | 3198 021 34740 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass . | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic . . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film . . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic . . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic | 2238 586 15624 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film . . . | 3198 011 03330 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass . . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass . | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01510 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03109 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass . | 3198 021 32240 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film | 2312 915 12002 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01510 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film | 3198 011 03320 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass . | 3198 021 34740 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01510 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01510 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 021 31040 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass . | 3198 021 31540 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film | 2120 101 74158 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film | 3198 011 05620 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film | 3198 011 01030 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film . . | 3198 012 32290 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass . . | 2322 734 61202 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film . | 3198 011 03910 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film | 3198 011 02230 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 021 31020 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | S 3504 | Res, PTC, 3 ohm, 144V | 2122 663 00019 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass . . | 2322 242 13155 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film . | 3198 011 05610 | 3507 | Surge Protector | 2422 549 43073 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass . | 3198 021 33340 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | S 3510 | Res, NTC, 4R7, 20%, 3W1 | 2122 612 00056 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film . | 3198 011 02710 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film . | 3198 011 05610 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film | 3198 011 04780 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass . | 3198 021 53340 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3524 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |

S = Safety Part Be sure to use exact replacement part.

27PT643F35A (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . . | 3198 021 54720 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . . | 3198 021 51520 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 734 64702 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . . | 2322 730 61274 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . . | 3198 021 51530 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . . | 3198 021 51230 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 021 55620 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . . | 3198 021 52220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 021 55620 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 04710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5341 | Coil, 22u. | 2422 535 97333 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5342 | Coil, 3u9, 10% | 2422 535 97323 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5445 | Transformer, LOT | 2422 531 02574 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5451 | Coil, 22u, 10% | 3198 018 72290 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5457 | Coil, 25u. | 2422 535 91028 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . . | 3198 021 31530 | 5480 | Coil, 47u, 10% | 2422 535 97337 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . . | 3198 021 31220 | S 5501 | Mains Filter | 2422 549 43432 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5521 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5560 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5562 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5564 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . . | 3198 021 38220 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6331 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6401 | Zener Diode, 47 volt | 3198 010 24790 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6460 | Diode, Rect, BY228/24. | 9340 559 50112 |

27PT643F35A (continued)

| | | | | | | | | | |
|--------|----------------------------------|------|-----|-------|------|----------------|------|-----|-------|
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9414 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9423 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9424 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9426 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9463 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I | 9352 | 728 | 40557 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 7400 | Power FET, IR. | 9322 | 053 | 35687 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9617 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 9620 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9621 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1 | 9352 | 673 | 56112 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 | 310 | 10215 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9633 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9651 | Wire Jumper. | 3198 | 036 | 90010 |
| 7901 | IC, AN7522N PH | 9322 | 181 | 41682 | 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 9101 | Wire Jumper. | 3198 | 036 | 90010 | 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 9102 | Wire Jumper. | 3198 | 036 | 90010 | 9656 | Wire Jumper. | 3198 | 036 | 90010 |
| 9103 | Wire Jumper. | 3198 | 036 | 90010 | 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 9104 | Wire Jumper. | 3198 | 036 | 90010 | 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 9123 | Wire Jumper. | 3198 | 036 | 90010 | 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 | 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9173 | Wire Jumper. | 3198 | 036 | 90010 | 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 9175 | Wire Jumper. | 3198 | 036 | 90010 | 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 9176 | Wire Jumper. | 3198 | 036 | 90010 | 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9178 | Wire Jumper. | 3198 | 036 | 90010 | 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9179 | Wire Jumper. | 3198 | 036 | 90010 | 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9181 | Wire Jumper. | 3198 | 036 | 90010 | 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9182 | Wire Jumper. | 3198 | 036 | 90010 | 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9192 | Wire Jumper. | 3198 | 036 | 90010 | 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9193 | Wire Jumper. | 3198 | 036 | 90010 | 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9311 | Wire Jumper. | 3198 | 036 | 90010 | 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9312 | Wire Jumper. | 3198 | 036 | 90010 | 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9406 | Wire Jumper. | 3198 | 036 | 90010 | 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9407 | Wire Jumper. | 3198 | 036 | 90010 | 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9408 | Wire Jumper. | 3198 | 036 | 90010 | 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9409 | Wire Jumper. | 3198 | 036 | 90010 | 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9410 | Wire Jumper. | 3198 | 036 | 90010 | 9679 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part. Be sure to use exact replacement part.

27PT643F35A (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 59201 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR. | 9322 | 185 | 69682 |

S = Safety Part. Be sure to use exact replacement part.

| | | | | |
|------|---|------|-----|-------|
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly. | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0232 | Headphone Jack. | 2422 | 026 | 04747 |
| 0250 | A/V Jack. | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly. | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly. | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|---|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used). | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitt. | 9299 | 000 | 65263 |
| AC05 | Cabinet Back. | 3139 | 124 | 44711 |
| AC06 | Cabinet Back Screw Cover (2 Used). | 3139 | 124 | 39301 |
| AC08 | Chassis Tray. | 3139 | 124 | 31325 |
| S AC09 | CRT, A68QCU754X73(N). | 9301 | 925 | 60527 |

27PT643F35A (continued)

| | | | | |
|--------|---|------|-----|-------|
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3139 | 124 | 31122 |
| AC17 | Owner's Manual, English. | 3121 | 235 | 21091 |
| AC17 | Owner's Manual, French | 3121 | 235 | 21281 |
| AC18 | Quick Use Guide. | 3121 | 233 | 43491 |
| AC18 | Quick Use Guide, French. | 3121 | 233 | 44841 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53303 |
| AC20A | Cabinet Front. | 3139 | 177 | 58401 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 5W (2 Used). | 2422 | 264 | 00409 |
| AC20J | Top Control Assembly | 3139 | 138 | 11451 |
| REMOTE | Remote Control Transmitter, RC19036002/ 01A. | 3139 | 238 | 04312 |

27PT643R/37C - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | |
|--------------------|--|------|-----------|
| 0127 | Socket Fuse. | 2422 | 088 00271 |
| 0129 | NTC Holder. | 3139 | 120 10151 |
| 0136 | IC-Spring. | 3104 | 301 22081 |
| 0137 | Spring. | 3139 | 121 24583 |
| 0138 | IC-Spring. | 3104 | 301 22081 |
| 0139 | Spring for Bracket. | 3122 | 121 24786 |
| 0140 | Spring. | 3139 | 121 24583 |
| 0141 | IC-Spring. | 3104 | 301 22081 |
| 0152 | Cable, DIP, 6 Pin, 400mm. | 3104 | 301 09421 |
| 0153 | Cable, DIPMate, 5 Pin, 480mm. | 3139 | 121 07951 |
| 0211 | 2 Pin Connector. | 2422 | 025 16374 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 |
| 0214 | 5 Pin Connector. | 2422 | 025 12481 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 |
| 0223 | A/V Jack. | 2422 | 026 05236 |
| 0225 | SVHS Jack. | 2422 | 026 04926 |
| 0229 | 3 Pin Connector. | 2412 | 020 00725 |
| 0239 | 3 Pin Connector. | 2422 | 025 16382 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 |
| S 0254 | 9 Pin CRT Socket. | 2422 | 500 80076 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 |
| 0269 | Jack. | 2422 | 026 05182 |
| S 1000 | Tuner, V+U PLL. | 2422 | 542 90141 |
| 1002 | SAW Filter, 45.75MHz. | 2422 | 549 44518 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 | 549 40807 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 |
| 1660 | Crystal, 12MHz000. | 2422 | 543 01203 |
| 1811 | 3 Pin Connector. | 2412 | 020 00725 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 04740 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |

| | | | |
|--------|--|------|-----------|
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 | 370 76104 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 90020 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyest. | 2222 | 368 90177 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 |
| 2401 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 | 021 90552 |
| 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2404 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 | 025 54790 |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 03310 |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 | 014 02230 |
| 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 01810 |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2457 | Cap, 360n, 5%, 250v, Metalized Polypropylene. | 2022 | 333 00163 |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| S 2463 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 | 479 90042 |
| S 2465 | Cap, 15n, 5%, 1600v, Polypropylene. | 2020 | 301 90255 |
| 2466 | Cap, 15n, 10%, 400v, Polyester. | 2222 | 347 90219 |
| 2468 | Cap, 22n, 10%, 400v, Polyester. | 2222 | 347 90223 |
| 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 | 365 75154 |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 | 365 75104 |
| 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 90586 |
| 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2482 | Cap, 120n, 5%, 250v, Metalized Polypropylene. | 2222 | 479 90051 |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 91049 |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 | 330 00018 |
| 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90647 |
| 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91353 |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |

27PT643R/37C (continued)

| | | | | | |
|------|--|----------------|--------|---|----------------|
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3401 | Res, 220K, 5%, 1/6W, Carbon Film. | 3198 011 02240 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3403 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 915 18203 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . . . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . . . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. | 2306 204 03109 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 32240 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film. | 2312 915 15102 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 34730 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. . . | 3198 021 34740 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 915 13908 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 34730 | 3472 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 915 13908 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film. | 2312 915 12208 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 34730 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. | 3198 011 07590 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 31040 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . . . | 3198 021 52720 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 31540 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3482 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . . . | 3198 021 31520 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 31030 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . . | 3198 012 32290 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. | 2322 734 61202 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03910 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . . | 3198 021 51020 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 32230 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 021 31020 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 33330 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 31230 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass. . . . | 3198 021 51030 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . . | 2322 242 13155 |

S = Safety Part Be sure to use exact replacement part.

27PT643R/37C (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3507 | Surge Protector. | 2422 | 549 | 43073 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film | 3198 | 013 | 02210 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 | 612 | 00056 | 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02710 | 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51220 | 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04780 | 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53340 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film | 2306 | 204 | 03101 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55630 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 | 012 | 13370 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 | 730 | 61274 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51530 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51230 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 | 021 | 52220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5341 | Coil, 22u. | 2422 | 535 | 97333 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5342 | Coil, 3u9, 10% | 2422 | 535 | 97323 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT | 2422 | 531 | 02574 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 22u, 10% | 3198 | 018 | 72290 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5457 | Coil, 25u. | 2422 | 535 | 91028 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5480 | Coil, 47u, 10% | 2422 | 535 | 97337 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31530 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31220 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 38220 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |

S = Safety Part Be sure to use exact replacement part.

27PT643R/37C (continued)

| | | | | | |
|--------|--|----------------|------|-------------------------|----------------|
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | 9182 | Wire Jumper. | 3198 036 90010 |
| 6333 | Diode, Signal, BAV21. | 3198 010 10070 | 9183 | Wire Jumper. | 3198 036 90010 |
| 6335 | Diode, Signal, BAV21. | 3198 010 10070 | 9192 | Wire Jumper. | 3198 036 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6401 | Zener Diode, 47 volt. | 3198 010 24790 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt. | 3198 020 51090 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99. | 3198 010 10620 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6464 | Diode, Signal, BAS316. | 3198 010 10630 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 010 10070 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 010 10070 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 001 80133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 010 21590 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 728 40557 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9611 | Coil, 27u, 10%. | 3198 018 22790 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9624 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQFP9N50. | 9322 187 16687 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 310 10215 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH. | 9322 181 41682 | 9652 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

27PT643R/37C (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 23231 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |

| | | | | |
|--------|--|------|-----|-------|
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR. | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly. | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0232 | Headphone Jack. | 2422 | 026 | 04747 |
| 0250 | A/V Jack. | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly. | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |

S = Safety Part. Be sure to use exact replacement part.

27PT643R/37C (continued)

CBA Top Control Panel Assembly 3139 187 15841

Cabinet & Accessory Parts

| | | | | |
|--------|---|------|-----|-------|
| | Cabinet & Accessory Parts | | | |
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44711 |
| AC06 | Cabinet Back Screw Cover (2 Used) | 3139 | 124 | 39301 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A68QCP893X001 | 9322 | 173 | 75682 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3139 | 124 | 31122 |
| AC17 | Owner's Manual, English. | 3121 | 235 | 21091 |
| AC18 | Quick Use Guide. | 3121 | 233 | 43491 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53303 |
| AC20A | Cabinet Front. | 3139 | 177 | 58401 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 5W (2 Used). | 2422 | 264 | 00409 |
| AC20J | Top Control Assembly | 3139 | 177 | 56381 |
| REMOTE | Remote Control Transmitter, RC19036002/01A. | 3139 | 238 | 04313 |

27PT643R/97A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | |
|--------------------|--|------|-----------|
| | Socket Fuse. | 2422 | 088 00271 |
| 0127 | NTC Holder. | 3139 | 120 10151 |
| 0129 | IC-Spring. | 3104 | 301 22081 |
| 0136 | Spring. | 3139 | 121 24583 |
| 0137 | IC-Spring. | 3104 | 301 22081 |
| 0138 | Spring for Bracket. | 3122 | 121 24786 |
| 0139 | Spring. | 3139 | 121 24583 |
| 0140 | IC-Spring. | 3104 | 301 22081 |
| 0141 | Cable, DIP, 6 Pin, 400mm. | 3104 | 301 09421 |
| 0152 | Cable, DIPMate, 5 Pin, 480mm. | 3139 | 121 07951 |
| 0153 | 2 Pin Connector. | 2422 | 025 16374 |
| 0211 | 2 Pin Connector. | 2422 | 025 16375 |
| 0212 | 5 Pin Connector. | 2422 | 025 12481 |
| 0214 | 6 Pin Connector. | 2422 | 025 12482 |
| 0219 | 5 Pin Connector. | 2422 | 025 04853 |
| 0220 | 2 Pin Connector. | 2422 | 025 15503 |
| 0221 | 2 Pin Connector. | 2422 | 025 10646 |
| 0222 | A/V Jack. | 2422 | 026 05236 |
| 0223 | SVHS Jack. | 2422 | 026 04926 |
| 0225 | 3 Pin Connector. | 2412 | 020 00725 |
| 0229 | 3 Pin Connector. | 2422 | 025 16382 |
| 0239 | 6 Pin Connector. | 2422 | 025 04854 |
| 0243 | 5 Pin Connector. | 2422 | 025 04853 |
| 0244 | 6 Pin Connector. | 2422 | 025 04854 |
| 0245 | 5 Pin Connector. | 2422 | 025 12481 |
| 0246 | 9 Pin CRT Socket. | 2422 | 500 80076 |
| S 0254 | 3 Pin Connector. | 2412 | 020 00725 |
| 0267 | Jack. | 2422 | 026 05182 |
| 0269 | Tuner, V+U PLL. | 2422 | 542 90141 |
| S 1000 | SAW Filter, 45.75MHz. | 2422 | 549 44518 |
| 1002 | Filter, Ceramic, 4MHz5. | 2422 | 549 40807 |
| 1200 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 |
| S 1500 | Relay, 5 Amp, 12V. | 2422 | 132 07444 |
| S 1515 | Crystal, 12MHz000. | 2422 | 543 01203 |
| 1660 | 3 Pin Connector. | 2412 | 020 00725 |
| 1811 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 15090 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 04740 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |

| | | | |
|--------|--|------|-----------|
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 | 370 76104 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 90020 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | |
| | er. | 2222 | 368 90177 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 |
| 2401 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 | 021 90552 |
| 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2404 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 | 025 54790 |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2415 | Cap, 1n, 5%, 50v, Ceramic. | 3198 | 016 01020 |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 | 014 02230 |
| 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 01810 |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2457 | Cap, 360n, 5%, 250v, Metalized Polyprop | | |
| | ylene. | 2022 | 333 00163 |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| S 2463 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | | |
| | lene. | 2222 | 479 90042 |
| S 2465 | Cap, 15n, 5%, 1600v, Polypropylene. | 2020 | 301 90255 |
| 2466 | Cap, 15n, 10%, 400v, Polyester. | 2222 | 347 90219 |
| 2468 | Cap, 27n, 10%, 400v, Polyester. | 2222 | 347 90232 |
| 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | | |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | | |
| 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 90586 |
| 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2482 | Cap, 120n, 5%, 250v, Metalized Polyprop | | |
| | ylene. | 2222 | 479 90051 |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 91049 |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | | |
| | pylene. | 2022 | 330 00018 |
| 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90647 |
| 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91353 |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |

27PT643R/97A (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic. . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic. . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. . . . | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. . . . | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3403 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 915 18203 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film. | 2312 915 15102 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass. . . | 3198 021 34730 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film. | 2312 915 14708 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . . | 3198 021 34730 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film. | 2312 915 14708 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film. | 2312 915 12208 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . . | 3198 021 34730 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . . | 3198 021 52720 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2120 101 74158 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3482 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . . | 3198 021 31520 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31030 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . . | 3198 012 32290 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . . | 3198 021 51020 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . . | 3198 021 32230 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 31020 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . . | 3198 021 33330 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31230 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51030 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |

S = Safety Part Be sure to use exact replacement part.

27PT643R/97A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3507 | Surge Protector. | 2422 | 549 | 43073 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film | 3198 | 013 | 02210 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 | 612 | 00056 | 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02710 | 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51220 | 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04780 | 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53340 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film | 2306 | 204 | 03101 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55630 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 | 012 | 13370 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 | 730 | 61274 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51530 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51230 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 | 021 | 52220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5341 | Coil, 22u. | 2422 | 535 | 97333 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5342 | Coil, 3u9, 10% | 2422 | 535 | 97323 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT | 2422 | 531 | 02574 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 22u, 10% | 3198 | 018 | 72290 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5457 | Coil, 25u. | 2422 | 535 | 91028 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5480 | Coil, 47u, 10% | 2422 | 535 | 97337 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31530 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31220 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 38220 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |

S = Safety Part Be sure to use exact replacement part.

27PT643R/97A (continued)

| | | | | | |
|--------|--|----------------|------|-------------------------|----------------|
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | 9182 | Wire Jumper. | 3198 036 90010 |
| 6333 | Diode, Signal, BAV21. | 3198 010 10070 | 9183 | Wire Jumper. | 3198 036 90010 |
| 6335 | Diode, Signal, BAV21. | 3198 010 10070 | 9192 | Wire Jumper. | 3198 036 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6401 | Zener Diode, 47 volt. | 3198 010 24790 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt. | 3198 020 51090 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99. | 3198 010 10620 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6464 | Diode, Signal, BAS316. | 3198 010 10630 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 010 10070 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 010 10070 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 001 80133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 010 21590 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 728 40557 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9611 | Coil, 27u, 10%. | 3198 018 22790 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9624 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQFP9N50. | 9322 187 16687 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 310 10215 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH. | 9322 181 41682 | 9652 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

27PT643R/97A (continued)

| | | | | |
|------|--------------------------|------|-----|-------|
| 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis | 3141 | 058 | 58471 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 32210 |

| | | | | |
|--------|--|------|-----|-------|
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. . . . | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. . . . | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |

S = Safety Part. Be sure to use exact replacement part.

27PT643R/97A (continued)

CBA Top Control Panel Assembly 3139 187 15841

Cabinet & Accessory Parts

| | | | | |
|--------|---|------|-----|-------|
| | Cabinet & Accessory Parts | | | |
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44711 |
| AC06 | Cabinet Back Screw Cover (2 Used) | 3139 | 124 | 39301 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A68QCU754X73(N) | 9301 | 925 | 60527 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3139 | 124 | 31122 |
| AC17 | Owner's Manual, English. | 3121 | 235 | 21091 |
| AC18 | Quick Use Guide. | 3121 | 233 | 43491 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53303 |
| AC20A | Cabinet Front. | 3139 | 177 | 58401 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 5W (2 Used). | 2422 | 264 | 00409 |
| AC20J | Top Control Assembly | 3139 | 177 | 56381 |
| REMOTE | Remote Control Transmitter, RC19036002/01A. | 3139 | 238 | 04313 |

27PT643R37A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|---|--------------------------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | er. 2222 368 90177 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0214 | 5 Pin Connector. | 2422 025 12481 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0223 | A/V Jack. | 2422 026 05236 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 021 90552 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 0239 | 3 Pin Connector. | 2422 025 16382 | 2404 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 025 54790 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 017 24730 |
| S 0254 | 9 Pin CRT Socket. | 2422 500 80076 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| 0269 | Jack. | 2422 026 05182 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 014 02230 |
| S 1000 | Tuner, V+U PLL. | 2422 542 90098 | 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 01810 |
| 1002 | SAW Filter, 45.75MHz. | 2422 549 44518 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 549 40807 | 2457 | Cap, 360n, 5%, 250v, Metalized Polyprop | ylene. 2022 333 00163 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1600 | Crystal, 12MHz000. | 2422 543 01203 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | S 2463 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | lene. 2222 479 90042 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene. | 2020 301 90255 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2466 | Cap, 15n, 10%, 400v, Polyester. | 2222 347 90219 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2468 | Cap, 27n, 10%, 400v, Polyester. | 2222 347 90232 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2482 | Cap, 120n, 5%, 250v, Metalized Polyprop | ylene. 2222 479 90051 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 021 90854 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 021 91049 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene. 2022 330 00018 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 024 90647 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 021 91654 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91353 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 014 04740 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 370 76104 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | | | |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | | | |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | | | |

S = Safety Part Be sure to use exact replacement part.

27PT643R37A (continued)

| | | | | | |
|------|--|----------------|--------|---|----------------|
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. . . | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. . . . | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2120 101 74158 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 32290 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3507 | Surge Protector. | 2422 549 43073 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |

S = Safety Part Be sure to use exact replacement part.

27PT643R37A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film | 3198 | 012 | 13370 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. | 2322 | 730 | 61274 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51530 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51030 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51230 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32220 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5341 | Coil, 22u. | 2422 | 535 | 97333 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT | 2422 | 531 | 02574 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 22u, 10% | 3198 | 018 | 72290 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5457 | Coil, 25u. | 2422 | 535 | 91028 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31530 | 5480 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31220 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 38220 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |

S = Safety Part Be sure to use exact replacement part.

27PT643R37A (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 728 40557 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, IR. | 9322 053 35687 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9624 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQFPFN50. | 9322 187 16687 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9651 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9652 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

27PT643R37A (continued)

| | | | | |
|------|--------------------------|------|-----|-------|
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9994 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis | 3141 | 058 | 58471 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |

| | | | | |
|--------|--|------|-----|-------|
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S = Safety Part. Be sure to use exact replacement part.

27PT643R37A (continued)

| | | | | | |
|--------|--------|--|------|-----|-------|
| S | AC01 | AC Cord. | 3135 | 010 | 03831 |
| | AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| | AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| | AC05 | Cabinet Back | 3139 | 124 | 44711 |
| | AC06 | Cabinet Back Screw Cover (2 Used) | 3139 | 124 | 39301 |
| | AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S | AC09 | CRT, A68QCU754X73(N) | 9301 | 925 | 60527 |
| S | AC12 | Degaussing Coil | 2422 | 549 | 43967 |
| | AC13 | Front Interface Panel Bracket | 3139 | 124 | 32891 |
| | AC15 | Holder, Degaussing Coil (4 Used) | 3139 | 124 | 31122 |
| | AC17 | Owner's Manual, English | 3121 | 235 | 21091 |
| | AC19 | Side Jack Panel Bracket | 3139 | 124 | 37061 |
| | AC20 | Cabinet Front Assembly | 3121 | 237 | 53301 |
| | AC20A | Cabinet Front | 3139 | 177 | 58401 |
| | AC20C | Light Guide | 3139 | 124 | 39701 |
| | AC20D | Nameplate | 3141 | 050 | 00161 |
| | AC20E | Power Button | 3139 | 138 | 10881 |
| | AC20H | Speaker, 8 ohm, 5W (2 Used) | 2422 | 264 | 00409 |
| | AC20J | Top Control Assembly | 3139 | 138 | 11451 |
| | AC20J1 | Top Control Bracket | 3139 | 124 | 39802 |
| | AC20J2 | Top Control Buttons | 3139 | 124 | 39812 |
| REMOTE | | Remote Control Transmitter, RC19036002/ | | | |
| | | 01. | 3139 | 228 | 88003 |

27PT663R37A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | Main Chassis Parts | | |
|--------------------|--|----------------|--------------------|--|----------------|
| 0211 | 2 Pin Connector. | 2422 025 16374 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0214 | 5 Pin Connector. | 2422 025 12481 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 0223 | A/V Jack | 2422 026 05236 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0239 | 3 Pin Connector. | 2422 025 16382 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 014 02230 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 01810 |
| 0269 | Jack | 2422 026 05182 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| S 1000 | Tuner, V+U PLL | 2422 542 90141 | 2457 | Cap, 360n, 5%, 250v, Metalized Polypropylene. | 2022 333 00163 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | S 2463 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 479 90042 |
| 1810 | 6 Pin Connector. | 2422 025 16607 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene | 2020 301 90255 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 543 00842 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2468 | Cap, 27n, 10%, 400v, Polyester | 2222 347 90232 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 365 75154 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 365 75104 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2482 | Cap, 120n, 5%, 250v, Metalized Polypropylene. | 2222 479 90051 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 330 00018 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91374 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2604 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 368 90177 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 | 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 | 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 |

S = Safety Part Be sure to use exact replacement part.

27PT663R37A (continued)

| | | | | | |
|------|---|----------------|--------|--|----------------|
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic . . . | 3198 026 31020 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . . | 3198 021 38220 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass. . . | 3198 021 34730 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2120 101 74158 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 32290 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3507 | Surge Protector. | 2422 549 43073 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 021 32730 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . . | 2322 704 63903 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |

S = Safety Part Be sure to use exact replacement part.

27PT663R37A (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|--|------|-----|-------|
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass . . | 2322 | 734 | 64702 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51020 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3565 | Res, 220 ohm, 5%, 1W, Metal Film | 3198 | 012 | 12210 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film . . . | 2306 | 204 | 03109 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52240 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52240 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 08220 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 02220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 02220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 04710 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 08220 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film | 3198 | 011 | 06820 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31030 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32220 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5202 | Wire Jumper | 3198 | 036 | 90010 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51020 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5241 | Wire Jumper | 3198 | 036 | 90010 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 08220 | 5341 | Coil, 22u. | 2422 | 535 | 97333 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 | S 5445 | Transformer, LOT | 2422 | 531 | 02574 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5451 | Coil, 22u, 10% | 3198 | 018 | 72290 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 | S 5457 | Coil, 25u. | 2422 | 535 | 91028 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | 5480 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | S 5520 | Transformer, SS42202-00 B. | 2422 | 531 | 02562 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31040 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32220 | 5810 | Coil, 10u, 10% | 3198 | 018 | 51090 |
| 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 36820 | 5831 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3903 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 | 5832 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3905 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 | 5833 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3909 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32730 | 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 |
| 3910 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32730 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 08210 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6461 | Diode, Rect, RGP303-L7004. | 9338 | 617 | 60682 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |

S = Safety Part Be sure to use exact replacement part.

27PT663R37A (continued)

| | | | | | |
|--------|--|----------------|------|-------------------------|----------------|
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 010 21590 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6490 | Diode, Rect, BYD33J. | 9337 234 20133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 132 55667 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 175 70667 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1298. | 9352 742 85557 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9611 | Coil, 27u, 10%. | 3198 018 22790 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9627 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQFFN50. | 9322 187 16687 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 310 10215 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, PPTC143ZT. | 3198 010 42150 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7803 | IC, HEF4053BT. | 9333 729 60653 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7804 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L. | 9322 187 89682 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7580. | 9322 166 29682 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7903 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10%. | 3198 018 22290 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10%. | 3198 018 22290 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9681 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

27PT663R37A (continued)

| | | | | | | | | | |
|------|--------------------------------|------|-----|-------|------|--|------|-----|-------|
| 9682 | Wire Jumper. | 3198 | 036 | 90010 | 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 | 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 | 2440 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 | 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 | 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 | 2450 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 | 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 | 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 | 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 | 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 | 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31820 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 | 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 | 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 | 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 36820 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 | 3407 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31020 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 | 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 | 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. | 2122 | 118 | 05951 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 | 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 | 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 | 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 | 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 68202 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 | 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 | 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 | 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 | 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9863 | Wire Jumper. | 3198 | 036 | 90010 | 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | 3457 | Wire Jumper. | 3198 | 036 | 90010 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 | 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9870 | Wire Jumper. | 3198 | 036 | 90010 | 4403 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9871 | Wire Jumper. | 3198 | 036 | 90010 | 5401 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | 5407 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | 5408 | Coil, 33u, 20% | 3198 | 018 | 33390 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | 5421 | Inductor, 100 MHz, 120 ohm | 3198 | 018 | 90070 |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 | 5425 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | 5428 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 9878 | Wire Jumper. | 3198 | 036 | 90010 | 5429 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | 5430 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | 5440 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | 5442 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | 5450 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | 5452 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | 7401 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | 7402 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | 7403 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9923 | Wire Jumper. | 3198 | 036 | 90010 | 7421 | IC, TC90A53N | 9322 | 182 | 18682 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | 7440 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 | 7444 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 | 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 58611 | 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| | | | | | 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| | | | | | CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

| | | | | |
|------|--|------|-----|-------|
| | 2D 3 Line Comb Filter Parts | | | |
| 0266 | 6 Pin Connector. | 2422 | 025 | 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 | 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 028 | 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 | 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 | 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 | 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 | 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2431 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 |
| 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| | Front Interface Panel Parts | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |

27PT663R37A (continued)

| | | | | |
|------|--|------|-----|-------|
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

| | | | | |
|--------|--|------|-----|-------|
| AC20J2 | Top Control Buttons. | 3139 | 124 | 39812 |
| REMOTE | Remote Control Transmitter, RC19036002/ 01. | 3139 | 228 | 88003 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)
ly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44711 |
| AC06 | Cabinet Back Screw Cover (2 Used). . . | 3139 | 124 | 39301 |
| AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S AC09 | CRT, A68QCU754X73(N) | 9301 | 925 | 60527 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) . . . | 3139 | 124 | 31122 |
| AC17 | Owner's Manual | 3121 | 235 | 20671 |
| AC18 | Quick Use Guide. | 3121 | 233 | 43491 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53101 |
| AC20A | Cabinet Front. | 3139 | 177 | 58401 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76521 |
| AC20J | Top Control Assembly | 3139 | 138 | 11451 |
| AC20J1 | Top Control Bracket. | 3139 | 124 | 39802 |

S = Safety Part Be sure to use exact replacement part.

27PT663R37C - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16374 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0214 | 5 Pin Connector. | 2422 025 12481 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 0223 | A/V Jack | 2422 026 05236 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0239 | 3 Pin Connector. | 2422 025 16382 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 014 02230 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 01810 |
| 0269 | Jack | 2422 026 05182 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| S 1000 | Tuner, V+U PLL | 2422 542 90098 | 2457 | Cap, 360n, 5%, 250v, Metalized Polypropylene. | 2022 333 00163 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | S 2463 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 479 90042 |
| 1810 | 6 Pin Connector. | 2422 025 16607 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene | 2020 301 90255 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 543 00842 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2468 | Cap, 22n, 10%, 400v, Polyester | 2222 347 90223 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 365 75154 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 365 75104 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2482 | Cap, 120n, 5%, 250v, Metalized Polypropylene. | 2222 479 90051 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 330 00018 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91374 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2604 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 368 90177 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 | 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 | 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 |

S = Safety Part Be sure to use exact replacement part.

27PT663R37C (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3401 | Res, 220K, 5%, 1/6W, Carbon Film | 3198 011 02240 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic . . . | 3198 026 31020 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 32290 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3507 | Surge Protector. | 2422 549 43073 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |

S = Safety Part Be sure to use exact replacement part.

27PT663R37C (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass . . | 2322 | 734 | 64702 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51020 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3565 | Res, 220 ohm, 5%, 1W, Metal Film | 3198 | 012 | 12210 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film . . . | 2306 | 204 | 03109 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52240 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52240 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 08220 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 02220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 02220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 04710 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 08220 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film | 3198 | 011 | 06820 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5202 | Wire Jumper | 3198 | 036 | 90010 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51020 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5241 | Wire Jumper | 3198 | 036 | 90010 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 08220 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 5341 | Coil, 22u. | 2422 | 535 | 97333 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | S 5445 | Transformer, LOT | 2422 | 531 | 02574 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 5451 | Coil, 22u, 10% | 3198 | 018 | 72290 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 | S 5457 | Coil, 25u. | 2422 | 535 | 91028 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5480 | Coil, 47u, 10% | 2422 | 535 | 97337 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | S 5520 | Transformer, SS42202-00 B. | 2422 | 531 | 02562 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 36820 | 5810 | Coil, 10u, 10% | 3198 | 018 | 51090 |
| 3903 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 | 5831 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3905 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 | 5832 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3909 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32730 | 5833 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3910 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32730 | 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 |
| 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 08210 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |

S = Safety Part Be sure to use exact replacement part.

27PT663R37C (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6490 | Diode, Rect, BYD33J. | 9337 234 20133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 132 55667 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 175 70667 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1298. | 9352 742 85557 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9627 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7803 | IC, HEF4053BT. | 9333 729 60653 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7804 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 187 89682 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7580 | 9322 166 29682 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7903 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

27PT663R37C (continued)

| | | | | | |
|------|--------------------------------|----------------|------|--|----------------|
| 9681 | Wire Jumper. | 3198 036 90010 | 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9682 | Wire Jumper. | 3198 036 90010 | 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9685 | Wire Jumper. | 3198 036 90010 | 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9686 | Wire Jumper. | 3198 036 90010 | 2440 | Cap, 10u, 20%, 16v, Electrolytic | 3198 028 21090 |
| 9687 | Wire Jumper. | 3198 036 90010 | 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9688 | Wire Jumper. | 3198 036 90010 | 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9689 | Wire Jumper. | 3198 036 90010 | 2450 | Cap, 10u, 20%, 16v, Electrolytic | 3198 028 21090 |
| 9690 | Wire Jumper. | 3198 036 90010 | 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9691 | Wire Jumper. | 3198 036 90010 | 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9694 | Wire Jumper. | 3198 036 90010 | 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9695 | Wire Jumper. | 3198 036 90010 | 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9697 | Wire Jumper. | 3198 036 90010 | 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 021 31820 |
| 9698 | Wire Jumper. | 3198 036 90010 | 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 |
| 9699 | Wire Jumper. | 3198 036 90010 | 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9821 | Wire Jumper. | 3198 036 90010 | 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 021 36820 |
| 9822 | Wire Jumper. | 3198 036 90010 | 3407 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 9825 | Wire Jumper. | 3198 036 90010 | 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9828 | Wire Jumper. | 3198 036 90010 | 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. . | 2122 118 05951 |
| 9829 | Wire Jumper. | 3198 036 90010 | 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9831 | Wire Jumper. | 3198 036 90010 | 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9832 | Wire Jumper. | 3198 036 90010 | 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9837 | Wire Jumper. | 3198 036 90010 | 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 704 68202 |
| 9838 | Wire Jumper. | 3198 036 90010 | 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9839 | Wire Jumper. | 3198 036 90010 | 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9846 | Wire Jumper. | 3198 036 90010 | 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 9847 | Wire Jumper. | 3198 036 90010 | 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9849 | Wire Jumper. | 3198 036 90010 | 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 021 32720 |
| 9851 | Wire Jumper. | 3198 036 90010 | 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9856 | Wire Jumper. | 3198 036 90010 | 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9858 | Wire Jumper. | 3198 036 90010 | 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 9859 | Wire Jumper. | 3198 036 90010 | 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9860 | Wire Jumper. | 3198 036 90010 | 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 021 32720 |
| 9862 | Wire Jumper. | 3198 036 90010 | 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9863 | Wire Jumper. | 3198 036 90010 | 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 9864 | Wire Jumper. | 3198 036 90010 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9865 | Wire Jumper. | 3198 036 90010 | 3457 | Wire Jumper. | 3198 036 90010 |
| 9867 | Wire Jumper. | 3198 036 90010 | 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 9868 | Wire Jumper. | 3198 036 90010 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9869 | Wire Jumper. | 3198 036 90010 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9870 | Wire Jumper. | 3198 036 90010 | 4403 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9871 | Wire Jumper. | 3198 036 90010 | 5401 | Coil, 10u, 10% | 3198 018 31090 |
| 9873 | Wire Jumper. | 3198 036 90010 | 5407 | Coil, 33u, 5% | 3198 018 13390 |
| 9874 | Wire Jumper. | 3198 036 90010 | 5408 | Coil, 33u, 20% | 3198 018 33390 |
| 9875 | Wire Jumper. | 3198 036 90010 | 5421 | Inductor, 100 MHz, 120 ohm | 3198 018 90070 |
| 9876 | Wire Jumper. | 3198 036 90010 | 5425 | Coil, 10u, 10% | 3198 018 31090 |
| 9877 | Wire Jumper. | 3198 036 90010 | 5428 | Coil, 10u, 5% | 3198 018 11090 |
| 9878 | Wire Jumper. | 3198 036 90010 | 5429 | Coil, 10u, 10% | 3198 018 31090 |
| 9901 | Wire Jumper. | 3198 036 90010 | 5430 | Coil, 10u, 10% | 3198 018 31090 |
| 9902 | Wire Jumper. | 3198 036 90010 | 5440 | Coil, 10u, 10% | 3198 018 31090 |
| 9903 | Wire Jumper. | 3198 036 90010 | 5442 | Coil, 22u, 5% | 3198 018 12290 |
| 9904 | Wire Jumper. | 3198 036 90010 | 5450 | Coil, 10u, 10% | 3198 018 31090 |
| 9911 | Wire Jumper. | 3198 036 90010 | 5452 | Coil, 33u, 5% | 3198 018 13390 |
| 9913 | Wire Jumper. | 3198 036 90010 | 7401 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 9914 | Wire Jumper. | 3198 036 90010 | 7402 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9915 | Wire Jumper. | 3198 036 90010 | 7403 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9923 | Wire Jumper. | 3198 036 90010 | 7421 | IC, TC90A53N | 9322 182 18682 |
| 9991 | Wire Jumper. | 3198 036 90010 | 7440 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9993 | Wire Jumper. | 3198 036 90010 | 7444 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9996 | Wire Jumper. | 3198 036 90010 | 7450 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9997 | Wire Jumper. | 3198 036 90010 | 7454 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9998 | Wire Jumper. | 3198 036 90010 | 9401 | Wire Jumper. | 3198 036 90010 |
| CBA | Main Chassis Assembly. | 3139 177 26271 | 9402 | Wire Jumper. | 3198 036 90010 |
| | | | 9403 | Wire Jumper. | 3198 036 90010 |
| | | | CBA | 2D 3 Line Comb Filter Assembly | 3139 177 26561 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

| | | |
|-----------------------------|--|----------------|
| 2D 3 Line Comb Filter Parts | | |
| 0266 | 6 Pin Connector. | 2422 025 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 028 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2431 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 |
| 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

| | | |
|-----------------------------|--|----------------|
| Front Interface Panel Parts | | |
| S 0211 | 2 Pin Connector. | 2422 025 16268 |
| S 0212 | 2 Pin Connector. | 2422 025 16559 |
| 0214 | 5 Pin Connector. | 2422 025 06353 |
| 1606 | Tact Switch. | 2422 128 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 242 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 242 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 011 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 011 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 011 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 |

27PT663R37C (continued)

| | | | | | | | | | |
|------|--|------|-----|-------|-------------|---|------|-----|-------|
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 | AC20J1 | Top Control Bracket. | 3139 | 124 | 39802 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | AC20J2 | Top Control Buttons. | 3139 | 124 | 39812 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 | REMOTE | Remote Control Transmitter, RC19036002/ | | | |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 | 01. | | 3139 | 228 | 88003 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44711 |
| AC06 | Cabinet Back Screw Cover (2 Used). | 3139 | 124 | 39301 |
| AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S AC09 | CRT, A68QCP893X001 | 9322 | 173 | 75682 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3139 | 124 | 31122 |
| AC17 | Owner's Manual | 3121 | 235 | 20671 |
| AC18 | Quick Use Guide. | 3121 | 233 | 43491 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53101 |
| AC20A | Cabinet Front. | 3139 | 177 | 58401 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76521 |
| AC20J | Top Control Assembly | 3139 | 138 | 11451 |

S = Safety Part Be sure to use exact replacement part.

27ST110P/35 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|------------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2247 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0213 | 2 Pin Connector. | 2422 025 16374 | 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0217 | 6 Pin Connector. | 2422 025 12482 | 2250 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 |
| 0218 | A/V Jack | 2422 026 04742 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | er. |
| 0223 | A/V Jack | 2422 026 05236 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . | 2222 368 90177 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. . . | 2020 012 93495 |
| 0227 | 6 Pin Connector. | 2422 025 15849 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0240 | 7 Pin Connector. | 2422 025 11244 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0242 | 7 Pin Connector. | 2422 025 17042 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 21040 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . | 2020 558 90445 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 025 32210 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0259 | 5 Pin Connector. | 2422 025 15848 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic . . . | 3198 017 24730 |
| 0262 | 3 Pin Connector. | 2422 025 16937 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. . . . | 2020 021 91139 |
| 0280 | 4 Pin Connector. | 2422 025 12479 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | ylene. |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. . . . | 2022 333 00086 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 2020 021 91331 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1600 | Tact Switch. | 2422 128 02742 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 333 00084 |
| 1601 | Tact Switch. | 2422 128 02742 | S 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2252 712 95024 |
| 1602 | Tact Switch. | 2422 128 02742 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene . . | 2020 301 90251 |
| 1603 | Tact Switch. | 2422 128 02742 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 1606 | Tact Switch. | 2422 128 02742 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester | 2222 365 75154 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester | 2222 365 75104 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. . . . | 2020 021 90856 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 021 91577 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 2020 021 91049 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 021 91577 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 2022 330 00018 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2503 | Cap, 470u, 20%, 200v, Electrolytic . . . | 2020 024 90647 |
| 2123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2125 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2127 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2128 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2561 | Cap, 100u, 20%, 160v, Electrolytic . . . | 2020 021 91654 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . . | 3198 023 22240 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 021 21050 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . . | 3198 025 32210 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | | | |

S = Safety Part Be sure to use exact replacement part.

27ST110P/35 (continued)

| | | | | | |
|------|--|----------------|--------|---|----------------|
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic . . . | 3198 017 44740 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film . | 3198 011 08210 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 021 31020 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic | 2238 586 15626 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic | 3198 016 31510 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2869 | Cap, 68n, 10%, 50v, Polyester | 3198 014 06830 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2870 | Cap, 68n, 10%, 50v, Polyester | 3198 014 06830 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic | 3198 016 31510 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic | 2238 586 15626 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film . . | 2306 207 03109 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . | 3198 011 03390 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic . . . | 3198 025 24710 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic . . . | 3198 017 42240 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass . . | 3198 021 31050 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film . . . | 3198 011 01530 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film . . . | 3198 011 05620 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01810 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film . | 3198 011 08210 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic | 2238 586 15624 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03109 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic | 2238 586 15624 | 3452 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film | 2312 915 13902 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic | 3198 016 33310 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film . | 3198 011 02210 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film | 3198 011 03320 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 021 31020 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass . | 3198 021 32240 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass . | 3198 021 32240 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01510 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01510 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film | 2122 101 02083 |
| 3122 | Res, 680 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06810 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3123 | Res, 680 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06810 | 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3125 | Res, 680 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06810 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film . . | 3198 012 33390 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3182 | Wire Jumper | 3198 036 90010 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03910 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass . . | 2322 242 13335 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass . . | 2322 242 13335 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass . . | 2322 242 13155 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film | 3198 011 02230 | 3507 | Surge Protector | 2422 549 43073 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film . | 3198 011 02710 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film | 3198 011 04780 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 05610 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass . | 3198 021 33340 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 05610 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film | 3198 012 13370 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3223 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 08210 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass . . | 2322 734 64702 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3247 | Res, 680K, 5%, 1/16W, Metalized Glass . | 3198 021 36840 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 |

S = Safety Part Be sure to use exact replacement part.

27ST110P/35 (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|--|------|-----|-------|
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3558 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 | 012 | 13310 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 53320 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (1342.0043B). | 2422 | 531 | 02506 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5457 | Coil, 42u. | 2422 | 535 | 94865 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 | 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6181 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4126 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4128 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4181 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4604 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 |

27ST110P/35 (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9522 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6561 | Diode, Rect, SB340L-7010. | 9322 128 18682 | 9528 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9530 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9612 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9613 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9614 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9615 | Wire Jumper. | 3198 036 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 247 60133 | 9616 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 185 69682 | 9617 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9618 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9619 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I. | 4835 310 57622 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9634 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PDTCL143ZT. | 9340 547 00215 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9647 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PDTCL114ET. | 9340 310 10215 | 9657 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9658 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, LE33CZ. | 9322 106 11676 | 9659 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PDTCL143ZT. | 9340 547 00215 | 9660 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9661 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C16-WBN6. | 9322 147 25682 | 9662 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9663 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9664 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9665 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9666 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH. | 9322 181 41682 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9681 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9685 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9689 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9690 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9691 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9694 | Wire Jumper. | 3198 036 90010 |
| 9415 | Wire Jumper. | 3198 036 90010 | 9695 | Wire Jumper. | 3198 036 90010 |
| 9416 | Wire Jumper. | 3198 036 90010 | 9697 | Wire Jumper. | 3198 036 90010 |
| 9417 | Wire Jumper. | 3198 036 90010 | 9698 | Wire Jumper. | 3198 036 90010 |
| 9418 | Wire Jumper. | 3198 036 90010 | 9699 | Wire Jumper. | 3198 036 90010 |
| 9419 | Wire Jumper. | 3198 036 90010 | 9821 | Wire Jumper. | 3198 036 90010 |
| 9421 | Wire Jumper. | 3198 036 90010 | 9822 | Wire Jumper. | 3198 036 90010 |
| 9422 | Wire Jumper. | 3198 036 90010 | 9825 | Wire Jumper. | 3198 036 90010 |
| 9423 | Wire Jumper. | 3198 036 90010 | 9828 | Wire Jumper. | 3198 036 90010 |
| 9425 | Wire Jumper. | 3198 036 90010 | 9829 | Wire Jumper. | 3198 036 90010 |
| 9427 | Wire Jumper. | 3198 036 90010 | 9831 | Wire Jumper. | 3198 036 90010 |
| 9453 | Wire Jumper. | 3198 036 90010 | 9832 | Wire Jumper. | 3198 036 90010 |
| 9460 | Wire Jumper. | 3198 036 90010 | 9837 | Wire Jumper. | 3198 036 90010 |
| 9500 | Wire Jumper. | 3198 036 90010 | 9838 | Wire Jumper. | 3198 036 90010 |
| 9501 | Wire Jumper. | 3198 036 90010 | 9839 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

27ST110P/35 (continued)

| | | | | | | | | | |
|------|--|------|-----|-------|------|--|------|-----|-------|
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | 0210 | 0.01uF, 10%, 50 Volt, Polyester. | 2020 | 300 | 90573 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | 0210 | 40 Pin Socket. | 2422 | 549 | 13629 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | 0220 | 0.01uF, 10%, 50 Volt, Polyester. | 2020 | 300 | 90573 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 | 0220 | 10k, 5%, Metal Film. | 2322 | 187 | 53103 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | 0220 | Variable Inductor, 7MM, 24M576B, L3. | 2422 | 549 | 43232 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 | 0230 | 0.1uF, 10%, 50 Volt, Polyester. | 2020 | 300 | 90586 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 | 0230 | 47k, 5%, Metal Film. | 2322 | 187 | 53473 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | 0240 | 1pF, 0.25%, 50 Volt, NP0, Ceramic. | 2020 | 552 | 90576 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | 0240 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 | 0250 | 0.1uF, 10%, 50 Volt, Polyester. | 2020 | 300 | 90586 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | 0250 | 16K, 5%, Carbon. | 2120 | 101 | 74163 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | 0250 | IC, LM393N. | 9337 | 591 | 30682 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | 0260 | 0.1uF, 10%, 50 Volt, Polyester. | 2020 | 300 | 90586 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | 0260 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | 0270 | 0.1uF, 10%, 50 Volt, Polyester. | 2020 | 300 | 90586 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | 0270 | 10k, 5%, Metal Film. | 2322 | 187 | 53103 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | 0280 | 0.1uF, 10%, 50 Volt, Polyester. | 2020 | 300 | 90586 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | 0280 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 | 0290 | 0.1uF, 10%, 50 Volt, Polyester. | 2020 | 300 | 90586 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 | 0290 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | 0300 | 0.1uF, 10%, 50 Volt, Polyester. | 2020 | 300 | 90586 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | 0300 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | 0310 | 100uF, 20%, 25 Volt, Electrolytic. | 2020 | 012 | 92639 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | 0310 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 | 0320 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | 0320 | Transistor, Signal, BC557B. | 9332 | 026 | 20126 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | 0330 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | 0340 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | 0360 | 1k, 5%, Metal Film. | 2322 | 187 | 53102 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 | 0370 | 1k, 5%, Metal Film. | 2322 | 187 | 53102 |
| 9919 | Wire Jumper. | 3198 | 036 | 90010 | 0380 | 1k, 5%, Metal Film. | 2322 | 187 | 53102 |
| 9920 | Wire Jumper. | 3198 | 036 | 90010 | 0390 | 100 ohm, 5%, Metal Film. | 2322 | 187 | 53101 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | 0400 | 100 ohm, 5%, Metal Film. | 2322 | 187 | 53101 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | 0410 | 100 ohm, 5%, Metal Film. | 2322 | 187 | 53101 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | 0420 | 270K, 5%, Carbon. | 2120 | 101 | 74274 |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 | 127 | 27372 | 0430 | 24K, 5%, Carbon. | 2120 | 101 | 74243 |
| CBA | EPS Module (ITV). | 3139 | 137 | 22961 | 0440 | 100 ohm, 5%, Metal Film. | 2322 | 187 | 53101 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 26831 | 0450 | 10k, 5%, Metal Film. | 2322 | 187 | 53103 |
| CBA | Interface Panel (ITV). | 3139 | 188 | 04541 | CBA | Channel One Card Assembly. | 3135 | 127 | 10131 |

Channel One Card Parts

| | | | | |
|------------------------|---|------|-----|-------|
| Channel One Card Parts | | | | |
| 0010 | 4.7k, 5%, Metal Film. | 2322 | 187 | 53472 |
| 0010 | Transistor, Signal, BC547B. | 3198 | 020 | 40030 |
| 0020 | 4.7k, 5%, Metal Film. | 2322 | 187 | 53472 |
| 0020 | 0.1uF., 10%, 50 Volt, Polyester. | 3198 | 014 | 01040 |
| 0030 | 4.7k, 5%, Metal Film. | 2322 | 187 | 53472 |
| 0030 | 100pF., 50 Volt, NP0, Ceramic. | 3198 | 019 | 01010 |
| 0040 | 4.7k, 5%, Metal Film. | 2322 | 187 | 53472 |
| 0040 | Shield. | 3135 | 011 | 01471 |
| 0040 | 1000 pF, 10%, 50 Volt, Polyester. | 3198 | 014 | 01020 |
| 0050 | 3.3k, 5%, Metal Film. | 2322 | 187 | 53332 |
| 0060 | 47k, 5%, Metal Film. | 2322 | 187 | 53473 |
| 0060 | IC, P87C52EBPN IC4. | 3135 | 019 | 01011 |
| 0060 | 1000 pF, 10%, 50 Volt, Polyester. | 3198 | 014 | 01020 |
| 0070 | 10k, 5%, Metal Film. | 2322 | 187 | 53103 |
| 0070 | 1000 pF, 10%, 50 Volt, Polyester. | 3198 | 014 | 01020 |
| 0080 | 47k, 5%, Metal Film. | 2322 | 187 | 53473 |
| 0080 | 0.1uF., 10%, 50 Volt, Polyester. | 3198 | 014 | 01040 |
| 0080 | IC, 74HC08N. | 9336 | 687 | 80652 |
| 0090 | 10k, 5%, Metal Film. | 2322 | 187 | 53103 |
| 0090 | Transistor, Signal, BC547B. | 3198 | 020 | 40030 |
| 0090 | IC, SA614AD. | 9339 | 954 | 10118 |
| 0100 | 10k, 5%, Metal Film. | 2322 | 187 | 53103 |
| 0100 | Variable Inductor, 7MM, 24M576B, L3. | 2422 | 549 | 43232 |
| 0100 | Transistor, Signal, BC547B. | 3198 | 020 | 40030 |
| 0110 | 220 ohm, 5%, Metal Film. | 2322 | 187 | 53221 |
| 0110 | Transistor, Signal, BC547B. | 3198 | 020 | 40030 |
| 0110 | IC, MC7805CT. | 9334 | 536 | 00682 |
| 0120 | 47k, 5%, Metal Film. | 2322 | 187 | 53473 |
| 0120 | Transistor, Signal, BC547B. | 3198 | 020 | 40030 |
| 0130 | 47k, 5%, Metal Film. | 2322 | 187 | 53473 |
| 0130 | 32 Pin Connector. | 3135 | 010 | 03541 |
| 0130 | Transistor, Signal, BC547B. | 3198 | 020 | 40030 |
| 0140 | 4.7pF, 0.25%, 50 Volt, NP0, Ceramic. | 2020 | 552 | 90585 |
| 0140 | 47k, 5%, Metal Film. | 2322 | 187 | 53473 |
| 0150 | 47k, 5%, Metal Film. | 2322 | 187 | 53473 |
| 0150 | Transistor, Signal, BC547B. | 3198 | 020 | 40030 |
| 0160 | 0.01uF, 10%, 50 Volt, Polyester. | 2020 | 300 | 90573 |
| 0160 | Fixed Inductor, 1uH, 20%. | 2422 | 535 | 97315 |
| 0170 | 12pF, 5%, 50 Volt, NP0, Ceramic. | 2020 | 552 | 90591 |
| 0170 | 6 Pin Modular Jack Socket. | 2422 | 025 | 14552 |
| 0170 | Zener Diode, BZX79-C16, 16 Volt. | 3198 | 010 | 21690 |
| 0180 | 47pF, 5%, 50 Volt, NP0, Ceramic. | 2020 | 552 | 90598 |
| 0180 | 1 Pin Cinch Socket. | 2422 | 026 | 04366 |
| 0180 | Diode, Regulator, BZX79-C8V2, 8.2 Volt. | 3198 | 010 | 28280 |
| 0190 | 4.7uF, 20%, 50 Volt, Electrolytic. | 2020 | 012 | 92651 |
| 0190 | F-Connector. | 2422 | 031 | 10792 |
| 0190 | Diode, Regulator, BZX79-C8V2, 8.2 Volt. | 3198 | 010 | 28280 |
| 0200 | 0.01uF, 10%, 50 Volt, Polyester. | 2020 | 300 | 90573 |
| 0200 | Ceramic Resonator, 12MHz. | 2422 | 540 | 98187 |
| 0200 | Diode, Regulator, BZX79-C8V2, 8.2 Volt. | 3198 | 010 | 28280 |

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|---|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 128 | 70011 |
| AC03 | Anode Lead Spacer (3 Used). | 3135 | 014 | 04471 |
| AC05 | Cabinet Back. | 3139 | 124 | 45261 |
| S AC09 | CRT, A68AJB82X11. | 9301 | 891 | 90631 |
| AC10 | Customer Control Buttons. | 3139 | 124 | 30901 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC15 | Holder, Degaussing Coil (4 Used). | 3135 | 013 | 01641 |
| AC20 | Cabinet Front Assembly. | 3121 | 237 | 52392 |
| AC20A | Cabinet Front. | 3135 | 127 | 50011 |
| AC20B | Chassis Guide (2 Used). | 3139 | 124 | 31381 |
| AC20B | Chassis Guide. | 3139 | 124 | 41711 |
| AC20C | Light Guide. | 3139 | 124 | 26461 |
| AC20D | Nameplate. | 3135 | 015 | 03571 |
| AC20E | Power Button. | 3139 | 124 | 26444 |
| AC20H | Speaker, 16 ohm, 5W (2 Used). | 2422 | 264 | 00401 |

27ST110P/35 (continued)

| | | |
|------|----------------------------|----------------|
| AC21 | Card Door. | 3135 014 05191 |
| AC22 | Cinch Cover. | 3139 124 25551 |
| AC26 | EPS Bracket. | 3119 107 17241 |
| AC27 | ITV Card Bracket | 3139 124 37933 |

27ST220L/17 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2247 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0213 | 2 Pin Connector. | 2422 025 16374 | 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0217 | 6 Pin Connector. | 2422 025 12482 | 2250 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 |
| 0218 | A/V Jack | 2422 026 04742 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | |
| 0223 | A/V Jack | 2422 026 05236 | | er. | |
| 0225 | SVHS Jack. | 2422 026 04926 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . | 2222 368 90177 |
| 0227 | 6 Pin Connector. | 2422 025 15849 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. . . | 2020 558 90445 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 2020 012 93495 |
| 0240 | 7 Pin Connector. | 2422 025 11244 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 019 43320 |
| 0242 | 7 Pin Connector. | 2422 025 17042 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 3198 016 05610 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 2020 558 90559 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . | 3198 023 21040 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. . . | 2020 558 90445 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 025 32210 |
| 0259 | 5 Pin Connector. | 2422 025 15848 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 016 03310 |
| 0262 | 3 Pin Connector. | 2422 025 16937 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic . . . | 3198 025 51080 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 2020 021 91139 |
| 0280 | 4 Pin Connector. | 2422 025 12479 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | 2455 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 025 34790 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | | ylene. | |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. . . | 2022 333 00086 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 2020 021 91331 |
| 1600 | Tact Switch. | 2422 128 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 019 46810 |
| 1601 | Tact Switch. | 2422 128 02742 | 2462 | Cap, 330n, 10%, 250v, MPP. | 3198 016 01010 |
| 1602 | Tact Switch. | 2422 128 02742 | 2463 | Cap, 1nf, 10%, 2000v, Ceramic Only with | |
| 1603 | Tact Switch. | 2422 128 02742 | | 5445 (JF0501-21835) Layer Wound. . . | 2022 333 00084 |
| 1606 | Tact Switch. | 2422 128 02742 | S 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2020 558 90487 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene . . | 2252 712 95024 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | S 2465 | Cap, 12n, 5%, 1600v, Polypropylene Only | |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | | with 5445 (JF0501-21835) Layer Wound . | 2020 301 90251 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 2471 | Cap, 100n, 10%, 50v, Polyester | 2222 375 90156 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 3198 014 01040 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 2222 365 75104 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2480 | Cap, 47u, 20%, 25v, Electrolytic . . . | 2020 021 90586 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. . . . | 2020 021 90856 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 021 91577 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 2020 021 91049 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 021 91577 |
| 2123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2125 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | |
| 2127 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | | pylene | |
| 2128 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 2022 330 00018 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic . . . | 2020 024 90647 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic . . . | 2020 021 91654 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . | 3198 023 22240 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| | | | 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . . | 3198 025 32210 |

S = Safety Part Be sure to use exact replacement part.

27ST220L/17 (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. . . | 3198 025 54780 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . | 3198 013 01520 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. . . . | 3198 014 02240 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3452 | Res, 5K6, 1%, 3/5W, Metal Film Only wit | |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | | h 5445 (JF0501-21835) Layer Wound. . . | 2312 915 15602 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3452 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3454 | Res, 2K, 1%, 3/5W, Metal Film Only with | |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | | 5445 (JF0501-21835) Layer Wound. . . . | 2312 915 12002 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film. | 2312 915 13902 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3122 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3123 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3125 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3482 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3182 | Wire Jumper. | 3198 036 90010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass. . | 3198 021 31230 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3507 | Surge Protector. | 2422 549 43073 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | S 3510 | Res, NTC, 4R7, 20%, 3W. | 2122 612 00056 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . | 3198 021 51220 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03101 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 021 55630 |
| 3223 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 012 11070 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32210 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3528 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |

S = Safety Part Be sure to use exact replacement part.

27ST220L/17 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4604 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass | 2322 | 734 | 64702 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 | 730 | 61274 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51530 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3558 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51230 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 | 021 | 52220 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass | 3198 | 021 | 53320 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (JF0501-21835) Layer W | | | |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | | ound | 2422 | 531 | 02611 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (1342.0043B). | 2422 | 531 | 02506 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5457 | Coil, 42u. | 2422 | 535 | 94865 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31530 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31220 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 38220 | 6181 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4126 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4128 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4181 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |

27ST220L/17 (continued)

| | | | | | | | | | |
|--------|----------------------------------|------|-----|-------|------|----------------|------|-----|-------|
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9423 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 6561 | Diode, Rect, SB340L-7010 | 9322 | 128 | 18682 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9616 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | 9617 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I | 4835 | 310 | 57622 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9634 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9647 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PDTCL14ET | 9340 | 310 | 10215 | 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, LE33CZ | 9322 | 106 | 11676 | 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 | 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C16-WBN6. | 9322 | 147 | 25682 | 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 | 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 7901 | IC, AN7522N PH | 9322 | 181 | 41682 | 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9104 | Wire Jumper. | 3198 | 036 | 90010 | 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 | 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9173 | Wire Jumper. | 3198 | 036 | 90010 | 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9175 | Wire Jumper. | 3198 | 036 | 90010 | 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9181 | Wire Jumper. | 3198 | 036 | 90010 | 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9182 | Wire Jumper. | 3198 | 036 | 90010 | 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9192 | Wire Jumper. | 3198 | 036 | 90010 | 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9193 | Wire Jumper. | 3198 | 036 | 90010 | 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9311 | Wire Jumper. | 3198 | 036 | 90010 | 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9312 | Wire Jumper. | 3198 | 036 | 90010 | 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9406 | Wire Jumper. | 3198 | 036 | 90010 | 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9407 | Wire Jumper. | 3198 | 036 | 90010 | 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9408 | Wire Jumper. | 3198 | 036 | 90010 | 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9409 | Wire Jumper. | 3198 | 036 | 90010 | 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9410 | Wire Jumper. | 3198 | 036 | 90010 | 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9411 | Wire Jumper. | 3198 | 036 | 90010 | 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9412 | Wire Jumper. | 3198 | 036 | 90010 | 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9413 | Wire Jumper. | 3198 | 036 | 90010 | 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9415 | Wire Jumper. | 3198 | 036 | 90010 | 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9416 | Wire Jumper. | 3198 | 036 | 90010 | 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9417 | Wire Jumper. | 3198 | 036 | 90010 | 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9418 | Wire Jumper. | 3198 | 036 | 90010 | 9699 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part. Be sure to use exact replacement part.

27ST220L/17 (continued)

| | | | | | | | | | |
|------|--|------|-----|-------|--------|--|------|-----|-------|
| 9821 | Wire Jumper. | 3198 | 036 | 90010 | S AC01 | AC Cord. | 3135 | 128 | 70011 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 | AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 | AC05 | Cabinet Back | 3139 | 124 | 45261 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 | S AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 | AC10 | Customer Control Buttons | 3139 | 124 | 30901 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 | S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 | AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 | AC20 | Cabinet Front Assembly | 3121 | 237 | 52392 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 | AC20A | Cabinet Front. | 3135 | 127 | 50011 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 | AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | AC20B | Chassis Guide. | 3139 | 124 | 41711 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | AC20C | Light Guide. | 3139 | 124 | 26461 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | AC20D | Nameplate. | 3135 | 015 | 03571 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 | AC20E | Power Button | 3139 | 124 | 26444 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 | AC22 | Cinch Cover. | 3139 | 124 | 25551 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 | AC26 | EPS Bracket. | 3119 | 107 | 17241 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | AC27 | ITV Card Bracket | 3139 | 124 | 37933 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | AC28 | ITV Card Slot Cover. | 3139 | 124 | 30571 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 | ITV | Institutional Interconnect Device (Mode | | | |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | | 1 27ST240P/35 Only). | 0Net | 1DE | VX/35 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9919 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9920 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 | 127 | 27372 | | | | | |
| CBA | EPS Module (ITV) | 3139 | 137 | 22961 | | | | | |
| CBA | Main Chassis Assembly. | 3139 | 187 | 26831 | | | | | |
| CBA | Interface Panel (ITV). | 3139 | 188 | 04541 | | | | | |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

ITV Institutional Interconnect Device (For
ITV Models Only) 0Net 1DE VX/35

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S = Safety Part Be sure to use exact replacement part.

27ST220L17 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2247 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0213 | 2 Pin Connector. | 2422 025 16374 | 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0217 | 6 Pin Connector. | 2422 025 12482 | 2250 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 |
| 0218 | A/V Jack | 2422 026 04742 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | |
| 0223 | A/V Jack | 2422 026 05236 | | er. | |
| 0225 | SVHS Jack. | 2422 026 04926 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . | 2222 368 90177 |
| 0227 | 6 Pin Connector. | 2422 025 15849 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. . . . | 2020 558 90445 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 2020 012 93495 |
| 0240 | 7 Pin Connector. | 2422 025 11244 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 019 43320 |
| 0242 | 7 Pin Connector. | 2422 025 17042 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 3198 016 05610 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 2020 558 90559 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . | 3198 023 21040 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. . . . | 2020 558 90445 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 025 32210 |
| 0259 | 5 Pin Connector. | 2422 025 15848 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 016 03310 |
| 0262 | 3 Pin Connector. | 2422 025 16937 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 025 51080 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 2020 021 91139 |
| 0280 | 4 Pin Connector. | 2422 025 12479 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | | ylene. | 2022 333 00086 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. . . . | 2020 021 91331 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1600 | Tact Switch. | 2422 128 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1601 | Tact Switch. | 2422 128 02742 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 333 00084 |
| 1602 | Tact Switch. | 2422 128 02742 | 2463 | Cap, 1nf, 10%, 2000v, Ceramic Only with | |
| 1603 | Tact Switch. | 2422 128 02742 | | 5445 (JF0501-21835) Layer Wound. . . . | 2020 558 90487 |
| 1606 | Tact Switch. | 2422 128 02742 | S 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2252 712 95024 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene . . . | 2020 301 90251 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | S 2465 | Cap, 12n, 5%, 1600v, Polypropylene Only | |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | | with 5445 (JF0501-21835) Layer Wound . . | 2222 375 90156 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. . . . | 2020 021 90856 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 021 91577 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 021 91577 |
| 2123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2125 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | |
| 2127 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | | pylene | 2022 330 00018 |
| 2128 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . . | 3198 023 22240 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| | | | 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . . | 3198 025 32210 |

S = Safety Part Be sure to use exact replacement part.

27ST220L17 (continued)

| | | | | | |
|------|---|----------------|--------|---|----------------|
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. . . . | 3198 025 54780 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. . . . | 3198 025 52280 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 014 02240 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . . | 3198 026 21020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3452 | Res, 5K6, 1%, 3/5W, Metal Film Only wit | |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | | h 5445 (JF0501-21835) Layer Wound. . . | 2312 915 15602 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3452 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3454 | Res, 2K, 1%, 3/5W, Metal Film Only with | |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | | 5445 (JF0501-21835) Layer Wound. . . . | 2312 915 12002 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film. | 2312 915 13902 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3122 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06810 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3123 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06810 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3125 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06810 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3482 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3182 | Wire Jumper. | 3198 036 90010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass. . | 3198 021 31230 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3507 | Surge Protector. | 2422 549 43073 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | S 3510 | Res, NTC, 4R7, 20%, 3W. | 2122 612 00056 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . | 3198 021 51220 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03101 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 021 55630 |
| 3223 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 012 11070 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3528 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |

S = Safety Part Be sure to use exact replacement part.

27ST220L17 (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|---|------|-----|-------|
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4604 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass . . | 2322 | 734 | 64702 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3558 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 | 012 | 13310 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52240 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52240 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 02220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 04710 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 08220 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film | 3198 | 011 | 06820 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51020 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 53320 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5202 | Wire Jumper | 3198 | 036 | 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5241 | Wire Jumper | 3198 | 036 | 90010 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (JF0501-21835) Layer W | | | |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | | ound | 2422 | 531 | 02611 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (1342.0043B) | 2422 | 531 | 02506 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | S 5457 | Coil, 42u. | 2422 | 535 | 94865 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 | 6181 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4126 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4128 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4181 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |

S = Safety Part Be sure to use exact replacement part.

27ST220L17 (continued)

| | | | | | | | | | |
|--------|----------------------------------|------|-----|-------|------|----------------|------|-----|-------|
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9423 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 | 010 | 21590 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 | 010 | 23390 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 | 020 | 52290 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 | 020 | 51090 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 6561 | Diode, Rect, SB340L-7010 | 9322 | 128 | 18682 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9616 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | 9617 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I | 4835 | 310 | 57622 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9634 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9647 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PDTCL14ET | 9340 | 310 | 10215 | 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, LE33CZ | 9322 | 106 | 11676 | 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 | 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C16-WBN6. | 9322 | 147 | 25682 | 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 | 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 7901 | IC, AN7522N PH | 9322 | 181 | 41682 | 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9104 | Wire Jumper. | 3198 | 036 | 90010 | 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 | 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9173 | Wire Jumper. | 3198 | 036 | 90010 | 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9175 | Wire Jumper. | 3198 | 036 | 90010 | 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9181 | Wire Jumper. | 3198 | 036 | 90010 | 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9182 | Wire Jumper. | 3198 | 036 | 90010 | 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9192 | Wire Jumper. | 3198 | 036 | 90010 | 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9193 | Wire Jumper. | 3198 | 036 | 90010 | 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9311 | Wire Jumper. | 3198 | 036 | 90010 | 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9312 | Wire Jumper. | 3198 | 036 | 90010 | 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9406 | Wire Jumper. | 3198 | 036 | 90010 | 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9407 | Wire Jumper. | 3198 | 036 | 90010 | 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9408 | Wire Jumper. | 3198 | 036 | 90010 | 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9409 | Wire Jumper. | 3198 | 036 | 90010 | 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9410 | Wire Jumper. | 3198 | 036 | 90010 | 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9411 | Wire Jumper. | 3198 | 036 | 90010 | 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9412 | Wire Jumper. | 3198 | 036 | 90010 | 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9413 | Wire Jumper. | 3198 | 036 | 90010 | 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9415 | Wire Jumper. | 3198 | 036 | 90010 | 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9416 | Wire Jumper. | 3198 | 036 | 90010 | 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9417 | Wire Jumper. | 3198 | 036 | 90010 | 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9418 | Wire Jumper. | 3198 | 036 | 90010 | 9699 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part. Be sure to use exact replacement part.

27ST220L17 (continued)

| | | | | | | | | | |
|------|--|------|-----|-------|--------|--|------|-----|-------|
| 9821 | Wire Jumper. | 3198 | 036 | 90010 | S AC01 | AC Cord. | 3135 | 128 | 70011 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 | AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 | AC05 | Cabinet Back | 3139 | 124 | 45261 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 | S AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 | AC10 | Customer Control Buttons | 3139 | 124 | 30901 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 | S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 | AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 | AC20 | Cabinet Front Assembly | 3121 | 237 | 52392 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 | AC20A | Cabinet Front. | 3135 | 127 | 50011 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 | AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | AC20B | Chassis Guide. | 3139 | 124 | 41711 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | AC20C | Light Guide. | 3139 | 124 | 26461 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | AC20D | Nameplate. | 3135 | 015 | 03571 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 | AC20E | Power Button | 3139 | 124 | 26444 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 | AC22 | Cinch Cover. | 3139 | 124 | 25551 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 | AC26 | EPS Bracket. | 3119 | 107 | 17241 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | AC27 | ITV Card Bracket | 3139 | 124 | 37933 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | AC28 | ITV Card Slot Cover. | 3139 | 124 | 30571 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 | ITV | Institutional Interconnect Device (Mode | | | |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | | 1 27ST240P/35 Only). | 0Net | 1DE | VX/35 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9919 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9920 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 | 127 | 27372 | | | | | |
| CBA | EPS Module (ITV) | 3139 | 137 | 22961 | | | | | |
| CBA | Main Chassis Assembly. | 3139 | 187 | 26831 | | | | | |
| CBA | Interface Panel (ITV). | 3139 | 188 | 04541 | | | | | |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

ITV Institutional Interconnect Device (For
ITV Models Only) 0Net 1DE VX/35

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S = Safety Part Be sure to use exact replacement part.

27ST230P/35 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|--|------|-----------|--------|--|------|-----------|
| | Main Chassis Parts | | | | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 16269 | 2247 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 | 026 21020 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 0213 | 2 Pin Connector. | 2422 | 025 16374 | 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 0217 | 6 Pin Connector. | 2422 | 025 12482 | 2250 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 | 025 52280 |
| 0218 | A/V Jack | 2422 | 026 04742 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | |
| 0223 | A/V Jack | 2422 | 026 05236 | | er. | 2222 | 368 90177 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . | 2020 | 558 90445 |
| 0227 | 6 Pin Connector. | 2422 | 025 15849 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. . . . | 2020 | 012 93495 |
| 0229 | 3 Pin Connector. | 2412 | 020 00725 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 |
| 0240 | 7 Pin Connector. | 2422 | 025 11244 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 0242 | 7 Pin Connector. | 2422 | 025 17042 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 21040 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . | 2020 | 558 90445 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. . . . | 3198 | 025 32210 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 03310 |
| 0259 | 5 Pin Connector. | 2422 | 025 15848 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0262 | 3 Pin Connector. | 2422 | 025 16937 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0280 | 4 Pin Connector. | 2422 | 025 12479 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. . . . | 2020 | 021 91139 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 | 014 01530 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | | |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | | ylene. | 2022 | 333 00086 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. . . . | 2020 | 021 91331 |
| 1600 | Tact Switch. | 2422 | 128 02742 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 1601 | Tact Switch. | 2422 | 128 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 1602 | Tact Switch. | 2422 | 128 02742 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 | 333 00084 |
| 1603 | Tact Switch. | 2422 | 128 02742 | S 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2252 | 712 95024 |
| 1606 | Tact Switch. | 2422 | 128 02742 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene . . . | 2020 | 301 90251 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester | 2222 | 365 75154 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester | 2222 | 365 75104 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 | 025 24710 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 41040 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 | 025 31010 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 24740 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 | 347 90234 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. . . . | 2020 | 021 90856 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 | 021 91577 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 | 021 90854 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 2020 | 021 91049 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 | 021 91577 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | | |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | | pylene | 2022 | 330 00018 |
| 2123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2125 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2127 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 57590 | 2503 | Cap, 470u, 20%, 200v, Electrolytic . . . | 2020 | 024 90647 |
| 2128 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 57590 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic . . . | 2020 | 021 91654 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 42240 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 41040 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91353 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 54780 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 44740 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 22240 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 42240 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 31020 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 44740 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 021 21050 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . . | 3198 | 025 32210 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 42240 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 42240 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 42240 |
| | | | | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| | | | | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |

S = Safety Part Be sure to use exact replacement part.

27ST230P/35 (continued)

| | | | | | |
|------|---|----------------|--------|---|----------------|
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. . . . | 3198 025 54780 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. . . . | 3198 025 52280 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 014 02240 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . . | 3198 026 21020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3452 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film. | 2312 915 13902 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3122 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06810 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3123 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06810 | 3482 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3125 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06810 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3182 | Wire Jumper. | 3198 036 90010 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass. . | 3198 021 31230 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3507 | Surge Protector. | 2422 549 43073 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . . | 3198 021 51220 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03101 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 021 55630 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 012 11070 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3223 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. . | 3198 021 54720 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film. | 2306 204 03222 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. . | 3198 021 51520 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3543 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 915 18203 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 734 64702 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 730 61274 |
| 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. . | 3198 021 36840 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. . | 3198 021 51530 |

S = Safety Part Be sure to use exact replacement part.

27ST230P/35 (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|--|------|-----|-------|
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3558 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 | 012 | 13310 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 53320 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (1342.0043B). | 2422 | 531 | 02506 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5457 | Coil, 42u. | 2422 | 535 | 94865 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 | 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6181 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4126 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4128 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4181 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4604 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 |

27ST230P/35 (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9522 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6561 | Diode, Rect, SB340L-7010. | 9322 128 18682 | 9528 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9530 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9612 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9613 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9614 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9615 | Wire Jumper. | 3198 036 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 247 60133 | 9616 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 185 69682 | 9617 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9618 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9619 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I. | 4835 310 57622 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9634 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PDTCL143ZT. | 9340 547 00215 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9647 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PDTCL114ET. | 9340 310 10215 | 9657 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9658 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, LE33CZ. | 9322 106 11676 | 9659 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PDTCL143ZT. | 9340 547 00215 | 9660 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9661 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C16-WBN6. | 9322 147 25682 | 9662 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9663 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9664 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9665 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9666 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH. | 9322 181 41682 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9681 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9685 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9689 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9690 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9691 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9694 | Wire Jumper. | 3198 036 90010 |
| 9415 | Wire Jumper. | 3198 036 90010 | 9695 | Wire Jumper. | 3198 036 90010 |
| 9416 | Wire Jumper. | 3198 036 90010 | 9697 | Wire Jumper. | 3198 036 90010 |
| 9417 | Wire Jumper. | 3198 036 90010 | 9698 | Wire Jumper. | 3198 036 90010 |
| 9418 | Wire Jumper. | 3198 036 90010 | 9699 | Wire Jumper. | 3198 036 90010 |
| 9419 | Wire Jumper. | 3198 036 90010 | 9821 | Wire Jumper. | 3198 036 90010 |
| 9421 | Wire Jumper. | 3198 036 90010 | 9822 | Wire Jumper. | 3198 036 90010 |
| 9422 | Wire Jumper. | 3198 036 90010 | 9825 | Wire Jumper. | 3198 036 90010 |
| 9423 | Wire Jumper. | 3198 036 90010 | 9828 | Wire Jumper. | 3198 036 90010 |
| 9425 | Wire Jumper. | 3198 036 90010 | 9829 | Wire Jumper. | 3198 036 90010 |
| 9427 | Wire Jumper. | 3198 036 90010 | 9831 | Wire Jumper. | 3198 036 90010 |
| 9453 | Wire Jumper. | 3198 036 90010 | 9832 | Wire Jumper. | 3198 036 90010 |
| 9460 | Wire Jumper. | 3198 036 90010 | 9837 | Wire Jumper. | 3198 036 90010 |
| 9500 | Wire Jumper. | 3198 036 90010 | 9838 | Wire Jumper. | 3198 036 90010 |
| 9501 | Wire Jumper. | 3198 036 90010 | 9839 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

27ST230P/35 (continued)

| | | | | |
|------|--|------|-----|-------|
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9919 | Wire Jumper. | 3198 | 036 | 90010 |
| 9920 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Scan 4 Card Assembly | 3121 | 237 | 53761 |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 | 127 | 27372 |
| CBA | EPS Module (ITV) | 3139 | 137 | 22961 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 26831 |
| CBA | Interface Panel (ITV). | 3139 | 188 | 04541 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

| | | | | |
|------|---|------|-----|-------|
| 1000 | F-Connector. | 2422 | 031 | 10792 |
| 1001 | Socket, Cinch, 1 Pin | 2422 | 026 | 05003 |
| 1002 | 5 Pin Connector. | 2422 | 025 | 12708 |
| 2000 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 21040 |
| 2001 | Cap, 39p, 5%, 50v, Ceramic | 3198 | 016 | 03990 |
| 2002 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 02290 |
| 2003 | Cap, 39p, 5%, 50v, Ceramic | 3198 | 016 | 03990 |
| 2004 | Cap, 100n, 10%, 25v, Ceramic | 2238 | 910 | 15649 |
| 2005 | Cap, 270p, 5%, 50v, Ceramic. | 3198 | 016 | 02710 |
| 2006 | Cap, 390p, 5%, 50v, Ceramic. | 3198 | 016 | 03910 |
| 2007 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 | 03390 |
| 2008 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 | 01010 |
| 2009 | Cap, 10p, 5%, 50v, Ceramic | 3198 | 016 | 01090 |
| 2010 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 21040 |
| 2011 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 01030 |
| 2012 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 01030 |
| 2013 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 21040 |
| 2014 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 21040 |
| 2015 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 3000 | Res, 10k, 5% | 3198 | 021 | 51030 |
| 3001 | Res, 10k, 5% | 3198 | 021 | 51030 |
| 3002 | Res, 47 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54790 |
| 3003 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 |
| 3004 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 |
| 3005 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 |
| 3006 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 |
| 3007 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 |

| | | | | |
|------|---|------|-----|-------|
| 3008 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 |
| 3009 | Res, 47k, 5% | 3198 | 021 | 54730 |
| 3011 | Res, 10k, 5% | 3198 | 021 | 51030 |
| 3012 | Res, 47 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54790 |
| 5000 | Fixed Inductor, 0.15uH, 10%. | 3198 | 018 | 31570 |
| 5001 | Fixed Inductor, 0.15uH, 10%. | 3198 | 018 | 31570 |
| 5002 | Fixed Inductor, 0.68uH, 10%. | 3198 | 018 | 36870 |
| 5003 | Fixed Inductor, 2.2uH, 5%. | 2422 | 535 | 96509 |
| 5004 | Fixed Inductor, 10uH, 10%. | 3198 | 018 | 31090 |
| 5005 | Inductor, Fixed 22u, 20% | 3198 | 018 | 32290 |
| 5006 | Fixed Inductor, 4.7uH., 10%. | 3198 | 018 | 34780 |
| 6000 | Diode, Signal, BAS216. | 9340 | 255 | 30115 |
| 6001 | Diode, Signal, BAS216. | 9340 | 255 | 30115 |
| 6002 | Diode, Signal, BAS216. | 9340 | 255 | 30115 |
| 7000 | IC, NE592/N8 | 9337 | 334 | 80602 |
| 7001 | Transistor, Signal, BC847B | 9335 | 895 | 90215 |
| CBA | Net 1 Panel (part of Scan 4 Card Assembly). | 3135 | 127 | 10151 |

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

| | | | | |
|------|--|------|-----|-------|
| 1000 | Connector, 15 Pin. | 2422 | 025 | 16857 |
| 1001 | Crystal, Resonator, 20M140 | 2422 | 543 | 01196 |
| 1002 | SOC MDIN H 4P F YKF51 B | 2422 | 026 | 05133 |
| 1003 | SOC CINCH H 4P F WHRD B | 2422 | 026 | 04402 |
| 1005 | Resonator Crystal, 14M31818, 20P | 2422 | 543 | 00904 |
| 1010 | Connector, 32 Pin. | 3135 | 010 | 03541 |
| 1011 | Crystal, Resonator, 12MHz, 20 Pin. | 2422 | 543 | 00488 |
| 1012 | Connector, 5 Pin | 2422 | 025 | 12708 |
| 2000 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 030 | 81080 |
| 2001 | Cap, 82p, 5%, 50v, Ceramic | 3198 | 016 | 08290 |
| 2002 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 2003 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 01590 |
| 2004 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 21040 |
| 2005 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 030 | 81080 |
| 2006 | Cap, 82p, 5%, 50v, Ceramic | 3198 | 016 | 08290 |
| 2007 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 2008 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 2009 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 | 01510 |
| 2010 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 030 | 81080 |
| 2011 | Cap, 270p, 5%, 50v, Ceramic. | 3198 | 016 | 02710 |
| 2012 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 01590 |
| 2013 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 2014 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 | 01510 |
| 2015 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 | 01010 |
| 2016 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 02290 |
| 2017 | Cap, 10u, 20%, 25V, Electrolytic | 2020 | 004 | 90288 |
| 2018 | Cap, 270p, 5%, 50v, Ceramic. | 3198 | 016 | 02710 |
| 2019 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 01590 |
| 2020 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 21040 |
| 2021 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 2022 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 | 01510 |
| 2023 | Cap, 270p, 5%, 50v, Ceramic. | 3198 | 016 | 02710 |
| 2024 | Cap, 82p, 5%, 50v, Ceramic | 3198 | 016 | 08290 |
| 2025 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 2026 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 02290 |
| 2059 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 | 01010 |
| 2060 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2061 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2062 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2063 | Cap, 4u7, +80/-20%, 10v, Ceramic | 2020 | 552 | 96305 |
| 2064 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2065 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2066 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2067 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2068 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 02290 |
| 2070 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 02290 |
| 2071 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2072 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2073 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2074 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 030 | 74780 |
| 2075 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2076 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 030 | 74780 |
| 2077 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2078 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 030 | 74780 |
| 2079 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 01020 |
| 2080 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2081 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2082 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2083 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2084 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2085 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 030 | 74780 |
| 2086 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 01020 |
| 2087 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2088 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2089 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2090 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2091 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 030 | 74780 |
| 2092 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 01020 |
| 2093 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2094 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |

S = Safety Part Be sure to use exact replacement part.

27ST230P/35 (continued)

| | | | | | |
|------|--|----------------|------|---|----------------|
| 2095 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3091 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 035 10339 |
| 2096 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3097 | Res, 150 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51510 |
| 2097 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3099 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 2098 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3100 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 2099 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 3101 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 2100 | Cap, 47u, 20%, 25v, Electrolytic. . . . | 3198 025 34790 | 3102 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 |
| 2101 | Cap, 1u, 20%, 35v, Electrolytic. | 2020 004 90282 | 3103 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 2102 | Cap, 1u, 20%, 35v, Electrolytic. | 2020 004 90282 | 3104 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 2103 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 030 81080 | 3105 | Res, 150 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51510 |
| 2104 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 030 81080 | 3106 | Res, 270 ohm, 5%, 1/10W, Metalized Glas | 3198 021 52710 |
| 2106 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 030 81080 | 3108 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 2107 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 030 81080 | 3109 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 2111 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 030 81080 | 3110 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 2112 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 030 81080 | 3111 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 2113 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 030 81080 | 3112 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 2114 | Cap, 470u, 20%, 25v, Electrolytic. . . . | 2020 012 93457 | 3113 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 |
| 2115 | Cap, 10u, 20%, 10v, Electrolytic | 3198 032 34130 | 3114 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 2116 | Cap, 10u, 20%, 10v, Electrolytic | 3198 032 34130 | 3116 | Res, 1K8, 5%, 1/10W, Metalized Glass . | 3198 021 51820 |
| 2118 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 02290 | 3117 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 |
| 2119 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 02290 | 3118 | Res, 6K8, 5%, 1/10W, Metalized Glass . | 3198 021 56820 |
| 2120 | Cap, 680p, 10%, 50v, Ceramic | 3198 017 06810 | 3119 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 021 51040 |
| 2121 | Cap, 680p, 10%, 50v, Ceramic | 3198 017 06810 | 3120 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 2122 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3121 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 2123 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3122 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 2124 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3124 | Res, 910 ohm, 1%, 1/8W, Metalized Glass | 2322 734 69101 |
| 2125 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3129 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2126 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3130 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2127 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3132 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 021 51040 |
| 2129 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3133 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 021 51040 |
| 2130 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3135 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 |
| 2131 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3136 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2132 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3137 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2134 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3138 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2135 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | 3139 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2136 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 | 3140 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 |
| 2137 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 | 3141 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 2139 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | 3142 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 |
| 2140 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | 3143 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2141 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 01810 | 4004 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90020 |
| 2142 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 01810 | 4005 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90020 |
| 3001 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4006 | Res, Zero ohm, 'Chip' Jumper | 3198 021 90020 |
| 3002 | Res, 220 ohm, 5%, 1/10W, Metalized Glas | 3198 021 52210 | 5001 | Coil, 820n | 3198 018 38270 |
| 3003 | Res, 1M, 5%, 1/10W, Metalized Glass. . | 3198 021 51050 | 5002 | Coil, 1u2 | 3198 018 31280 |
| 3004 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | 5003 | Coil, 1u2 | 3198 018 31280 |
| 3005 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | 5004 | Coil, 1u2 | 3198 018 31280 |
| 3006 | Res, 1K8, 5%, 1/10W, Metalized Glass . | 3198 021 51820 | 5010 | Coil, 820n | 3198 018 38270 |
| 3007 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 5012 | Coil, 820n | 3198 018 38270 |
| 3008 | Res, 150K, 5%, 1/10W, Metalized Glass. . | 3198 021 51540 | 5014 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 |
| 3009 | Res, 13K, 5%, 1/8W, Metalized Glass. . . | 2322 730 61133 | 5015 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 018 90060 |
| 3010 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 5016 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 018 90060 |
| 3011 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | 5017 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 018 90060 |
| 3012 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 5018 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 018 90060 |
| 3013 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 5019 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 018 90060 |
| 3014 | Res, 150K, 5%, 1/10W, Metalized Glass. . | 3198 021 51540 | 5020 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 018 90060 |
| 3015 | Res, 13K, 5%, 1/8W, Metalized Glass. . . | 2322 730 61133 | 5021 | Coil, 82u. | 2422 535 95408 |
| 3016 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 5023 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 018 90060 |
| 3017 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 5024 | Coil, 1u8. | 3198 018 31880 |
| 3018 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | 6001 | Diode, Signal, BAV99 | 3198 010 10620 |
| 3019 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 6002 | Diode, Signal, BAV99 | 3198 010 10620 |
| 3020 | Res, 150K, 5%, 1/10W, Metalized Glass. . | 3198 021 51540 | 6003 | Diode, Signal, BAV99 | 3198 010 10620 |
| 3021 | Res, 13K, 5%, 1/8W, Metalized Glass. . . | 2322 730 61133 | 6004 | Diode, Signal, BAV99 | 3198 010 10620 |
| 3022 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 6005 | Diode, Signal, BAV99 | 3198 010 10620 |
| 3023 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 6006 | Diode, Signal, BAV99 | 3198 010 10620 |
| 3024 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | 6009 | Diode, Signal, BAV99 | 3198 010 10620 |
| 3025 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 | 6010 | Diode, Signal, BAV99 | 3198 010 10620 |
| 3026 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 | 6011 | Diode, Signal, BAS16WS | 9322 031 99685 |
| 3027 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 | 6012 | Diode, Signal, BAS16WS | 9322 031 99685 |
| 3028 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 6013 | Diode, Signal, BAS16WS | 9322 031 99685 |
| 3029 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 | 6014 | Diode, Signal, BAS16WS | 9322 031 99685 |
| 3030 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 | 6015 | Diode, Signal, BAS16WS | 9322 031 99685 |
| 3031 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 | 6016 | Diode, Signal, BAS16WS | 9322 031 99685 |
| 3033 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | 6017 | Diode, Rect, MBRSL40. | 9322 070 26668 |
| 3049 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | 6018 | Zener Diode, 6.8 volt. | 9340 386 40115 |
| 3052 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | 6019 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3053 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | 7000 | F.E.T. Signal, BSN20 | 9340 125 00235 |
| 3056 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 7001 | IC, LM393D | 9339 575 30668 |
| 3057 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | 7002 | IC, LM393D | 9339 575 30668 |
| 3058 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 7003 | Transistor, NPN, BC847B. | 3198 010 42030 |
| 3059 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | 7004 | Transistor, NPN, BC847B. | 3198 010 42030 |
| 3060 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 7005 | Transistor, NPN, BC847B. | 3198 010 42030 |
| 3061 | Res, 1M, 5%, 1/10W, Metalized Glass. . . | 3198 021 51050 | 7006 | Transistor, PNP, BC857B. | 3198 010 42150 |
| 3062 | Res, 220 ohm, 5%, 1/10W, Metalized Glas | 3198 021 52210 | 7007 | FET Signal, BSN20. | 9340 125 00235 |
| 3063 | Res, 820 ohm, 5%, 1/10W, Metalized Glas | 3198 021 58210 | 7010 | FET Signal, BSN20. | 9340 125 00235 |
| 3064 | Res, 220 ohm, 5%, 1/10W, Metalized Glas | 3198 021 52210 | 7011 | IC, FS401AC. | 9322 107 99671 |
| 3065 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 035 10339 | 7012 | IC, HY57V161610DTC-10. | 9322 161 58668 |
| 3066 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 035 10339 | 7013 | FET Signal, BSN20. | 9340 125 00235 |
| 3073 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 035 10339 | 7014 | IC SM P87C51RD+4A SCAN 4 | 3135 120 50111 |
| 3074 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 035 10339 | 7016 | IC, 74HC4066D. | 9337 144 20653 |
| 3082 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 035 10339 | 7018 | IC, M24C04-WMN6. | 9322 122 33668 |
| 3085 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 035 10339 | 7019 | Wire Jumper. | 3198 036 90010 |
| 3089 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 7020 | Transistor, PNP, BC857B. | 3198 010 42150 |
| 3090 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 035 10339 | 7021 | Transistor, NPN, BC847B. | 3198 010 42030 |

S = Safety Part Be sure to use exact replacement part.

27ST230P/35 (continued)

| | | | | |
|------|---|------|-----|-------|
| 7022 | IC, MC33269D-3.3 | 9322 | 106 | 88668 |
| 7023 | IC, MC33269D-3.3 | 9322 | 106 | 88668 |
| 7024 | IC, LM2596S-ADJ. | 9322 | 130 | 86685 |
| 7028 | FET Signal, BSH103 | 9340 | 547 | 13215 |
| 7036 | FET Signal, BSH103 | 9340 | 547 | 13215 |
| 7037 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| CBA | Scan 4 Card (part of Scan 4 Card Assemb ly). | 3135 | 127 | 10281 |

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | | |
|---|--------|--|------|-----|-------|
| S | AC01 | AC Cord. | 3135 | 128 | 70011 |
| | AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| | AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| | AC05 | Cabinet Back | 3139 | 124 | 45261 |
| S | AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| | AC10 | Customer Control Buttons | 3139 | 124 | 30901 |
| S | AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| | AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| | AC17 | Owner's Manual, Scan 4 Card. | 3135 | 125 | 21341 |
| | AC20 | Cabinet Front Assembly | 3121 | 237 | 52392 |
| | AC20A | Cabinet Front. | 3135 | 127 | 50011 |
| | AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| | AC20B | Chassis Guide. | 3139 | 124 | 41711 |
| | AC20C | Light Guide. | 3139 | 124 | 26461 |
| | AC20D | Nameplate. | 3135 | 015 | 03571 |
| | AC20E | Power Button | 3139 | 124 | 26444 |
| | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| | AC22 | Cinch Cover. | 3139 | 124 | 25551 |
| | AC26 | EPS Bracket. | 3119 | 107 | 17241 |
| | AC27 | ITV Card Bracket | 3139 | 124 | 37933 |
| | AC30 | Scan 3 VGA Adapter | 3135 | 017 | 07401 |
| | AC31 | Scan 4 Card Cover. | 3139 | 124 | 45551 |
| | REMOTE | Remote Control Transmitter, RC2572/01. | 3139 | 228 | 88691 |

27ST240P/35 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2247 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0213 | 2 Pin Connector. | 2422 025 16374 | 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0217 | 6 Pin Connector. | 2422 025 12482 | 2250 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 |
| 0218 | A/V Jack | 2422 026 04742 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | |
| 0223 | A/V Jack | 2422 026 05236 | | er. | |
| 0225 | SVHS Jack. | 2422 026 04926 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . | 2222 368 90177 |
| 0227 | 6 Pin Connector. | 2422 025 15849 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. . . | 2020 558 90445 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 2020 012 93495 |
| 0240 | 7 Pin Connector. | 2422 025 11244 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 019 43320 |
| 0242 | 7 Pin Connector. | 2422 025 17042 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 3198 016 05610 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 2020 558 90559 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . | 3198 023 21040 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. . . | 2020 558 90445 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 025 32210 |
| 0259 | 5 Pin Connector. | 2422 025 15848 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 016 03310 |
| 0262 | 3 Pin Connector. | 2422 025 16937 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic . . . | 3198 025 51080 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 2020 021 91139 |
| 0280 | 4 Pin Connector. | 2422 025 12479 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | 2455 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 025 34790 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | | ylene. | 2022 333 00086 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. . . | 2020 021 91331 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1600 | Tact Switch. | 2422 128 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1601 | Tact Switch. | 2422 128 02742 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 333 00084 |
| 1602 | Tact Switch. | 2422 128 02742 | 2463 | Cap, 1nf, 10%, 2000v, Ceramic Only with | |
| 1603 | Tact Switch. | 2422 128 02742 | | 5445 (JF0501-21835) Layer Wound. . . . | 2020 558 90487 |
| 1606 | Tact Switch. | 2422 128 02742 | S 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2252 712 95024 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene . . | 2020 301 90251 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | S 2465 | Cap, 12n, 5%, 1600v, Polypropylene Only | |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | | with 5445 (JF0501-21835) Layer Wound . . | 2222 375 90156 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2480 | Cap, 47u, 20%, 25v, Electrolytic . . . | 2020 021 90586 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. . . . | 2020 021 90856 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 021 91577 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 2020 021 91049 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 021 91577 |
| 2123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2125 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | |
| 2127 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | | pylene | 2022 330 00018 |
| 2128 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic . . . | 2020 024 90647 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic . . . | 2020 021 91654 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . . | 3198 023 22240 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| | | | 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . . | 3198 025 32210 |

S = Safety Part Be sure to use exact replacement part.

27ST240P/35 (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. . . | 3198 025 54780 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . | 3198 013 01520 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. | 3198 014 02240 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3452 | Res, 5K6, 1%, 3/5W, Metal Film Only wit | |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | | h 5445 (JF0501-21835) Layer Wound. . . | 2312 915 15602 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3452 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3454 | Res, 2K, 1%, 3/5W, Metal Film Only with | |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | | 5445 (JF0501-21835) Layer Wound. . . . | 2312 915 12002 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film. | 2312 915 13902 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3122 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3123 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3125 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3482 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3182 | Wire Jumper. | 3198 036 90010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass. . | 3198 021 31230 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3507 | Surge Protector. | 2422 549 43073 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | S 3510 | Res, NTC, 4R7, 20%, 3W. | 2122 612 00056 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . | 3198 021 51220 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03101 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 021 55630 |
| 3223 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 012 11070 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32210 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3528 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |

S = Safety Part Be sure to use exact replacement part.

27ST240P/35 (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|---|------|-----|-------|
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4604 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass . . | 2322 | 734 | 64702 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3558 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 | 012 | 13310 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52240 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52240 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 02220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 04710 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 08220 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film | 3198 | 011 | 06820 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51020 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 | 011 | 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 53320 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5202 | Wire Jumper | 3198 | 036 | 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5241 | Wire Jumper | 3198 | 036 | 90010 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (JF0501-21835) Layer W | | | |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | | ound | 2422 | 531 | 02611 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (1342.0043B) | 2422 | 531 | 02506 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31040 | S 5457 | Coil, 42u. | 2422 | 535 | 94865 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 | 011 | 01010 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 | 6181 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4126 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4128 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4181 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |

27ST240P/35 (continued)

| | | | | | | | | | |
|--------|----------------------------------|------|-----|-------|------|----------------|------|-----|-------|
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9423 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 | 010 | 21590 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 | 010 | 23390 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 | 020 | 52290 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 | 020 | 51090 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 6561 | Diode, Rect, SB340L-7010 | 9322 | 128 | 18682 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9616 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | 9617 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I | 4835 | 310 | 57622 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9634 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9647 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PDTCL14ET | 9340 | 310 | 10215 | 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, LE33CZ | 9322 | 106 | 11676 | 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 | 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C16-WBN6. | 9322 | 147 | 25682 | 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 | 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 7901 | IC, AN7522N PH | 9322 | 181 | 41682 | 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9104 | Wire Jumper. | 3198 | 036 | 90010 | 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 | 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9173 | Wire Jumper. | 3198 | 036 | 90010 | 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9175 | Wire Jumper. | 3198 | 036 | 90010 | 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9181 | Wire Jumper. | 3198 | 036 | 90010 | 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9182 | Wire Jumper. | 3198 | 036 | 90010 | 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9192 | Wire Jumper. | 3198 | 036 | 90010 | 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9193 | Wire Jumper. | 3198 | 036 | 90010 | 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9311 | Wire Jumper. | 3198 | 036 | 90010 | 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9312 | Wire Jumper. | 3198 | 036 | 90010 | 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9406 | Wire Jumper. | 3198 | 036 | 90010 | 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9407 | Wire Jumper. | 3198 | 036 | 90010 | 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9408 | Wire Jumper. | 3198 | 036 | 90010 | 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9409 | Wire Jumper. | 3198 | 036 | 90010 | 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9410 | Wire Jumper. | 3198 | 036 | 90010 | 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9411 | Wire Jumper. | 3198 | 036 | 90010 | 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9412 | Wire Jumper. | 3198 | 036 | 90010 | 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9413 | Wire Jumper. | 3198 | 036 | 90010 | 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9415 | Wire Jumper. | 3198 | 036 | 90010 | 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9416 | Wire Jumper. | 3198 | 036 | 90010 | 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9417 | Wire Jumper. | 3198 | 036 | 90010 | 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9418 | Wire Jumper. | 3198 | 036 | 90010 | 9699 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part. Be sure to use exact replacement part.

27ST240P/35 (continued)

| | | | | | | | | | |
|------|--|------|-----|-------|--------|--|------|-----|-------|
| 9821 | Wire Jumper. | 3198 | 036 | 90010 | S AC01 | AC Cord. | 3135 | 128 | 70011 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 | AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 | AC05 | Cabinet Back | 3139 | 124 | 45261 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 | S AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 | AC10 | Customer Control Buttons | 3139 | 124 | 30901 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 | S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 | AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 | AC20 | Cabinet Front Assembly | 3121 | 237 | 52392 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 | AC20A | Cabinet Front. | 3135 | 127 | 50011 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 | AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | AC20B | Chassis Guide. | 3139 | 124 | 41711 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | AC20C | Light Guide. | 3139 | 124 | 26461 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | AC20D | Nameplate. | 3135 | 015 | 03571 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 | AC20E | Power Button | 3139 | 124 | 26444 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 | AC22 | Cinch Cover. | 3139 | 124 | 25551 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 | AC26 | EPS Bracket. | 3119 | 107 | 17241 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | AC27 | ITV Card Bracket | 3139 | 124 | 37933 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | AC28 | ITV Card Slot Cover. | 3139 | 124 | 30571 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 | ITV | Institutional Interconnect Device (Mode | | | |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | | 1 27ST240P/35 Only). | 0Net | 1DE | VX/35 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9919 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9920 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 | 127 | 27372 | | | | | |
| CBA | EPS Module (ITV) | 3139 | 137 | 22961 | | | | | |
| CBA | Main Chassis Assembly. | 3139 | 187 | 26831 | | | | | |
| CBA | Interface Panel (ITV). | 3139 | 188 | 04541 | | | | | |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

ITV Institutional Interconnect Device (For
ITV Models Only) 0Net 1DE VX/35

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S = Safety Part Be sure to use exact replacement part.

27ST420L/17 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|----------------|
| | 2 Pin Connector. | 2422 025 16269 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0211 | 2 Pin Connector. | 2422 025 16375 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0212 | 2 Pin Connector. | 2422 025 16374 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0213 | 2 Pin Connector. | 2422 025 16374 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 017 24730 |
| 0223 | A/V Jack. | 2422 026 05236 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| 0240 | 7 Pin Connector. | 2422 025 11244 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2457 | Cap, 470n, 5%, 250v, Metalized Polypropylene. | 2022 333 00086 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| S 0254 | 9 Pin CRT Socket. | 2422 500 80076 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 0259 | 5 Pin Connector. | 2422 025 15848 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 0262 | 3 Pin Connector. | 2422 025 16937 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 333 00084 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2463 | Cap, 680p, 10%, 2000v, Ceramic. | 2020 558 90485 |
| 0280 | 4 Pin Connector. | 2422 025 12479 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene. | 2020 301 90251 |
| S 1000 | Tuner, V+U, PLL. | 2422 542 90108 | 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 1002 | SAW Filter, 45.75MHz. | 2422 549 44518 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 365 75154 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 549 40807 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 365 75104 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 1600 | Tact Switch. | 2422 128 02742 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 1601 | Tact Switch. | 2422 128 02742 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 |
| 1602 | Tact Switch. | 2422 128 02742 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 1603 | Tact Switch. | 2422 128 02742 | 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 347 90234 |
| 1606 | Tact Switch. | 2422 128 02742 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 1660 | Crystal, 12MHz000. | 2422 543 01203 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 543 00842 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 021 90854 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 021 91049 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 330 00018 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 024 90647 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2123 | Res, Zero ohm, 'Chip' Jumper. | 3198 021 90020 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2125 | Res, Zero ohm, 'Chip' Jumper. | 3198 021 90020 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 021 91654 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91353 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 014 04740 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 370 76104 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2837 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 |
| 2254 | Res, Zero ohm, 'Chip' Jumper. | 3198 021 90020 | 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 368 90177 | 2841 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 |
| 2331 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 | 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 | 2843 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 | 2844 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 |
| | | | 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 |

S = Safety Part Be sure to use exact replacement part.

27ST420L/17 (continued)

| | | | | | |
|--------|---|----------------|--------|--|----------------|
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glass | 3198 021 51010 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 | 3452 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film | 2312 915 13902 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 2910 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2911 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 33390 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3123 | Wire Jumper. | 3198 036 90010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3124 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3125 | Wire Jumper. | 3198 036 90010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3126 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3507 | Surge Protector. | 2422 549 43073 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass . | 3198 021 33340 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13070 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | S 3558 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 021 31020 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 |
| 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 |
| 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 |
| 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 |
| 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 |
| 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 |
| 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 | 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 | 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 |
| S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 | 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 |
| 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 | 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 |

S = Safety Part Be sure to use exact replacement part.

27ST420L/17 (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . . | 3198 021 53320 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . . | 3198 021 51520 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | S 5445 | Transformer, LOT (1342.0043B). . . . | 2422 531 02506 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5451 | Coil, 33u, 10% | 3198 018 73390 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | S 5457 | Coil, 42u. | 2422 535 94865 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 531 02478 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5471 | Coil, 3u3, 20% | 3198 018 73380 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5480 | Coil, 39u, 10% | 2422 535 97336 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5501 | Mains Filter | 2422 549 43432 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5521 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5560 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5562 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 5564 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5831 | Coil, 6u8, 5% | 3198 018 16880 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 5832 | Coil, 6u8, 5% | 3198 018 16880 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 5833 | Coil, 6u8, 5% | 3198 018 16880 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 | 5835 | Coil, 12u, 10% | 3198 018 31290 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . . | 3198 021 33320 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . . | 3198 021 38220 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4128 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6460 | Diode, Rect, BY228/24. | 9340 559 50112 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6465 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6466 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6467 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6468 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4604 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6469 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6470 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6476 | Zener Diode, 15 volt | 3198 010 21590 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6485 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6487 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6500 | Diode, Bridge Rect, GBU6JL-7002. . . . | 9322 138 08667 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6520 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6523 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4696 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6524 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6525 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6526 | Zener Diode, 22 volt | 3198 020 52290 |
| 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6541 | Zener Diode, 10 volt | 3198 020 51090 |
| 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 |
| 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6561 | Diode, Rect, SB340L-7010 | 9322 128 18682 |
| 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6563 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6565 | Diode, Signal, BAV70 | 9331 849 10215 |
| 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6566 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6569 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6580 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6681 | Diode, Signal, BAT85 | 9336 247 60133 |
| 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6691 | LED, LTL-10234WHCR | 9322 185 69682 |

S = Safety Part Be sure to use exact replacement part.

27ST420L/17 (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6692 | IR Receiver. | 9322 127 54667 | 9623 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9626 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9627 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I | 4835 310 57626 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9647 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9655 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9657 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9658 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9659 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9660 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9661 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9662 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9663 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, LE33CZ | 9322 106 11676 | 9664 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9665 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9666 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C16-WBN6. | 9322 147 25682 | 9667 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9668 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 187 89682 | 9669 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9685 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9689 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9690 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9691 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9694 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9695 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9697 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9698 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9699 | Wire Jumper. | 3198 036 90010 |
| 9415 | Wire Jumper. | 3198 036 90010 | 9821 | Wire Jumper. | 3198 036 90010 |
| 9416 | Wire Jumper. | 3198 036 90010 | 9822 | Wire Jumper. | 3198 036 90010 |
| 9417 | Wire Jumper. | 3198 036 90010 | 9825 | Wire Jumper. | 3198 036 90010 |
| 9418 | Wire Jumper. | 3198 036 90010 | 9828 | Wire Jumper. | 3198 036 90010 |
| 9419 | Wire Jumper. | 3198 036 90010 | 9829 | Wire Jumper. | 3198 036 90010 |
| 9421 | Wire Jumper. | 3198 036 90010 | 9831 | Wire Jumper. | 3198 036 90010 |
| 9422 | Wire Jumper. | 3198 036 90010 | 9832 | Wire Jumper. | 3198 036 90010 |
| 9423 | Wire Jumper. | 3198 036 90010 | 9837 | Wire Jumper. | 3198 036 90010 |
| 9425 | Wire Jumper. | 3198 036 90010 | 9838 | Wire Jumper. | 3198 036 90010 |
| 9427 | Wire Jumper. | 3198 036 90010 | 9839 | Wire Jumper. | 3198 036 90010 |
| 9453 | Wire Jumper. | 3198 036 90010 | 9846 | Wire Jumper. | 3198 036 90010 |
| 9460 | Wire Jumper. | 3198 036 90010 | 9847 | Wire Jumper. | 3198 036 90010 |
| 9500 | Wire Jumper. | 3198 036 90010 | 9849 | Wire Jumper. | 3198 036 90010 |
| 9501 | Wire Jumper. | 3198 036 90010 | 9851 | Wire Jumper. | 3198 036 90010 |
| 9503 | Wire Jumper. | 3198 036 90010 | 9856 | Wire Jumper. | 3198 036 90010 |
| 9506 | Wire Jumper. | 3198 036 90010 | 9858 | Wire Jumper. | 3198 036 90010 |
| 9507 | Wire Jumper. | 3198 036 90010 | 9859 | Wire Jumper. | 3198 036 90010 |
| 9510 | Wire Jumper. | 3198 036 90010 | 9860 | Wire Jumper. | 3198 036 90010 |
| 9511 | Wire Jumper. | 3198 036 90010 | 9862 | Wire Jumper. | 3198 036 90010 |
| 9512 | Wire Jumper. | 3198 036 90010 | 9864 | Wire Jumper. | 3198 036 90010 |
| 9513 | Wire Jumper. | 3198 036 90010 | 9865 | Wire Jumper. | 3198 036 90010 |
| 9514 | Wire Jumper. | 3198 036 90010 | 9867 | Wire Jumper. | 3198 036 90010 |
| 9515 | Wire Jumper. | 3198 036 90010 | 9868 | Wire Jumper. | 3198 036 90010 |
| 9516 | Wire Jumper. | 3198 036 90010 | 9869 | Wire Jumper. | 3198 036 90010 |
| 9518 | Wire Jumper. | 3198 036 90010 | 9873 | Wire Jumper. | 3198 036 90010 |
| 9520 | Wire Jumper. | 3198 036 90010 | 9874 | Wire Jumper. | 3198 036 90010 |
| 9521 | Wire Jumper. | 3198 036 90010 | 9875 | Wire Jumper. | 3198 036 90010 |
| 9522 | Wire Jumper. | 3198 036 90010 | 9877 | Wire Jumper. | 3198 036 90010 |
| 9524 | Wire Jumper. | 3198 036 90010 | 9901 | Wire Jumper. | 3198 036 90010 |
| 9528 | Wire Jumper. | 3198 036 90010 | 9902 | Wire Jumper. | 3198 036 90010 |
| 9530 | Wire Jumper. | 3198 036 90010 | 9903 | Wire Jumper. | 3198 036 90010 |
| 9611 | Coil, 27u, 10% | 3198 018 22790 | 9904 | Wire Jumper. | 3198 036 90010 |
| 9612 | Wire Jumper. | 3198 036 90010 | 9905 | Wire Jumper. | 3198 036 90010 |
| 9613 | Wire Jumper. | 3198 036 90010 | 9911 | Wire Jumper. | 3198 036 90010 |
| 9614 | Wire Jumper. | 3198 036 90010 | 9913 | Wire Jumper. | 3198 036 90010 |
| 9615 | Wire Jumper. | 3198 036 90010 | 9914 | Wire Jumper. | 3198 036 90010 |
| 9618 | Wire Jumper. | 3198 036 90010 | 9915 | Wire Jumper. | 3198 036 90010 |
| 9619 | Wire Jumper. | 3198 036 90010 | 9919 | Wire Jumper. | 3198 036 90010 |
| 9622 | Wire Jumper. | 3198 036 90010 | 9920 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

27ST420L/17 (continued)

| | | | | |
|------|--|------|-----|-------|
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 | 127 | 27372 |
| CBA | EPS Module (ITV). | 3139 | 137 | 22961 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 26851 |
| CBA | Interface Panel (ITV). | 3139 | 188 | 04541 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| | ITV Front Jack Panel Parts | | | |
| 1002 | 3 Pin A/V Jack | 2422 | 026 | 05208 |
| 1219 | 6 Pin Board Connector. | 2422 | 025 | 10738 |
| 2002 | Cap, 330p, 50v, Ceramic. | 3198 | 017 | 03310 |
| 2004 | Cap, 330p, 50v, Ceramic. | 3198 | 017 | 03310 |
| 3001 | Res, 75 ohm, 5%. | 3198 | 021 | 57590 |
| 3002 | Res, 150 ohm, 5%. | 3198 | 021 | 51510 |
| 3003 | Res, 47k, 5%. | 3198 | 021 | 54730 |
| 3004 | Res, 150 ohm, 5%. | 3198 | 021 | 51510 |
| 3005 | Res, 47k, 5%. | 3198 | 021 | 54730 |
| 6001 | Zener Diode, 6.8V. | 3198 | 020 | 56880 |
| CBA | ITV Front Jack Panel Assembly. | 3139 | 187 | 26901 |

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 07161 |
| AC03 | Anode Lead Spacer (3 Used). | 3135 | 014 | 04471 |
| AC05 | Cabinet Back | 3139 | 124 | 45241 |
| S AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| AC10 | Customer Control Buttons | 3139 | 124 | 42141 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53571 |
| AC20A | Cabinet Front. | 3135 | 017 | 07161 |
| AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| AC20C | Light Guide. | 3139 | 124 | 26461 |
| AC20D | Nameplate. | 3135 | 015 | 03571 |
| AC20E | Power Button | 3139 | 124 | 42151 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| AC26 | EPS Bracket. | 3119 | 107 | 17241 |
| AC27 | ITV Card Bracket | 3139 | 124 | 37933 |
| AC28 | ITV Card Slot Cover. | 3139 | 124 | 30571 |

27ST421L/17 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|---|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0213 | 2 Pin Connector. | 2422 025 16374 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0223 | A/V Jack. | 2422 026 05236 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 017 24730 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0240 | 7 Pin Connector. | 2422 025 11244 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2457 | Cap, 470n, 5%, 250v, Metalized Polypropylene. | 2022 333 00086 |
| S 0254 | 9 Pin CRT Socket. | 2422 500 80076 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 0259 | 5 Pin Connector. | 2422 025 15848 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 0262 | 3 Pin Connector. | 2422 025 16937 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 333 00084 |
| 0280 | 4 Pin Connector. | 2422 025 12479 | 2463 | Cap, 1n, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound. | 2020 558 90487 |
| S 1000 | Tuner, V+U, PLL. | 2422 542 90108 | 2463 | Cap, 680p, 10%, 2000v, Ceramic. | 2020 558 90485 |
| 1002 | SAW Filter, 45.75MHz. | 2422 549 44518 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene. | 2020 301 90251 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 549 40807 | S 2465 | Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound. | 2222 375 90156 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 365 75154 |
| 1600 | Tact Switch. | 2422 128 02742 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 365 75104 |
| 1601 | Tact Switch. | 2422 128 02742 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 1602 | Tact Switch. | 2422 128 02742 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 1603 | Tact Switch. | 2422 128 02742 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 1606 | Tact Switch. | 2422 128 02742 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 |
| 1660 | Crystal, 12MHz000. | 2422 543 01203 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 543 00842 | 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 347 90234 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 021 90854 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 021 91049 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 330 00018 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 024 90647 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2123 | Res, Zero ohm, 'Chip' Jumper. | 3198 021 90020 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2125 | Res, Zero ohm, 'Chip' Jumper. | 3198 021 90020 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 021 91654 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91353 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 014 04740 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 021 21050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 370 76104 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 |
| 2254 | Res, Zero ohm, 'Chip' Jumper. | 3198 021 90020 | 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 368 90177 | 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 | 2837 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 | 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 | 2841 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 |

S = Safety Part Be sure to use exact replacement part.

27ST421L/17 (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03108 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03108 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . | 3198 011 01520 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | 3452 | Res, 5K6, 1%, 3/5W, Metal Film Only wit | |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | | h 5445 (JF0501-21835) Layer Wound. . . | 2312 915 15602 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3452 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3454 | Res, 2K, 1%, 3/5W, Metal Film Only with | |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | | 5445 (JF0501-21835) Layer Wound. . . . | 2312 915 12002 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film. | 2312 915 13902 |
| 2910 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 2911 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . . | 3198 021 52720 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3123 | Wire Jumper. | 3198 036 90010 | 3482 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3124 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3125 | Wire Jumper. | 3198 036 90010 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 |
| 3126 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . . | 3198 021 34730 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . . | 3198 021 51020 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . . | 3198 021 34730 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . . | 3198 021 32230 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31230 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51030 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . . | 2322 242 13335 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . . | 2322 242 13335 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 31020 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . . | 3198 021 33330 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . . | 2322 242 13155 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3507 | Surge Protector. | 2422 549 43073 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . . | 3198 021 51220 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . . | 3198 021 38230 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . . | 3198 021 32220 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03101 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . . | 3198 021 55630 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . . | 3198 021 51020 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 012 11070 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3528 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . . | 3198 021 32230 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . . | 3198 021 54730 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . . | 3198 021 32730 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51030 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. . . | 3198 021 54720 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . . | 2322 704 63903 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film. | 2306 204 03222 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31030 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. . | 3198 021 36840 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. . . | 3198 021 51520 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . . | 3198 021 33330 | 3543 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 915 18203 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . . | 2322 734 64702 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. . . | 2322 730 61274 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . . . | 3198 021 31020 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51530 |
| 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31060 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51030 |
| 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 3558 | Res, 330 ohm, 5%, 1W, Metal Film. | 3198 012 13310 |
| 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51230 |
| 3332 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. . . | 3198 021 55620 |
| 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass. . . | 3198 021 52220 |
| 3334 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 | 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass. . . | 3198 021 55620 |
| 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3580 | Res, 47K, 5%, 1/10W, Metalized Glass. . . | 3198 021 54730 |
| 3336 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 | 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 |

S = Safety Part Be sure to use exact replacement part.

27ST421L/17 (continued)

| | | | | | | | | | |
|------|---|------|-----|-------|--------|--|------|-----|-------|
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass | 3198 | 021 | 53320 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | S 5445 | Transformer, LOT (JF0501-21835) Layer W | | | |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | | ound | 2422 | 531 | 02611 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | S 5445 | Transformer, LOT (1342.0043B) | 2422 | 531 | 02506 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5457 | Coil, 42u. | 2422 | 535 | 94865 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5831 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 5832 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 5833 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 38220 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4128 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4604 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 |
| 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 |
| 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 |
| 4826 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 |
| 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 |
| 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4835 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 |

S = Safety Part Be sure to use exact replacement part.

27ST421L/17 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|--------------------------|------|-----|-------|
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 6561 | Diode, Rect, SB340L-7010 | 9322 | 128 | 18682 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I | 4835 | 310 | 57626 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9647 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PDT143ZT | 9340 | 547 | 00215 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PDT114ET | 9340 | 310 | 10215 | 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, LE33CZ | 9322 | 106 | 11676 | 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PDT143ZT | 9340 | 547 | 00215 | 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C16-WBN6. | 9322 | 147 | 25682 | 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 | 187 | 89682 | 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 7901 | IC, AN7522N PH | 9322 | 181 | 41682 | 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9104 | Wire Jumper. | 3198 | 036 | 90010 | 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9123 | Wire Jumper. | 3198 | 036 | 90010 | 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 | 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9173 | Wire Jumper. | 3198 | 036 | 90010 | 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9181 | Wire Jumper. | 3198 | 036 | 90010 | 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9182 | Wire Jumper. | 3198 | 036 | 90010 | 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9192 | Wire Jumper. | 3198 | 036 | 90010 | 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9193 | Wire Jumper. | 3198 | 036 | 90010 | 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9311 | Wire Jumper. | 3198 | 036 | 90010 | 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9312 | Wire Jumper. | 3198 | 036 | 90010 | 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9406 | Wire Jumper. | 3198 | 036 | 90010 | 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9407 | Wire Jumper. | 3198 | 036 | 90010 | 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9408 | Wire Jumper. | 3198 | 036 | 90010 | 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9409 | Wire Jumper. | 3198 | 036 | 90010 | 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9410 | Wire Jumper. | 3198 | 036 | 90010 | 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9411 | Wire Jumper. | 3198 | 036 | 90010 | 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9412 | Wire Jumper. | 3198 | 036 | 90010 | 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9413 | Wire Jumper. | 3198 | 036 | 90010 | 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9415 | Wire Jumper. | 3198 | 036 | 90010 | 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9416 | Wire Jumper. | 3198 | 036 | 90010 | 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9417 | Wire Jumper. | 3198 | 036 | 90010 | 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9418 | Wire Jumper. | 3198 | 036 | 90010 | 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9419 | Wire Jumper. | 3198 | 036 | 90010 | 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9421 | Wire Jumper. | 3198 | 036 | 90010 | 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9422 | Wire Jumper. | 3198 | 036 | 90010 | 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9423 | Wire Jumper. | 3198 | 036 | 90010 | 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9425 | Wire Jumper. | 3198 | 036 | 90010 | 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9427 | Wire Jumper. | 3198 | 036 | 90010 | 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9453 | Wire Jumper. | 3198 | 036 | 90010 | 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9460 | Wire Jumper. | 3198 | 036 | 90010 | 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9500 | Wire Jumper. | 3198 | 036 | 90010 | 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9501 | Wire Jumper. | 3198 | 036 | 90010 | 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9503 | Wire Jumper. | 3198 | 036 | 90010 | 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9506 | Wire Jumper. | 3198 | 036 | 90010 | 9858 | Wire Jumper. | 3198 | 036 | 90010 |
| 9507 | Wire Jumper. | 3198 | 036 | 90010 | 9859 | Wire Jumper. | 3198 | 036 | 90010 |
| 9510 | Wire Jumper. | 3198 | 036 | 90010 | 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9511 | Wire Jumper. | 3198 | 036 | 90010 | 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9512 | Wire Jumper. | 3198 | 036 | 90010 | 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9513 | Wire Jumper. | 3198 | 036 | 90010 | 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9514 | Wire Jumper. | 3198 | 036 | 90010 | 9867 | Wire Jumper. | 3198 | 036 | 90010 |
| 9515 | Wire Jumper. | 3198 | 036 | 90010 | 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9516 | Wire Jumper. | 3198 | 036 | 90010 | 9869 | Wire Jumper. | 3198 | 036 | 90010 |
| 9518 | Wire Jumper. | 3198 | 036 | 90010 | 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9520 | Wire Jumper. | 3198 | 036 | 90010 | 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9521 | Wire Jumper. | 3198 | 036 | 90010 | 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9522 | Wire Jumper. | 3198 | 036 | 90010 | 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9524 | Wire Jumper. | 3198 | 036 | 90010 | 9901 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part. Be sure to use exact replacement part.

27ST421L/17 (continued)

| | | | | |
|------|--|------|-----|-------|
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9919 | Wire Jumper. | 3198 | 036 | 90010 |
| 9920 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 | 127 | 27372 |
| CBA | EPS Module (ITV) | 3139 | 137 | 22961 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 26851 |
| CBA | Interface Panel (ITV). | 3139 | 188 | 04541 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 1002 | 3 Pin A/V Jack | 2422 | 026 | 05208 |
| 1219 | 6 Pin Board Connector. | 2422 | 025 | 10738 |
| 2002 | Cap, 330p, 50v, Ceramic. | 3198 | 017 | 03310 |
| 2004 | Cap, 330p, 50v, Ceramic. | 3198 | 017 | 03310 |
| 3001 | Res, 75 ohm, 5%. | 3198 | 021 | 57590 |
| 3002 | Res, 150 ohm, 5% | 3198 | 021 | 51510 |
| 3003 | Res, 47k, 5% | 3198 | 021 | 54730 |
| 3004 | Res, 150 ohm, 5% | 3198 | 021 | 51510 |
| 3005 | Res, 47k, 5% | 3198 | 021 | 54730 |
| 6001 | Zener Diode, 6.8V. | 3198 | 020 | 56880 |
| CBA | ITV Front Jack Panel Assembly. | 3139 | 187 | 26901 |

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 07161 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC05 | Cabinet Back | 3139 | 124 | 45241 |
| S AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| AC10 | Customer Control Buttons | 3139 | 124 | 45731 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53581 |
| AC20A | Cabinet Front. | 3139 | 177 | 62021 |
| AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| AC20C | Light Guide. | 3139 | 124 | 26461 |
| AC20D | Nameplate. | 3135 | 015 | 03571 |
| AC20E | Power Button | 3139 | 124 | 45741 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| AC26 | EPS Bracket. | 3119 | 107 | 17241 |
| AC27 | ITV Card Bracket | 3139 | 124 | 37933 |
| AC28 | ITV Card Slot Cover. | 3139 | 124 | 30571 |

28PW6532/85R - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|---|------|-----|-------|--------|---|----------------|
| | Socket Fuse. | 2422 | 088 | 00271 | 2247 | Cap, 2u2, 20%, 10v, Electrolytic . . . | 2020 012 93728 |
| 0127 | IC-Spring. | 3104 | 301 | 22081 | 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0136 | Spring. | 3139 | 121 | 24583 | 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 |
| 0137 | IC-Spring. | 3104 | 301 | 22081 | 2250 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 |
| 0138 | Spring for Bracket. | 3122 | 121 | 24786 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0139 | Spring. | 3139 | 121 | 24583 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0140 | IC-Spring. | 3104 | 301 | 22081 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0141 | Cable, DIP, 6 Pin, 400mm | 3104 | 301 | 09421 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 368 90177 |
| 0152 | Cable, DIPMate. | 3104 | 301 | 08381 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . | 2020 558 90445 |
| 0153 | 2 Pin Connector. | 2422 | 025 | 16374 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. . . | 2020 012 93495 |
| 0211 | 2 Pin Connector. | 2422 | 025 | 16375 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 |
| 0212 | 5 Pin Connector. | 2422 | 025 | 12481 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0214 | 6 Pin Connector. | 2422 | 025 | 12482 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0219 | 5 Pin Connector. | 2422 | 025 | 04853 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 21040 |
| 0220 | 2 Pin Connector. | 2422 | 025 | 15503 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . | 2020 558 90445 |
| 0221 | 2 Pin Connector. | 2422 | 025 | 10646 | 2360 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 |
| 0222 | 2 Pin Connector. | 2422 | 025 | 05236 | 2362 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 |
| 0223 | SVHS Jack. | 2422 | 026 | 04926 | 2364 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 0225 | 3 Pin Connector. | 2422 | 025 | 16382 | 2365 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 0239 | 6 Pin Connector. | 2422 | 025 | 04854 | 2366 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 0243 | 5 Pin Connector. | 2422 | 025 | 04853 | 2367 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 |
| 0244 | 6 Pin Connector. | 2422 | 025 | 04854 | 2368 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 025 34790 |
| 0245 | 5 Pin Connector. | 2422 | 025 | 12481 | 2369 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 02290 |
| 0246 | 3 Pin Connector. | 2412 | 020 | 00725 | 2372 | Cap, 10u, 20%, 160v, Electrolytic. . . | 2020 012 93318 |
| 0267 | 3 Pin Connector. | 2412 | 020 | 00725 | 2373 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 0268 | Jack. | 2422 | 026 | 05182 | 2375 | Cap, 220p, 5%, 50v, Ceramic. | 3198 019 02210 |
| 0269 | 3 Pin Connector. | 2412 | 020 | 00725 | 2378 | Cap, 10u, 20%, 100v, Electrolytic. . . | 3198 025 71090 |
| 0278 | SAW Filter, 45.75MHz | 2422 | 549 | 44518 | 2379 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 1002 | Filter, Ceramic, 4MHz5 | 2422 | 549 | 40807 | 2380 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 |
| 1200 | Fuse, 4A, 250V, IEC. | 2422 | 086 | 10914 | 2381 | Cap, 2u2, 20%, 100v, Electrolytic. . . | 2022 031 00138 |
| S 1500 | Crystal, 12MHz000 | 2422 | 543 | 01203 | 2401 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 1660 | Crystal, Resonator, 18MHz432, 12 Pin, H | 2422 | 543 | 00842 | 2402 | Cap, 47u, 20%, 50v, Electrolytic . . . | 3198 025 54790 |
| 1831 | C49/U A. | 2412 | 020 | 00725 | 2404 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 025 32210 |
| 1851 | 3 Pin Connector. | 3198 | 025 | 51090 | 2405 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 025 | 51090 | 2415 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 | 24710 | 2420 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 04710 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 | 025 | 41040 | 2421 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 025 | 31010 | 2441 | Cap, 47n, +80/-20%, 50v, Ceramic. . . | 3198 017 24730 |
| 2008 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 |
| 2009 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 | 24740 | 2448 | Cap, 100p, 10%, 1000v, Ceramic. . . . | 3198 019 51010 |
| 2101 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. . . | 2022 031 00103 |
| 2102 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 014 02230 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | 2454 | Cap, 68n, 5%, 250v, Metalized Polypropy | 2222 479 90133 |
| 2104 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 | 51090 | 2455 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 025 34790 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 | 51090 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | 2222 479 90023 |
| 2106 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | 2463 | Cap, 680p, 10%, 2000v, Ceramic. . . . | 2020 558 90485 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | 2465 | Cap, 12n, 5%, 1600v, Polypropylene . . | 2222 375 90156 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 017 | 33310 | 2467 | Cap, 9n1, 5%, 1000v, Polypropylene . . | 2222 375 90424 |
| 2121 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 | 2468 | Cap, 470n, 5%, 250v, Metalized Polyprop | 2222 479 90023 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2123 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2124 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2125 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 016 | 32290 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2131 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2132 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | 2480 | Cap, 47u, 20%, 25v, Electrolytic . . . | 2038 035 13301 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 023 | 41040 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2135 | Cap, 150n, +80/-20%, 16v, Ceramic. . . | 2238 | 786 | 19852 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2136 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 | 31010 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. . . | 2022 031 00137 |
| 2141 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 | 32210 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. . . | 2022 031 00139 |
| 2143 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. . . | 2038 035 13508 |
| 2150 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic . . | 2022 031 00144 |
| 2172 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 41040 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. . . | 2022 031 00139 |
| 2173 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 41040 | 2490 | Cap, 2u2, 20%, 100v, Electrolytic. . . | 2022 031 00138 |
| 2174 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 41040 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2184 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 | 51090 | 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | 2222 336 29148 |
| 2187 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 | 41050 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2201 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 | 017 | 44740 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2202 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2503 | Cap, 330u, 20%, 400v, Electrolytic . . | 2020 024 90592 |
| 2203 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2204 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2205 | Cap, 2u2, 20%, 10v, Electrolytic . . . | 2020 | 012 | 93728 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. . . . | 3198 019 64710 |
| 2206 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2509 | Cap, 100n, 20%, 275v, Metalized Polypro | 2222 336 29144 |
| 2207 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 | 42240 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90128 |
| 2208 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 | 04740 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2209 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. . . . | 3198 025 52290 |
| 2210 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 | 31520 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2211 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 | 41050 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2212 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2213 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 | 76104 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2214 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 | 42240 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2215 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 01030 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2216 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 01030 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |

S = Safety Part Be sure to use exact replacement part.

28PW6532/85R (continued)

| | | | | | | | | | |
|------|--|------|-----|-------|--------|--|------|-----|-------|
| 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 | 90472 | 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31540 |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic . . . | 2020 | 021 | 91654 | 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 05620 |
| 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 | 11020 | 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01030 |
| 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 | 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31520 |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 | 91374 | 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31030 |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 | 34790 | 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 | 734 | 61202 |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 | 51080 | 3172 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 | 24790 | 3180 | Res, 68K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 36830 |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 | 52290 | 3181 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31540 |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. . . . | 2222 | 910 | 19856 | 3190 | Res, 68K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 36830 |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 | 22240 | 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03910 |
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 | 31010 | 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 |
| 2604 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 | 31020 | 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 | 33390 | 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02230 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 | 41050 | 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 | 33390 | 3206 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 32240 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 | 41050 | 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 | 36890 | 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 | 36890 | 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36890 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 | 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 | 41050 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 05610 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 | 21050 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 33340 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 | 42240 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 38230 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32220 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 | 016 | 31080 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 05610 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 | 016 | 31080 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 | 32210 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32230 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 | 31520 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32730 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 | 54780 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 08210 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 | 41040 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . . | 2322 | 704 | 63903 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31030 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 | 41040 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34740 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 33330 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 08210 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 | 41040 | 3250 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 | 025 | 51010 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 | 31020 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 | 31020 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31060 |
| 2851 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 | 41050 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 | 31020 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34740 |
| 2853 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 | 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 | 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 | 013 | 01020 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 | 33390 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 | 013 | 01020 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 | 31510 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 | 31810 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 | 013 | 01020 |
| 2861 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 | 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 | 207 | 03109 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 | 32210 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 | 204 | 03108 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 | 016 | 35610 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 | 204 | 03108 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 | 016 | 33910 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 | 013 | 01520 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 | 011 | 03390 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic | 3198 | 026 | 31020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 | 593 | 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 | 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 | 011 | 03390 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 | 24740 | 3360 | Res, 39K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 33930 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 01020 | 3361 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31030 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 | 017 | 24740 | 3362 | Res, 39K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 33930 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 01020 | 3363 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 3367 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3368 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 02210 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3369 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32220 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 3373 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31520 | 3374 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02280 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 38220 | 3375 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32730 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3376 | Res, 68K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06830 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 | 011 | 06890 | 3378 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 | 57590 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | 3380 | Res, 68K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 36830 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3381 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32730 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 32240 | 3383 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3384 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02280 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 32240 | 3385 | Res, 10K, 5%, 5W, Metal Film | 2322 | 257 | 41103 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 | 011 | 07590 | S 3386 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 | 204 | 03109 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 03310 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 | 011 | 07590 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 03330 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01040 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 | 011 | 07590 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 04780 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 04780 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 | 3407 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 04780 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3408 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01030 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01030 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 | 204 | 03478 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01510 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 | 3443 | Res, 1M, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51050 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 | 011 | 07590 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01530 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 05620 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01810 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 08210 |

S = Safety Part Be sure to use exact replacement part.

28PW6532/85R (continued)

| | | | | | |
|--------|--|----------------|------|--|----------------|
| 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 | 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3452 | Res, 47K, 1%, 3/5W, Metal Film | 2312 915 14703 | 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3454 | Res, 15K, 1%, 3/5W, Metal Film | 2312 915 11503 | 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 | 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3457 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 | 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 | 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 | 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3470 | Res, 470K, 5%, 1/10W, Metalized Glass. . | 3198 021 54740 | 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3473 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 | 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 | 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3481 | Res, 18K, 1%, 3/5W, Metal Film | 2312 915 11803 | 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 32290 | 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 |
| 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3489 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3491 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 021 53320 | 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3492 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3851 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 |
| 3495 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 021 52230 | 3852 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3496 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 021 51040 | 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 021 36820 |
| 3497 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 021 51040 | 3903 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 |
| 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 3905 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 |
| S 3504 | Res, PTC, 9R 220V. | 2120 661 00024 | 3909 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 | 3910 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 3507 | Surge Protector. | 2422 549 43073 | 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3521 | Res, 22 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 02290 | 4311 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3522 | Res, 330K, 1%, 1/8W, Metalized Glass . | 2322 734 63304 | 4312 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| S 3523 | Res, 47 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03479 | 4313 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3526 | Res, OR15, 5%, 3/5W, Metal Film. . . . | 3198 012 11570 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3527 | Res, OR22, 5%, 3/5W, Metal Film. . . . | 3198 012 12270 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 33K, 5%, 1/10W, Metalized Glass . | 3198 021 53330 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 8K2, 5%, 1/10W, Metalized Glass . | 3198 021 58220 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3614 | Res, 4K7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3615 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3617 | Res, 4K7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04720 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3619 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |

S = Safety Part Be sure to use exact replacement part.

| | | | | | | | | | |
|------|--|------|-----|-------|------|--------------------------------|------|-----|-------|
| 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5001 | Coil, 5u6. | 3198 | 018 | 25680 | 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 5002 | Coil, 820n, 10%. | 3198 | 018 | 18270 | 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 5201 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 | 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 | 7360 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 | 7366 | Transistor, PNP, 2SA965. | 9322 | 167 | 18676 |
| 5242 | Coil, 10u, 5%. | 3198 | 018 | 11090 | 7369 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5341 | Coil, 22u. | 2422 | 535 | 97333 | 7373 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 |
| 5342 | Coil, 27u. | 2422 | 535 | 97334 | 7380 | Transistor, NPN, 2SC2235 | 9322 | 167 | 19676 |
| 5376 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7382 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 |
| 5400 | Coil, 11u7 | 2422 | 535 | 91027 | 7400 | Power FET, STP3NC60FP. | 9322 | 157 | 37687 |
| 5451 | Coil, 22u, 10%. | 3198 | 018 | 72290 | 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 | 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 |
| 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02477 | 7444 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 |
| 5464 | Coil, Bridge, C946-01 Y. | 2422 | 531 | 02419 | 7450 | Transistor, PNP, PDTA114ET | 3198 | 010 | 44010 |
| 5471 | Coil, 6u8, 20%. | 3198 | 018 | 76880 | 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 |
| 5472 | Coil, 3u3, 10%. | 3198 | 018 | 23380 | 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 |
| 5480 | Coil, 39u, 10%. | 2422 | 535 | 97336 | 7462 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 |
| 5500 | Mains Filter | 2422 | 549 | 43567 | 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 |
| 5501 | Mains Filter | 2422 | 549 | 43432 | 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 |
| 5561 | Coil, 27u, 5%. | 2422 | 535 | 95366 | 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 |
| 5602 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7541 | Transistor, NPN, PDTCL14ET | 9340 | 310 | 10215 |
| 5603 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5604 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 |
| 5831 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 7561 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 |
| 5832 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5833 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 |
| 5835 | Coil, 12u, 10%. | 3198 | 018 | 31290 | 7606 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 |
| 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7851 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7901 | IC, AN7580 | 9322 | 166 | 29682 |
| 6202 | Diode, Signal, BAS316. | 3198 | | | | | | | |

S = Safety Part Be sure to use exact replacement part.

28PW6532/85R (continued)

| | | | | |
|------|--|------|-----|-------|
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2172 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2173 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2174 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01210 |
| 3157 | Res, 120 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01210 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 16211 |

Subwoofer Panel Parts

| | | | | |
|-----------------------|--|------|-----|-------|
| Subwoofer Panel Parts | | | | |
| 1901 | Connector, 3 Pin | 2422 | 025 | 09191 |
| 1902 | Cinch Socket | 2422 | 026 | 05156 |
| 2901 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 029 | 31010 |
| 2902 | Cap, 100p, 10%, 50v, Ceramic | 3198 | 019 | 11010 |
| 3901 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01510 |
| CBA | Subwoofer Panel Assembly | 3139 | 187 | 11641 |

Top Control Panel Parts

| | | | | |
|-------------------------|---|------|-----|-------|
| Top Control Panel Parts | | | | |
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

| | | | | |
|---------------------------|--|------|-----|-------|
| Cabinet & Accessory Parts | | | | |
| S AC01 | AC Cord. | 3139 | 128 | 75281 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitt | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44061 |
| AC06 | Cabinet Back Screw Cover (2 Used). | 3139 | 124 | 43031 |
| AC07 | Canceller Coil | 3128 | 138 | 60581 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, W66ERF022X013 | 9301 | 888 | 10314 |
| S AC12 | Degaussing Coil. | 3106 | 101 | 02381 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32523 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 21141 |
| AC18 | Quick Use Guide. | 3121 | 233 | 44521 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37662 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53381 |
| AC20A | Cabinet Front. | 3139 | 124 | 44141 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10681 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76081 |
| AC20J | Top Control Assembly | 3139 | 177 | 56381 |
| REMOTE | Remote Control Transmitter, RC19335010/01. | 3139 | 238 | 02791 |

29DV6931/85R - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | Main Chassis Parts | | | |
|--------------------|---|------|-----------|--------------------|---|------|-----------|
| 0130 | Bead, Ferrite, 100MHz | 2422 | 549 45808 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 |
| 0211 | 2 Pin Connector | 2422 | 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | |
| 0212 | 2 Pin Connector | 2422 | 025 16375 | | er | 2222 | 368 90177 |
| 0214 | 5 Pin Connector | 2422 | 025 12481 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic | 2020 | 558 90445 |
| 0217 | 3 Pin Connector | 2412 | 020 00725 | 2340 | Cap, 10u, 20%, 250v, Electrolytic | 2020 | 012 93495 |
| 0219 | 6 Pin Connector | 2422 | 025 12482 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 |
| 0220 | 5 Pin Connector | 2422 | 025 04853 | 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 | 016 05610 |
| 0221 | 2 Pin Connector | 2422 | 025 15503 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic | 2020 | 558 90559 |
| 0222 | 2 Pin Connector | 2422 | 025 10646 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 21040 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 | 558 90445 |
| 0225 | SVHS Jack | 2422 | 026 04926 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 | 021 90552 |
| 0229 | 7 Pin Connector | 2422 | 025 11244 | 2402 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 0239 | 3 Pin Connector | 2422 | 025 16382 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 | 025 54790 |
| 0240 | 4 Pin Connector | 2422 | 025 12479 | 2405 | Cap, 220u, 20%, 25v, Electrolytic | 3198 | 025 32210 |
| 0243 | 6 Pin Connector | 2422 | 025 04854 | 2415 | Cap, 330p, 5%, 50v, Ceramic | 3198 | 016 03310 |
| 0244 | 5 Pin Connector | 2422 | 025 04853 | 2441 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 0245 | 6 Pin Connector | 2422 | 025 04854 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| 0246 | 5 Pin Connector | 2422 | 025 12481 | 2444 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 0251 | 4 Pin Connector | 2422 | 025 15847 | 2450 | Cap, 47u, 20%, 160v, Electrolytic | 2020 | 021 91139 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2451 | Cap, 22n, 10%, 50v, Polyester | 3198 | 014 02230 |
| 0267 | 3 Pin Connector | 2412 | 020 00725 | 2452 | Cap, 180p, 5%, 50v, Ceramic | 3198 | 016 01810 |
| 0269 | Jack | 2422 | 026 05182 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2457 | Cap, 360n, 5%, 250v, Metalized Polyprop | | |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | | ylene | 2022 | 333 00163 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic | 2020 | 021 91331 |
| S 1500 | Fuse, 4A, 250V, IEC | 2422 | 086 10914 | 2459 | Cap, 680p, 10%, 500v, Ceramic | 3198 | 019 46810 |
| S 1515 | Relay, 5 Amp, 12V | 2422 | 132 07444 | 2460 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 01010 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | S 2463 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 | 558 90489 |
| 1810 | 6 Pin Connector | 2422 | 025 15849 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | | |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | | | | lene | 2222 | 479 90042 |
| | C49/U A | 2422 | 543 00842 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene | 2020 | 301 90255 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 | 024 44730 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 | 347 90219 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2468 | Cap, 27n, 10%, 400v, Polyester | 2222 | 347 90232 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic | 3198 | 025 24710 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic | 3198 | 025 31010 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2474 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic | 3198 | 017 24740 | 2475 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2476 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 04720 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2481 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2482 | Cap, 120n, 5%, 250v, Metalized Polyprop | | |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | | ylene | 2222 | 479 90051 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic | 2020 | 021 90856 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 | 021 90854 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91049 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2491 | Cap, 1n, 10%, 500v, Ceramic | 3198 | 019 41020 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | | |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | | pylene | 2022 | 330 00018 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 | 024 90647 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic | 2020 | 554 90172 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2520 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic | 2238 | 786 19852 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 | 558 90489 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2525 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 017 04710 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2541 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 54780 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 | 021 91654 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 | 017 44740 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91374 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic | 2222 | 910 19856 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic | 3198 | 023 22240 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 31010 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic | 3198 | 017 31520 | 2604 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 | 2606 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 32220 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 31020 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic | 3198 | 017 21050 |
| | | | | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 |
| | | | | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |

S = Safety Part Be sure to use exact replacement part.

29DV6931/85R (continued)

| | | | | | |
|------|--|----------------|--------|---|----------------|
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic | 3198 016 34710 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic | 3198 016 32210 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic | 3198 017 31520 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . | 3198 011 08220 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . | 3198 011 03330 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic . . . | 3198 026 31020 | 3403 | Res, 82K, 1%, 3/5W, Metal Film . . . | 2312 915 18203 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film . . . | 3198 011 01020 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2120 101 74158 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 32290 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3507 | Surge Protector. | 2422 549 43073 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. | 3198 013 02210 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3526 | Res, OR1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | S 3527 | Res, OR33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |

S = Safety Part Be sure to use exact replacement part.

29DV6931/85R (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 | 730 | 61274 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51530 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51230 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 | 021 | 52220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. | 2306 | 204 | 03109 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5341 | Coil, 22u. | 2422 | 535 | 97333 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5342 | Coil, 3u9, 10% | 2422 | 535 | 97323 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | S 5445 | Transformer, LOT | 2422 | 531 | 02574 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5451 | Coil, 22u, 10% | 3198 | 018 | 72290 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | S 5457 | Coil, 25u. | 2422 | 535 | 91028 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5480 | Coil, 47u, 10% | 2422 | 535 | 97337 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5520 | Transformer, SS42202-00 B. | 2422 | 531 | 02562 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5831 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5832 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 5833 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36820 | 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 |
| 3903 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3905 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3909 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32730 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3910 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32730 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08210 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 |

S = Safety Part Be sure to use exact replacement part.

29DV6931/85R (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6490 | Diode, Rect, BYV95C. | 9335 001 80133 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 132 55667 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 175 70667 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9569H/N1/4I/1313. | 9352 743 94557 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9628 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9644 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9645 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7803 | IC, HEF4053BT. | 9333 729 60653 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 187 89682 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7580 | 9322 166 29682 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7903 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9681 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9685 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9414 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

29DV6931/85R (continued)

| | | | | | | | | | |
|------------------------------------|--|------|-----|-------|--------|---|------|-----|-------|
| 9689 | Wire Jumper. | 3198 | 036 | 90010 | 2113 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 | 2114 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 | 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 | 2185 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 | 2263 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 41040 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 | 2300 | Cap, 10u, 20%, 250v, Electrolytic. . . | 2020 | 012 | 93495 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 | 2301 | Cap, 22n, 10%, 400v, Metalized Polyeste | 2222 | 365 | 55223 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 | 2302 | Cap, 100p, 10%, 1KV, Ceramic | 3198 | 019 | 51010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 | 2310 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 | 2311 | Cap, 470n, 10%, 25v, Ceramic | 2020 | 552 | 96465 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 | 2313 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 | 2315 | Cap, 220p, 10%, 1KV, Ceramic | 3198 | 019 | 62210 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 | 2316 | Cap, 33n, 10%, 16v, Ceramic. | 3198 | 017 | 33330 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 | 2319 | Cap, 220n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 22240 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 | 2330 | Cap, 2u2, 20%, 25v, Electrolytic . . . | 3198 | 026 | 32220 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 | 2331 | Cap, 470u, 20%, 10v, Electrolytic. . . | 3198 | 025 | 14710 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 | 2332 | Cap, 2u2, 20%, 25v, Electrolytic . . . | 3198 | 026 | 32220 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 | 2333 | Cap, 1000u, 20%, 10v, Electrolytic . . | 2020 | 021 | 91631 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | 2337 | Cap, 1000u, 20%, 25v, Electrolytic . . | 3198 | 026 | 31020 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | 2338 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 | 025 | 24710 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | 2339 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 | 025 | 24710 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | 2341 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 | 42240 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | 2342 | Cap, 47u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 24790 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 | 2350 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 | 2351 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | 2353 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | 3101 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | 3102 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36890 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | 3110 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 | 3111 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | 3112 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 | 3113 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | 3114 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | 3115 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | 3116 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 | 3117 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | 3118 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | 3180 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | 3182 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | 3262 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | 3266 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | S 3300 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 | 204 | 03108 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | S 3301 | Power Resistor, 68K, 5%, 2W. | 3198 | 012 | 26830 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | 3308 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | 3309 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9923 | Wire Jumper. | 3198 | 036 | 90010 | 3310 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | 3311 | Res, 180 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31810 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | 3312 | Res, 10 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31090 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | 3313 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 23581 | 3314 | Res, 1 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01080 |
| CBA | DVD Loader SD5.12. | 3139 | 188 | 55471 | 3315 | Res, 1 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01080 |
| CBA | DVD MPEG Assembly SD5.12 | 3139 | 188 | 55481 | 3317 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| CBA | DVD Module SD5.12 (contains Loader and | | | | 3318 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| | MPEG Assembly) | 4835 | 310 | 57599 | 3319 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| | | | | | 3320 | Res, 100K, 1%, 1/16W, Metalized Glass. | 2322 | 704 | 61004 |
| Channel One Card Parts | | | | | 3339 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 |
| Channel One Card Parts | | | | | 3340 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 2D 3 Line Comb Filter Parts | | | | | 3342 | Res, 4K7, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 64702 |
| 2D 3 Line Comb Filter Parts | | | | | 3344 | Res, 4K7, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 64702 |
| DAF Panel Parts | | | | | 3360 | Res, 4R7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34780 |
| DAF Panel Parts | | | | | 3361 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01020 |
| DVD Eject Panel Parts | | | | | 4105 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| DVD Eject Panel Parts | | | | | 4106 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0267 | 3 Pin Board Connector. | 2422 | 025 | 09191 | 4185 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0361 | Eject Button | 3139 | 177 | 63451 | 4226 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 1110 | Tact Switch. | 2422 | 128 | 02742 | 4261 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| CBA | DVD Eject Panel Assembly | 3139 | 187 | 23311 | 4265 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| DVD Interface Panel Parts | | | | | 4266 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| DVD Interface Panel Parts | | | | | 4316 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0226 | Connector, 6 Pin | 2422 | 025 | 12482 | 4342 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0228 | Connector, 3 Pin | 2412 | 020 | 00725 | 4343 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0251 | Connector, 4 Pin | 2422 | 025 | 15847 | 4361 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0253 | Connector, 7 Pin | 2422 | 025 | 11244 | 4363 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0254 | Connector, 3 Pin | 2422 | 025 | 16382 | 4364 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0266 | Connector, 6 Pin | 2422 | 025 | 15849 | 5100 | Inductor, Variable, 100uH, 10% | 2422 | 549 | 41663 |
| 0269 | Connector, 5 Pin | 2422 | 025 | 15848 | 5110 | Coil, 220n | 3198 | 018 | 12270 |
| 1100 | Socket, Cinch, 1 Pin | 2422 | 026 | 04425 | 5300 | Coil, 27u. | 3198 | 018 | 22790 |
| 1101 | Connector, 8 Pin | 2422 | 025 | 12483 | 5301 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| S 1330 | Fuse, 2A, 250V | 2422 | 086 | 10422 | S 5315 | Transformer, SS25113-00. | 2422 | 531 | 02596 |
| S 1331 | Fuse, 2A, 250V | 2422 | 086 | 10422 | 5331 | Coil, 10u, 5%. | 2422 | 535 | 95363 |
| S 1332 | Fuse, 2A, 250V | 2422 | 086 | 10421 | 5333 | Coil, 10u, 5%. | 2422 | 535 | 95363 |
| 2101 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 | 5337 | Coil, 10u, 10% | 2422 | 535 | 97328 |
| 2102 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 21090 | 5339 | Coil, 10u, 10% | 2422 | 535 | 97328 |
| 2103 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 | 6100 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 2104 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 41040 | 6101 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 2110 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 41040 | 6300 | Diode, Rect, BYD33J | 9337 | 234 | 20133 |
| 2111 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 | 6311 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 2112 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 | 6312 | Zener Diode, 22 volt | 3198 | 020 | 52290 |
| | | | | | 6330 | Diode, Rect, EGP20DL-5100 | 9322 | 164 | 42682 |
| | | | | | 6332 | Diode, Rect, SB340L-7024. | 9322 | 161 | 76682 |
| | | | | | 6336 | Diode, Rect, BYV27-200. | 9335 | 526 | 80133 |
| | | | | | 7110 | IC, HEF4053BT. | 9333 | 729 | 60653 |

S = Safety Part Be sure to use exact replacement part.

29DV6931/85R (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|---|------|-----|-------|
| 7262 | Transistor, NPN, PDTCl24ET | 9340 | 310 | 20215 | 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 7310 | Transistor, NPN, PDTCl14ET | 3198 | 010 | 44110 | 3093 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 7311 | Transistor, PNP, PDTAl14ET | 3198 | 010 | 44010 | 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 7312 | Transistor, PNP, BC857B. | 3198 | 010 | 42150 | 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 7313 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 | 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 7315 | IC, TEAl523P/N2. | 9352 | 699 | 68112 | 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 7340 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 7341 | IC, TL431CLP | 9337 | 711 | 00676 | 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9110 | Wire Jumper. | 3198 | 036 | 90010 | 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| 9111 | Wire Jumper. | 3198 | 036 | 90010 | CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9266 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9315 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9350 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9351 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9352 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9355 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9357 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| CBA | DVD Interface Panel Assembly | 3141 | 058 | 64801 | | | | | |

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| | Front Interface Panel Parts | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| | Side Jack Panel Parts | | | |
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 15849 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2172 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2173 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2174 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01210 |
| 3157 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01210 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 188 | 03541 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

| | | | | |
|------|--|------|-----|-------|
| | Top Control Panel Parts | | | |
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| | Cabinet & Accessory Parts | | | |
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44931 |
| AC06 | Cabinet Back Screw Cover (2 Used). . . | 3139 | 124 | 39301 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A68QCU754X73(N) | 9301 | 925 | 60527 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 45709 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 21341 |
| AC18 | Quick Use Guide. | 3121 | 233 | 44461 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53503 |
| AC20A | Cabinet Front. | 3139 | 177 | 75451 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76521 |
| AC20J | Top Control Assembly | 3139 | 177 | 56381 |
| AC23 | DVD Door | 3139 | 177 | 63441 |
| AC24 | DVD Interface Panel Bracket. | 3139 | 124 | 43291 |
| REMOTE | Remote Control Transmitter, RC19042007/01. | 3128 | 147 | 14521 |

29DV693R85A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | Main Chassis Parts | | | |
|--------------------|---|------|-----------|--------------------|---|------|-----------|
| 0130 | Bead, Ferrite, 100MHz | 2422 | 549 45808 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 |
| 0211 | 2 Pin Connector | 2422 | 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | |
| 0212 | 2 Pin Connector | 2422 | 025 16375 | | er | 2222 | 368 90177 |
| 0214 | 5 Pin Connector | 2422 | 025 12481 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic | 2020 | 558 90445 |
| 0217 | 3 Pin Connector | 2412 | 020 00725 | 2340 | Cap, 10u, 20%, 250v, Electrolytic | 2020 | 012 93495 |
| 0219 | 6 Pin Connector | 2422 | 025 12482 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 |
| 0220 | 5 Pin Connector | 2422 | 025 04853 | 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 | 016 05610 |
| 0221 | 2 Pin Connector | 2422 | 025 15503 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic | 2020 | 558 90559 |
| 0222 | 2 Pin Connector | 2422 | 025 10646 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 21040 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 | 558 90445 |
| 0225 | SVHS Jack | 2422 | 026 04926 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 | 021 90552 |
| 0229 | 7 Pin Connector | 2422 | 025 11244 | 2402 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 0239 | 3 Pin Connector | 2422 | 025 16382 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 | 025 54790 |
| 0240 | 4 Pin Connector | 2422 | 025 12479 | 2405 | Cap, 220u, 20%, 25v, Electrolytic | 3198 | 025 32210 |
| 0243 | 6 Pin Connector | 2422 | 025 04854 | 2415 | Cap, 330p, 5%, 50v, Ceramic | 3198 | 016 03310 |
| 0244 | 5 Pin Connector | 2422 | 025 04853 | 2441 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 0245 | 6 Pin Connector | 2422 | 025 04854 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| 0246 | 5 Pin Connector | 2422 | 025 12481 | 2444 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 0251 | 4 Pin Connector | 2422 | 025 15847 | 2450 | Cap, 47u, 20%, 160v, Electrolytic | 2020 | 021 91139 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2451 | Cap, 22n, 10%, 50v, Polyester | 3198 | 014 02230 |
| 0267 | 3 Pin Connector | 2412 | 020 00725 | 2452 | Cap, 180p, 5%, 50v, Ceramic | 3198 | 016 01810 |
| 0269 | Jack | 2422 | 026 05182 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2457 | Cap, 360n, 5%, 250v, Metalized Polyprop | | |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | | ylene | 2022 | 333 00163 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic | 2020 | 021 91331 |
| S 1500 | Fuse, 4A, 250V, IEC | 2422 | 086 10914 | 2459 | Cap, 680p, 10%, 500v, Ceramic | 3198 | 019 46810 |
| S 1515 | Relay, 5 Amp, 12V | 2422 | 132 07444 | 2460 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 01010 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | S 2463 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 | 558 90489 |
| 1810 | 6 Pin Connector | 2422 | 025 15849 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | | |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | | | | lene | 2222 | 479 90042 |
| | C49/U A | 2422 | 543 00842 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene | 2020 | 301 90255 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 | 024 44730 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 | 347 90219 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2468 | Cap, 27n, 10%, 400v, Polyester | 2222 | 347 90232 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic | 3198 | 025 24710 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic | 3198 | 025 31010 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2474 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic | 3198 | 017 24740 | 2475 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2476 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 04720 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2481 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2482 | Cap, 120n, 5%, 250v, Metalized Polyprop | | |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | | ylene | 2222 | 479 90051 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic | 2020 | 021 90856 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 | 021 90854 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91049 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2491 | Cap, 1n, 10%, 500v, Ceramic | 3198 | 019 41020 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | | |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | | pylene | 2022 | 330 00018 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 | 024 90647 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic | 2020 | 554 90172 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2520 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic | 2238 | 786 19852 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 | 558 90489 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2525 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 017 04710 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2541 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 54780 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 | 021 91654 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 | 017 44740 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91374 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic | 2222 | 910 19856 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic | 3198 | 023 22240 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 31010 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic | 3198 | 017 31520 | 2604 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 | 2606 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 32220 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 31020 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic | 3198 | 017 21050 |
| | | | | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 |
| | | | | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |

S = Safety Part Be sure to use exact replacement part.

29DV693R85A (continued)

| | | | | | |
|------|--|----------------|--------|---|----------------|
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic | 3198 016 34710 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic | 3198 016 32210 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic | 3198 017 31520 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . | 3198 011 08220 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . | 3198 011 03330 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic . . . | 3198 026 31020 | 3403 | Res, 82K, 1%, 3/5W, Metal Film . . . | 2312 915 18203 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film . . . | 3198 011 01020 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2120 101 74158 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 32290 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3507 | Surge Protector. | 2422 549 43073 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. | 3198 013 02210 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3526 | Res, OR1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | S 3527 | Res, OR33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |

S = Safety Part Be sure to use exact replacement part.

29DV693R85A (continued)

| | | | | | |
|--------|---|----------------|--------|--|----------------|
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 021 54730 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 021 51030 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 021 54720 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 021 51520 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass | 2322 734 64702 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 730 61274 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 021 51530 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 021 54720 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass | 3198 021 51020 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 021 51230 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 021 55620 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 021 52220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 021 55620 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 021 54730 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film | 2306 204 03109 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass | 3198 021 52240 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass | 3198 021 52240 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 011 02220 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 011 02220 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film | 3198 011 04710 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film | 3198 011 06820 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5202 | Wire Jumper | 3198 036 90010 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 021 32220 | 5241 | Wire Jumper | 3198 036 90010 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5341 | Coil, 22u | 2422 535 97333 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5342 | Coil, 3u9, 10% | 2422 535 97323 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass | 3198 021 51020 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | S 5445 | Transformer, LOT | 2422 531 02574 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5451 | Coil, 22u, 10% | 3198 018 72290 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | S 5457 | Coil, 25u | 2422 535 91028 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass | 3198 021 31020 | 5463 | Coil, Choke | 3128 138 37021 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5480 | Coil, 47u, 10% | 2422 535 97337 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | S 5501 | Mains Filter | 2422 549 43432 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | S 5520 | Transformer, SS42202-00 B | 2422 531 02562 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 021 34730 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5831 | Coil, 6u8, 5% | 3198 018 16880 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5832 | Coil, 6u8, 5% | 3198 018 16880 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 021 32220 | 5833 | Coil, 6u8, 5% | 3198 018 16880 |
| 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 021 36820 | 5835 | Coil, 12u, 10% | 3198 018 31290 |
| 3903 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 021 34730 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3905 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 021 34730 | 6150 | Diode, Signal, BAS316 | 3198 010 10630 |
| 3909 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 021 32730 | 6201 | Diode, Signal, BAS316 | 3198 010 10630 |
| 3910 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 021 32730 | 6202 | Diode, Signal, BAS316 | 3198 010 10630 |
| 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film | 3198 011 08210 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316 | 3198 010 10630 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6400 | Res, 1K, 1%, 3/5W, Metal Film | 2312 915 11002 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6401 | Zener Diode, 47 volt | 3198 010 24790 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6447 | Diode, Signal, 1N4148 | 3198 010 10010 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6460 | Diode, Rect, BY228/24 | 9340 559 50112 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6461 | Diode, Rect, RGP30J-L7004 | 9338 617 60682 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6465 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6466 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6467 | Diode, Signal, BAS316 | 3198 010 10630 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6468 | Diode, Signal, BAS316 | 3198 010 10630 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6469 | Diode, Rect, BYV95C | 9335 001 80133 |

S = Safety Part Be sure to use exact replacement part.

29DV693R85A (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6490 | Diode, Rect, BYV95C. | 9335 001 80133 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 132 55667 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 175 70667 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9569H/N1/4I/1313. | 9352 743 94557 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9628 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9644 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9645 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7803 | IC, HEF4053BT. | 9333 729 60653 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 187 89682 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7580 | 9322 166 29682 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7903 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9681 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9685 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9414 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

29DV693R85A (continued)

| | | | | | | | | | |
|------------------------------------|--|------|-----|-------|--------|---|------|-----|-------|
| 9689 | Wire Jumper. | 3198 | 036 | 90010 | 2113 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 | 2114 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 | 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 | 2185 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 | 2263 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 41040 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 | 2300 | Cap, 10u, 20%, 250v, Electrolytic. . . | 2020 | 012 | 93495 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 | 2301 | Cap, 22n, 10%, 400v, Metalized Polyeste | 2222 | 365 | 55223 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 | 2302 | Cap, 100p, 10%, 1KV, Ceramic | 3198 | 019 | 51010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 | 2310 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 | 2311 | Cap, 470n, 10%, 25v, Ceramic | 2020 | 552 | 96465 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 | 2313 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 | 2315 | Cap, 220p, 10%, 1KV, Ceramic | 3198 | 019 | 62210 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 | 2316 | Cap, 33n, 10%, 16v, Ceramic. | 3198 | 017 | 33330 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 | 2319 | Cap, 220n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 22240 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 | 2330 | Cap, 2u2, 20%, 25v, Electrolytic . . . | 3198 | 026 | 32220 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 | 2331 | Cap, 470u, 20%, 10v, Electrolytic. . . | 3198 | 025 | 14710 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 | 2332 | Cap, 2u2, 20%, 25v, Electrolytic . . . | 3198 | 026 | 32220 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 | 2333 | Cap, 1000u, 20%, 10v, Electrolytic . . | 2020 | 021 | 91631 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | 2337 | Cap, 1000u, 20%, 25v, Electrolytic . . | 3198 | 026 | 31020 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | 2338 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 | 025 | 24710 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | 2339 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 | 025 | 24710 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | 2341 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 | 42240 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | 2342 | Cap, 47u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 24790 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 | 2350 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 | 2351 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | 2353 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | 3101 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | 3102 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36890 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | 3110 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 | 3111 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | 3112 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 | 3113 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | 3114 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | 3115 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | 3116 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 | 3117 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | 3118 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | 3180 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | 3182 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | 3262 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | 3266 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | S 3300 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 | 204 | 03108 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | S 3301 | Power Resistor, 68K, 5%, 2W. | 3198 | 012 | 26830 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | 3308 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | 3309 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9923 | Wire Jumper. | 3198 | 036 | 90010 | 3310 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | 3311 | Res, 180 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31810 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | 3312 | Res, 10 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31090 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | 3313 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 23581 | 3314 | Res, 1 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01080 |
| CBA | DVD Loader SD5.12. | 3139 | 188 | 55471 | 3315 | Res, 1 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01080 |
| CBA | DVD MPEG Assembly SD5.12 | 3139 | 188 | 55481 | 3317 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| CBA | DVD Module SD5.12 (contains Loader and | | | | 3318 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| | MPEG Assembly) | 4835 | 310 | 57599 | 3319 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| | | | | | 3320 | Res, 100K, 1%, 1/16W, Metalized Glass. | 2322 | 704 | 61004 |
| Channel One Card Parts | | | | | 3339 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 |
| Channel One Card Parts | | | | | 3340 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 2D 3 Line Comb Filter Parts | | | | | 3342 | Res, 4K7, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 64702 |
| 2D 3 Line Comb Filter Parts | | | | | 3344 | Res, 4K7, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 64702 |
| DAF Panel Parts | | | | | 3360 | Res, 4R7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34780 |
| DAF Panel Parts | | | | | 3361 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01020 |
| DVD Eject Panel Parts | | | | | 4105 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| DVD Eject Panel Parts | | | | | 4106 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0267 | 3 Pin Board Connector. | 2422 | 025 | 09191 | 4185 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0361 | Eject Button | 3139 | 177 | 63451 | 4226 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 1110 | Tact Switch. | 2422 | 128 | 02742 | 4261 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| CBA | DVD Eject Panel Assembly | 3139 | 187 | 23311 | 4265 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| DVD Interface Panel Parts | | | | | 4266 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| DVD Interface Panel Parts | | | | | 4316 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0226 | Connector, 6 Pin | 2422 | 025 | 12482 | 4342 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0228 | Connector, 3 Pin | 2412 | 020 | 00725 | 4343 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0251 | Connector, 4 Pin | 2422 | 025 | 15847 | 4361 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0253 | Connector, 7 Pin | 2422 | 025 | 11244 | 4363 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0254 | Connector, 3 Pin | 2422 | 025 | 16382 | 4364 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0266 | Connector, 6 Pin | 2422 | 025 | 15849 | 5100 | Inductor, Variable, 100uH, 10% | 2422 | 549 | 41663 |
| 0269 | Connector, 5 Pin | 2422 | 025 | 15848 | 5110 | Coil, 220n | 3198 | 018 | 12270 |
| 1100 | Socket, Cinch, 1 Pin | 2422 | 026 | 04425 | 5300 | Coil, 27u. | 3198 | 018 | 22790 |
| 1101 | Connector, 8 Pin | 2422 | 025 | 12483 | 5301 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| S 1330 | Fuse, 2A, 250V | 2422 | 086 | 10422 | S 5315 | Transformer, SS25113-00. | 2422 | 531 | 02596 |
| S 1331 | Fuse, 2A, 250V | 2422 | 086 | 10422 | 5331 | Coil, 10u, 5%. | 2422 | 535 | 95363 |
| S 1332 | Fuse, 2A, 250V | 2422 | 086 | 10421 | 5333 | Coil, 10u, 5%. | 2422 | 535 | 95363 |
| 2101 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 | 5337 | Coil, 10u, 10% | 2422 | 535 | 97328 |
| 2102 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 21090 | 5339 | Coil, 10u, 10% | 2422 | 535 | 97328 |
| 2103 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 | 6100 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 2104 | Cap, 100n, +80/-20%, 25v, Ceramic. . | 3198 | 023 | 41040 | 6101 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 2110 | Cap, 100n, +80/-20%, 25v, Ceramic. . | 3198 | 023 | 41040 | 6300 | Diode, Rect, BYD33J | 9337 | 234 | 20133 |
| 2111 | Cap, 2u2, +80/-20%, 10v, Ceramic . . | 3198 | 017 | 22250 | 6311 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 2112 | Cap, 2u2, +80/-20%, 10v, Ceramic . . | 3198 | 017 | 22250 | 6312 | Zener Diode, 22 volt | 3198 | 020 | 52290 |
| | | | | | 6330 | Diode, Rect, EGP20DL-5100 | 9322 | 164 | 42682 |
| | | | | | 6332 | Diode, Rect, SB340L-7024. | 9322 | 161 | 76682 |
| | | | | | 6336 | Diode, Rect, BYV27-200. | 9335 | 526 | 80133 |
| | | | | | 7110 | IC, HEF4053BT. | 9333 | 729 | 60653 |

S = Safety Part Be sure to use exact replacement part.

29DV693R85A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|---|------|-----|-------|
| 7262 | Transistor, NPN, PDTCL124ET | 9340 | 310 | 20215 | 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 7310 | Transistor, NPN, PDTCL14ET | 3198 | 010 | 44110 | 3093 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 7311 | Transistor, PNP, PDTA114ET | 3198 | 010 | 44010 | 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 7312 | Transistor, PNP, BC857B. | 3198 | 010 | 42150 | 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 7313 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 | 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 7315 | IC, TEA1523P/N2. | 9352 | 699 | 68112 | 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 7340 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 7341 | IC, TL431CLP | 9337 | 711 | 00676 | 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9110 | Wire Jumper. | 3198 | 036 | 90010 | 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| 9111 | Wire Jumper. | 3198 | 036 | 90010 | CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9266 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9315 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9350 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9351 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9352 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9355 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9357 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| CBA | DVD Interface Panel Assembly | 3141 | 058 | 64801 | | | | | |

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| | Front Interface Panel Parts | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| | Side Jack Panel Parts | | | |
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 15849 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2172 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2173 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2174 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01210 |
| 3157 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01210 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 188 | 03541 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

| | | | | |
|------|--|------|-----|-------|
| | Top Control Panel Parts | | | |
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| | Cabinet & Accessory Parts | | | |
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44931 |
| AC06 | Cabinet Back Screw Cover (2 Used). . . | 3139 | 124 | 39301 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A68QCU754X73(N) | 9301 | 925 | 60527 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 45709 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 21341 |
| AC18 | Quick Use Guide. | 3121 | 233 | 44461 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53503 |
| AC20A | Cabinet Front. | 3139 | 177 | 75451 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76521 |
| AC20J | Top Control Assembly | 3139 | 177 | 56381 |
| AC23 | DVD Door | 3139 | 177 | 63441 |
| AC24 | DVD Interface Panel Bracket. | 3139 | 124 | 43291 |
| REMOTE | Remote Control Transmitter, RC19042007/01. | 3128 | 147 | 14521 |

29DV693R85C - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | Main Chassis Parts | | | |
|--------------------|---|------|-----------|--------------------|---|------|-----------|
| 0130 | Bead, Ferrite, 100MHz | 2422 | 549 45808 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 |
| 0211 | 2 Pin Connector | 2422 | 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 | 368 90177 |
| 0212 | 2 Pin Connector | 2422 | 025 16375 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic | 2020 | 558 90445 |
| 0214 | 5 Pin Connector | 2422 | 025 12481 | 2340 | Cap, 10u, 20%, 250v, Electrolytic | 2020 | 012 93495 |
| 0217 | 3 Pin Connector | 2412 | 020 00725 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 |
| 0219 | 6 Pin Connector | 2422 | 025 12482 | 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 | 016 05610 |
| 0220 | 5 Pin Connector | 2422 | 025 04853 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic | 2020 | 558 90559 |
| 0221 | 2 Pin Connector | 2422 | 025 15503 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 21040 |
| 0222 | 2 Pin Connector | 2422 | 025 10646 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 | 558 90445 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 | 021 90552 |
| 0225 | SVHS Jack | 2422 | 026 04926 | 2402 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 0229 | 7 Pin Connector | 2422 | 025 11244 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 | 025 54790 |
| 0239 | 3 Pin Connector | 2422 | 025 16382 | 2405 | Cap, 220u, 20%, 25v, Electrolytic | 3198 | 025 32210 |
| 0240 | 4 Pin Connector | 2422 | 025 12479 | 2415 | Cap, 330p, 5%, 50v, Ceramic | 3198 | 016 03310 |
| 0243 | 6 Pin Connector | 2422 | 025 04854 | 2441 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 0244 | 5 Pin Connector | 2422 | 025 04853 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| 0245 | 6 Pin Connector | 2422 | 025 04854 | 2444 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 0246 | 5 Pin Connector | 2422 | 025 12481 | 2450 | Cap, 47u, 20%, 160v, Electrolytic | 2020 | 021 91139 |
| 0251 | 4 Pin Connector | 2422 | 025 15847 | 2451 | Cap, 22n, 10%, 50v, Polyester | 3198 | 014 02230 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2452 | Cap, 180p, 5%, 50v, Ceramic | 3198 | 016 01810 |
| 0267 | 3 Pin Connector | 2412 | 020 00725 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 0269 | Jack | 2422 | 026 05182 | 2457 | Cap, 360n, 5%, 250v, Metalized Polypropylene | 2022 | 333 00163 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic | 2020 | 021 91331 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2459 | Cap, 680p, 10%, 500v, Ceramic | 3198 | 019 46810 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2460 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 01010 |
| S 1500 | Fuse, 4A, 250V, IEC | 2422 | 086 10914 | S 2463 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 | 558 90489 |
| S 1515 | Relay, 5 Amp, 12V | 2422 | 132 07444 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene | 2222 | 479 90042 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene | 2020 | 301 90255 |
| 1810 | 6 Pin Connector | 2422 | 025 15849 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 | 347 90219 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | 2422 | 543 00842 | 2468 | Cap, 27n, 10%, 400v, Polyester | 2222 | 347 90232 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 | 024 44730 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester | 2222 | 365 75154 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic | 3198 | 025 24710 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester | 2222 | 365 75104 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2474 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic | 3198 | 025 31010 | 2475 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2476 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 04720 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic | 3198 | 017 24740 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2481 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2482 | Cap, 120n, 5%, 250v, Metalized Polypropylene | 2222 | 479 90051 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic | 2020 | 021 90856 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 | 021 90854 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91049 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic | 3198 | 019 41020 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene | 2022 | 330 00018 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 | 024 90647 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic | 2020 | 554 90172 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2520 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 | 558 90489 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2525 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 017 04710 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic | 2238 | 786 19852 | 2527 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2540 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 | 021 91654 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91374 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 54780 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 | 2568 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 | 017 44740 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic | 2222 | 910 19856 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic | 3198 | 023 22240 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2602 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 31010 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2604 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2606 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic | 3198 | 017 31520 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 32220 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 31020 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic | 3198 | 017 21050 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 | | | | |
| 2253 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 | | | | |

S = Safety Part Be sure to use exact replacement part.

29DV693R85C (continued)

| | | | | | |
|------|--|----------------|--------|---|----------------|
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic | 3198 016 34710 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic | 3198 016 32210 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic | 3198 017 31520 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . | 3198 011 08220 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . | 3198 011 03330 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic . . . | 3198 026 31020 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2120 101 74158 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 32290 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3507 | Surge Protector. | 2422 549 43073 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3526 | Res, OR1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | S 3527 | Res, OR33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |

S = Safety Part Be sure to use exact replacement part.

29DV693R85C (continued)

| | | | | | |
|--------|---|----------------|--------|--|----------------|
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 021 54730 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 021 51030 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 021 54720 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 021 51520 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass | 2322 734 64702 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 730 61274 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 021 51530 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 021 54720 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass | 3198 021 51020 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 021 51230 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 021 55620 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 021 52220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 021 55620 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 021 54730 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film | 2306 204 03109 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass | 3198 021 52240 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass | 3198 021 52240 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 011 02220 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film | 3198 011 02220 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film | 3198 011 04710 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film | 3198 011 06820 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5202 | Wire Jumper | 3198 036 90010 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 021 32220 | 5241 | Wire Jumper | 3198 036 90010 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5341 | Coil, 22u | 2422 535 97333 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5342 | Coil, 3u9, 10% | 2422 535 97323 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass | 3198 021 51020 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | S 5445 | Transformer, LOT | 2422 531 02574 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5451 | Coil, 22u, 10% | 3198 018 72290 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | S 5457 | Coil, 25u | 2422 535 91028 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass | 3198 021 31020 | 5463 | Coil, Choke | 3128 138 37021 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5480 | Coil, 47u, 10% | 2422 535 97337 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | S 5501 | Mains Filter | 2422 549 43432 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | S 5520 | Transformer, SS42202-00 B | 2422 531 02562 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass | 3198 021 31040 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 021 34730 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5831 | Coil, 6u8, 5% | 3198 018 16880 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film | 3198 011 01010 | 5832 | Coil, 6u8, 5% | 3198 018 16880 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 021 32220 | 5833 | Coil, 6u8, 5% | 3198 018 16880 |
| 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 021 36820 | 5835 | Coil, 12u, 10% | 3198 018 31290 |
| 3903 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 021 34730 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3905 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 021 34730 | 6150 | Diode, Signal, BAS316 | 3198 010 10630 |
| 3909 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 021 32730 | 6201 | Diode, Signal, BAS316 | 3198 010 10630 |
| 3910 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 021 32730 | 6202 | Diode, Signal, BAS316 | 3198 010 10630 |
| 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film | 3198 011 08210 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316 | 3198 010 10630 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6400 | Res, 1K, 1%, 3/5W, Metal Film | 2312 915 11002 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6401 | Zener Diode, 47 volt | 3198 010 24790 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6447 | Diode, Signal, 1N4148 | 3198 010 10010 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6460 | Diode, Rect, BY228/24 | 9340 559 50112 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6461 | Diode, Rect, RGP30J-L7004 | 9338 617 60682 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6465 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6466 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6467 | Diode, Signal, BAS316 | 3198 010 10630 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6468 | Diode, Signal, BAS316 | 3198 010 10630 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6469 | Diode, Rect, BYV95C | 9335 001 80133 |

S = Safety Part Be sure to use exact replacement part.

29DV693R85C (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6490 | Diode, Rect, BYV95C. | 9335 001 80133 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 132 55667 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 175 70667 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9569H/N1/4I/1313. | 9352 743 94557 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9628 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9644 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9645 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7803 | IC, HEF4053BT. | 9333 729 60653 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 187 89682 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7580 | 9322 166 29682 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7903 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9681 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9685 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9414 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

29DV693R85C (continued)

| | | | | | | | | | |
|------------------------------------|--|------|-----|-------|--------|---|------|-----|-------|
| 9689 | Wire Jumper. | 3198 | 036 | 90010 | 2113 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 | 2114 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 | 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 | 2185 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 | 017 | 22250 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 | 2263 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 41040 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 | 2300 | Cap, 10u, 20%, 250v, Electrolytic. . . | 2020 | 012 | 93495 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 | 2301 | Cap, 22n, 10%, 400v, Metalized Polyeste | 2222 | 365 | 55223 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 | 2302 | Cap, 100p, 10%, 1KV, Ceramic | 3198 | 019 | 51010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 | 2310 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 | 2311 | Cap, 470n, 10%, 25v, Ceramic | 2020 | 552 | 96465 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 | 2313 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 | 2315 | Cap, 220p, 10%, 1KV, Ceramic | 3198 | 019 | 62210 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 | 2316 | Cap, 33n, 10%, 16v, Ceramic. | 3198 | 017 | 33330 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 | 2319 | Cap, 220n, +80/-20%, 25v, Ceramic. . . | 3198 | 023 | 22240 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 | 2330 | Cap, 2u2, 20%, 25v, Electrolytic . . . | 3198 | 026 | 32220 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 | 2331 | Cap, 470u, 20%, 10v, Electrolytic. . . | 3198 | 025 | 14710 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 | 2332 | Cap, 2u2, 20%, 25v, Electrolytic . . . | 3198 | 026 | 32220 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 | 2333 | Cap, 1000u, 20%, 10v, Electrolytic . . | 2020 | 021 | 91631 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | 2337 | Cap, 1000u, 20%, 25v, Electrolytic . . | 3198 | 026 | 31020 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | 2338 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 | 025 | 24710 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | 2339 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 | 025 | 24710 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | 2341 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 | 42240 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | 2342 | Cap, 47u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 24790 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 | 2350 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 | 2351 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | 2353 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | 3101 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | 3102 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36890 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | 3110 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 | 3111 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | 3112 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 | 3113 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | 3114 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | 3115 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | 3116 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 | 3117 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | 3118 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | 3180 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | 3182 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | 3262 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | 3266 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | S 3300 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 | 204 | 03108 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | S 3301 | Power Resistor, 68K, 5%, 2W. | 3198 | 012 | 26830 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | 3308 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | 3309 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9923 | Wire Jumper. | 3198 | 036 | 90010 | 3310 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | 3311 | Res, 180 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31810 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | 3312 | Res, 10 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31090 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | 3313 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 23581 | 3314 | Res, 1 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01080 |
| CBA | DVD Loader SD5.12. | 3139 | 188 | 55471 | 3315 | Res, 1 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01080 |
| CBA | DVD MPEG Assembly SD5.12 | 3139 | 188 | 55481 | 3317 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| CBA | DVD Module SD5.12 (contains Loader and | | | | 3318 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 |
| | MPEG Assembly) | 4835 | 310 | 57599 | 3319 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| | | | | | 3320 | Res, 100K, 1%, 1/16W, Metalized Glass. | 2322 | 704 | 61004 |
| Channel One Card Parts | | | | | 3339 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 |
| Channel One Card Parts | | | | | 3340 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 2D 3 Line Comb Filter Parts | | | | | 3342 | Res, 4K7, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 64702 |
| 2D 3 Line Comb Filter Parts | | | | | 3344 | Res, 4K7, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 64702 |
| DAF Panel Parts | | | | | 3360 | Res, 4R7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34780 |
| DAF Panel Parts | | | | | 3361 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01020 |
| DVD Eject Panel Parts | | | | | 4105 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| DVD Eject Panel Parts | | | | | 4106 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0267 | 3 Pin Board Connector. | 2422 | 025 | 09191 | 4185 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0361 | Eject Button | 3139 | 177 | 63451 | 4226 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 1110 | Tact Switch. | 2422 | 128 | 02742 | 4261 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| CBA | DVD Eject Panel Assembly | 3139 | 187 | 23311 | 4265 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| DVD Interface Panel Parts | | | | | 4266 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| DVD Interface Panel Parts | | | | | 4316 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0226 | Connector, 6 Pin | 2422 | 025 | 12482 | 4342 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0228 | Connector, 3 Pin | 2412 | 020 | 00725 | 4343 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0251 | Connector, 4 Pin | 2422 | 025 | 15847 | 4361 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0253 | Connector, 7 Pin | 2422 | 025 | 11244 | 4363 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0254 | Connector, 3 Pin | 2422 | 025 | 16382 | 4364 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 |
| 0266 | Connector, 6 Pin | 2422 | 025 | 15849 | 5100 | Inductor, Variable, 100uH, 10% | 2422 | 549 | 41663 |
| 0269 | Connector, 5 Pin | 2422 | 025 | 15848 | 5110 | Coil, 220n | 3198 | 018 | 12270 |
| 1100 | Socket, Cinch, 1 Pin | 2422 | 026 | 04425 | 5300 | Coil, 27u. | 3198 | 018 | 22790 |
| 1101 | Connector, 8 Pin | 2422 | 025 | 12483 | 5301 | Fixed, Inductor, 100MHZ, 50R. | 3198 | 018 | 90010 |
| S 1330 | Fuse, 2A, 250V | 2422 | 086 | 10422 | S 5315 | Transformer, SS25113-00. | 2422 | 531 | 02596 |
| S 1331 | Fuse, 2A, 250V | 2422 | 086 | 10422 | 5331 | Coil, 10u, 5%. | 2422 | 535 | 95363 |
| S 1332 | Fuse, 2A, 250V | 2422 | 086 | 10421 | 5333 | Coil, 10u, 5%. | 2422 | 535 | 95363 |
| 2101 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 | 5337 | Coil, 10u, 10% | 2422 | 535 | 97328 |
| 2102 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 21090 | 5339 | Coil, 10u, 10% | 2422 | 535 | 97328 |
| 2103 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 | 6100 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 2104 | Cap, 100n, +80/-20%, 25v, Ceramic. . | 3198 | 023 | 41040 | 6101 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 2110 | Cap, 100n, +80/-20%, 25v, Ceramic. . | 3198 | 023 | 41040 | 6300 | Diode, Rect, BYD33J | 9337 | 234 | 20133 |
| 2111 | Cap, 2u2, +80/-20%, 10v, Ceramic . . | 3198 | 017 | 22250 | 6311 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 2112 | Cap, 2u2, +80/-20%, 10v, Ceramic . . | 3198 | 017 | 22250 | 6312 | Zener Diode, 22 volt | 3198 | 020 | 52290 |
| | | | | | 6330 | Diode, Rect, EGP20DL-5100 | 9322 | 164 | 42682 |
| | | | | | 6332 | Diode, Rect, SB340L-7024. | 9322 | 161 | 76682 |
| | | | | | 6336 | Diode, Rect, BYV27-200. | 9335 | 526 | 80133 |
| | | | | | 7110 | IC, HEF4053BT. | 9333 | 729 | 60653 |

S = Safety Part Be sure to use exact replacement part.

29DV693R85C (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|---|------|-----|-------|
| 7262 | Transistor, NPN, PDTCL124ET | 9340 | 310 | 20215 | 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 7310 | Transistor, NPN, PDTCL14ET | 3198 | 010 | 44110 | 3093 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 7311 | Transistor, PNP, PDTA114ET | 3198 | 010 | 44010 | 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 7312 | Transistor, PNP, BC857B. | 3198 | 010 | 42150 | 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 7313 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 | 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 7315 | IC, TEA1523P/N2. | 9352 | 699 | 68112 | 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 7340 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 7341 | IC, TL431CLP | 9337 | 711 | 00676 | 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9110 | Wire Jumper. | 3198 | 036 | 90010 | 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| 9111 | Wire Jumper. | 3198 | 036 | 90010 | CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9266 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9315 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9350 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9351 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9352 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9355 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9357 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| CBA | DVD Interface Panel Assembly | 3141 | 058 | 64801 | | | | | |

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| | Front Interface Panel Parts | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| | Side Jack Panel Parts | | | |
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 15849 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2172 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2173 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2174 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01210 |
| 3157 | Res, 120 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01210 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 188 | 03541 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

| | | | | |
|------|--|------|-----|-------|
| | Top Control Panel Parts | | | |
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| | Cabinet & Accessory Parts | | | |
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44931 |
| AC06 | Cabinet Back Screw Cover (2 Used). . . | 3139 | 124 | 39301 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A68QCU754X73(N) | 9301 | 925 | 60527 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 45709 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 21341 |
| AC18 | Quick Use Guide. | 3121 | 233 | 44461 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53503 |
| AC20A | Cabinet Front. | 3139 | 177 | 75451 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76521 |
| AC20J | Top Control Assembly | 3139 | 177 | 56381 |
| AC23 | DVD Door | 3139 | 177 | 63441 |
| AC24 | DVD Interface Panel Bracket. | 3139 | 124 | 43291 |
| REMOTE | Remote Control Transmitter, RC19042007/01. | 3128 | 147 | 14521 |

29PT543S44A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|---|----------------|--------|--|---|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 368 90177 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | | er. | |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0223 | A/V Jack | 2422 026 05236 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0246 | 5 Pin Connector. | 2422 025 15848 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 0269 | Jack | 2422 026 05182 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| S 1000 | Tuner, V+U PLL | 2422 542 90098 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 48087 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | 2022 333 00086 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | | ylene. | |
| 1600 | Tact Switch. | 2422 128 02742 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1601 | Tact Switch. | 2422 128 02742 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1602 | Tact Switch. | 2422 128 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1603 | Tact Switch. | 2422 128 02742 | 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 333 00084 |
| 1606 | Tact Switch. | 2422 128 02742 | 2463 | Cap, 1nf, 10%, 2000v, Ceramic Only with | 5445 (JF0501-21835) Layer Wound. |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2020 558 90485 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene | 2020 301 90251 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | S 2465 | Cap, 12n, 5%, 1600v, Polypropylene Only | with 5445 (JF0501-21835) Layer Wound. |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 021 90854 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 2022 330 00018 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2503 | Cap, 330u, 20%, 400v, Electrolytic | 2020 024 90561 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 46710 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2509 | Cap, 100n, 20%, 275v, Metalized Polypro | pylene |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | | | |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2022 336 29144 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 2020 554 90172 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 017 01030 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 025 52290 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2523 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |

S = Safety Part Be sure to use exact replacement part.

29PT543S44A (continued)

| | | | | | | |
|------|---|----------------|--------|---|--|----------------|
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 | |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 | |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 | |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 | |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 | |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 | |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 | |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 | |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 | |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 | |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3452 | Res, 5K6, 1%, 3/5W, Metal Film Only wit | h 5445 (JF0501-21835) Layer Wound. . . | 2312 915 15602 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3452 | Res, 47K, 1%, 3/5W, Metal Film | 2312 915 14703 | |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3454 | Res, 15K, 1%, 3/5W, Metal Film | 2312 915 11503 | |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film Only with | 5445 (JF0501-21835) Layer Wound. . . . | 2312 915 12002 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 | |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3457 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 | |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3461 | Res, 1K, 5%, 1W, Metal Film. | 3198 012 11020 | |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 | |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 | |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 | |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 | |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 | |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 | |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 33390 | |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3491 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 | |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 | |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 | |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 | |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | S 3504 | Res, PTC, 9 ohm, 265V. | 2122 663 00021 | |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 | |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3507 | Surge Protector. | 2422 549 43073 | |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 | |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 | |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 | |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3521 | Res, 22 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 02290 | |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3522 | Res, 390K, 5%, 1/8W, Metalized Glass . | 2322 730 61394 | |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3523 | Res, 47 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03479 | |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 | |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | | | | |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | | | | |

S = Safety Part Be sure to use exact replacement part.

29PT543S44A (continued)

| | | | | | |
|--------|--|----------------|--------|---|----------------|
| 3526 | Res, OR15, 5%, 3/5W, Metal Film. . . . | 3198 012 11570 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3527 | Res, OR22, 5%, 3/5W, Metal Film. . . . | 3198 012 12270 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4122 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4127 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 8K2, 5%, 1/10W, Metalized Glass . | 3198 021 58220 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3681 | Res, 180 ohm, 1%, 1/8W, Metalized Glass | 2322 734 61801 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3682 | Res, 270 ohm, 1%, 1/8W, Metalized Glass | 2322 734 62701 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3683 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 734 63901 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3684 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 734 63901 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3686 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3687 | Res, 75 ohm, 1%, 1/8W, Metalized Glass | 2322 734 67509 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3688 | Res, 68 ohm, 1%, 1/8W, Metalized Glass | 2322 734 66809 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3689 | Res, 2K7, 1%, 1/8W, Metalized Glass. . | 2322 734 62702 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5445 | Transformer, LOT (JF0501-21835) Layer W | |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | | ound | 2422 531 02611 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5445 | Transformer, LOT | 3128 138 21391 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5451 | Coil, 33u, 10% | 3198 018 73390 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5453 | Coil, 22u, 5% | 3198 018 12290 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5457 | Coil, 42u. | 2422 535 94865 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 531 02478 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5471 | Coil, 3u3, 20% | 3198 018 73380 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 021 31530 | 5480 | Coil, 39u, 10% | 2422 535 97336 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 021 31220 | S 5500 | Mains Filter | 2422 549 43567 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | S 5501 | Mains Filter | 2422 549 43432 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 5520 | Transformer, SS42025-03. | 2422 531 02462 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |

S = Safety Part Be sure to use exact replacement part.

29PT543S44A (continued)

| | | | | | |
|--------|--|----------------|------|-------------------------|----------------|
| 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9179 | Wire Jumper. | 3198 036 90010 |
| 6331 | Diode, Signal, BAV21. | 3198 010 10070 | 9181 | Wire Jumper. | 3198 036 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | 9182 | Wire Jumper. | 3198 036 90010 |
| 6333 | Diode, Signal, BAV21. | 3198 010 10070 | 9183 | Wire Jumper. | 3198 036 90010 |
| 6335 | Diode, Signal, BAV21. | 3198 010 10070 | 9184 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt. | 3198 020 51090 | 9192 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99. | 3198 010 10620 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6453 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 010 10070 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 010 10070 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 010 21590 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 9.1 volt. | 9322 150 08685 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6567 | Zener Diode, 4.7 volt. | 3198 020 54780 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.2 volt. | 9322 163 91685 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9522 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 185 69682 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9528 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9530 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9611 | Coil, 27u, 10%. | 3198 018 22790 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9577H/N1/AI/1130. | 9352 731 51557 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7450 | Transistor, PNP, PDTA114ET. | 3198 010 44010 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9632 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1104(G). | 9322 175 72667 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, STU9NC80ZI. | 9322 163 76687 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 310 10215 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9657 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH. | 9322 181 41682 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

29PT543S44A (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9994 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 58181 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)
S = Safety Part. Be sure to use exact replacement part.

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 2422 | 070 | 98239 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 35953 |
| S AC09 | CRT, A68AJB82X01 | 9301 | 787 | 70612 |
| AC10 | Customer Control Buttons | 3139 | 177 | 60751 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 45506 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 20761 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53071 |
| AC20A | Cabinet Front. | 3139 | 177 | 53551 |
| AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| AC20C | Light Guide. | 3139 | 124 | 35111 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 177 | 60761 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| REMOTE | Remote Control Transmitter, RC19335004/01. | 3139 | 228 | 86463 |

29PT543S85A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|---|----------------|--------|--|--|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 368 90177 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2331 | er. | 2020 558 90445 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0223 | A/V Jack | 2422 026 05236 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0269 | Jack | 2422 026 05182 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| S 1000 | Tuner, V+U PLL | 2422 542 90098 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | 2222 479 90023 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2458 | ylene. | 2020 021 91331 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2459 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1600 | Tact Switch. | 2422 128 02742 | 2460 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1601 | Tact Switch. | 2422 128 02742 | 2462 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1602 | Tact Switch. | 2422 128 02742 | 2463 | Cap, 330n, 10%, 250v, MPP. | 2022 333 00084 |
| 1603 | Tact Switch. | 2422 128 02742 | | Cap, 1nf, 10%, 2000v, Ceramic Only with | 5445 (JF0501-21835) Layer Wound. |
| 1606 | Tact Switch. | 2422 128 02742 | 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2020 558 90485 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | S 2465 | Cap, 12n, 5%, 1600v, Polypropylene Only | with 5445 (JF0501-21835) Layer Wound |
| 1811 | 3 Pin Connector. | 2412 020 00725 | S 2465 | Cap, 11n, 5%, 1600v, Polypropylene | 2222 375 90156 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2606 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | | | |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | | | |

S = Safety Part Be sure to use exact replacement part.

29PT543S85A (continued)

| | | | | | | |
|------|--|----------------|--------|---|--|----------------|
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 | |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 | |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 | |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 | |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 | |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 | |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 | |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 | |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 | |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 | |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3452 | Res, 5K6, 1%, 3/5W, Metal Film Only wit | h 5445 (JF0501-21835) Layer Wound. . . | 2312 915 15602 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3452 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 | |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3454 | Res, 2K, 1%, 3/5W, Metal Film Only with | 5445 (JF0501-21835) Layer Wound. . . | 2312 915 12002 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film | 2312 915 13902 | |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 | |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 | |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 | |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 | |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 | |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 | |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 | |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 | |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film . . . | 3198 012 33390 | |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 | |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 | |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 | |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 | |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 | |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 | |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | 3507 | Surge Protector. | 2422 549 43073 | |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 | |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 | |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 | |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 | |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass . | 3198 021 33340 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 | |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 | |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 | |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 | |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 | |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 | |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | | | | |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | | | | |

S = Safety Part Be sure to use exact replacement part.

29PT543S85A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|---|------|-----|-------|
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 | 734 | 64702 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 | 012 | 13310 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3681 | Res, 180 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 61801 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3682 | Res, 270 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 62701 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 63901 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 390 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 63901 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3686 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3687 | Res, 75 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 67509 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3688 | Res, 68 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 66809 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3689 | Res, 2K7, 1%, 1/8W, Metalized Glass. . | 2322 | 734 | 62702 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (JF0501-21835) Layer W | | | |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | | ound | 2422 | 531 | 02611 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (1342.0043B). | 2422 | 531 | 02506 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5457 | Coil, 42u. | 2422 | 535 | 94865 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 | 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |

S = Safety Part Be sure to use exact replacement part.

29PT543S85A (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 | 9522 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9528 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9577H/N1/AI/1130. | 9352 731 51557 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9629 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9184 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

29PT543S85A (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9994 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 57971 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

S = Safety Part. Be sure to use exact replacement part.

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 22240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 35953 |
| S AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| AC10 | Customer Control Buttons | 3139 | 177 | 60751 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 20771 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53071 |
| AC20A | Cabinet Front. | 3139 | 177 | 53551 |
| AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| AC20C | Light Guide. | 3139 | 124 | 35111 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 177 | 60761 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| REMOTE | Remote Control Transmitter, RC19335004/01. | 3139 | 228 | 86463 |

29PT563S85A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | |
|--------------------|--|------|-----------|
| 0211 | 2 Pin Connector. | 2422 | 025 16269 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 |
| 0223 | A/V Jack | 2422 | 026 05236 |
| 0225 | SVHS Jack. | 2422 | 026 04926 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 |
| 0269 | Jack | 2422 | 026 05182 |
| S 1000 | Tuner, V+U PLL | 2422 | 542 90098 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 |
| 1600 | Tact Switch. | 2422 | 128 02742 |
| 1601 | Tact Switch. | 2422 | 128 02742 |
| 1602 | Tact Switch. | 2422 | 128 02742 |
| 1603 | Tact Switch. | 2422 | 128 02742 |
| 1606 | Tact Switch. | 2422 | 128 02742 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 |
| 1810 | 6 Pin Connector. | 2422 | 025 16607 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 | 543 00842 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 54780 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 | 368 90177 |

S = Safety Part Be sure to use exact replacement part.

| | | | |
|--------|--|------|-----------|
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 | 558 90445 |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 | 014 01530 |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2457 | Cap, 470n, 5%, 250v, Metalized Polypropylene. | 2222 | 479 90023 |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46310 |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 2462 | Cap, 330n, 10%, 250v, MPP. | 2022 | 333 00084 |
| 2463 | Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound. | 2020 | 558 90487 |
| 2463 | Cap, 680p, 10%, 2000v, Ceramic | 2020 | 558 90485 |
| S 2465 | Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound | 2222 | 375 90156 |
| S 2465 | Cap, 11n, 5%, 1600v, Polypropylene | 2222 | 375 90155 |
| 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyester | 2222 | 365 75154 |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyester | 2222 | 365 75104 |
| 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 | 347 90234 |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91049 |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene | 2222 | 336 29148 |
| 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 | 024 90647 |
| 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 | 021 91654 |
| 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91353 |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 31020 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 21050 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 | 016 31080 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 | 016 31080 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 34790 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 34710 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 32210 |

29PT563S85A (continued)

| | | | | | |
|------|---|----------------|--------|--|----------------|
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2910 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 2911 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3452 | Res, 5K6, 1%, 3/5W, Metal Film Only wit | |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | | h 5445 (JF0501-21835) Layer Wound. . . | 2312 915 15602 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3452 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3454 | Res, 2K, 1%, 3/5W, Metal Film Only with | |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | | 5445 (JF0501-21835) Layer Wound. . . . | 2312 915 12002 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3454 | Res, 3K9, 1%, 3/5W, Metal Film | 2312 915 13902 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3470 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . . | 3198 012 33390 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass . . . | 3198 021 31020 | S 3504 | Res, PTC, 3R0, Degaussing. | 2120 661 00025 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3507 | Surge Protector. | 2422 549 43073 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 021 32730 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . . | 3198 021 54720 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . . | 2322 704 63903 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |

S = Safety Part Be sure to use exact replacement part.

29PT563S85A (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|---|------|-----|-------|
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass . . | 2322 | 734 | 64702 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . . | 2322 | 730 | 61274 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51530 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51030 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51020 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51230 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 55620 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 52220 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 55620 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 54730 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 04710 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31030 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32220 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 53320 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51520 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | S 5445 | Transformer, LOT (JF0501-21835) Layer W | | | |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | | ound | 2422 | 531 | 02611 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5445 | Transformer, LOT (1342.0043B) | 2422 | 531 | 02506 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5457 | Coil, 42u. | 2422 | 535 | 94865 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32220 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 33320 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 33320 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31030 | 5810 | Coil, 10u, 10% | 3198 | 018 | 51090 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 33320 | 5831 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31030 | 5832 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 38220 | 5833 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6333 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6335 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |

S = Safety Part Be sure to use exact replacement part.

29PT563S85A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|--------------------------|------|-----|-------|
| 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9312 | Wire Jumper. | 3198 | 036 | 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9406 | Wire Jumper. | 3198 | 036 | 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 | 9407 | Wire Jumper. | 3198 | 036 | 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9408 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9409 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9410 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9423 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9587H/N1/3I/0990. | 9352 | 725 | 47557 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9620 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9621 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 9633 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQFP9N50. | 9322 | 187 | 16687 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9639 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 | 310 | 10215 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 | 9651 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 7803 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 7804 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 | 187 | 89682 | 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 7901 | IC, AN7522N PH | 9322 | 181 | 41682 | 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 9101 | Wire Jumper. | 3198 | 036 | 90010 | 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9102 | Wire Jumper. | 3198 | 036 | 90010 | 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 9103 | Wire Jumper. | 3198 | 036 | 90010 | 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 9104 | Wire Jumper. | 3198 | 036 | 90010 | 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9123 | Wire Jumper. | 3198 | 036 | 90010 | 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 | 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9173 | Wire Jumper. | 3198 | 036 | 90010 | 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9175 | Wire Jumper. | 3198 | 036 | 90010 | 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9176 | Wire Jumper. | 3198 | 036 | 90010 | 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9178 | Wire Jumper. | 3198 | 036 | 90010 | 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9179 | Wire Jumper. | 3198 | 036 | 90010 | 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9181 | Wire Jumper. | 3198 | 036 | 90010 | 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9182 | Wire Jumper. | 3198 | 036 | 90010 | 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9192 | Wire Jumper. | 3198 | 036 | 90010 | 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9193 | Wire Jumper. | 3198 | 036 | 90010 | 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9311 | Wire Jumper. | 3198 | 036 | 90010 | 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |

S = Safety Part Be sure to use exact replacement part.

29PT563S85A (continued)

| | | | | | | | | | |
|------|--------------------------------|------|-----|-------|------|---|------|-----|-------|
| 9679 | Wire Jumper. | 3198 | 036 | 90010 | 2431 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 | 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 | 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9682 | Wire Jumper. | 3198 | 036 | 90010 | 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 | 2435 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 | 31040 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 | 2436 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 | 31040 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 | 2440 | Cap, 10u, 20%, 16v, Electrolytic. . . | 3198 | 028 | 21090 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 | 2442 | Cap, 56p, 5%, 50v, Ceramic. | 3198 | 016 | 35690 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 | 2443 | Cap, 56p, 5%, 50v, Ceramic. | 3198 | 016 | 35690 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 | 2450 | Cap, 10u, 20%, 16v, Electrolytic. . . | 3198 | 028 | 21090 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 | 2452 | Cap, 56p, 5%, 50v, Ceramic. | 3198 | 016 | 35690 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 | 2453 | Cap, 56p, 5%, 50v, Ceramic. | 3198 | 016 | 35690 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 | 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 | 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 | 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31820 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 | 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 | 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 | 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 36820 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 | 3407 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 | 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 | 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. | 2122 | 118 | 05951 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 | 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 | 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 | 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 | 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 68202 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 | 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 | 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 | 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 9863 | Wire Jumper. | 3198 | 036 | 90010 | 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 | 3457 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9870 | Wire Jumper. | 3198 | 036 | 90010 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9871 | Wire Jumper. | 3198 | 036 | 90010 | 4403 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | 5401 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | 5407 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | 5408 | Coil, 33u, 20% | 3198 | 018 | 33390 |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 | 5421 | Inductor, 100 MHz, 120 ohm | 3198 | 018 | 90070 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | 5425 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9878 | Wire Jumper. | 3198 | 036 | 90010 | 5428 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | 5429 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | 5430 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | 5440 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | 5442 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 | 5450 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | 5452 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | 7401 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | 7402 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | 7403 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | 7421 | IC, TC90A53N | 9322 | 182 | 18682 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 | 7440 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9994 | Wire Jumper. | 3198 | 036 | 90010 | 7444 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 | 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 58141 | 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| | | | | | 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| | | | | | CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

| | | | | |
|-----------------------------|--|------|-----|-------|
| 2D 3 Line Comb Filter Parts | | | | |
| 0266 | 6 Pin Connector. | 2422 | 025 | 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic . . . | 3198 | 028 | 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 | 017 | 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 | 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 | 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 | 025 | 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

29PT563S85A (continued)

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

| | | | | |
|---------------------------|--|------|-----|-------|
| Cabinet & Accessory Parts | | | | |
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitt | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 43281 |
| S AC09 | CRT, A68AJB82X11 | 9301 | 891 | 90631 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01641 |
| AC17 | Owner's Manual | 3121 | 235 | 20791 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53081 |
| AC20A | Cabinet Front. | 3139 | 177 | 55961 |
| AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3121 | 237 | 53341 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| REMOTE | Remote Control Transmitter, RC19335004/ | | | |
| | 01. | 3139 | 228 | 86463 |

29PT633R85A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|---|--------------------------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | er. 2222 368 90177 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0214 | 5 Pin Connector. | 2422 025 12481 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0223 | A/V Jack. | 2422 026 05236 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 021 90552 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 0239 | 3 Pin Connector. | 2422 025 16382 | 2404 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 025 54790 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 017 24730 |
| S 0254 | 9 Pin CRT Socket. | 2422 500 80076 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| 0269 | Jack. | 2422 026 05182 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 014 02230 |
| S 1000 | Tuner, V+U PLL. | 2422 542 90098 | 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 01810 |
| 1002 | SAW Filter, 45.75MHz. | 2422 549 44518 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 549 40807 | 2457 | Cap, 360n, 5%, 250v, Metalized Polyprop | ylene. 2022 333 00163 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| S 1510 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1660 | Crystal, 12MHz000. | 2422 543 01203 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | S 2463 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | lene. 2222 479 90042 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene. | 2020 301 90255 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2466 | Cap, 15n, 10%, 400v, Polyester. | 2222 347 90219 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2468 | Cap, 27n, 10%, 400v, Polyester. | 2222 347 90232 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2482 | Cap, 120n, 5%, 250v, Metalized Polyprop | ylene. 2222 479 90051 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 021 90854 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 021 91049 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene. 2022 330 00018 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 024 90647 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 021 91654 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91353 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 014 04740 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 370 76104 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | | | |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | | | |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | | | |

S = Safety Part Be sure to use exact replacement part.

29PT633R85A (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. . . | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. . . . | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3403 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 915 18203 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film. | 2312 915 15102 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film. | 2312 915 14708 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film. | 2312 915 14708 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film. | 2312 915 12208 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2120 101 74158 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3482 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass . . | 2322 734 61202 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 32290 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3507 | Surge Protector. | 2422 549 43073 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03101 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |

S = Safety Part Be sure to use exact replacement part.

29PT633R85A (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 021 51020 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film | 3198 012 13370 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 021 54730 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 021 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 021 54720 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 021 51520 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 734 64702 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 730 61274 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 021 51530 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 021 51030 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 021 51020 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 021 51230 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 021 55620 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 021 52220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 021 55620 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 021 54730 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 011 04710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 011 06820 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 021 32220 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 021 51020 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 021 31020 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5341 | Coil, 22u. | 2422 535 97333 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | S 5445 | Transformer, LOT | 2422 531 02574 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5451 | Coil, 22u, 10% | 3198 018 72290 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | S 5457 | Coil, 25u. | 2422 535 91028 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass | 3198 021 31530 | 5480 | Coil, 27u, 10% | 3198 018 22790 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass | 3198 021 31220 | S 5501 | Mains Filter | 2422 549 43432 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 021 33320 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 021 31020 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 021 33320 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 021 33320 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass | 3198 021 38220 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6401 | Zener Diode, 47 volt | 3198 010 24790 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |

29PT633R85A (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 728 40557 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9624 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQFPFN50. | 9322 187 16687 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9651 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9652 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

29PT633R85A (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9994 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 58631 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |

| | | | | |
|--------|--|------|-----|-------|
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 09191 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3088 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 4092 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6092 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel. | 3139 | 187 | 10251 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S = Safety Part. Be sure to use exact replacement part.

29PT633R85A (continued)

| | | | | | |
|--------|--------|--|------|-----|-------|
| S | AC01 | AC Cord. | 3135 | 010 | 03831 |
| | AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| | AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| | AC05 | Cabinet Back | 3139 | 124 | 36763 |
| | AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S | AC09 | CRT, A68QCU754X73(N) | 9301 | 925 | 60527 |
| S | AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| | AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| | AC15 | Holder, Degaussing Coil (4 Used) | 3139 | 124 | 31122 |
| | AC17 | Owner's Manual | 3121 | 235 | 20811 |
| | AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| | AC20 | Cabinet Front Assembly | 3121 | 237 | 53091 |
| | AC20A | Cabinet Front. | 3139 | 177 | 60011 |
| | AC20C | Light Guide. | 3139 | 124 | 33811 |
| | AC20D | Nameplate. | 3141 | 050 | 00161 |
| | AC20F | Power Button Cover | 3139 | 124 | 32921 |
| | AC20G | Power Button Shaft | 3139 | 124 | 32791 |
| | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00371 |
| | AC20J1 | Top Control Bracket. | 3139 | 124 | 33941 |
| | AC20J3 | Top Control Cover. | 3139 | 124 | 31131 |
| | AC20J4 | Top Control Rubber | 3139 | 124 | 30391 |
| REMOTE | | Remote Control Transmitter, RC19335004/ | | | |
| | | 01. | 3139 | 228 | 86463 |

29PT633R85C - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|----------------|
| | 2 Pin Connector | 2422 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | |
| 0211 | 2 Pin Connector | 2422 025 16375 | 2331 | er. | 2222 368 90177 |
| 0212 | 5 Pin Connector | 2422 025 12481 | 2340 | Cap, 10n, +80/-20% 1000v, Ceramic . . . | 2020 558 90445 |
| 0214 | 6 Pin Connector | 2422 025 12482 | 2341 | Cap, 10u, 20%, 250v, Electrolytic . . . | 2020 012 93495 |
| 0219 | 5 Pin Connector | 2422 025 04853 | 2342 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0220 | 2 Pin Connector | 2422 025 15503 | 2343 | Cap, 560p, 5%, 50v, Ceramic | 3198 016 05610 |
| 0222 | 2 Pin Connector | 2422 025 10646 | 2344 | Cap, 2n2, 10%, 2000v, Ceramic | 2020 558 90559 |
| 0223 | A/V Jack | 2422 026 05236 | 2345 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 21040 |
| 0225 | SVHS Jack | 2422 026 04926 | 2401 | Cap, 10n, +80/-20%, 1000v, Ceramic . . | 2020 558 90445 |
| 0229 | 3 Pin Connector | 2412 020 00725 | 2402 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 |
| 0239 | 3 Pin Connector | 2422 025 16382 | 2404 | Cap, 470p, 10%, 500v, Ceramic | 3198 019 44710 |
| 0243 | 6 Pin Connector | 2422 025 04854 | 2405 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 |
| 0244 | 5 Pin Connector | 2422 025 04853 | 2415 | Cap, 220u, 20%, 25v, Electrolytic . . . | 3198 025 32210 |
| 0245 | 6 Pin Connector | 2422 025 04854 | 2416 | Cap, 330p, 5%, 50v, Ceramic | 3198 016 03310 |
| 0246 | 5 Pin Connector | 2422 025 12481 | 2441 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 0267 | 3 Pin Connector | 2412 020 00725 | 2444 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 |
| 0269 | Jack | 2422 026 05182 | 2450 | Cap, 47u, 20%, 160v, Electrolytic . . . | 2020 021 91139 |
| S 1000 | Tuner, V+U PLL | 2422 542 90098 | 2451 | Cap, 22n, 10%, 50v, Polyester | 3198 014 02230 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2452 | Cap, 180p, 5%, 50v, Ceramic | 3198 016 01810 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| S 1500 | Fuse, 4A, 250V, IEC | 2422 086 10914 | 2457 | Cap, 360n, 5%, 250v, Metalized Polyprop | |
| S 1515 | Relay, 5 Amp, 12V | 2422 132 07444 | 2458 | ylene. | 2222 479 90019 |
| 1600 | Crystal, 12MHz000 | 2422 543 01203 | 2459 | Cap, 2u2, 20%, 100v, Electrolytic | 2020 021 91331 |
| 1811 | 3 Pin Connector | 2412 020 00725 | 2460 | Cap, 680p, 10%, 500v, Ceramic | 3198 019 46810 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | S 2463 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 01010 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 024 44730 | 2464 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 558 90489 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2465 | Cap, 2u2, 5%, 160v, Metalized Polypropy | |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic | 3198 025 24710 | 2466 | lene | 2222 479 90042 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2468 | Cap, 15n, 5%, 1600v, Polypropylene . . . | 2222 375 90158 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 | 2471 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2472 | Cap, 22n, 10%, 400v, Polyester | 2222 347 90223 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic | 3198 017 24740 | 2473 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2474 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2475 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2476 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2480 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 04720 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2481 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2482 | Cap, 470p, 10%, 500v, Ceramic | 3198 019 44710 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2485 | Cap, 120n, 5%, 250v, Metalized Polyprop | |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2486 | ylene. | 2222 479 90051 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 4u7, 20%, 250v, Electrolytic | 2020 021 90856 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2488 | Cap, 470u, 20%, 16v, Electrolytic | 2020 021 91577 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2489 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2491 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 2020 021 91049 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2500 | Cap, 470u, 20%, 16v, Electrolytic | 2020 021 91577 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2501 | Cap, 1n, 10%, 500v, Ceramic | 3198 019 41020 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2502 | Cap, 470n, 20%, 275v, Metalized Polypro | |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2503 | pylene | 2222 336 29148 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2507 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2508 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2515 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2520 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic | 2238 786 19852 | S 2515 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2520 | Cap, 1n5, 20%, 50v, Ceramic | 2020 554 90172 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2521 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2522 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | S 2523 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2525 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 558 90489 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2527 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 | 2528 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2540 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2541 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 017 44740 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic | 2222 910 19856 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 31010 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic | 3198 023 22240 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 | 2602 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 31010 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic | 3198 016 38210 | 2606 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic | 3198 017 31520 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 32220 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester . | 2222 370 76104 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic | 3198 017 21050 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |

S = Safety Part Be sure to use exact replacement part.

29PT633R85C (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic. . . | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic. . . | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester. . . . | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3401 | Res, 220K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02240 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3403 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 915 18203 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. . . . | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film. | 2312 915 15102 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3124 | Res, 47 ohm, 5%, 1/16W, Metalized Glass | 3198 021 34790 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3468 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 3126 | Res, 47 ohm, 5%, 1/16W, Metalized Glass | 3198 021 34790 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 915 13908 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 915 13908 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film. | 2312 915 12208 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3482 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 32290 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass. . | 3198 021 31230 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3507 | Surge Protector. | 2422 549 43073 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . | 3198 021 51220 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03101 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 021 55630 |

S = Safety Part Be sure to use exact replacement part.

29PT633R85C (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film | 3198 | 012 | 13370 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. | 2322 | 730 | 61274 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51530 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51030 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51230 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32220 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5341 | Coil, 22u. | 2422 | 535 | 97333 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, LOT | 2422 | 531 | 02574 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 22u, 10% | 3198 | 018 | 72290 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5457 | Coil, 25u. | 2422 | 535 | 91028 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31530 | 5480 | Coil, 47u, 10% | 2422 | 535 | 97337 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31220 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 38220 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21. | 3198 | 010 | 10070 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |

S = Safety Part Be sure to use exact replacement part.

29PT633R85C (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 728 40557 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9624 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQFPFN50. | 9322 187 16687 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9651 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9652 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

29PT633R85C (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9994 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 57981 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |

S = Safety Part. Be sure to use exact replacement part.

| | | | | |
|--------|--|------|-----|-------|
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 09191 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3088 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 4092 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6092 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel. | 3139 | 187 | 10251 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

29PT633R85C (continued)

| | | | | | |
|--------|--------|--|------|-----|-------|
| S | AC01 | AC Cord. | 3135 | 010 | 03831 |
| | AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| | AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| | AC05 | Cabinet Back | 3139 | 124 | 36763 |
| | AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S | AC09 | CRT, A68QCP893X001 | 9322 | 173 | 75682 |
| S | AC12 | Degaussing Coil | 2422 | 549 | 43967 |
| | AC13 | Front Interface Panel Bracket | 3139 | 124 | 32891 |
| | AC15 | Holder, Degaussing Coil (4 Used) | 3139 | 124 | 31122 |
| | AC17 | Owner's Manual | 3121 | 235 | 20811 |
| | AC19 | Side Jack Panel Bracket | 3139 | 124 | 37061 |
| | AC20 | Cabinet Front Assembly | 3121 | 237 | 53091 |
| | AC20A | Cabinet Front | 3139 | 177 | 60011 |
| | AC20C | Light Guide | 3139 | 124 | 33811 |
| | AC20D | Nameplate | 3141 | 050 | 00161 |
| | AC20F | Power Button Cover | 3139 | 124 | 32921 |
| | AC20G | Power Button Shaft | 3139 | 124 | 32791 |
| | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00371 |
| | AC20J1 | Top Control Bracket | 3139 | 124 | 33941 |
| | AC20J3 | Top Control Cover | 3139 | 124 | 31131 |
| | AC20J4 | Top Control Rubber | 3139 | 124 | 30391 |
| REMOTE | | Remote Control Transmitter, RC19335004/ | | | |
| | | 01. | 3139 | 228 | 86463 |

29PT643R85A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | Main Chassis Parts | | | |
|--------------------|---|------|-----------|--------------------|--|------|-----------|
| 0211 | 2 Pin Connector. | 2422 | 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 | 368 90177 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2331 | er. | 2020 | 558 90445 |
| 0214 | 5 Pin Connector. | 2422 | 025 12481 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 | 558 90445 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 | 021 90552 |
| 0229 | 3 Pin Connector. | 2412 | 020 00725 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 0239 | 3 Pin Connector. | 2422 | 025 16382 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 | 025 54790 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 03310 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 0269 | Jack | 2422 | 026 05182 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 | 014 02230 |
| S 1000 | Tuner, V+U PLL | 2422 | 542 90141 | 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 01810 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2457 | Cap, 360n, 5%, 250v, Metalized Polyprop | 2022 | 333 00163 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2458 | ylene. | 2020 | 021 91331 |
| S 1510 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2459 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | 2460 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 1811 | 3 Pin Connector. | 2412 | 020 00725 | S 2463 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 | 2464 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2465 | Cap, 2u2, 5%, 160v, Metalized Polypropy | 2022 | 479 90042 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | S 2465 | lene | 2020 | 301 90255 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2466 | Cap, 15n, 5%, 1600v, Polypropylene | 2020 | 301 90255 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2468 | Cap, 15n, 10%, 400v, Polyester | 2222 | 347 90219 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2471 | Cap, 27n, 10%, 400v, Polyester | 2222 | 347 90232 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2472 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 | 2473 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2474 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2476 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2480 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2481 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2482 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2485 | Cap, 120n, 5%, 250v, Metalized Polyprop | 2022 | 479 90051 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2486 | ylene. | 2020 | 021 90856 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2487 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 91577 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2488 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2489 | Cap, 47u, 20%, 50v, Electrolytic | 2020 | 021 90854 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2491 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91049 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | S 2500 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2501 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2502 | Cap, 470n, 20%, 275v, Metalized Polypro | 2022 | 330 00018 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2503 | pylene | 2022 | 330 00018 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2507 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2508 | Cap, 470u, 20%, 200v, Electrolytic | 2020 | 024 90647 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2515 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2520 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 | S 2515 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2520 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2521 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2522 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | S 2523 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2525 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2527 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2528 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2540 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 54780 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 | 021 91654 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91353 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 | 016 36890 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 31020 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 021 21050 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |

S = Safety Part Be sure to use exact replacement part.

29PT643R85A (continued)

| | | | | | |
|------|---|----------------|--------|--|----------------|
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic | 2238 586 15626 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass . | 3198 021 34740 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass . | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic . . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film . . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic . . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic | 2238 586 15624 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film | 3198 011 03330 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic | 2238 580 15642 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass . . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass . | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03109 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass . | 3198 021 32240 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film | 2312 915 12002 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film | 3198 011 03320 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass . | 3198 021 34740 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 021 31040 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass . | 3198 021 31540 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film | 2120 101 74158 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film | 3198 011 05620 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film | 3198 011 01030 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film | 3198 011 03920 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film . . | 3198 012 32290 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass . . . | 2322 734 61202 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03910 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film | 3198 011 08220 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film | 3198 011 02230 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass . . . | 3198 021 31020 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | S 3504 | Res, PTC, 3 ohm, 144V | 2122 663 00019 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass . . | 2322 242 13155 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 05610 | 3507 | Surge Protector | 2422 549 43073 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass . | 3198 021 33340 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | S 3510 | Res, NTC, 4R7, 20%, 3W1 | 2122 612 00056 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 02710 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 01010 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 05610 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film | 3198 011 04780 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass . | 3198 021 53340 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3524 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |

S = Safety Part Be sure to use exact replacement part.

29PT643R85A (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5341 | Coil, 22u. | 2422 535 97333 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5342 | Coil, 3u9, 10% | 2422 535 97323 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5445 | Transformer, LOT | 2422 531 02574 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5451 | Coil, 22u, 10% | 3198 018 72290 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5457 | Coil, 25u. | 2422 535 91028 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 021 31530 | 5480 | Coil, 47u, 10% | 2422 535 97337 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 021 31220 | S 5501 | Mains Filter | 2422 549 43432 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5521 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5560 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5562 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5564 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6331 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6401 | Zener Diode, 47 volt | 3198 010 24790 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6460 | Diode, Rect, BY228/24. | 9340 559 50112 |

S = Safety Part Be sure to use exact replacement part.

29PT643R85A (continued)

| | | | | | | | | | |
|--------|----------------------------------|------|-----|-------|------|----------------|------|-----|-------|
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9414 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9423 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9424 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9426 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9463 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 | 728 | 40557 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 7400 | Power FET, IR. | 9322 | 053 | 35687 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9617 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 9620 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9621 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1 | 9352 | 673 | 56112 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 | 310 | 10215 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9633 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9651 | Wire Jumper. | 3198 | 036 | 90010 |
| 7901 | IC, AN7522N PH | 9322 | 181 | 41682 | 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 9101 | Wire Jumper. | 3198 | 036 | 90010 | 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 9102 | Wire Jumper. | 3198 | 036 | 90010 | 9656 | Wire Jumper. | 3198 | 036 | 90010 |
| 9103 | Wire Jumper. | 3198 | 036 | 90010 | 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 9104 | Wire Jumper. | 3198 | 036 | 90010 | 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 9123 | Wire Jumper. | 3198 | 036 | 90010 | 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 | 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9173 | Wire Jumper. | 3198 | 036 | 90010 | 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 9175 | Wire Jumper. | 3198 | 036 | 90010 | 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 9176 | Wire Jumper. | 3198 | 036 | 90010 | 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9178 | Wire Jumper. | 3198 | 036 | 90010 | 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9179 | Wire Jumper. | 3198 | 036 | 90010 | 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9181 | Wire Jumper. | 3198 | 036 | 90010 | 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9182 | Wire Jumper. | 3198 | 036 | 90010 | 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9192 | Wire Jumper. | 3198 | 036 | 90010 | 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9193 | Wire Jumper. | 3198 | 036 | 90010 | 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9311 | Wire Jumper. | 3198 | 036 | 90010 | 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9312 | Wire Jumper. | 3198 | 036 | 90010 | 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9406 | Wire Jumper. | 3198 | 036 | 90010 | 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9407 | Wire Jumper. | 3198 | 036 | 90010 | 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9408 | Wire Jumper. | 3198 | 036 | 90010 | 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9409 | Wire Jumper. | 3198 | 036 | 90010 | 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9410 | Wire Jumper. | 3198 | 036 | 90010 | 9679 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part Be sure to use exact replacement part.

29PT643R85A (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 58631 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR. | 9322 | 185 | 69682 |

S = Safety Part. Be sure to use exact replacement part.

| | | | | |
|------|---|------|-----|-------|
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly. | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0232 | Headphone Jack. | 2422 | 026 | 04747 |
| 0250 | A/V Jack. | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly. | 3139 | 177 | 26231 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas. | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly. | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|---|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used). | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitt. | 9299 | 000 | 65263 |
| AC05 | Cabinet Back. | 3139 | 124 | 44711 |
| AC06 | Cabinet Back Screw Cover (2 Used). | 3139 | 124 | 39301 |
| AC08 | Chassis Tray. | 3139 | 124 | 31325 |
| S AC09 | CRT, A68QCU754X73(N). | 9301 | 925 | 60527 |

29PT643R85A (continued)

| | | | | |
|--------|--|------|-----|-------|
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3139 | 124 | 31122 |
| AC17 | Owner's Manual | 3121 | 235 | 21101 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53302 |
| AC20A | Cabinet Front. | 3139 | 177 | 58401 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 5W (2 Used). | 2422 | 264 | 00409 |
| AC20J | Top Control Assembly | 3139 | 138 | 11451 |
| REMOTE | Remote Control Transmitter, RC19335004/ 01. | 3139 | 228 | 86464 |

29PT6631/44 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|--|------|-----|-------|--|--|--|
| | Main Chassis Parts | | | | | | |
| 0022 | Bracket. | 3139 | 124 | 44421 | | | |
| 0122 | Heatsink. | 3139 | 121 | 62214 | | | |
| 0127 | Socket Fuse. | 2422 | 088 | 00271 | | | |
| 0129 | NTC Holder. | 3139 | 120 | 10151 | | | |
| 0136 | IC-Spring. | 3104 | 301 | 22081 | | | |
| 0137 | Spring. | 3139 | 121 | 24583 | | | |
| 0138 | IC-Spring. | 3104 | 301 | 22081 | | | |
| 0139 | Spring for Bracket. | 3122 | 121 | 24786 | | | |
| 0140 | Spring. | 3139 | 121 | 24583 | | | |
| 0141 | IC-Spring. | 3104 | 301 | 22081 | | | |
| 0152 | Cable, DIP, 6 Pin, 400mm. | 3104 | 301 | 09421 | | | |
| 0153 | Cable, DIPMate. | 3104 | 301 | 08381 | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 | 16374 | | | |
| 0214 | 5 Pin Connector. | 2422 | 025 | 12481 | | | |
| 0219 | 6 Pin Connector. | 2422 | 025 | 12482 | | | |
| 0223 | A/V Jack. | 2422 | 026 | 05236 | | | |
| 0225 | SVHS Jack. | 2422 | 026 | 04926 | | | |
| 0239 | 3 Pin Connector. | 2422 | 025 | 16382 | | | |
| 0246 | 5 Pin Connector. | 2422 | 025 | 12481 | | | |
| S 0254 | 9 Pin CRT Socket. | 2422 | 500 | 80076 | | | |
| 0269 | Jack. | 2422 | 026 | 05182 | | | |
| 0320 | Factory Plate. | 3122 | 120 | 01701 | | | |
| S 1000 | Tuner, V+U, PLL. | 2422 | 542 | 90108 | | | |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 | 07444 | | | |
| 1810 | 6 Pin Connector. | 2422 | 025 | 16607 | | | |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | | | | | | |
| | C49/U A. | 2422 | 543 | 00842 | | | |
| 2004 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 024 | 44730 | | | |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 24740 | | | |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | | | |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | | | |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | | | |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 | | | |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 | | | |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | | | |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | | | |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | | | |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | | | |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | | | |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 | | | |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | | | |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 | | | |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | | | |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 | | | |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | | | |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 | | | |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | | | |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 | 32290 | | | |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 | | | |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | | | |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 | 19852 | | | |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 | | | |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 | 22250 | | | |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | | | |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 | 54780 | | | |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 | 41050 | | | |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | | | |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | | | |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | | | |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 | 21020 | | | |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 | 04740 | | | |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 | 32230 | | | |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 | 32220 | | | |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 | | | |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 | 21020 | | | |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 | 90445 | | | |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 | 90559 | | | |
| 2401 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 | 021 | 90552 | | | |
| 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 | 44710 | | | |
| 2404 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 | 025 | 54790 | | | |
| 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 | 03310 | | | |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 | 91139 | | | |
| 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 | 014 | 02230 | | | |
| 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 | 01810 | | | |
| 2457 | Cap, 360n, 5%, 250v, Metalized Polypropylene. | 2022 | 333 | 00163 | | | |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 | 91331 | | | |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 | 46810 | | | |
| S 2463 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 | 90489 | | | |
| 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 | 479 | 90042 | | | |
| S 2465 | Cap, 15n, 5%, 1600v, Polypropylene. | 2020 | 301 | 90255 | | | |
| 2466 | Cap, 15n, 10%, 400v, Polyester. | 2222 | 347 | 90219 | | | |
| 2468 | Cap, 22n, 10%, 400v, Polyester. | 2222 | 347 | 90223 | | | |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 | 365 | 75154 | | | |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 | 90586 | | | |
| 2482 | Cap, 120n, 5%, 250v, Metalized Polypropylene. | 2222 | 479 | 90051 | | | |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 | 90856 | | | |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 | 91577 | | | |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 | 90854 | | | |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 | 91049 | | | |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 | 91577 | | | |
| S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 | 330 | 00018 | | | |
| S 2503 | Cap, 330u, 20%, 450v, Electrolytic. | 2020 | 024 | 90774 | | | |
| 2509 | Cap, 100n, 20%, 275v, Metalized Polypropylene. | 2222 | 336 | 29144 | | | |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 | 90172 | | | |
| S 2516 | Cap, 330p, 20%, 50v, Ceramic. | 2020 | 554 | 90121 | | | |
| 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 01030 | | | |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 | 91374 | | | |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 | 19856 | | | |
| 2604 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 | | | |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 | 31020 | | | |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 | | | |
| 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 22240 | | | |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 | 44740 | | | |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 | 016 | 31080 | | | |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 | 016 | 31080 | | | |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 | 016 | 34790 | | | |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 | | | |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 | 32210 | | | |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 | 31520 | | | |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 | 54780 | | | |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | | | |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 | | | |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | | | |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 | | | |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 | | | |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 | | | |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 | | | |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 | 31020 | | | |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 | 31020 | | | |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 | 31020 | | | |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 | 31020 | | | |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 | 33390 | | | |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 | 016 | 34790 | | | |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 | 31510 | | | |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 | 31810 | | | |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 | 32210 | | | |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 | 016 | 35610 | | | |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 | 016 | 33910 | | | |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 | | | |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic. | 3198 | 026 | 31020 | | | |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 24740 | | | |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 | 31020 | | | |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 24740 | | | |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 | 31020 | | | |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06890 | | | |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | | | |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01510 | | | |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32240 | | | |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01510 | | | |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32240 | | | |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 07590 | | | |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | | | |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 07590 | | | |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | | | |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 07590 | | | |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | | | |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01510 | | | |
| 3124 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | | | |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01510 | | | |
| 3126 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | | | |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01510 | | | |
| 3132 | Res, 47K, 5%, 1/10W, Metalized | | | | | | |

29PT6631/44 (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3454 | Res, 2K, 1%, 3/5W, Metal Film. . . . | 2312 915 12002 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3472 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 | 5241 | Wire Jumper. | 3198 036 90010 |
| S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 32290 | 5341 | Coil, 22u, | 2422 535 97333 |
| 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5342 | Coil, 3u9, 10% | 2422 535 97323 |
| 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 | S 5445 | Transformer, LOT | 2422 531 02574 |
| 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 5451 | Coil, 22u, 10% | 3198 018 72290 |
| 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5457 | Coil, Linear | 3128 138 53201 |
| 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| S 3504 | Res, PTC, 9R 220V. | 2120 661 00024 | 5480 | Coil, 47u, 10% | 2422 535 97337 |
| 3521 | Res, 22 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 02290 | S 5500 | Mains Filter | 2422 549 43567 |
| 3522 | Res, 330K, 1%, 1/8W, Metalized Glass . | 2322 734 63304 | S 5520 | Transformer, SS49109-00 B. | 2422 531 02579 |
| S 3523 | Res, 47 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03479 | 5810 | Coil, 10u, 10% | 3198 018 51090 |
| 3526 | Res, 0R15, 5%, 3/5W, Metal Film. . . . | 3198 012 11570 | 5831 | Coil, 6u8, 5%. | 3198 018 16880 |
| 3527 | Res, 0R22, 5%, 3/5W, Metal Film. . . . | 3198 012 12270 | 5832 | Coil, 6u8, 5%. | 3198 018 16880 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 5833 | Coil, 6u8, 5%. | 3198 018 16880 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 5835 | Coil, 12u, 10% | 3198 018 31290 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3561 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. . . . | 2312 915 11002 |
| 3563 | Res, 8K2, 5%, 1/10W, Metalized Glass . | 3198 021 58220 | 6401 | Zener Diode, 47 volt | 3198 010 24790 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 | 6460 | Diode, Rect, BY228/24. | 9340 559 50112 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 6469 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 6476 | Zener Diode, 15 volt | 3198 010 21590 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 6485 | Diode, Rect, BYV95C. | 9335 000 80133 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 6487 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 6490 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 6500 | Diode, Bridge Rect, GBU4JL-7002. . . | 9322 132 55667 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 6520 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 6541 | Zener Diode, 9.1 volt. | 9322 150 08685 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 6570 | Zener Diode, 6.2 volt. | 9322 163 91685 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 6582 | Diode, Rect, STPS10L60D. | 9322 175 70667 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 6831 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 7200 | IC, TDA9588H/N1/3I/1298. | 9352 742 85557 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 7400 | Power FET, STP3NC60FP. | 9322 157 37687 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 7515 | Optical Coupler, TCET1104(G) | 9322 175 72667 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 7521 | Power FET, STP7NC80ZFP | 3139 120 51961 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 7560 | IC, L78L33ACZ. | 9322 134 92676 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 7602 | IC, M24C08-WBN6. | 9322 154 38682 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 7606 | Transistor, NPN, PDTCT1432T | 9340 547 00215 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 7802 | IC, HEF4053BT. | 9333 729 60653 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 7803 | IC, HEF4053BT. | 9333 729 60653 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 7804 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 021 36820 | 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L . . . | 9322 187 89682 |
| 3903 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 7901 | IC, AN7580 | 9322 166 29682 |
| 3905 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 7903 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 3909 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 9001 | Wire Jumper. | 3198 036 90010 |
| 3910 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 9101 | Wire Jumper. | 3198 036 90010 |
| 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 9102 | Wire Jumper. | 3198 036 90010 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9103 | Wire Jumper. | 3198 036 90010 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9104 | Wire Jumper. | 3198 036 90010 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9123 | Wire Jumper. | 3198 036 90010 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9171 | Wire Jumper. | 3198 036 90010 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9173 | Wire Jumper. | 3198 036 90010 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9175 | Wire Jumper. | 3198 036 90010 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9176 | Wire Jumper. | 3198 036 90010 |
| 4824 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9178 | Wire Jumper. | 3198 036 90010 |
| 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9179 | Wire Jumper. | 3198 036 90010 |
| 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9181 | Wire Jumper. | 3198 036 90010 |
| 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9182 | Wire Jumper. | 3198 036 90010 |
| 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9183 | Wire Jumper. | 3198 036 90010 |
| 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9192 | Wire Jumper. | 3198 036 90010 |
| 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 9193 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

29PT6631/44 (continued)

| | | | | | |
|------|----------------------|----------------|------|--------------|----------------|
| 9311 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9681 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9682 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9685 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9689 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9690 | Wire Jumper. | 3198 036 90010 |
| 9414 | Wire Jumper. | 3198 036 90010 | 9691 | Wire Jumper. | 3198 036 90010 |
| 9415 | Wire Jumper. | 3198 036 90010 | 9694 | Wire Jumper. | 3198 036 90010 |
| 9416 | Wire Jumper. | 3198 036 90010 | 9695 | Wire Jumper. | 3198 036 90010 |
| 9417 | Wire Jumper. | 3198 036 90010 | 9697 | Wire Jumper. | 3198 036 90010 |
| 9418 | Wire Jumper. | 3198 036 90010 | 9698 | Wire Jumper. | 3198 036 90010 |
| 9419 | Wire Jumper. | 3198 036 90010 | 9699 | Wire Jumper. | 3198 036 90010 |
| 9421 | Wire Jumper. | 3198 036 90010 | 9821 | Wire Jumper. | 3198 036 90010 |
| 9422 | Wire Jumper. | 3198 036 90010 | 9822 | Wire Jumper. | 3198 036 90010 |
| 9424 | Wire Jumper. | 3198 036 90010 | 9825 | Wire Jumper. | 3198 036 90010 |
| 9425 | Wire Jumper. | 3198 036 90010 | 9828 | Wire Jumper. | 3198 036 90010 |
| 9426 | Wire Jumper. | 3198 036 90010 | 9829 | Wire Jumper. | 3198 036 90010 |
| 9427 | Wire Jumper. | 3198 036 90010 | 9831 | Wire Jumper. | 3198 036 90010 |
| 9453 | Wire Jumper. | 3198 036 90010 | 9832 | Wire Jumper. | 3198 036 90010 |
| 9460 | Wire Jumper. | 3198 036 90010 | 9837 | Wire Jumper. | 3198 036 90010 |
| 9463 | Wire Jumper. | 3198 036 90010 | 9838 | Wire Jumper. | 3198 036 90010 |
| 9500 | Wire Jumper. | 3198 036 90010 | 9839 | Wire Jumper. | 3198 036 90010 |
| 9501 | Wire Jumper. | 3198 036 90010 | 9846 | Wire Jumper. | 3198 036 90010 |
| 9503 | Wire Jumper. | 3198 036 90010 | 9847 | Wire Jumper. | 3198 036 90010 |
| 9511 | Wire Jumper. | 3198 036 90010 | 9849 | Wire Jumper. | 3198 036 90010 |
| 9512 | Wire Jumper. | 3198 036 90010 | 9851 | Wire Jumper. | 3198 036 90010 |
| 9513 | Wire Jumper. | 3198 036 90010 | 9856 | Wire Jumper. | 3198 036 90010 |
| 9514 | Wire Jumper. | 3198 036 90010 | 9858 | Wire Jumper. | 3198 036 90010 |
| 9515 | Wire Jumper. | 3198 036 90010 | 9859 | Wire Jumper. | 3198 036 90010 |
| 9516 | Wire Jumper. | 3198 036 90010 | 9860 | Wire Jumper. | 3198 036 90010 |
| 9518 | Wire Jumper. | 3198 036 90010 | 9862 | Wire Jumper. | 3198 036 90010 |
| 9520 | Wire Jumper. | 3198 036 90010 | 9863 | Wire Jumper. | 3198 036 90010 |
| 9521 | Wire Jumper. | 3198 036 90010 | 9864 | Wire Jumper. | 3198 036 90010 |
| 9522 | Wire Jumper. | 3198 036 90010 | 9865 | Wire Jumper. | 3198 036 90010 |
| 9524 | Wire Jumper. | 3198 036 90010 | 9867 | Wire Jumper. | 3198 036 90010 |
| 9525 | Wire Jumper, 0.58MM. | 3198 036 90010 | 9868 | Wire Jumper. | 3198 036 90010 |
| 9528 | Wire Jumper. | 3198 036 90010 | 9869 | Wire Jumper. | 3198 036 90010 |
| 9530 | Wire Jumper. | 3198 036 90010 | 9870 | Wire Jumper. | 3198 036 90010 |
| 9612 | Wire Jumper. | 3198 036 90010 | 9871 | Wire Jumper. | 3198 036 90010 |
| 9613 | Wire Jumper. | 3198 036 90010 | 9873 | Wire Jumper. | 3198 036 90010 |
| 9614 | Wire Jumper. | 3198 036 90010 | 9874 | Wire Jumper. | 3198 036 90010 |
| 9615 | Wire Jumper. | 3198 036 90010 | 9875 | Wire Jumper. | 3198 036 90010 |
| 9618 | Wire Jumper. | 3198 036 90010 | 9876 | Wire Jumper. | 3198 036 90010 |
| 9619 | Wire Jumper. | 3198 036 90010 | 9877 | Wire Jumper. | 3198 036 90010 |
| 9620 | Wire Jumper. | 3198 036 90010 | 9878 | Wire Jumper. | 3198 036 90010 |
| 9621 | Wire Jumper. | 3198 036 90010 | 9901 | Wire Jumper. | 3198 036 90010 |
| 9622 | Wire Jumper. | 3198 036 90010 | 9902 | Wire Jumper. | 3198 036 90010 |
| 9623 | Wire Jumper. | 3198 036 90010 | 9903 | Wire Jumper. | 3198 036 90010 |
| 9624 | Wire Jumper. | 3198 036 90010 | 9904 | Wire Jumper. | 3198 036 90010 |
| 9626 | Wire Jumper. | 3198 036 90010 | 9911 | Wire Jumper. | 3198 036 90010 |
| 9627 | Wire Jumper. | 3198 036 90010 | 9913 | Wire Jumper. | 3198 036 90010 |
| 9628 | Wire Jumper. | 3198 036 90010 | 9914 | Wire Jumper. | 3198 036 90010 |
| 9629 | Wire Jumper. | 3198 036 90010 | 9915 | Wire Jumper. | 3198 036 90010 |
| 9631 | Wire Jumper. | 3198 036 90010 | 9923 | Wire Jumper. | 3198 036 90010 |
| 9632 | Wire Jumper. | 3198 036 90010 | 9991 | Wire Jumper. | 3198 036 90010 |
| 9633 | Wire Jumper. | 3198 036 90010 | 9993 | Wire Jumper. | 3198 036 90010 |
| 9637 | Wire Jumper. | 3198 036 90010 | 9996 | Wire Jumper. | 3198 036 90010 |
| 9638 | Wire Jumper. | 3198 036 90010 | 9997 | Wire Jumper. | 3198 036 90010 |
| 9639 | Wire Jumper. | 3198 036 90010 | 9998 | Wire Jumper. | 3198 036 90010 |
| 9640 | Wire Jumper. | 3198 036 90010 | CBA | Main Chassis | 3141 058 58171 |
| 9641 | Wire Jumper. | 3198 036 90010 | | | |
| 9642 | Wire Jumper. | 3198 036 90010 | | | |
| 9643 | Wire Jumper. | 3198 036 90010 | | | |
| 9648 | Wire Jumper. | 3198 036 90010 | | | |
| 9650 | Wire Jumper. | 3198 036 90010 | | | |
| 9651 | Wire Jumper. | 3198 036 90010 | | | |
| 9652 | Wire Jumper. | 3198 036 90010 | | | |
| 9654 | Wire Jumper. | 3198 036 90010 | | | |
| 9655 | Wire Jumper. | 3198 036 90010 | | | |
| 9656 | Wire Jumper. | 3198 036 90010 | | | |
| 9657 | Wire Jumper. | 3198 036 90010 | | | |
| 9658 | Wire Jumper. | 3198 036 90010 | | | |
| 9659 | Wire Jumper. | 3198 036 90010 | | | |
| 9660 | Wire Jumper. | 3198 036 90010 | | | |
| 9661 | Wire Jumper. | 3198 036 90010 | | | |
| 9662 | Wire Jumper. | 3198 036 90010 | | | |
| 9663 | Wire Jumper. | 3198 036 90010 | | | |
| 9664 | Wire Jumper. | 3198 036 90010 | | | |
| 9665 | Wire Jumper. | 3198 036 90010 | | | |
| 9666 | Wire Jumper. | 3198 036 90010 | | | |
| 9667 | Wire Jumper. | 3198 036 90010 | | | |
| 9668 | Wire Jumper. | 3198 036 90010 | | | |
| 9669 | Wire Jumper. | 3198 036 90010 | | | |
| 9670 | Wire Jumper. | 3198 036 90010 | | | |
| 9671 | Wire Jumper. | 3198 036 90010 | | | |
| 9674 | Wire Jumper. | 3198 036 90010 | | | |
| 9675 | Wire Jumper. | 3198 036 90010 | | | |
| 9676 | Wire Jumper. | 3198 036 90010 | | | |

S = Safety Part. Be sure to use exact replacement part.

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

| | | |
|------|-----------------------------------|----------------|
| | 2D 3 Line Comb Filter Parts | |
| 0266 | 6 Pin Connector. | 2422 025 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 028 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 017 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic | 3198 016 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2431 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 |

29PT6631/44 (continued)

| | | | | |
|------|--|------|-----|-------|
| 2432 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 | 31030 |
| 2433 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 | 31030 |
| 2434 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 | 31030 |
| 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2440 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 |
| 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2450 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 |
| 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31820 |
| 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 36820 |
| 3407 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31020 |
| 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. | 2122 | 118 | 05951 |
| 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 68202 |
| 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3457 | Wire Jumper. | 3198 | 036 | 90010 |
| 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4403 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 5401 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5407 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 5408 | Coil, 33u, 20% | 3198 | 018 | 33390 |
| 5421 | Inductor, 100 MHz, 120 ohm | 3198 | 018 | 90070 |
| 5425 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5428 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 5429 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5430 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5440 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5442 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 5450 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5452 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 7401 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7402 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7403 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7421 | IC, TC90A53N | 9322 | 182 | 18682 |
| 7440 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7444 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |

S = Safety Part Be sure to use exact replacement part.

| | | | | |
|------|--|------|-----|-------|
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3121 | 231 | 00081 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44711 |
| AC06 | Cabinet Back Screw Cover (2 Used). | 3139 | 124 | 39301 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| AC09 | CRT, A68QCP893X003 | 9322 | 173 | 76682 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 45505 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32892 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3139 | 124 | 31122 |
| AC17 | Owner's Manual | 3121 | 235 | 20832 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53102 |
| AC20A | Cabinet Front. | 3139 | 177 | 58401 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76521 |
| AC20J | Top Control Assembly | 3139 | 177 | 56381 |

29PT6631/44 (continued)

REMOTE Remote Control Transmitter, RC19335004/
01. 3139 228 86464

29PT663R85A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16374 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0214 | 5 Pin Connector. | 2422 025 12481 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 0223 | A/V Jack | 2422 026 05236 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0239 | 3 Pin Connector. | 2422 025 16382 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 014 02230 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 01810 |
| 0269 | Jack | 2422 026 05182 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| S 1000 | Tuner, V+U PLL | 2422 542 90098 | 2457 | Cap, 360n, 5%, 250v, Metalized Polypropylene. | 2022 333 00163 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | S 2463 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 479 90042 |
| 1810 | 6 Pin Connector. | 2422 025 16607 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene | 2020 301 90255 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 543 00842 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2468 | Cap, 27n, 10%, 400v, Polyester | 2222 347 90232 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 365 75154 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 365 75104 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2482 | Cap, 120n, 5%, 250v, Metalized Polypropylene. | 2222 479 90051 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 330 00018 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91374 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2604 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 368 90177 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 | 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 | 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 |

S = Safety Part Be sure to use exact replacement part.

29PT663R85A (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic . . . | 3198 026 31020 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2120 101 74158 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 32290 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3507 | Surge Protector. | 2422 549 43073 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |

S = Safety Part Be sure to use exact replacement part.

29PT663R85A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54710 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass | 2322 | 734 | 64702 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 | 730 | 61274 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51530 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51020 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51230 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3565 | Res, 220 ohm, 5%, 1W, Metal Film | 3198 | 012 | 12210 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 | 021 | 52220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. | 2306 | 204 | 03109 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 | 53310 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34710 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 5341 | Coil, 22u. | 2422 | 535 | 97333 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32210 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | S 5445 | Transformer, LOT | 2422 | 531 | 02574 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5451 | Coil, 22u, 10% | 3198 | 018 | 72290 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | S 5457 | Coil, 25u. | 2422 | 535 | 91028 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5480 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5520 | Transformer, SS42202-00 B. | 2422 | 531 | 02562 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 5810 | Coil, 10u, 10% | 3198 | 018 | 51090 |
| 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36820 | 5831 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3903 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 | 5832 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3905 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 | 5833 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3909 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32730 | 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 |
| 3910 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32730 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08210 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |

S = Safety Part Be sure to use exact replacement part.

29PT663R85A (continued)

| | | | | | |
|--------|--|----------------|------|-------------------------|----------------|
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 010 21590 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6490 | Diode, Rect, BYD33J. | 9337 234 20133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 132 55667 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 175 70667 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1298. | 9352 742 85557 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9611 | Coil, 27u, 10%. | 3198 018 22790 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9627 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQFFN50. | 9322 187 16687 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 310 10215 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, PPTC143ZT. | 3198 010 42150 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7803 | IC, HEF4053BT. | 9333 729 60653 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7804 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L. | 9322 187 89682 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7580. | 9322 166 29682 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7903 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10%. | 3198 018 22290 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10%. | 3198 018 22290 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9681 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

29PT663R85A (continued)

| | | | | | |
|------|--------------------------------|----------------|------|--|----------------|
| 9682 | Wire Jumper. | 3198 036 90010 | 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9685 | Wire Jumper. | 3198 036 90010 | 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9686 | Wire Jumper. | 3198 036 90010 | 2440 | Cap, 10u, 20%, 16v, Electrolytic | 3198 028 21090 |
| 9687 | Wire Jumper. | 3198 036 90010 | 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9688 | Wire Jumper. | 3198 036 90010 | 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9689 | Wire Jumper. | 3198 036 90010 | 2450 | Cap, 10u, 20%, 16v, Electrolytic | 3198 028 21090 |
| 9690 | Wire Jumper. | 3198 036 90010 | 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9691 | Wire Jumper. | 3198 036 90010 | 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9694 | Wire Jumper. | 3198 036 90010 | 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9695 | Wire Jumper. | 3198 036 90010 | 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9697 | Wire Jumper. | 3198 036 90010 | 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 021 31820 |
| 9698 | Wire Jumper. | 3198 036 90010 | 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 |
| 9699 | Wire Jumper. | 3198 036 90010 | 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9821 | Wire Jumper. | 3198 036 90010 | 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 021 36820 |
| 9822 | Wire Jumper. | 3198 036 90010 | 3407 | Res, 1K, 5%, 1/16W, Metalized Glass . | 3198 021 31020 |
| 9825 | Wire Jumper. | 3198 036 90010 | 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9828 | Wire Jumper. | 3198 036 90010 | 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. | 2122 118 05951 |
| 9829 | Wire Jumper. | 3198 036 90010 | 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9831 | Wire Jumper. | 3198 036 90010 | 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9832 | Wire Jumper. | 3198 036 90010 | 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9837 | Wire Jumper. | 3198 036 90010 | 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 704 68202 |
| 9838 | Wire Jumper. | 3198 036 90010 | 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9839 | Wire Jumper. | 3198 036 90010 | 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9846 | Wire Jumper. | 3198 036 90010 | 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 9847 | Wire Jumper. | 3198 036 90010 | 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9849 | Wire Jumper. | 3198 036 90010 | 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 021 32720 |
| 9851 | Wire Jumper. | 3198 036 90010 | 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9856 | Wire Jumper. | 3198 036 90010 | 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9858 | Wire Jumper. | 3198 036 90010 | 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 9859 | Wire Jumper. | 3198 036 90010 | 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9860 | Wire Jumper. | 3198 036 90010 | 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 021 32720 |
| 9862 | Wire Jumper. | 3198 036 90010 | 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9863 | Wire Jumper. | 3198 036 90010 | 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 9864 | Wire Jumper. | 3198 036 90010 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9865 | Wire Jumper. | 3198 036 90010 | 3457 | Wire Jumper. | 3198 036 90010 |
| 9867 | Wire Jumper. | 3198 036 90010 | 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 9868 | Wire Jumper. | 3198 036 90010 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9869 | Wire Jumper. | 3198 036 90010 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9870 | Wire Jumper. | 3198 036 90010 | 4403 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9871 | Wire Jumper. | 3198 036 90010 | 5401 | Coil, 10u, 10% | 3198 018 31090 |
| 9873 | Wire Jumper. | 3198 036 90010 | 5407 | Coil, 33u, 5% | 3198 018 13390 |
| 9874 | Wire Jumper. | 3198 036 90010 | 5408 | Coil, 33u, 20% | 3198 018 33390 |
| 9875 | Wire Jumper. | 3198 036 90010 | 5421 | Inductor, 100 MHz, 120 ohm | 3198 018 90070 |
| 9876 | Wire Jumper. | 3198 036 90010 | 5425 | Coil, 10u, 10% | 3198 018 31090 |
| 9877 | Wire Jumper. | 3198 036 90010 | 5428 | Coil, 10u, 5% | 3198 018 11090 |
| 9878 | Wire Jumper. | 3198 036 90010 | 5429 | Coil, 10u, 10% | 3198 018 31090 |
| 9901 | Wire Jumper. | 3198 036 90010 | 5430 | Coil, 10u, 10% | 3198 018 31090 |
| 9902 | Wire Jumper. | 3198 036 90010 | 5440 | Coil, 10u, 10% | 3198 018 31090 |
| 9903 | Wire Jumper. | 3198 036 90010 | 5442 | Coil, 22u, 5% | 3198 018 12290 |
| 9904 | Wire Jumper. | 3198 036 90010 | 5450 | Coil, 10u, 10% | 3198 018 31090 |
| 9911 | Wire Jumper. | 3198 036 90010 | 5452 | Coil, 33u, 5% | 3198 018 13390 |
| 9913 | Wire Jumper. | 3198 036 90010 | 7401 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 9914 | Wire Jumper. | 3198 036 90010 | 7402 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9915 | Wire Jumper. | 3198 036 90010 | 7403 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9923 | Wire Jumper. | 3198 036 90010 | 7421 | IC, TC90A53N | 9322 182 18682 |
| 9991 | Wire Jumper. | 3198 036 90010 | 7440 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9993 | Wire Jumper. | 3198 036 90010 | 7444 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9996 | Wire Jumper. | 3198 036 90010 | 7450 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9997 | Wire Jumper. | 3198 036 90010 | 7454 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9998 | Wire Jumper. | 3198 036 90010 | 9401 | Wire Jumper. | 3198 036 90010 |
| CBA | Main Chassis Assembly. | 3141 058 58621 | 9402 | Wire Jumper. | 3198 036 90010 |
| | | | 9403 | Wire Jumper. | 3198 036 90010 |
| | | | CBA | 2D 3 Line Comb Filter Assembly | 3139 177 26561 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

| | | |
|------|--|----------------|
| | 2D 3 Line Comb Filter Parts | |
| 0266 | 6 Pin Connector. | 2422 025 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 028 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2431 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 |
| 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

| | | |
|--------|--|----------------|
| | Front Interface Panel Parts | |
| S 0211 | 2 Pin Connector. | 2422 025 16268 |
| S 0212 | 2 Pin Connector. | 2422 025 16559 |
| 0214 | 5 Pin Connector. | 2422 025 06353 |
| 1606 | Tact Switch. | 2422 128 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 242 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 242 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 011 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 011 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 011 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 127 54667 |

29PT663R85A (continued)

| | | | | |
|------|--|------|-----|-------|
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

| | | | | |
|--------|--|------|-----|-------|
| REMOTE | Remote Control Transmitter, RC19335004/ 01. | 3139 | 228 | 86463 |
|--------|--|------|-----|-------|

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)
ly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitt | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44711 |
| AC06 | Cabinet Back Screw Cover (2 Used). . . | 3139 | 124 | 39301 |
| AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S AC09 | CRT, A68QCU754X73(N) | 9301 | 925 | 60527 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) . . . | 3139 | 124 | 31122 |
| AC17 | Owner's Manual | 3121 | 235 | 20831 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53101 |
| AC20A | Cabinet Front. | 3139 | 177 | 58401 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76521 |
| AC20J | Top Control Assembly | 3139 | 138 | 11451 |
| AC20J1 | Top Control Bracket. | 3139 | 124 | 39802 |
| AC20J2 | Top Control Buttons. | 3139 | 124 | 39812 |

S = Safety Part Be sure to use exact replacement part.

29PT663R85C - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16374 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0214 | 5 Pin Connector. | 2422 025 12481 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 0223 | A/V Jack | 2422 026 05236 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0239 | 3 Pin Connector. | 2422 025 16382 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 014 02230 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 01810 |
| 0269 | Jack | 2422 026 05182 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| S 1000 | Tuner, V+U PLL | 2422 542 90098 | 2457 | Cap, 360n, 5%, 250v, Metalized Polypropylene. | 2222 479 90019 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | S 2463 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 479 90042 |
| 1810 | 6 Pin Connector. | 2422 025 16607 | 2465 | Cap, 15n, 5%, 1600v, Polypropylene | 2222 375 90158 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 543 00842 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2468 | Cap, 22n, 10%, 400v, Polyester | 2222 347 90223 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 365 75154 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 365 75104 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2482 | Cap, 120n, 5%, 250v, Metalized Polypropylene. | 2222 479 90051 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2222 336 29148 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91374 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2604 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 370 76104 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 368 90177 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 | 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 | 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 |

S = Safety Part Be sure to use exact replacement part.

29PT663R85C (continued)

| | | | | | | |
|------|--|----------------|--------|--|----------------|----------------|
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 | |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | S 3341 | Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X | 34. | 2306 204 03108 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | S 3341 | Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33 | 0X34 | 2306 204 03278 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | S 3342 | Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X | 34. | 2306 204 03108 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | S 3342 | Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 | 0X34 | 2306 204 03278 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3342 | Res, 1 ohm, 5%, 1/3W, MF for A80ECK33 | 0X34 | 2306 204 03278 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | S 3342 | Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 | 0X34 | 2306 204 03278 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | S 3342 | Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 | 0X34 | 2306 204 03278 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | S 3342 | Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 | 0X34 | 2306 204 03278 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic . . . | 3198 026 31020 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 | |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 | |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03310 | |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3401 | Res, 220K, 5%, 1/6W, Carbon Film | 3198 011 02240 | |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 | |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 | |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 | |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 | |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 | |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 | |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 | |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 | |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 | |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | S 3455 | Res, 6R8, 5%, 1/3W, Metal Film | 3198 012 26880 | |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | S 3459 | Res, 15K, 5%, 1/3W, Metal Film | 3198 012 21530 | |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 | |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 | |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3472 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 | |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 | |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 | |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 | |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 32290 | |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 | |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 | |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 | |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 | |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3507 | Surge Protector. | 2422 549 43073 | |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 | |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 | |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 | |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 021 32730 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 | |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 | |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . . | 2322 704 63903 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 | |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 | |

S = Safety Part Be sure to use exact replacement part.

29PT663R85C (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 | 012 | 13370 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 54730 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51030 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 54720 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51520 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 | 734 | 64702 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . . | 2322 | 730 | 61274 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51530 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 54720 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51230 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 55620 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3565 | Res, 220 ohm, 5%, 1W, Metal Film | 3198 | 012 | 12210 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 52220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 55620 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 54730 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 | 204 | 03109 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 04710 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31030 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32220 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 5341 | Coil, 22u. | 2422 | 535 | 97333 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34720 | 5342 | Coil, 22u for A80QCF340X34 | 2422 | 535 | 97333 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5342 | Coil, 47u for A80QCF330X34 | 3198 | 018 | 24790 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | S 5445 | Transformer, LOT | 2422 | 531 | 02574 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 5451 | Coil, 22u, 10% | 3198 | 018 | 72290 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | S 5457 | Coil, 25u. | 2422 | 535 | 91028 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5480 | Coil, 47u, 10% | 2422 | 535 | 97337 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5520 | Transformer, SS42202-00 B. | 2422 | 531 | 02562 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 01010 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32220 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 36820 | 5810 | Coil, 10u, 10% | 3198 | 018 | 51090 |
| 3903 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 | 5831 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3905 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 | 5832 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3909 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32730 | 5833 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3910 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 32730 | 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 |
| 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 | 011 | 08210 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 |

S = Safety Part Be sure to use exact replacement part.

29PT663R85C (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99. | 3198 010 10620 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 010 10070 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 010 10070 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 010 21590 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6490 | Diode, Rect, BYD33J. | 9337 234 20133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 132 55667 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 175 70667 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1298. | 9352 742 85557 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PDTCL43ZT | 9340 547 00215 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9627 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQFFN50. | 9322 187 16687 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PDTCL14ET | 9340 310 10215 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PDTCL43ZT | 9340 547 00215 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PDTCL43ZT | 9340 547 00215 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7803 | IC, HEF4053BT. | 9333 729 60653 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7804 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 187 89682 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7580 | 9322 166 29682 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7903 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10% | 3198 018 22290 |

S = Safety Part Be sure to use exact replacement part.

29PT663R85C (continued)

| | | | | | | | | | |
|------|--------------------------------|------|-----|-------|------|---|------|-----|-------|
| 9674 | Wire Jumper. | 3198 | 036 | 90010 | 2428 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 | 2429 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 | 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 | 2431 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 | 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 | 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 | 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9682 | Wire Jumper. | 3198 | 036 | 90010 | 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 | 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 | 2440 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 21090 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 | 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 | 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 | 2450 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 21090 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 | 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 | 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 | 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 | 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 | 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31820 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 | 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 | 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 | 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 36820 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 | 3407 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 | 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 | 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. | 2122 | 118 | 05951 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 | 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 | 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 | 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 | 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 68202 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 | 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 | 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 | 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 | 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9863 | Wire Jumper. | 3198 | 036 | 90010 | 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | 3457 | Wire Jumper. | 3198 | 036 | 90010 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 | 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9870 | Wire Jumper. | 3198 | 036 | 90010 | 4403 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9871 | Wire Jumper. | 3198 | 036 | 90010 | 5401 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | 5407 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | 5408 | Coil, 33u, 20% | 3198 | 018 | 33390 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | 5421 | Inductor, 100 MHz, 120 ohm | 3198 | 018 | 90070 |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 | 5425 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | 5428 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 9878 | Wire Jumper. | 3198 | 036 | 90010 | 5429 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | 5430 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | 5440 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | 5442 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | 5450 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | 5452 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | 7401 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | 7402 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | 7403 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9923 | Wire Jumper. | 3198 | 036 | 90010 | 7421 | IC, TC90A53N | 9322 | 182 | 18682 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | 7440 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 | 7444 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 | 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 57991 | 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| | | | | | 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| | | | | | CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

| | | | | |
|-----------------------------|--|------|-----|-------|
| 2D 3 Line Comb Filter Parts | | | | |
| 0266 | 6 Pin Connector. | 2422 | 025 | 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic . . . | 3198 | 028 | 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. . | 3198 | 017 | 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 | 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 | 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 | 025 | 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|-----------------------------|--|------|-----|-------|
| Front Interface Panel Parts | | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |

29PT663R85C (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 | AC20C | Light Guide. | 3139 | 124 | 39701 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 | AC20D | Nameplate. | 3141 | 050 | 00161 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 | AC20E | Power Button | 3139 | 138 | 10881 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 | AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76521 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 | AC20J | Top Control Assembly | 3139 | 138 | 11451 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | AC20J1 | Top Control Bracket. | 3139 | 124 | 39802 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 | AC20J2 | Top Control Buttons. | 3139 | 124 | 39812 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | REMOTE | Remote Control Transmitter, RC19335004/ 01. | 3139 | 228 | 86463 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 | | | | | |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44711 |
| AC06 | Cabinet Back Screw Cover (2 Used). | 3139 | 124 | 39301 |
| AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S AC09 | CRT, A68QCP893X001 | 9322 | 173 | 75682 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3139 | 124 | 31122 |
| AC17 | Owner's Manual | 3121 | 235 | 20831 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53101 |
| AC20A | Cabinet Front. | 3139 | 177 | 58401 |

S = Safety Part Be sure to use exact replacement part.

29PT663S85A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|---|------|-----------|--------|---|------|-----------|
| | Main Chassis Parts | | | | | | |
| 0127 | Socket Fuse. | 2422 | 088 00271 | 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 0129 | NTC Holder. | 3139 | 120 10151 | 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 0136 | IC-Spring. | 3104 | 301 22081 | 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 0137 | Spring. | 3139 | 121 24583 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 0138 | IC-Spring. | 3104 | 301 22081 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 0139 | Spring for Bracket. | 3122 | 121 24786 | 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 90020 |
| 0140 | Spring. | 3139 | 121 24583 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | |
| 0141 | IC-Spring. | 3104 | 301 22081 | | er. | 2222 | 368 90177 |
| 0152 | Cable, DIP, 6 Pin, 400mm. | 3104 | 301 09421 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 |
| 0153 | Cable, DIPMate, 5 Pin, 480mm. | 3139 | 121 07951 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 0211 | 2 Pin Connector. | 2422 | 025 16374 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 0214 | 5 Pin Connector. | 2422 | 025 12481 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 | 021 90552 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 0223 | A/V Jack. | 2422 | 026 05236 | 2404 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 | 025 54790 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 0239 | 3 Pin Connector. | 2422 | 025 16382 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 03310 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| S 0254 | 9 Pin CRT Socket. | 2422 | 500 80076 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 | 014 02230 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 01810 |
| 0269 | Jack. | 2422 | 026 05182 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| S 1000 | Tuner, V+U PLL. | 2422 | 542 90141 | 2457 | Cap, 360n, 5%, 250v, Metalized Polyprop | | |
| 1002 | SAW Filter, 45.75MHz. | 2422 | 549 44518 | | ylene. | 2022 | 333 00163 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 | 549 40807 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 1660 | Crystal, 12MHz000. | 2422 | 543 01203 | S 2463 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 1810 | 6 Pin Connector. | 2422 | 025 16607 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | | |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | | | | lene. | 2222 | 479 90042 |
| | C49/U A. | 2422 | 543 00842 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene. | 2020 | 301 90255 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2466 | Cap, 15n, 10%, 400v, Polyester. | 2222 | 347 90219 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2468 | Cap, 27n, 10%, 400v, Polyester. | 2222 | 347 90232 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 90586 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2482 | Cap, 120n, 5%, 250v, Metalized Polyprop | | |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | | ylene. | 2222 | 479 90051 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 91049 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | | |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | | pylene. | 2022 | 330 00018 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90647 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91374 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 04740 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2604 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| | | | | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| | | | | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |

S = Safety Part Be sure to use exact replacement part.

29PT663S85A (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. . . | 3198 023 22240 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03310 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic . . . | 3198 026 31020 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . . | 3198 021 38220 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3472 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2120 101 74158 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . . | 3198 012 32290 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . . | 3198 021 33330 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3507 | Surge Protector. | 2422 549 43073 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . . | 3198 013 02210 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 |

S = Safety Part Be sure to use exact replacement part.

29PT663S85A (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 021 55630 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. . | 3198 021 54720 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. . | 3198 021 51520 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 734 64702 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 730 61274 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. . | 3198 021 51530 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass. . | 3198 021 54720 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. . | 3198 021 51230 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. . | 3198 021 55620 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass. . | 3198 021 52220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass. . | 3198 021 55620 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 04710 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 5341 | Coil, 22u. | 2422 535 97333 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5342 | Coil, 3u9, 10% | 2422 535 97323 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | S 5445 | Transformer, LOT | 2422 531 02574 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 5451 | Coil, 22u, 10% | 3198 018 72290 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | S 5457 | Coil, 25u. | 2422 535 91028 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5480 | Coil, 47u, 10% | 2422 535 97337 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5501 | Mains Filter | 2422 549 43432 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5520 | Transformer, SS42202-00 B. | 2422 531 02562 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass. . | 3198 021 36820 | 5810 | Coil, 10u, 10% | 3198 018 51090 |
| 3903 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 5831 | Coil, 6u8, 5% | 3198 018 16880 |
| 3905 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 5832 | Coil, 6u8, 5% | 3198 018 16880 |
| 3909 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 | 5833 | Coil, 6u8, 5% | 3198 018 16880 |
| 3910 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 | 5835 | Coil, 12u, 10% | 3198 018 31290 |
| 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |

S = Safety Part Be sure to use exact replacement part.

29PT663S85A (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6335 | Diode, Signal, BAV21 | 3198 010 10070 | 9182 | Wire Jumper. | 3198 036 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 | 9183 | Wire Jumper. | 3198 036 90010 |
| 6401 | Zener Diode, 47 volt | 3198 010 24790 | 9192 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 001 80133 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6490 | Diode, Rect, BYV95C. | 9335 001 80133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 132 55667 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 175 70667 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1298. | 9352 742 85557 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9627 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7803 | IC, HEF4053BT. | 9333 729 60653 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7804 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 187 89682 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7580 | 9322 166 29682 | 9655 | Wire Jumper. | 3198 036 90010 |
| 7903 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

29PT663S85A (continued)

| | | | | | | | | | |
|------|--------------------------------|------|-----|-------|------|--|------|-----|-------|
| 9670 | Wire Jumper. | 3198 | 036 | 90010 | 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 | 2428 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 | 2429 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 | 2430 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 | 31040 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 | 2431 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 | 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 | 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 | 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 | 2435 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 | 31040 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 | 2436 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 | 31040 |
| 9682 | Wire Jumper. | 3198 | 036 | 90010 | 2440 | Cap, 10u, 20%, 16v, Electrolytic. . . . | 3198 | 028 | 21090 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 | 2442 | Cap, 56p, 5%, 50v, Ceramic. | 3198 | 016 | 35690 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 | 2443 | Cap, 56p, 5%, 50v, Ceramic. | 3198 | 016 | 35690 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 | 2450 | Cap, 10u, 20%, 16v, Electrolytic. . . . | 3198 | 028 | 21090 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 | 2452 | Cap, 56p, 5%, 50v, Ceramic. | 3198 | 016 | 35690 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 | 2453 | Cap, 56p, 5%, 50v, Ceramic. | 3198 | 016 | 35690 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 | 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 | 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 | 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31820 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 | 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 | 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 | 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 36820 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 | 3407 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 | 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 | 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. . | 2122 | 118 | 05951 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 | 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 | 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 | 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 | 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 68202 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 | 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 | 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 | 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 | 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 | 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 | 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9863 | Wire Jumper. | 3198 | 036 | 90010 | 3457 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | 4403 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 | 5401 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9870 | Wire Jumper. | 3198 | 036 | 90010 | 5407 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 9871 | Wire Jumper. | 3198 | 036 | 90010 | 5408 | Coil, 33u, 20% | 3198 | 018 | 33390 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | 5421 | Inductor, 100 MHz, 120 ohm | 3198 | 018 | 90070 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | 5425 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | 5428 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 | 5429 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | 5430 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9878 | Wire Jumper. | 3198 | 036 | 90010 | 5440 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | 5442 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | 5450 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | 5452 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | 7401 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | 7402 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | 7403 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | 7421 | IC, TC90A53N | 9322 | 182 | 18682 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | 7440 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9923 | Wire Jumper. | 3198 | 036 | 90010 | 7444 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 58621 | 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| | | | | | 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| | | | | | CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

| | | | | |
|-----------------------------|--|------|-----|-------|
| 2D 3 Line Comb Filter Parts | | | | |
| 0266 | 6 Pin Connector. | 2422 | 025 | 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic . . . | 3198 | 028 | 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 | 017 | 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 | 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 | 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 | 025 | 34790 |

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|-----------------------------|--|------|-----|-------|
| Front Interface Panel Parts | | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |

29PT663S85A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 | AC20A | Cabinet Front. | 3139 | 177 | 58401 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 | AC20C | Light Guide. | 3139 | 124 | 39701 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 | AC20D | Nameplate. | 3141 | 050 | 00161 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 05610 | AC20E | Power Button | 3139 | 138 | 10881 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 03310 | AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76521 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02210 | AC20J | Top Control Assembly | 3139 | 177 | 56381 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | REMOTE | Remote Control Transmitter, RC19335004/ 01. | 3139 | 228 | 86464 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 | | | | | |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 | | | | | |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assem-
bly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assem-
bly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitt | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44711 |
| AC06 | Cabinet Back Screw Cover (2 Used). . . | 3139 | 124 | 39301 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A68QCU754X73(N) | 9301 | 925 | 60527 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43967 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) . . . | 3139 | 124 | 31122 |
| AC17 | Owner's Manual | 3121 | 235 | 20832 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53102 |

S = Safety Part Be sure to use exact replacement part.

30DV693R37A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|---|----------------|--------|---|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16374 | 2250 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0214 | 5 Pin Connector. | 2422 025 12481 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0217 | 3 Pin Connector. | 2412 020 00725 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 368 90177 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . | 2020 558 90445 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. . . | 2020 012 93495 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 |
| 0223 | A/V Jack | 2422 026 05236 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. . . . | 2020 558 90559 |
| 0229 | 7 Pin Connector. | 2422 025 11244 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 21040 |
| 0239 | 3 Pin Connector. | 2422 025 16382 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. . . | 2020 558 90445 |
| 0240 | 4 Pin Connector. | 2422 025 12479 | 2401 | Cap, 2u2, 20%, 100v, Electrolytic. . . | 2020 021 91331 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2402 | Cap, 470p, 10%, 500v, Ceramic. . . . | 3198 019 44710 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2404 | Cap, 47u, 20%, 50v, Electrolytic. . . . | 3198 025 54790 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 025 32210 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| 0251 | 4 Pin Connector. | 2422 025 15847 | 2420 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2421 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 |
| 0268 | 3 Pin Connector. | 2412 020 00725 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. . . . | 3198 017 24730 |
| 0269 | Jack | 2422 026 05182 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. . . | 2020 021 91139 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 014 02230 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2454 | Cap, 68n, 5%, 250v, Metalized Polypropy | 2222 479 90133 |
| S 1400 | Relay, 5 Amp, 12V. | 2422 132 07543 | 2455 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 025 34790 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | 2022 333 00086 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1810 | 6 Pin Connector. | 2422 025 15849 | S 2463 | Cap, 390p, 10%, 2000v, Ceramic. . . . | 2020 558 90482 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | 2422 543 00842 | S 2465 | Cap, 13n, 5%, 1600v, Polypropylene . . | 2020 301 90254 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2467 | Cap, 9n1, 5%, 1000v, Polypropylene . . | 2222 375 90424 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 2468 | Cap, 9n1, 5%, 1000v, Polypropylene . . | 2222 375 90424 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 2469 | Cap, 430n, 5%, 250v, Metalized Polyprop | 2022 333 00164 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2480 | Cap, 47u, 20%, 25v, Electrolytic . . . | 2020 021 90586 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. . . | 2020 021 90856 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. . . | 2020 021 91577 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic . . . | 2020 021 90854 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic . . | 2020 021 91049 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. . . | 2020 021 91577 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 2490 | Cap, 2u2, 20%, 100v, Electrolytic. . . | 2020 021 91331 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | 2022 330 00018 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2503 | Cap, 470u, 20%, 200v, Electrolytic . . | 2020 024 90647 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. . . . | 3198 019 64710 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. . . | 2238 786 19852 | 2521 | Cap, 22u, 20%, 50v, Electrolytic . . . | 3198 025 52290 |
| 2172 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2173 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . | 3198 017 22250 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. . . . | 2020 558 90472 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 2561 | Cap, 100u, 20%, 160v, Electrolytic . . | 2020 021 91654 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic . . . | 2020 021 91374 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 2567 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 025 34790 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic . . . | 3198 028 24790 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic . . . | 3198 025 52290 |
| 2216 | Cap, 2u2, 20%, 10v, Electrolytic . . . | 2020 012 93728 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . | 3198 023 22240 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 2604 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2243 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2247 | Cap, 2u2, 20%, 10v, Electrolytic . . . | 2020 012 93728 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | | | |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | | | |

S = Safety Part Be sure to use exact replacement part.

30DV693R37A (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic. . . . | 3198 025 54780 | 3247 | Res, 560K, 5%, Metalized Glass. . . . | 2322 702 60564 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3250 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03108 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03108 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic. . . | 3198 026 31020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3401 | Res, 82K, 5%, 1/6W, Carbon Film. . . . | 3198 011 08230 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01040 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3407 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3408 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. . . . | 2306 204 03478 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3451 | Res, 4R7, 5%, 1/3W, Metal Film. . . . | 2306 204 03478 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film. . . . | 2312 915 15602 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3457 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3468 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3470 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 915 13908 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3473 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 915 13908 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3172 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3180 | Res, 68K, 5%, 1/16W, Metalized Glass . | 3198 021 36830 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3181 | Res, 120K, 5%, Metalized Glass | 2322 702 60124 | 3481 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 |
| 3190 | Res, 68K, 5%, 1/16W, Metalized Glass . | 3198 021 36830 | 3482 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 32290 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3489 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3491 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 021 53320 |
| 3206 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3492 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | S 3493 | Res, 2R2, 5%, 1/3W, Metal Film. | 2306 204 03228 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |

S = Safety Part Be sure to use exact replacement part.

30DV693R37A (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|--|------|-----|-------|
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13155 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3507 | Surge Protector. | 2422 | 549 | 43073 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. | 3198 | 013 | 02210 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 | 612 | 00056 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02710 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51220 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04780 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53340 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 3523 | Res, 47 ohm, 5%, 1/3W, Metal Film. | 2306 | 204 | 03479 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55630 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 | 012 | 11070 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3527 | Res, 0R15, 5%, 3/5W, Metal Film. | 3198 | 012 | 11570 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51030 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54720 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film. | 2306 | 204 | 03222 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54710 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51520 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 | 915 | 18203 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 33K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53330 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51530 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54720 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51230 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 8K2, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 58220 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film. | 3198 | 012 | 13310 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. | 2306 | 204 | 03109 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53310 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3614 | Res, 4K7, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3615 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01030 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3617 | Res, 4K7, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04720 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3619 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34710 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32220 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5341 | Coil, 22u. | 2422 | 535 | 97333 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5400 | Coil, 11u7 | 2422 | 535 | 91027 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | S 5445 | Transformer, LOT | 2422 | 531 | 02212 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 37590 | 5451 | Coil, 22u, 10% | 3198 | 018 | 72290 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 5453 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | S 5457 | Coil, 42u. | 2422 | 535 | 94865 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32210 | S 5461 | Transformer, SD10207-00 B. | 2422 | 531 | 02568 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5464 | Coil, Bridge, C946-01 Y. | 2422 | 531 | 02419 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 37590 | 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5480 | Coil, 10u, 10% | 2422 | 535 | 97328 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5520 | Transformer, SS42204-00 B. | 2422 | 531 | 02563 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 37590 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5831 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5832 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32220 | 5833 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 36820 | 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 |
| 3903 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3905 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3909 | Res, 27K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32730 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3910 | Res, 27K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32730 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08210 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |

S = Safety Part Be sure to use exact replacement part.

30DV693R37A (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6331 | Diode, Signal, BAV21 | 3198 010 10070 | 9160 | Wire Jumper. | 3198 036 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | 9171 | Wire Jumper. | 3198 036 90010 |
| 6333 | Diode, Signal, BAV21 | 3198 010 10070 | 9173 | Wire Jumper. | 3198 036 90010 |
| 6335 | Diode, Signal, BAV21 | 3198 010 10070 | 9175 | Wire Jumper. | 3198 036 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 | 9176 | Wire Jumper. | 3198 036 90010 |
| 6401 | Zener Diode, 68 volt | 3198 010 26890 | 9178 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9179 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9181 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9182 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9183 | Wire Jumper. | 3198 036 90010 |
| 6452 | Diode, Signal, BAS316. | 3198 010 10630 | 9192 | Wire Jumper. | 3198 036 90010 |
| 6453 | Zener Diode, 5.6 volt. | 3198 020 55680 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, DG3-7005L | 9336 436 10682 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 12 volt | 3198 010 21290 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6490 | Diode, Rect, BYV95C. | 9335 001 80133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 132 55667 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9462 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9464 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 175 70667 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7000 | IC, TDA8941P/N1. | 9352 628 51112 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9569H/N1/4I/1313. | 9352 743 94557 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7444 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7450 | Transistor, PNP, PDTA114ET | 3198 010 44010 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PDTA143ZT | 9340 547 00215 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9629 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9635 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9636 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PDTA114ET | 9340 310 10215 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PDTA143ZT | 9340 547 00215 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PDTA143ZT | 9340 547 00215 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9644 | Wire Jumper. | 3198 036 90010 |
| 7803 | IC, HEF4053BT. | 9333 729 60653 | 9645 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 187 89682 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7580 | 9322 166 29682 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7903 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9652 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

30DV693R37A (continued)

| | | | | |
|------|--|------|-----|-------|
| 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9683 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9848 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9855 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9857 | Wire Jumper. | 3198 | 036 | 90010 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9923 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 20801 |
| CBA | DVD Loader SD5.12. | 3139 | 188 | 55471 |
| CBA | DVD MPEG Assembly SD5.12 | 3139 | 188 | 55481 |
| CBA | DVD Module SD5.12 (contains Loader and MPEG Assembly) | 4835 | 310 | 57599 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

S = Safety Part Be sure to use exact replacement part.

DVD Eject Panel Parts

| | | | | |
|-----------------------|------------------------------------|------|-----|-------|
| DVD Eject Panel Parts | | | | |
| 0267 | 3 Pin Board Connector. | 2422 | 025 | 09191 |
| 0361 | Eject Button | 3139 | 177 | 63451 |
| 1110 | Tact Switch. | 2422 | 128 | 02742 |
| CBA | DVD Eject Panel Assembly | 3139 | 187 | 23311 |

DVD Interface Panel Parts

| | | | | |
|---------------------------|---|------|-----|-------|
| DVD Interface Panel Parts | | | | |
| 0226 | Connector, 6 Pin | 2422 | 025 | 12482 |
| 0228 | Connector, 3 Pin | 2412 | 020 | 00725 |
| 0251 | Connector, 4 Pin | 2422 | 025 | 15847 |
| 0253 | Connector, 7 Pin | 2422 | 025 | 11244 |
| 0254 | Connector, 3 Pin | 2422 | 025 | 16382 |
| 0266 | Connector, 6 Pin | 2422 | 025 | 15849 |
| 0269 | Connector, 5 Pin | 2422 | 025 | 15848 |
| 1100 | Socket, Cinch, 1 Pin | 2422 | 026 | 04425 |
| 1101 | Connector, 8 Pin | 2422 | 025 | 12483 |
| S 1330 | Fuse, 2A, 250V | 2422 | 086 | 10422 |
| S 1331 | Fuse, 2A, 250V | 2422 | 086 | 10422 |
| S 1332 | Fuse, 2A, 250V | 2422 | 086 | 10421 |
| 2101 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 |
| 2102 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 |
| 2103 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 34790 |
| 2104 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 2110 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 2111 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2112 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2113 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2114 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2185 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2260 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 41040 |
| 2262 | Cap, 4u7, +80/-20%, 10V, Ceramic | 2020 | 552 | 96305 |
| 2300 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 | 93495 |
| 2301 | Cap, 22n, 10%, 400v, Metalized Polyeste | 2222 | 365 | 55223 |
| 2302 | Cap, 100p, 10%, 1KV, Ceramic | 3198 | 019 | 51010 |
| 2310 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2311 | Cap, 470n, 10%, 25v, Ceramic | 2020 | 552 | 96465 |
| 2313 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2315 | Cap, 220p, 10%, 1KV, Ceramic | 3198 | 019 | 62210 |
| 2316 | Cap, 33n, 10%, 16v, Ceramic. | 3198 | 017 | 33330 |
| 2319 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 22240 |
| 2330 | Cap, 2u2, 20%, 25v, Electrolytic | 3198 | 026 | 32220 |
| 2331 | Cap, 470u, 20%, 10v, Electrolytic. | 3198 | 025 | 14710 |
| 2332 | Cap, 2u2, 20%, 25v, Electrolytic | 3198 | 026 | 32220 |
| 2333 | Cap, 470u, 20%, 10v, Electrolytic. | 3198 | 025 | 14710 |
| 2337 | Cap, 1000u, 20%, 25v, Electrolytic | 3198 | 026 | 31020 |
| 2338 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 | 24710 |
| 2339 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 | 24710 |
| 2341 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 2342 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 | 24790 |
| 2350 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 2351 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 2353 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 31020 |
| 3101 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3102 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36890 |
| 3110 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3111 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3112 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3113 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3114 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3115 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3116 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3117 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3118 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3180 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3182 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3262 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3263 | Res, 82K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 38230 |
| 3264 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3265 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32730 |
| 3271 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3272 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 |
| S 3300 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 | 204 | 03108 |
| S 3301 | Power Resistor, 68K, 5%, 2W. | 3198 | 012 | 26830 |
| 3308 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3309 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3310 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3311 | Res, 180 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31810 |
| 3312 | Res, 10 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31090 |
| 3313 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3314 | Res, 1 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01080 |
| 3315 | Res, 1 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01080 |
| 3317 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3318 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 |
| 3319 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3320 | Res, 100K, 1%, 1/16W, Metalized Glass. | 2322 | 704 | 61004 |
| 3339 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 |
| 3340 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 |
| 3342 | Res, 4K7, 1%, 1/16W, Metalized Glass | 2322 | 704 | 64702 |

30DV693R37A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|--|------|-----|-------|
| 3344 | Res, 4K7, 1%, 1/16W, Metalized Glass | 2322 | 704 | 64702 | 0250 | A/V Jack | 2422 | 026 | 04815 |
| 3360 | Res, 4R7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34780 | 0251 | 6 Pin Connector. | 2422 | 025 | 15849 |
| 3361 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 4105 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 | 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 4106 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 | 2171 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 4185 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 | 2172 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 4226 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 | 2173 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 4261 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 | 2174 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 4265 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 | 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 4316 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 | 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 4342 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 | 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 019 | 14710 |
| 4343 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 | 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 4361 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 | 3150 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 4363 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 | 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 4364 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90030 | 3152 | Res, 47k, 5%, 1/6W, Carbon | 3198 | 011 | 04730 |
| 5100 | Inductor, Variable, 100uH, 10% | 2422 | 549 | 41663 | 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 5110 | Coil, 220n | 3198 | 018 | 12270 | 3156 | Res, 120 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01210 |
| 5300 | Coil, 27u. | 3198 | 018 | 12270 | 3157 | Res, 120 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01210 |
| 5301 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| S 5315 | Transformer, SS25113-00. | 2422 | 531 | 02596 | 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 5331 | Coil, 10u, 5%. | 2422 | 535 | 95363 | 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| 5333 | Coil, 10u, 5%. | 2422 | 535 | 95363 | 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| 5337 | Coil, 10u, 10% | 2422 | 535 | 97328 | CBA | Side Jack Panel Assembly | 3139 | 188 | 03541 |
| 5339 | Coil, 10u, 10% | 2422 | 535 | 97328 | | | | | |
| 6100 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | | | | | |
| 6101 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | | | | | |
| 6300 | Diode, Rect, BYD33J | 9337 | 234 | 20133 | | | | | |
| 6311 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | | | | | |
| 6312 | Zener Diode, 22 volt | 3198 | 020 | 52290 | | | | | |
| 6330 | Diode, Rect, EGP20DL-5100 | 9322 | 164 | 42682 | | | | | |
| 6332 | Diode, Rect, SB340L-7024. | 9322 | 161 | 76682 | | | | | |
| 6336 | Diode, Rect, BVV27-200. | 9335 | 526 | 80133 | | | | | |
| 7110 | IC, HEF4053BT. | 9333 | 729 | 60653 | | | | | |
| 7260 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 | | | | | |
| 7261 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 | | | | | |
| 7262 | Transistor, NPN, PPTC124ET | 9340 | 310 | 20215 | | | | | |
| 7310 | Transistor, NPN, PPTC114ET | 3198 | 010 | 44110 | | | | | |
| 7311 | Transistor, PNP, PPTA114ET | 3198 | 010 | 44010 | | | | | |
| 7312 | Transistor, PNP, BC857B. | 3198 | 010 | 42150 | | | | | |
| 7313 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 | | | | | |
| 7315 | IC, TEA1523P/N2. | 9352 | 699 | 68112 | | | | | |
| S 7340 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | | | | | |
| 7341 | IC, TL431CLP | 9337 | 711 | 00676 | | | | | |
| 9110 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9111 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9266 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9315 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9350 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9351 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9352 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9355 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9357 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| CBA | DVD Interface Panel Assembly | 3139 | 187 | 20761 | | | | | |

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| | Front Interface Panel Parts | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|--------------------------|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
|------|--------------------------|------|-----|-------|

S = Safety Part Be sure to use exact replacement part.

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

| | | | | |
|------|--|------|-----|-------|
| | Top Control Panel Parts | | | |
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| | Cabinet & Accessory Parts | | | |
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitt | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44201 |
| AC06 | Cabinet Back Screw Cover (2 Used). | 3139 | 124 | 45431 |
| AC07 | Canceller Coil | 3128 | 138 | 60581 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, W76ERF942X013 | 9301 | 909 | 10314 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01661 |
| AC17 | Owner's Manual | 3121 | 235 | 21131 |
| AC18 | Quick Use Guide. | 3121 | 233 | 44471 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53511 |
| AC20A | Cabinet Front. | 3139 | 124 | 44191 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76081 |
| AC20J | Top Control Assembly | 3139 | 138 | 11451 |
| AC23 | DVD Door | 3139 | 177 | 63441 |
| AC24 | DVD Interface Panel Bracket. | 3139 | 124 | 43291 |
| REMOTE | Remote Control Transmitter, RC19042007/01. | 3128 | 147 | 14521 |

30PW633F35A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | |
|--------------------|--|------|-----------|
| | 2 Pin Connector. | 2422 | 025 16374 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 |
| 0214 | 5 Pin Connector. | 2422 | 025 12481 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 |
| 0223 | A/V Jack. | 2422 | 026 05236 |
| 0225 | SVHS Jack. | 2422 | 026 04926 |
| 0239 | 3 Pin Connector. | 2422 | 025 16382 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 |
| S 0256 | 9 Pin CRT Socket. | 2422 | 500 80053 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 |
| 0268 | 3 Pin Connector. | 2412 | 020 00725 |
| 0269 | Jack. | 2422 | 026 05182 |
| 0278 | 3 Pin Connector. | 2412 | 020 00725 |
| S 1000 | Tuner, V+U PLL. | 2422 | 542 90098 |
| 1002 | SAW Filter, 45.75MHz. | 2422 | 549 44518 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 | 549 48087 |
| S 1400 | Relay, 5 Amp, 12V. | 2422 | 132 07543 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 |
| 1660 | Crystal, 12MHz000. | 2422 | 543 01203 |
| 1810 | 6 Pin Connector. | 2422 | 025 16607 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 | 543 00842 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 |
| 2172 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2173 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 32210 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2216 | Cap, 2u2, 20%, 10v, Electrolytic. | 2020 | 012 93728 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 04740 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2243 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 | 370 76104 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2247 | Cap, 2u2, 20%, 10v, Electrolytic. | 2020 | 012 93728 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |

| | | | |
|--------|--|------|-----------|
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 90020 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyest er. | 2222 | 368 90177 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 |
| S 2346 | Cap, 470p, 10%, 2000v, Ceramic. | 2020 | 558 90483 |
| 2360 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 2362 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 32210 |
| 2364 | Cap, 27p, 5%, 50v, Ceramic. | 3198 | 016 32790 |
| 2365 | Cap, 27p, 5%, 50v, Ceramic. | 3198 | 016 32790 |
| 2366 | Cap, 27p, 5%, 50v, Ceramic. | 3198 | 016 32790 |
| 2367 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 2368 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2369 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2372 | Cap, 10u, 20%, 160v, Electrolytic. | 2020 | 012 93318 |
| 2373 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 2375 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 2378 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 019 02210 |
| 2379 | Cap, 10u, 20%, 100v, Electrolytic. | 3198 | 025 71090 |
| 2380 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 2381 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 2401 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2404 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 | 025 54790 |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2420 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2421 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 34710 |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 | 014 02230 |
| 2454 | Cap, 68n, 5%, 250v, Metalized Polypropylene. | 2222 | 479 90133 |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2457 | Cap, 470n, 5%, 250v, Metalized Polypropylene. | 2022 | 333 00086 |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| S 2463 | Cap, 390p, 10%, 2000v, Ceramic. | 2020 | 558 90482 |
| S 2465 | Cap, 13n, 5%, 1600v, Polypropylene. | 2020 | 301 90254 |
| 2467 | Cap, 9n1, 5%, 1000v, Polypropylene. | 2222 | 375 90424 |
| 2468 | Cap, 9n1, 5%, 1000v, Polypropylene. | 2222 | 375 90424 |
| 2469 | Cap, 430n, 5%, 250v, Metalized Polypropylene. | 2222 | 479 90022 |
| 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 | 365 75154 |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 | 365 75104 |
| 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 90586 |
| 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 91049 |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2490 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 | 330 00018 |
| 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90647 |
| 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91374 |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |

S = Safety Part Be sure to use exact replacement part.

30PW633F35A (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . | 3198 023 22240 | 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2604 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3206 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3207 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. . . | 3198 023 22240 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 3222 704 63903 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic. . . . | 3198 025 54780 | 3247 | Res, 560K, 5%, Metalized Glass. . . . | 3222 702 60564 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3250 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3341 | Res, 4R7, 5%, 1/3W, Metal Film. . . . | 2306 204 03478 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3342 | Res, 4R7, 5%, 1/3W, Metal Film. . . . | 2306 204 03478 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic. . . | 3198 026 31020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03390 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3360 | Res, 39K, 5%, 1/16W, Metalized Glass. . | 3198 021 33930 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3361 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3362 | Res, 39K, 5%, 1/16W, Metalized Glass. . | 3198 021 33930 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3363 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3367 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3368 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3369 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3373 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3374 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02280 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3375 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3376 | Res, 68K, 5%, 1/6W, Carbon Film. . . . | 3198 011 06830 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3377 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3378 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3380 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3381 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3383 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3384 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02280 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3385 | Res, 10K, 5%, 5W, Metal Film. | 2322 257 41103 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3386 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3401 | Res, 82K, 5%, 1/6W, Carbon Film. . . . | 3198 011 08230 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01040 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3124 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3407 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3126 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 | 3408 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3132 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. . . . | 2306 204 03478 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3134 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3451 | Res, 4R7, 5%, 1/3W, Metal Film. . . . | 2306 204 03478 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film. . . . | 2312 915 15602 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 3172 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. . . . | 2312 915 12002 |
| 3180 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3181 | Res, 120K, 5%, Metalized Glass. | 2322 702 60124 | 3456 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 3190 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 | 3457 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |

S = Safety Part Be sure to use exact replacement part.

30PW633F35A (continued)

| | | | | | |
|--------|--|----------------|------|--|----------------|
| S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 | 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . | 3198 011 03920 | 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03390 | 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3465 | Res, 27K, 1%, 3/5W, Metal Film . . . | 2312 915 12703 | 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . | 3198 011 03320 | 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3470 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 3473 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 | 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 | 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3481 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 | 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 32290 | 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3489 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3491 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 021 53320 | 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 |
| 3492 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| S 3493 | Res, 2R2, 5%, 1/3W, Metal Film | 2306 204 03228 | 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 021 36820 |
| 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 | 3903 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| S 3504 | Res, PTC, 3R0, Degaussing. | 2120 661 00025 | 3905 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 | 3909 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 3507 | Surge Protector. | 2422 549 43073 | 3910 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 | 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 | 4311 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3523 | Res, 47 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03479 | 4312 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 | 4313 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3527 | Res, 0R15, 5%, 3/5W, Metal Film. . . . | 3198 012 11570 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 33K, 5%, 1/10W, Metalized Glass . | 3198 021 53330 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 8K2, 5%, 1/10W, Metalized Glass . | 3198 021 58220 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3614 | Res, 4K7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04720 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3615 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3617 | Res, 4K7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04720 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3619 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |

S = Safety Part Be sure to use exact replacement part.

30PW633F35A (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 5202 | Wire Jumper. | 3198 036 90010 | 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7200 | IC, TDA9588H/N1/3I/1299. | 9352 742 87557 |
| 5241 | Wire Jumper. | 3198 036 90010 | 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5242 | Coil, 10u, 5%. | 3198 018 11090 | 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5341 | Coil, 22u. | 2422 535 97333 | 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5342 | Coil, 27u, 10%. | 3198 018 22790 | 7330 | IC, TDA6107JF/N3 | 9352 713 37112 |
| 5376 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 7360 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5400 | Coil, 11u7 | 2422 535 91027 | 7366 | Transistor, PNP, 2SA965. | 9322 167 18676 |
| S 5445 | Transformer, LOT | 2422 531 02612 | 7369 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5451 | Coil, 22u, 10%. | 3198 018 72290 | 7373 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 |
| 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7380 | Transistor, NPN, 2SC2235 | 9322 167 19676 |
| 5453 | Coil, 22u, 5%. | 3198 018 12290 | 7382 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 |
| S 5457 | Coil, 42u. | 2422 535 94865 | 7400 | Power FET, STP3NC60FP. | 9322 157 37687 |
| S 5461 | Transformer, SD10207-00 B. | 2422 531 02568 | 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5464 | Coil, Bridge, C946-01 Y. | 2422 531 02419 | 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 |
| 5471 | Coil, 6u8, 20%. | 3198 018 76880 | 7444 | Transistor, NPN, BC547B(COL) | 3198 020 40030 |
| 5472 | Coil, 3u3, 10%. | 3198 018 23380 | 7450 | Transistor, PNP, PDTA114ET | 3198 010 44010 |
| 5480 | Coil, 10u, 10%. | 2422 535 97328 | 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 |
| S 5501 | Mains Filter | 2422 549 43432 | 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 |
| S 5520 | Transformer, SS42204-00 B. | 2422 531 02563 | 7462 | Transistor, NPN, PDTCL143ZT | 9340 547 00215 |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 7471 | IC, TDA8359J/N2. | 9352 701 64112 |
| 5561 | Coil, 27u, 5%. | 2422 535 95366 | 7480 | Transistor, NPN, BD135 | 3198 020 41010 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 7482 | Transistor, NPN, BD135 | 3198 020 41010 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 |
| 5602 | Coil, 5u6, 5%. | 3198 018 15680 | 7520 | IC, TEA1507P/N1. | 9352 673 56112 |
| 5603 | Coil, 5u6, 5%. | 3198 018 15680 | 7521 | Power FET, FQPF9N50. | 9322 187 16687 |
| 5604 | Coil, 5u6, 5%. | 3198 018 15680 | 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5810 | Coil, 10u, 10%. | 3198 018 51090 | 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 |
| 5831 | Coil, 6u8, 5%. | 3198 018 16880 | 7541 | Transistor, NPN, PDTCL14ET | 9340 310 10215 |
| 5832 | Coil, 6u8, 5%. | 3198 018 16880 | 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5833 | Coil, 6u8, 5%. | 3198 018 16880 | 7560 | IC, L78L33ACZ. | 9322 134 92676 |
| 5835 | Coil, 12u, 10%. | 3198 018 31290 | 7561 | Transistor, NPN, PDTCL143ZT | 9340 547 00215 |
| 6001 | Zener Diode, 33 volt | 3198 010 23390 | 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 6150 | Diode, Signal, BAS316. | 3198 010 10630 | 7602 | IC, M24C08-WBN6. | 9322 154 38682 |
| 6201 | Diode, Signal, BAS316. | 3198 010 10630 | 7606 | Transistor, NPN, PDTCL143ZT | 9340 547 00215 |
| 6202 | Diode, Signal, BAS316. | 3198 010 10630 | 7802 | IC, HEF4053BT. | 9333 729 60653 |
| 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 | 7803 | IC, HEF4053BT. | 9333 729 60653 |
| 6331 | Diode, Signal, BAV21. | 3198 010 10070 | 7804 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | 7831 | IC MSP3425G-PO-B8-V3 (MTAS) L | 9322 187 89682 |
| 6333 | Diode, Signal, BAV21. | 3198 010 10070 | 7901 | IC, AN7580 | 9322 166 29682 |
| 6335 | Diode, Signal, BAV21. | 3198 010 10070 | 7903 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 6365 | Diode, Signal, BAT85 | 9336 247 60133 | 9001 | Wire Jumper. | 3198 036 90010 |
| 6366 | Diode, Signal, BAT85 | 9336 247 60133 | 9101 | Wire Jumper. | 3198 036 90010 |
| 6367 | Diode, Signal, BAV99 | 3198 010 10620 | 9102 | Wire Jumper. | 3198 036 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 | 9103 | Wire Jumper. | 3198 036 90010 |
| 6401 | Zener Diode, 68 volt | 3198 010 26890 | 9104 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9123 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9160 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9171 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9173 | Wire Jumper. | 3198 036 90010 |
| 6452 | Diode, Signal, BAS316. | 3198 010 10630 | 9175 | Wire Jumper. | 3198 036 90010 |
| 6453 | Zener Diode, 5.6 volt. | 3198 020 55680 | 9176 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, DG3-7005L | 9336 436 10682 | 9178 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9179 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 12 volt | 3198 010 21290 | 9181 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 010 10070 | 9182 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 010 10070 | 9183 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9192 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9313 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9314 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6490 | Diode, Rect, BYV95C. | 9335 001 80133 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 132 55667 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9420 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9462 | Wire Jumper. | 3198 036 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 175 70667 | 9464 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9503 | Wire Jumper. | 3198 036 90010 |
| 7000 | IC, TDA8941P/N1. | 9352 628 51112 | 9506 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

30PW633F35A (continued)

| | | |
|------|----------------|----------------|
| 9507 | Wire Jumper. | 3198 036 90010 |
| 9511 | Wire Jumper. | 3198 036 90010 |
| 9512 | Wire Jumper. | 3198 036 90010 |
| 9513 | Wire Jumper. | 3198 036 90010 |
| 9514 | Wire Jumper. | 3198 036 90010 |
| 9515 | Wire Jumper. | 3198 036 90010 |
| 9516 | Wire Jumper. | 3198 036 90010 |
| 9518 | Wire Jumper. | 3198 036 90010 |
| 9520 | Wire Jumper. | 3198 036 90010 |
| 9521 | Wire Jumper. | 3198 036 90010 |
| 9522 | Wire Jumper. | 3198 036 90010 |
| 9524 | Wire Jumper. | 3198 036 90010 |
| 9528 | Wire Jumper. | 3198 036 90010 |
| 9530 | Wire Jumper. | 3198 036 90010 |
| 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 9612 | Wire Jumper. | 3198 036 90010 |
| 9613 | Wire Jumper. | 3198 036 90010 |
| 9614 | Wire Jumper. | 3198 036 90010 |
| 9615 | Wire Jumper. | 3198 036 90010 |
| 9618 | Wire Jumper. | 3198 036 90010 |
| 9619 | Wire Jumper. | 3198 036 90010 |
| 9620 | Wire Jumper. | 3198 036 90010 |
| 9621 | Wire Jumper. | 3198 036 90010 |
| 9622 | Wire Jumper. | 3198 036 90010 |
| 9623 | Wire Jumper. | 3198 036 90010 |
| 9624 | Wire Jumper. | 3198 036 90010 |
| 9626 | Wire Jumper. | 3198 036 90010 |
| 9627 | Wire Jumper. | 3198 036 90010 |
| 9628 | Wire Jumper. | 3198 036 90010 |
| 9629 | Wire Jumper. | 3198 036 90010 |
| 9631 | Wire Jumper. | 3198 036 90010 |
| 9632 | Wire Jumper. | 3198 036 90010 |
| 9633 | Wire Jumper. | 3198 036 90010 |
| 9635 | Wire Jumper. | 3198 036 90010 |
| 9636 | Wire Jumper. | 3198 036 90010 |
| 9637 | Wire Jumper. | 3198 036 90010 |
| 9638 | Wire Jumper. | 3198 036 90010 |
| 9639 | Wire Jumper. | 3198 036 90010 |
| 9640 | Wire Jumper. | 3198 036 90010 |
| 9641 | Wire Jumper. | 3198 036 90010 |
| 9642 | Wire Jumper. | 3198 036 90010 |
| 9643 | Wire Jumper. | 3198 036 90010 |
| 9648 | Wire Jumper. | 3198 036 90010 |
| 9650 | Wire Jumper. | 3198 036 90010 |
| 9651 | Wire Jumper. | 3198 036 90010 |
| 9652 | Wire Jumper. | 3198 036 90010 |
| 9654 | Wire Jumper. | 3198 036 90010 |
| 9655 | Wire Jumper. | 3198 036 90010 |
| 9656 | Wire Jumper. | 3198 036 90010 |
| 9657 | Wire Jumper. | 3198 036 90010 |
| 9658 | Wire Jumper. | 3198 036 90010 |
| 9659 | Wire Jumper. | 3198 036 90010 |
| 9660 | Wire Jumper. | 3198 036 90010 |
| 9661 | Wire Jumper. | 3198 036 90010 |
| 9662 | Wire Jumper. | 3198 036 90010 |
| 9663 | Wire Jumper. | 3198 036 90010 |
| 9664 | Wire Jumper. | 3198 036 90010 |
| 9665 | Wire Jumper. | 3198 036 90010 |
| 9666 | Wire Jumper. | 3198 036 90010 |
| 9667 | Wire Jumper. | 3198 036 90010 |
| 9668 | Wire Jumper. | 3198 036 90010 |
| 9669 | Wire Jumper. | 3198 036 90010 |
| 9670 | Wire Jumper. | 3198 036 90010 |
| 9671 | Wire Jumper. | 3198 036 90010 |
| 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9674 | Wire Jumper. | 3198 036 90010 |
| 9675 | Wire Jumper. | 3198 036 90010 |
| 9676 | Wire Jumper. | 3198 036 90010 |
| 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9679 | Wire Jumper. | 3198 036 90010 |
| 9680 | Wire Jumper. | 3198 036 90010 |
| 9681 | Wire Jumper. | 3198 036 90010 |
| 9682 | Wire Jumper. | 3198 036 90010 |
| 9683 | Wire Jumper. | 3198 036 90010 |
| 9685 | Wire Jumper. | 3198 036 90010 |
| 9686 | Wire Jumper. | 3198 036 90010 |
| 9687 | Wire Jumper. | 3198 036 90010 |
| 9688 | Wire Jumper. | 3198 036 90010 |
| 9689 | Wire Jumper. | 3198 036 90010 |
| 9690 | Wire Jumper. | 3198 036 90010 |
| 9691 | Wire Jumper. | 3198 036 90010 |
| 9694 | Wire Jumper. | 3198 036 90010 |
| 9695 | Wire Jumper. | 3198 036 90010 |
| 9697 | Wire Jumper. | 3198 036 90010 |
| 9698 | Wire Jumper. | 3198 036 90010 |
| 9699 | Wire Jumper. | 3198 036 90010 |
| 9821 | Wire Jumper. | 3198 036 90010 |
| 9822 | Wire Jumper. | 3198 036 90010 |
| 9825 | Wire Jumper. | 3198 036 90010 |
| 9828 | Wire Jumper. | 3198 036 90010 |
| 9829 | Wire Jumper. | 3198 036 90010 |
| 9831 | Wire Jumper. | 3198 036 90010 |

| | | |
|------|------------------------|----------------|
| 9832 | Wire Jumper. | 3198 036 90010 |
| 9837 | Wire Jumper. | 3198 036 90010 |
| 9838 | Wire Jumper. | 3198 036 90010 |
| 9839 | Wire Jumper. | 3198 036 90010 |
| 9846 | Wire Jumper. | 3198 036 90010 |
| 9847 | Wire Jumper. | 3198 036 90010 |
| 9848 | Wire Jumper. | 3198 036 90010 |
| 9849 | Wire Jumper. | 3198 036 90010 |
| 9851 | Wire Jumper. | 3198 036 90010 |
| 9855 | Wire Jumper. | 3198 036 90010 |
| 9856 | Wire Jumper. | 3198 036 90010 |
| 9857 | Wire Jumper. | 3198 036 90010 |
| 9858 | Wire Jumper. | 3198 036 90010 |
| 9859 | Wire Jumper. | 3198 036 90010 |
| 9860 | Wire Jumper. | 3198 036 90010 |
| 9862 | Wire Jumper. | 3198 036 90010 |
| 9863 | Wire Jumper. | 3198 036 90010 |
| 9864 | Wire Jumper. | 3198 036 90010 |
| 9865 | Wire Jumper. | 3198 036 90010 |
| 9867 | Wire Jumper. | 3198 036 90010 |
| 9868 | Wire Jumper. | 3198 036 90010 |
| 9869 | Wire Jumper. | 3198 036 90010 |
| 9870 | Wire Jumper. | 3198 036 90010 |
| 9871 | Wire Jumper. | 3198 036 90010 |
| 9873 | Wire Jumper. | 3198 036 90010 |
| 9874 | Wire Jumper. | 3198 036 90010 |
| 9875 | Wire Jumper. | 3198 036 90010 |
| 9876 | Wire Jumper. | 3198 036 90010 |
| 9877 | Wire Jumper. | 3198 036 90010 |
| 9878 | Wire Jumper. | 3198 036 90010 |
| 9901 | Wire Jumper. | 3198 036 90010 |
| 9902 | Wire Jumper. | 3198 036 90010 |
| 9903 | Wire Jumper. | 3198 036 90010 |
| 9904 | Wire Jumper. | 3198 036 90010 |
| 9911 | Wire Jumper. | 3198 036 90010 |
| 9913 | Wire Jumper. | 3198 036 90010 |
| 9914 | Wire Jumper. | 3198 036 90010 |
| 9915 | Wire Jumper. | 3198 036 90010 |
| 9923 | Wire Jumper. | 3198 036 90010 |
| 9991 | Wire Jumper. | 3198 036 90010 |
| 9993 | Wire Jumper. | 3198 036 90010 |
| 9996 | Wire Jumper. | 3198 036 90010 |
| 9997 | Wire Jumper. | 3198 036 90010 |
| 9998 | Wire Jumper. | 3198 036 90010 |
| CBA | Main Chassis Assembly. | 3141 058 59221 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

| | | |
|-----------------------------|---|----------------|
| 2D 3 Line Comb Filter Parts | | |
| 0266 | 6 Pin Connector. | 2422 025 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 028 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 017 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic | 3198 016 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2431 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 |
| 2432 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2433 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2434 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2440 | Cap, 10u, 20%, 16v, Electrolytic | 3198 028 21090 |
| 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2450 | Cap, 10u, 20%, 16v, Electrolytic | 3198 028 21090 |
| 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31561 |
| 3402 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 |
| 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass | 3198 021 31820 |
| 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 021 31520 |
| 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 021 36820 |
| 3407 | Res, 1K, 5%, 1/16W, Metalized Glass | 3198 021 31020 |
| 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |

30PW633F35A (continued)

| | | | | |
|------|--|------|-----|-------|
| 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. | 2122 | 118 | 05951 |
| 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 68202 |
| 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3457 | Wire Jumper. | 3198 | 036 | 90010 |
| 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4403 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 5401 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5407 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 5408 | Coil, 33u, 20% | 3198 | 018 | 33390 |
| 5421 | Inductor, 100 MHz, 120 ohm | 3198 | 018 | 90070 |
| 5425 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5428 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 5429 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5430 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5440 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5442 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 5450 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5452 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 7401 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7402 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7403 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7421 | IC, TC90A53N | 9322 | 182 | 18682 |
| 7440 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7444 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| | Front Interface Panel Parts | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts
S = Safety Part Be sure to use exact replacement part.

| | | | | |
|------|--|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| | Top Control Panel Parts | | | |
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

| | | | | |
|--------|---|------|-----|-------|
| | Cabinet & Accessory Parts | | | |
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 46431 |
| AC06 | Cabinet Back Screw Cover (2 Used). . . | 3139 | 124 | 45431 |
| AC07 | Canceller Coil | 3128 | 138 | 60581 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, W76ERF942X013 | 9301 | 909 | 10314 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) . . . | 3135 | 013 | 01661 |
| AC17 | Owner's Manual | 3121 | 235 | 21291 |
| AC18 | Quick Use Guide. | 3121 | 233 | 44851 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53521 |
| AC20A | Cabinet Front. | 3139 | 124 | 43361 |
| AC20A | Cabinet Front. | 3139 | 177 | 56121 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76081 |
| AC20J | Top Control Assembly | 3139 | 138 | 11451 |
| REMOTE | Remote Control Transmitter, RC19036002/01A. | 3139 | 238 | 04313 |

30PW633R37A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | Main Chassis Parts | | | |
|--------------------|---|------|-----------|--------------------|---|------|-----------|
| 0211 | 2 Pin Connector | 2422 | 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 | 368 90177 |
| 0212 | 2 Pin Connector | 2422 | 025 16375 | 2331 | er. | 2020 | 558 90445 |
| 0214 | 5 Pin Connector | 2422 | 025 12481 | 2340 | Cap, 10u, 20%, 250v, Electrolytic | 2020 | 012 93495 |
| 0219 | 6 Pin Connector | 2422 | 025 12482 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 |
| 0220 | 5 Pin Connector | 2422 | 025 04853 | 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 | 016 05610 |
| 0221 | 2 Pin Connector | 2422 | 025 15503 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 21040 |
| 0222 | 2 Pin Connector | 2422 | 025 10646 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 | 558 90445 |
| 0223 | A/V Jack | 2422 | 026 05236 | S 2346 | Cap, 470p, 10%, 2000v, Ceramic | 2020 | 558 90483 |
| 0225 | SVHS Jack | 2422 | 026 04926 | 2360 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 34720 |
| 0239 | 3 Pin Connector | 2422 | 025 16382 | 2362 | Cap, 220p, 5%, 50v, Ceramic | 3198 | 016 32210 |
| 0243 | 6 Pin Connector | 2422 | 025 04854 | 2364 | Cap, 27p, 5%, 50v, Ceramic | 3198 | 016 32790 |
| 0244 | 5 Pin Connector | 2422 | 025 04853 | 2365 | Cap, 27p, 5%, 50v, Ceramic | 3198 | 016 32790 |
| 0245 | 6 Pin Connector | 2422 | 025 04854 | 2366 | Cap, 27p, 5%, 50v, Ceramic | 3198 | 016 32790 |
| 0246 | 5 Pin Connector | 2422 | 025 12481 | 2367 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 34720 |
| S 0256 | 9 Pin CRT Socket | 2422 | 500 80053 | 2368 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 0267 | 3 Pin Connector | 2412 | 020 00725 | 2369 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 0268 | 3 Pin Connector | 2412 | 020 00725 | 2372 | Cap, 10u, 20%, 160v, Electrolytic | 2020 | 012 93318 |
| 0269 | Jack | 2422 | 026 05182 | 2373 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 34720 |
| 0278 | 3 Pin Connector | 2412 | 020 00725 | 2375 | Cap, 560p, 5%, 50v, Ceramic | 3198 | 016 05610 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2378 | Cap, 220p, 5%, 50v, Ceramic | 3198 | 019 02210 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2379 | Cap, 10u, 20%, 100v, Electrolytic | 3198 | 025 71090 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 48087 | 2380 | Cap, 560p, 5%, 50v, Ceramic | 3198 | 016 05610 |
| S 1400 | Relay, 5 Amp, 12V. | 2422 | 132 07543 | 2381 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 34720 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2401 | Cap, 2u2, 20%, 100v, Electrolytic | 2020 | 021 91331 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2402 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 | 025 54790 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | 2422 | 543 00842 | 2405 | Cap, 220u, 20%, 25v, Electrolytic | 3198 | 025 32210 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 | 024 44730 | 2420 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2421 | Cap, 470p, 5%, 50v, Ceramic | 3198 | 016 34710 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic | 3198 | 025 24710 | 2441 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic | 3198 | 025 31010 | 2444 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2450 | Cap, 47u, 20%, 160v, Electrolytic | 2020 | 021 91139 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic | 3198 | 017 24740 | 2451 | Cap, 22n, 10%, 50v, Polyester | 3198 | 014 02230 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2454 | Cap, 68n, 5%, 250v, Metalized Polypropylene | 2222 | 479 90133 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2457 | Cap, 470n, 5%, 250v, Metalized Polypropylene | 2022 | 333 00086 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2459 | Cap, 680p, 10%, 500v, Ceramic | 3198 | 019 46810 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2460 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 01010 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | S 2463 | Cap, 390p, 10%, 2000v, Ceramic | 2020 | 558 90482 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | S 2465 | Cap, 13n, 5%, 1600v, Polypropylene | 2020 | 301 90254 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2467 | Cap, 9n1, 5%, 1000v, Polypropylene | 2222 | 375 90424 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2468 | Cap, 9n1, 5%, 1000v, Polypropylene | 2222 | 375 90424 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2469 | Cap, 430n, 5%, 250v, Metalized Polypropylene | 2022 | 333 00164 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester | 2222 | 365 75154 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester | 2222 | 365 75104 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2474 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2475 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2476 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 04720 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2481 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 | 347 90234 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic | 2020 | 021 90856 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2486 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic | 2238 | 786 19852 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 | 021 90854 |
| 2172 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 31010 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91049 |
| 2173 | Cap, 220p, 5%, 50v, Ceramic | 3198 | 016 32210 | 2489 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2490 | Cap, 2u2, 20%, 100v, Electrolytic | 2020 | 021 91331 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2491 | Cap, 1n, 10%, 500v, Ceramic | 3198 | 019 41020 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene | 2022 | 330 00018 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 | 024 90647 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic | 2020 | 554 90172 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 | 017 44740 | 2520 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 | 558 90489 |
| 2216 | Cap, 2u2, 20%, 10v, Electrolytic | 2020 | 012 93728 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2527 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 | 2540 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2541 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic | 3198 | 017 31520 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 | 021 91654 |
| 2243 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 31030 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91374 |
| 2247 | Cap, 2u2, 20%, 10v, Electrolytic | 2020 | 012 93728 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic | 3198 | 023 22240 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 | | | | |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | | | | |

S = Safety Part Be sure to use exact replacement part.

30PW633R37A (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 |
| 2604 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3206 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3207 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glass | 3198 021 34710 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3247 | Res, 560K, 5%, Metalized Glass. | 2322 702 60564 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3250 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3341 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3342 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic . . . | 3198 026 31020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3360 | Res, 39K, 5%, 1/16W, Metalized Glass. . | 3198 021 33930 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3361 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3362 | Res, 39K, 5%, 1/16W, Metalized Glass. . | 3198 021 33930 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3363 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3367 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3368 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3369 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3373 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3374 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02280 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3375 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3376 | Res, 68K, 5%, 1/6W, Carbon Film. . . . | 3198 011 06830 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3377 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3378 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3380 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3381 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3383 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3384 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02280 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3385 | Res, 10K, 5%, 5W, Metal Film. | 2322 257 41103 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3386 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3401 | Res, 82K, 5%, 1/6W, Carbon Film. . . . | 3198 011 08230 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01040 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3407 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3408 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3451 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film. | 2312 915 15602 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3172 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3180 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3181 | Res, 120K, 5%, Metalized Glass. | 2322 702 60124 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3190 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 | 3457 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |

S = Safety Part Be sure to use exact replacement part.

30PW633R37A (continued)

| | | | | | |
|--------|--|----------------|------|--|----------------|
| 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 | 3636 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 |
| 3468 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 | 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 | 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3470 | Res, 270K, 5%, 1/8W, Metalized Glass . . | 2322 730 61274 | 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 |
| 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 3473 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 | 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 | 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3481 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 | 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 32290 | 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 |
| 3489 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3491 | Res, 3K3, 5%, 1/10W, Metalized Glass . . | 3198 021 53320 | 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3492 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| S 3493 | Res, 2R2, 5%, 1/3W, Metal Film | 2306 204 03228 | 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 |
| 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass . . | 3198 021 36820 |
| 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | 3903 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 |
| 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3905 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 |
| 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3909 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 021 32730 |
| 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 | 3910 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 021 32730 |
| S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3507 | Surge Protector. | 2422 549 43073 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 | 4311 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 | 4312 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 | 4313 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3523 | Res, 47 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03479 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3527 | Res, 0R15, 5%, 3/5W, Metal Film. | 3198 012 11570 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . . | 3198 021 54720 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . . | 3198 021 51520 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 734 64702 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 33K, 5%, 1/10W, Metalized Glass . . | 3198 021 53330 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . . | 3198 021 51530 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass . . | 3198 021 54720 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . . | 3198 021 51230 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 8K2, 5%, 1/10W, Metalized Glass . . | 3198 021 58220 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . . | 3198 021 52220 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 021 55620 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 04710 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3614 | Res, 4K7, 5%, 1/6W, Carbon Film. | 3198 011 04720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3615 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3617 | Res, 4K7, 5%, 1/6W, Carbon Film. | 3198 011 04720 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 011 06820 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3619 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5341 | Coil, 22u. | 2422 535 97333 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5342 | Coil, 27u, 10% | 3198 018 22790 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5376 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |

S = Safety Part Be sure to use exact replacement part.

30PW633R37A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 5400 | Coil, 11u7 | 2422 | 535 | 91027 | 7369 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| S 5445 | Transformer, LOT | 2422 | 531 | 02612 | 7373 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 |
| 5451 | Coil, 22u, 10% | 3198 | 018 | 72290 | 7380 | Transistor, NPN, 2SC2235 | 9322 | 167 | 19676 |
| 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 | 7382 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 |
| 5453 | Coil, 22u, 5% | 3198 | 018 | 12290 | 7400 | Power FET, STP3NC60FP | 9322 | 157 | 37687 |
| S 5457 | Coil, 42u | 2422 | 535 | 94865 | 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| S 5461 | Transformer, SD10207-00 B. | 2422 | 531 | 02568 | 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 |
| 5464 | Coil, Bridge, C946-01 Y. | 2422 | 531 | 02419 | 7444 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 |
| 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 | 7450 | Transistor, PNP, PDTA114ET | 3198 | 010 | 44010 |
| 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 | 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 |
| 5480 | Coil, 10u, 10% | 2422 | 535 | 97328 | 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 |
| S 5501 | Mains Filter | 2422 | 549 | 43432 | 7462 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 |
| S 5520 | Transformer, SS42204-00 B. | 2422 | 531 | 02563 | 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 |
| 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 | 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 |
| 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 | 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 |
| 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 | 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 | 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 |
| 5831 | Coil, 6u8, 5% | 3198 | 018 | 16880 | 7541 | Transistor, NPN, PDTCL14ET | 9340 | 310 | 10215 |
| 5832 | Coil, 6u8, 5% | 3198 | 018 | 16880 | 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5833 | Coil, 6u8, 5% | 3198 | 018 | 16880 | 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 |
| 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 | 7561 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 |
| 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 |
| 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7606 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 |
| 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 6206 | Zener Diode, 6.8 volt | 3198 | 020 | 56880 | 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 | 187 | 89682 |
| 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 7901 | IC, AN7580 | 9322 | 166 | 29682 |
| 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7903 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9101 | Wire Jumper. | 3198 | 036 | 90010 |
| 6365 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9102 | Wire Jumper. | 3198 | 036 | 90010 |
| 6366 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9103 | Wire Jumper. | 3198 | 036 | 90010 |
| 6367 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9104 | Wire Jumper. | 3198 | 036 | 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 | 9123 | Wire Jumper. | 3198 | 036 | 90010 |
| 6401 | Zener Diode, 68 volt | 3198 | 010 | 26890 | 9160 | Wire Jumper. | 3198 | 036 | 90010 |
| 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9173 | Wire Jumper. | 3198 | 036 | 90010 |
| 6448 | Zener Diode, 6.2 volt | 9331 | 668 | 30133 | 9175 | Wire Jumper. | 3198 | 036 | 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9176 | Wire Jumper. | 3198 | 036 | 90010 |
| 6452 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9178 | Wire Jumper. | 3198 | 036 | 90010 |
| 6453 | Zener Diode, 5.6 volt | 3198 | 020 | 55680 | 9179 | Wire Jumper. | 3198 | 036 | 90010 |
| 6460 | Diode, Rect, DG3-7005L | 9336 | 436 | 10682 | 9181 | Wire Jumper. | 3198 | 036 | 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9182 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 12 volt | 3198 | 010 | 21290 | 9183 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9192 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9193 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9311 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9312 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9313 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9314 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt | 3198 | 010 | 25680 | 9406 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt | 9331 | 177 | 80133 | 9407 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9408 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9409 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9410 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6490 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 | 132 | 55667 | 9414 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt | 9331 | 668 | 30133 | 9420 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9462 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt | 3198 | 020 | 56880 | 9464 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 | 175 | 70667 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 7000 | IC, TDA8941P/N1. | 9352 | 628 | 51112 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I/1298. | 9352 | 742 | 85557 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 7360 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 7366 | Transistor, PNP, 2SA965. | 9322 | 167 | 18676 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part Be sure to use exact replacement part.

30PW633R37A (continued)

| | | | | |
|------|--------------------------|------|-----|-------|
| 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 9620 | Wire Jumper. | 3198 | 036 | 90010 |
| 9621 | Wire Jumper. | 3198 | 036 | 90010 |
| 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 9633 | Wire Jumper. | 3198 | 036 | 90010 |
| 9635 | Wire Jumper. | 3198 | 036 | 90010 |
| 9636 | Wire Jumper. | 3198 | 036 | 90010 |
| 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 9639 | Wire Jumper. | 3198 | 036 | 90010 |
| 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 9656 | Wire Jumper. | 3198 | 036 | 90010 |
| 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9683 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9848 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9855 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9857 | Wire Jumper. | 3198 | 036 | 90010 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9923 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 59081 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly. | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |

30PW633R37A (continued)

| | | | | |
|------|---|------|-----|-------|
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

| | | | | |
|-------------------------|---|------|-----|-------|
| Top Control Panel Parts | | | | |
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|---|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitt | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 46431 |
| AC06 | Cabinet Back Screw Cover (2 Used). . . | 3139 | 124 | 45431 |
| AC07 | Canceller Coil | 3128 | 138 | 60581 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, W76ERF942X013 | 9301 | 909 | 10314 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) . . . | 3135 | 013 | 01661 |
| AC17 | Owner's Manual | 3121 | 235 | 21151 |
| AC18 | Quick Use Guide. | 3121 | 233 | 44531 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53521 |
| AC20A | Cabinet Front. | 3139 | 124 | 43361 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76081 |
| AC20J | Top Control Assembly | 3139 | 138 | 11451 |
| REMOTE | Remote Control Transmitter, RC19036002/ | | | |
| | 01A. | 3139 | 238 | 04311 |

30PW633R37C - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | Main Chassis Parts | | | |
|--------------------|--|------|-----------|--------------------|--|------|-----------|
| 0211 | 2 Pin Connector. | 2422 | 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 | 368 90177 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2331 | er. | 2020 | 558 90445 |
| 0214 | 5 Pin Connector. | 2422 | 025 12481 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 | 558 90445 |
| 0223 | A/V Jack | 2422 | 026 05236 | S 2346 | Cap, 470p, 10%, 2000v, Ceramic | 2020 | 558 90483 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2360 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 0239 | 3 Pin Connector. | 2422 | 025 16382 | 2362 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 32210 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2364 | Cap, 27p, 5%, 50v, Ceramic. | 3198 | 016 32790 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2365 | Cap, 27p, 5%, 50v, Ceramic. | 3198 | 016 32790 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2366 | Cap, 27p, 5%, 50v, Ceramic. | 3198 | 016 32790 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 | 2367 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| S 0256 | 9 Pin CRT Socket | 2422 | 500 80053 | 2368 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2369 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 0268 | 3 Pin Connector. | 2412 | 020 00725 | 2372 | Cap, 10u, 20%, 160v, Electrolytic. | 2020 | 012 93318 |
| 0269 | Jack | 2422 | 026 05182 | 2373 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 0278 | 3 Pin Connector. | 2412 | 020 00725 | 2375 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2378 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 019 02210 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2379 | Cap, 10u, 20%, 100v, Electrolytic. | 3198 | 025 71090 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 08007 | 2380 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| S 1400 | Relay, 5 Amp, 12V. | 2422 | 132 07543 | 2381 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2401 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 | 025 54790 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | | | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| | C49/U A. | 2422 | 543 00842 | 2420 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2421 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 34710 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 | 014 02230 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 | 2454 | Cap, 68n, 5%, 250v, Metalized Polypropy | | |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2455 | lene | 2222 | 479 90133 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2457 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | | Cap, 470n, 5%, 250v, Metalized Polyprop | | |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2459 | ylene. | 2022 | 333 00086 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2460 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | S 2463 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | S 2465 | Cap, 390p, 10%, 2000v, Ceramic | 2020 | 558 90482 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2467 | Cap, 13n, 5%, 1600v, Polypropylene | 2020 | 301 90254 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2468 | Cap, 9n1, 5%, 1000v, Polypropylene | 2222 | 375 90424 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2469 | Cap, 9n1, 5%, 1000v, Polypropylene | 2222 | 375 90424 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | | Cap, 430n, 5%, 250v, Metalized Polyprop | | |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2471 | ylene. | 2022 | 333 00164 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2472 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2473 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2474 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2476 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2480 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2481 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2482 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2486 | Cap, 68n, 10%, 250v, Polyester | 2222 | 347 90234 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2172 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2487 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2173 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 32210 | 2488 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2489 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91049 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2490 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2491 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | S 2500 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | | Cap, 470n, 20%, 275v, Metalized Polypro | | |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2501 | pylene | 2022 | 330 00018 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2503 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2505 | Cap, 470u, 20%, 200v, Electrolytic | 2020 | 024 90647 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2507 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2508 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | S 2515 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2520 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2521 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2216 | Cap, 2u2, 20%, 10v, Electrolytic | 2020 | 012 93728 | 2522 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | S 2523 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2525 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 | 2527 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2528 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2540 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2243 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 | 021 91654 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2247 | Cap, 2u2, 20%, 10v, Electrolytic | 2020 | 012 93728 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91374 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |

S = Safety Part Be sure to use exact replacement part.

30PW633R37C (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 |
| 2604 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3206 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3207 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glass | 3198 021 34710 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3247 | Res, 560K, 5%, Metalized Glass. | 2322 702 60564 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3250 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3341 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3342 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic | 3198 026 31020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3360 | Res, 39K, 5%, 1/16W, Metalized Glass. . | 3198 021 33930 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3361 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3362 | Res, 39K, 5%, 1/16W, Metalized Glass. . | 3198 021 33930 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3363 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3367 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3368 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3369 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3373 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3374 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02280 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3375 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3376 | Res, 68K, 5%, 1/6W, Carbon Film. . . . | 3198 011 06830 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3377 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 04710 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3378 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3380 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3381 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3383 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3384 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02280 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3385 | Res, 10K, 5%, 5W, Metal Film. | 2322 257 41103 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3386 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3401 | Res, 82K, 5%, 1/6W, Carbon Film. . . . | 3198 011 08230 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01040 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3407 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3408 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3451 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film. | 2312 915 15602 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3172 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3180 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3181 | Res, 120K, 5%, Metalized Glass. | 2322 702 60124 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3190 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 | 3457 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |

S = Safety Part Be sure to use exact replacement part.

30PW633R37C (continued)

| | | | | | |
|--------|--|----------------|------|--|----------------|
| 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 | 3636 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 021 51020 |
| 3468 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 | 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 | 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3470 | Res, 270K, 5%, 1/8W, Metalized Glass . . | 2322 730 61274 | 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 |
| 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 3473 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 | 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 | 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3481 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 | 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3482 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 32290 | 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 |
| 3489 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3491 | Res, 3K3, 5%, 1/10W, Metalized Glass . . | 3198 021 53320 | 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3492 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| S 3493 | Res, 2R2, 5%, 1/3W, Metal Film | 2306 204 03228 | 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 |
| 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass . . | 3198 021 36820 |
| 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 | 3903 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 |
| 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3905 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 |
| 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3909 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 021 32730 |
| 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . . | 3198 021 31230 | 3910 | Res, 27K, 5%, 1/16W, Metalized Glass . . | 3198 021 32730 |
| S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3507 | Surge Protector. | 2422 549 43073 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02710 | 4311 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 | 4312 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 | 4313 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3523 | Res, 47 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03479 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . . | 3198 021 55630 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3527 | Res, 0R15, 5%, 3/5W, Metal Film. | 3198 012 11570 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . . | 3198 021 54720 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . . | 3198 021 51520 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 734 64702 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 33K, 5%, 1/10W, Metalized Glass . . | 3198 021 53330 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . . | 3198 021 51530 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass . . | 3198 021 54720 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . . | 3198 021 51230 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 8K2, 5%, 1/10W, Metalized Glass . . | 3198 021 58220 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . . | 3198 021 52220 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . . | 3198 021 55620 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . . | 3198 021 54730 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 04710 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3614 | Res, 4K7, 5%, 1/6W, Carbon Film. | 3198 011 04720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3615 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3617 | Res, 4K7, 5%, 1/6W, Carbon Film. | 3198 011 04720 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 011 06820 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3619 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . . | 3198 021 34720 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5341 | Coil, 22u. | 2422 535 97333 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5342 | Coil, 27u, 10% | 3198 018 22790 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 5376 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |

S = Safety Part Be sure to use exact replacement part.

30PW633R37C (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 5400 | Coil, 11u7 | 2422 | 535 | 91027 | 7369 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| S 5445 | Transformer, LOT | 2422 | 531 | 02612 | 7373 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 |
| 5451 | Coil, 22u, 10% | 3198 | 018 | 72290 | 7380 | Transistor, NPN, 2SC2235 | 9322 | 167 | 19676 |
| 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 | 7382 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 |
| 5453 | Coil, 22u, 5% | 3198 | 018 | 12290 | 7400 | Power FET, STP3NC60FP. | 9322 | 157 | 37687 |
| S 5457 | Coil, 42u. | 2422 | 535 | 94865 | 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| S 5461 | Transformer, SD10207-00 B. | 2422 | 531 | 02568 | 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 |
| 5464 | Coil, Bridge, C946-01 Y. | 2422 | 531 | 02419 | 7444 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 |
| 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 | 7450 | Transistor, PNP, PDTA114ET | 3198 | 010 | 44010 |
| 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 | 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 |
| 5480 | Coil, 10u, 10% | 2422 | 535 | 97328 | 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 |
| S 5501 | Mains Filter | 2422 | 549 | 43432 | 7462 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 |
| S 5520 | Transformer, SS42204-00 B. | 2422 | 531 | 02563 | 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 |
| 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 | 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 |
| 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 | 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 |
| 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 | 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 | 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 |
| 5831 | Coil, 6u8, 5% | 3198 | 018 | 16880 | 7541 | Transistor, NPN, PDTCL14ET | 9340 | 310 | 10215 |
| 5832 | Coil, 6u8, 5% | 3198 | 018 | 16880 | 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5833 | Coil, 6u8, 5% | 3198 | 018 | 16880 | 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 |
| 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 | 7561 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 |
| 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 |
| 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7606 | Transistor, NPN, PDTCL143ZT | 9340 | 547 | 00215 |
| 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 | 187 | 89682 |
| 6331 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 7901 | IC, AN7580 | 9322 | 166 | 29682 |
| 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7903 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 6333 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 6335 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9101 | Wire Jumper. | 3198 | 036 | 90010 |
| 6365 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9102 | Wire Jumper. | 3198 | 036 | 90010 |
| 6366 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9103 | Wire Jumper. | 3198 | 036 | 90010 |
| 6367 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9104 | Wire Jumper. | 3198 | 036 | 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 | 9123 | Wire Jumper. | 3198 | 036 | 90010 |
| 6401 | Zener Diode, 68 volt | 3198 | 010 | 26890 | 9160 | Wire Jumper. | 3198 | 036 | 90010 |
| 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9173 | Wire Jumper. | 3198 | 036 | 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9175 | Wire Jumper. | 3198 | 036 | 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9176 | Wire Jumper. | 3198 | 036 | 90010 |
| 6452 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9178 | Wire Jumper. | 3198 | 036 | 90010 |
| 6453 | Zener Diode, 5.6 volt. | 3198 | 020 | 55680 | 9179 | Wire Jumper. | 3198 | 036 | 90010 |
| 6460 | Diode, Rect, DG3-7005L | 9336 | 436 | 10682 | 9181 | Wire Jumper. | 3198 | 036 | 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9182 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 12 volt | 3198 | 010 | 21290 | 9183 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9192 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9193 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9311 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9312 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9313 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9314 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9406 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9407 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9408 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9409 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9410 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6490 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 | 132 | 55667 | 9414 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9420 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9462 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9464 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 | 175 | 70667 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 7000 | IC, TDA8941P/N1. | 9352 | 628 | 51112 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I/1298. | 9352 | 742 | 85557 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 7360 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 7366 | Transistor, PNP, 2SA965. | 9322 | 167 | 18676 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part Be sure to use exact replacement part.

30PW633R37C (continued)

| | | |
|------|--------------------------|----------------|
| 9528 | Wire Jumper. | 3198 036 90010 |
| 9530 | Wire Jumper. | 3198 036 90010 |
| 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 9612 | Wire Jumper. | 3198 036 90010 |
| 9613 | Wire Jumper. | 3198 036 90010 |
| 9614 | Wire Jumper. | 3198 036 90010 |
| 9615 | Wire Jumper. | 3198 036 90010 |
| 9618 | Wire Jumper. | 3198 036 90010 |
| 9619 | Wire Jumper. | 3198 036 90010 |
| 9620 | Wire Jumper. | 3198 036 90010 |
| 9621 | Wire Jumper. | 3198 036 90010 |
| 9622 | Wire Jumper. | 3198 036 90010 |
| 9623 | Wire Jumper. | 3198 036 90010 |
| 9626 | Wire Jumper. | 3198 036 90010 |
| 9627 | Wire Jumper. | 3198 036 90010 |
| 9628 | Wire Jumper. | 3198 036 90010 |
| 9629 | Wire Jumper. | 3198 036 90010 |
| 9631 | Wire Jumper. | 3198 036 90010 |
| 9632 | Wire Jumper. | 3198 036 90010 |
| 9633 | Wire Jumper. | 3198 036 90010 |
| 9635 | Wire Jumper. | 3198 036 90010 |
| 9636 | Wire Jumper. | 3198 036 90010 |
| 9637 | Wire Jumper. | 3198 036 90010 |
| 9638 | Wire Jumper. | 3198 036 90010 |
| 9639 | Wire Jumper. | 3198 036 90010 |
| 9640 | Wire Jumper. | 3198 036 90010 |
| 9641 | Wire Jumper. | 3198 036 90010 |
| 9642 | Wire Jumper. | 3198 036 90010 |
| 9643 | Wire Jumper. | 3198 036 90010 |
| 9648 | Wire Jumper. | 3198 036 90010 |
| 9650 | Wire Jumper. | 3198 036 90010 |
| 9652 | Wire Jumper. | 3198 036 90010 |
| 9654 | Wire Jumper. | 3198 036 90010 |
| 9655 | Wire Jumper. | 3198 036 90010 |
| 9656 | Wire Jumper. | 3198 036 90010 |
| 9657 | Wire Jumper. | 3198 036 90010 |
| 9658 | Wire Jumper. | 3198 036 90010 |
| 9659 | Wire Jumper. | 3198 036 90010 |
| 9660 | Wire Jumper. | 3198 036 90010 |
| 9661 | Wire Jumper. | 3198 036 90010 |
| 9662 | Wire Jumper. | 3198 036 90010 |
| 9663 | Wire Jumper. | 3198 036 90010 |
| 9664 | Wire Jumper. | 3198 036 90010 |
| 9665 | Wire Jumper. | 3198 036 90010 |
| 9666 | Wire Jumper. | 3198 036 90010 |
| 9667 | Wire Jumper. | 3198 036 90010 |
| 9668 | Wire Jumper. | 3198 036 90010 |
| 9669 | Wire Jumper. | 3198 036 90010 |
| 9670 | Wire Jumper. | 3198 036 90010 |
| 9671 | Wire Jumper. | 3198 036 90010 |
| 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9674 | Wire Jumper. | 3198 036 90010 |
| 9675 | Wire Jumper. | 3198 036 90010 |
| 9676 | Wire Jumper. | 3198 036 90010 |
| 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9679 | Wire Jumper. | 3198 036 90010 |
| 9680 | Wire Jumper. | 3198 036 90010 |
| 9681 | Wire Jumper. | 3198 036 90010 |
| 9683 | Wire Jumper. | 3198 036 90010 |
| 9685 | Wire Jumper. | 3198 036 90010 |
| 9686 | Wire Jumper. | 3198 036 90010 |
| 9687 | Wire Jumper. | 3198 036 90010 |
| 9688 | Wire Jumper. | 3198 036 90010 |
| 9689 | Wire Jumper. | 3198 036 90010 |
| 9690 | Wire Jumper. | 3198 036 90010 |
| 9691 | Wire Jumper. | 3198 036 90010 |
| 9694 | Wire Jumper. | 3198 036 90010 |
| 9695 | Wire Jumper. | 3198 036 90010 |
| 9697 | Wire Jumper. | 3198 036 90010 |
| 9698 | Wire Jumper. | 3198 036 90010 |
| 9699 | Wire Jumper. | 3198 036 90010 |
| 9821 | Wire Jumper. | 3198 036 90010 |
| 9822 | Wire Jumper. | 3198 036 90010 |
| 9825 | Wire Jumper. | 3198 036 90010 |
| 9828 | Wire Jumper. | 3198 036 90010 |
| 9829 | Wire Jumper. | 3198 036 90010 |
| 9831 | Wire Jumper. | 3198 036 90010 |
| 9832 | Wire Jumper. | 3198 036 90010 |
| 9837 | Wire Jumper. | 3198 036 90010 |
| 9838 | Wire Jumper. | 3198 036 90010 |
| 9839 | Wire Jumper. | 3198 036 90010 |
| 9846 | Wire Jumper. | 3198 036 90010 |
| 9847 | Wire Jumper. | 3198 036 90010 |
| 9848 | Wire Jumper. | 3198 036 90010 |
| 9849 | Wire Jumper. | 3198 036 90010 |
| 9851 | Wire Jumper. | 3198 036 90010 |
| 9855 | Wire Jumper. | 3198 036 90010 |
| 9856 | Wire Jumper. | 3198 036 90010 |
| 9857 | Wire Jumper. | 3198 036 90010 |
| 9858 | Wire Jumper. | 3198 036 90010 |
| 9859 | Wire Jumper. | 3198 036 90010 |
| 9860 | Wire Jumper. | 3198 036 90010 |

| | | |
|------|--------------------------------|----------------|
| 9862 | Wire Jumper. | 3198 036 90010 |
| 9864 | Wire Jumper. | 3198 036 90010 |
| 9865 | Wire Jumper. | 3198 036 90010 |
| 9867 | Wire Jumper. | 3198 036 90010 |
| 9868 | Wire Jumper. | 3198 036 90010 |
| 9869 | Wire Jumper. | 3198 036 90010 |
| 9873 | Wire Jumper. | 3198 036 90010 |
| 9874 | Wire Jumper. | 3198 036 90010 |
| 9875 | Wire Jumper. | 3198 036 90010 |
| 9877 | Wire Jumper. | 3198 036 90010 |
| 9901 | Wire Jumper. | 3198 036 90010 |
| 9902 | Wire Jumper. | 3198 036 90010 |
| 9903 | Wire Jumper. | 3198 036 90010 |
| 9904 | Wire Jumper. | 3198 036 90010 |
| 9911 | Wire Jumper. | 3198 036 90010 |
| 9913 | Wire Jumper. | 3198 036 90010 |
| 9914 | Wire Jumper. | 3198 036 90010 |
| 9915 | Wire Jumper. | 3198 036 90010 |
| 9923 | Wire Jumper. | 3198 036 90010 |
| 9991 | Wire Jumper. | 3198 036 90010 |
| 9993 | Wire Jumper. | 3198 036 90010 |
| 9996 | Wire Jumper. | 3198 036 90010 |
| 9997 | Wire Jumper. | 3198 036 90010 |
| 9998 | Wire Jumper. | 3198 036 90010 |
| CBA | Main Chassis Assembly. | 3141 058 59081 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

| | | |
|--------|--|----------------|
| S 0211 | 2 Pin Connector. | 2422 025 16268 |
| S 0212 | 2 Pin Connector. | 2422 025 16559 |
| 0214 | 5 Pin Connector. | 2422 025 06353 |
| 1606 | Tact Switch. | 2422 128 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 023 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 242 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 242 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 011 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 011 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 011 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 127 54667 |
| 9001 | Wire Jumper. | 3198 036 90010 |
| 9002 | Wire Jumper. | 3198 036 90010 |
| CBA | Front Interface Panel Assembly. | 3139 177 26211 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | |
|------|---|----------------|
| 0232 | Headphone Jack | 2422 026 04747 |
| 0250 | A/V Jack | 2422 026 04815 |
| 0251 | 6 Pin Connector. | 2422 025 12482 |
| 0254 | 5 Pin Connector. | 2422 025 12481 |
| 0255 | 4 Pin Connector. | 2422 025 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 021 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 011 01510 |

30PW633R37C (continued)

| | | | | |
|------|---|------|-----|-------|
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

| | | | | |
|-------------------------|---|------|-----|-------|
| Top Control Panel Parts | | | | |
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|---|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC04 | Batteries for Remote Control Transmitt | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 46431 |
| AC06 | Cabinet Back Screw Cover (2 Used). . . | 3139 | 124 | 45431 |
| AC07 | Canceller Coil | 3128 | 138 | 60581 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, W76ERF942X013 | 9301 | 909 | 10314 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (2 Used) . . . | 3104 | 304 | 14414 |
| AC15 | Holder, Degaussing Coil (2 Used) . . . | 3104 | 304 | 14713 |
| AC17 | Owner's Manual | 3121 | 235 | 21151 |
| AC18 | Quick Use Guide. | 3121 | 233 | 44531 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53521 |
| AC20A | Cabinet Front. | 3139 | 124 | 43361 |
| AC20A | Cabinet Front. | 3139 | 177 | 56121 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76081 |
| AC20J | Top Control Assembly | 3139 | 138 | 11451 |
| REMOTE | Remote Control Transmitter, RC19036002/ | | | |
| | 01A. | 3139 | 238 | 04311 |

32LT621L/17 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|---|------|-----------|--------|--|------|-----------|
| | Main Chassis Parts | | | | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 16374 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 |
| 0214 | 5 Pin Connector. | 2422 | 025 12481 | 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 | 016 05610 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic | 2020 | 558 90559 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 21040 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 | 558 90445 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2360 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 34720 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2362 | Cap, 220p, 5%, 50v, Ceramic | 3198 | 016 32210 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2364 | Cap, 27p, 5%, 50v, Ceramic | 3198 | 016 32790 |
| 0239 | 3 Pin Connector. | 2422 | 025 16382 | 2365 | Cap, 27p, 5%, 50v, Ceramic | 3198 | 016 32790 |
| 0240 | 7 Pin Connector. | 2422 | 025 11244 | 2366 | Cap, 27p, 5%, 50v, Ceramic | 3198 | 016 32790 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2367 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 34720 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2368 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2369 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 | 2372 | Cap, 10u, 20%, 160v, Electrolytic. | 2020 | 012 93318 |
| 0251 | 3 Pin Connector. | 2422 | 020 00725 | 2373 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 34720 |
| S 0256 | 10 Pin CRT Socket. | 2422 | 500 80063 | 2375 | Cap, 560p, 5%, 50v, Ceramic | 3198 | 016 05610 |
| 0259 | 5 Pin Connector. | 2422 | 025 15848 | 2378 | Cap, 220p, 5%, 50v, Ceramic | 3198 | 019 02210 |
| 0262 | 3 Pin Connector. | 2422 | 025 16937 | 2379 | Cap, 10u, 20%, 100v, Electrolytic. | 3198 | 025 71090 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2380 | Cap, 560p, 5%, 50v, Ceramic | 3198 | 016 05610 |
| 0268 | 3 Pin Connector. | 2412 | 020 00725 | 2381 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 34720 |
| 0278 | 3 Pin Connector. | 2412 | 020 00725 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 | 021 90552 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2402 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 | 025 54790 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2415 | Cap, 330p, 5%, 50v, Ceramic | 3198 | 016 03310 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| 1810 | 6 Pin Connector. | 2422 | 025 16607 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | | | S 2448 | Cap, 100p, 10%, 500v, Ceramic | 3198 | 019 41010 |
| | C49/U A. | 2422 | 543 00842 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 | 024 44730 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 | 014 02230 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2457 | Cap, 270n, 5%, 250v, Metalized Polypropylene. | 2222 | 479 90016 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2459 | Cap, 680p, 10%, 500v, Ceramic | 3198 | 019 46810 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2460 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 01010 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic | 3198 | 017 24740 | 2463 | Cap, 820p, 10%, 2000v, Ceramic | 2020 | 558 90486 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 | 479 90042 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | S 2465 | Cap, 12n, 5%, 1600v, Polypropylene | 2020 | 301 90252 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2466 | Cap, 18n, 10%, 400v, Polyester | 2222 | 347 90222 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2468 | Cap, 18n, 10%, 400v, Polyester | 2222 | 347 90222 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester | 2222 | 365 75154 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester | 2222 | 365 75104 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2474 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2123 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 90020 | 2475 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2125 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 90020 | 2476 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 04720 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2481 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 | 347 90234 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 | 021 90854 |
| 2172 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91049 |
| 2173 | Cap, 220p, 5%, 50v, Ceramic | 3198 | 016 32210 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2491 | Cap, 1n, 10%, 500v, Ceramic | 3198 | 019 41020 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 | 330 00018 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 | 024 90647 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 | 025 54780 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic | 2020 | 554 90172 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 | 2520 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 | 017 44740 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 | 558 90489 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2527 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2540 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 | 2541 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic | 3198 | 017 31520 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 | 021 91654 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2243 | Cap, 6n8, 50v, Ceramic | 3198 | 017 36820 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91374 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | 2568 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic | 3198 | 023 22240 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 | 2602 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 31010 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 | 2604 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 |
| 2254 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 90020 | 2606 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester | 2222 | 368 90177 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 33390 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic | 2020 | 558 90445 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 |

S = Safety Part Be sure to use exact replacement part.

32LT621L/17 (continued)

| | | | | | |
|------|--|----------------|--------|---|----------------|
| 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2807 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3250 | Res, 4K7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04720 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3258 | Res, 180K, 5%, 1/10W, Metalized Glass. | 2120 108 91721 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | 3360 | Res, 39K, 5%, 1/16W, Metalized Glass . | 3198 021 33930 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3361 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3362 | Res, 39K, 5%, 1/16W, Metalized Glass . | 3198 021 33930 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3363 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3367 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3368 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3369 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3373 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic . . . | 3198 026 31020 | 3374 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02280 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3375 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3376 | Res, 68K, 5%, 1/6W, Carbon Film. . . . | 3198 011 06830 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3377 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3378 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3380 | Res, 68K, 5%, 1/16W, Metalized Glass . | 3198 021 36830 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3381 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3383 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3384 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02280 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3385 | Res, 10K, 5%, 5W, Metal Film | 2322 257 41103 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | S 3386 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3403 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3123 | Wire Jumper. | 3198 036 90010 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3124 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3125 | Wire Jumper. | 3198 036 90010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3126 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3451 | Res, 3R9, 5%, 1/3W, Metal Film | 2306 204 03398 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film | 2312 915 15102 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3172 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3180 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3181 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3457 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3190 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3469 | Res, 100K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01040 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3470 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |

S = Safety Part Be sure to use exact replacement part.

32LT621L/17 (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 | 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 32290 | 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3490 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 3491 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 021 36820 |
| S 3493 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 | 3903 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 |
| 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3905 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 |
| 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3909 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 3496 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 021 31040 | 3910 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 3497 | Res, 100K, 5%, 1/16W, Metalized Glass . | 3198 021 31040 | 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3499 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | 4101 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 | 4102 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3507 | Surge Protector. | 2422 549 43073 | 4104 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 | 4128 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 | 4311 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | 4312 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 | 4313 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3526 | Res, OR1, 5%, 3/5W, Metal Film | 3198 012 11070 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| S 3527 | Res, OR33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 | 4604 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3617 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3619 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5341 | Coil, 22u. | 2422 535 97333 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 5342 | Coil, 27u, 10% | 3198 018 22790 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5376 | Fixed, Inductor, 100MHZ, 50R. | 3198 018 90010 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5445 | Transformer, LOT | 2422 531 02602 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5451 | Coil, 22u, 10% | 3198 018 72290 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5457 | Coil, 42u. | 2422 535 94865 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5461 | Transformer, SC10009-03 B. | 2422 531 02446 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5471 | Coil, 6u8, 20% | 3198 018 76880 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5480 | Coil, 18u. | 2422 535 97332 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | S 5501 | Mains Filter | 2422 549 43432 |

S = Safety Part Be sure to use exact replacement part.

32LT621L/17 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|---|------|-----|-------|
| S 5520 | Transformer, SS42202-00 B. | 2422 | 531 | 02562 | 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 |
| 5561 | Coil, 27u, 5%. | 2422 | 535 | 95366 | 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 |
| 5602 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7541 | Transistor, NPN, PDTCl14ET | 9340 | 310 | 10215 |
| 5603 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5604 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7560 | IC, LE33CZ | 9322 | 106 | 11676 |
| 5810 | Coil, 10u, 10%. | 3198 | 018 | 51090 | 7561 | Transistor, NPN, PDTCl143ZT | 9340 | 547 | 00215 |
| 5831 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5832 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 7602 | IC, M24C16-WBN6. | 9322 | 147 | 25682 |
| 5833 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 7606 | Transistor, NPN, PDTCl143ZT | 9340 | 547 | 00215 |
| 5835 | Coil, 12u, 10%. | 3198 | 018 | 31290 | 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 7803 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7804 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7831 | IC MSP3425G-PO-B8-V3 (MTAS) L | 9322 | 187 | 89682 |
| 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 7901 | IC, AN7580 | 9322 | 166 | 29682 |
| 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 7903 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9104 | Wire Jumper. | 3198 | 036 | 90010 |
| 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9123 | Wire Jumper. | 3198 | 036 | 90010 |
| 6365 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9160 | Wire Jumper. | 3198 | 036 | 90010 |
| 6366 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| 6367 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9173 | Wire Jumper. | 3198 | 036 | 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 | 9181 | Wire Jumper. | 3198 | 036 | 90010 |
| 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 | 9182 | Wire Jumper. | 3198 | 036 | 90010 |
| 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9183 | Wire Jumper. | 3198 | 036 | 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9192 | Wire Jumper. | 3198 | 036 | 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9193 | Wire Jumper. | 3198 | 036 | 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9311 | Wire Jumper. | 3198 | 036 | 90010 |
| 6453 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9312 | Wire Jumper. | 3198 | 036 | 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 | 9313 | Wire Jumper. | 3198 | 036 | 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9314 | Wire Jumper. | 3198 | 036 | 90010 |
| 6464 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9406 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9407 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9408 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9409 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9410 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 18 volt | 3198 | 010 | 21890 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9414 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9420 | Wire Jumper. | 3198 | 036 | 90010 |
| 6490 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 | 132 | 55667 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9424 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9426 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9463 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 | 175 | 70667 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 7000 | IC, TDA8941P/N1. | 9352 | 628 | 51112 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I | 4835 | 310 | 57626 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 7360 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9611 | Coil, 27u, 10%. | 3198 | 018 | 22790 |
| 7366 | Transistor, PNP, 2SA965. | 9322 | 167 | 18676 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 7369 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 7373 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 7380 | Transistor, NPN, 2SC2235 | 9322 | 167 | 19676 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 7382 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 | 157 | 37687 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7450 | Transistor, PNP, PDTA114ET | 3198 | 010 | 44010 | 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PDTCl143ZT | 9340 | 547 | 00215 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |

32LT621L/17 (continued)

| | | |
|------|----------------|----------------|
| 9635 | Wire Jumper. | 3198 036 90010 |
| 9636 | Wire Jumper. | 3198 036 90010 |
| 9637 | Wire Jumper. | 3198 036 90010 |
| 9638 | Wire Jumper. | 3198 036 90010 |
| 9639 | Wire Jumper. | 3198 036 90010 |
| 9640 | Wire Jumper. | 3198 036 90010 |
| 9641 | Wire Jumper. | 3198 036 90010 |
| 9642 | Wire Jumper. | 3198 036 90010 |
| 9643 | Wire Jumper. | 3198 036 90010 |
| 9647 | Wire Jumper. | 3198 036 90010 |
| 9648 | Wire Jumper. | 3198 036 90010 |
| 9650 | Wire Jumper. | 3198 036 90010 |
| 9651 | Wire Jumper. | 3198 036 90010 |
| 9652 | Wire Jumper. | 3198 036 90010 |
| 9654 | Wire Jumper. | 3198 036 90010 |
| 9655 | Wire Jumper. | 3198 036 90010 |
| 9656 | Wire Jumper. | 3198 036 90010 |
| 9657 | Wire Jumper. | 3198 036 90010 |
| 9658 | Wire Jumper. | 3198 036 90010 |
| 9659 | Wire Jumper. | 3198 036 90010 |
| 9660 | Wire Jumper. | 3198 036 90010 |
| 9661 | Wire Jumper. | 3198 036 90010 |
| 9662 | Wire Jumper. | 3198 036 90010 |
| 9663 | Wire Jumper. | 3198 036 90010 |
| 9664 | Wire Jumper. | 3198 036 90010 |
| 9665 | Wire Jumper. | 3198 036 90010 |
| 9666 | Wire Jumper. | 3198 036 90010 |
| 9667 | Wire Jumper. | 3198 036 90010 |
| 9668 | Wire Jumper. | 3198 036 90010 |
| 9669 | Wire Jumper. | 3198 036 90010 |
| 9670 | Wire Jumper. | 3198 036 90010 |
| 9671 | Wire Jumper. | 3198 036 90010 |
| 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9674 | Wire Jumper. | 3198 036 90010 |
| 9675 | Wire Jumper. | 3198 036 90010 |
| 9676 | Wire Jumper. | 3198 036 90010 |
| 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9679 | Wire Jumper. | 3198 036 90010 |
| 9680 | Wire Jumper. | 3198 036 90010 |
| 9681 | Wire Jumper. | 3198 036 90010 |
| 9682 | Wire Jumper. | 3198 036 90010 |
| 9683 | Wire Jumper. | 3198 036 90010 |
| 9685 | Wire Jumper. | 3198 036 90010 |
| 9686 | Wire Jumper. | 3198 036 90010 |
| 9687 | Wire Jumper. | 3198 036 90010 |
| 9688 | Wire Jumper. | 3198 036 90010 |
| 9689 | Wire Jumper. | 3198 036 90010 |
| 9690 | Wire Jumper. | 3198 036 90010 |
| 9691 | Wire Jumper. | 3198 036 90010 |
| 9694 | Wire Jumper. | 3198 036 90010 |
| 9695 | Wire Jumper. | 3198 036 90010 |
| 9697 | Wire Jumper. | 3198 036 90010 |
| 9698 | Wire Jumper. | 3198 036 90010 |
| 9699 | Wire Jumper. | 3198 036 90010 |
| 9821 | Wire Jumper. | 3198 036 90010 |
| 9822 | Wire Jumper. | 3198 036 90010 |
| 9825 | Wire Jumper. | 3198 036 90010 |
| 9828 | Wire Jumper. | 3198 036 90010 |
| 9829 | Wire Jumper. | 3198 036 90010 |
| 9831 | Wire Jumper. | 3198 036 90010 |
| 9832 | Wire Jumper. | 3198 036 90010 |
| 9837 | Wire Jumper. | 3198 036 90010 |
| 9838 | Wire Jumper. | 3198 036 90010 |
| 9839 | Wire Jumper. | 3198 036 90010 |
| 9846 | Wire Jumper. | 3198 036 90010 |
| 9847 | Wire Jumper. | 3198 036 90010 |
| 9848 | Wire Jumper. | 3198 036 90010 |
| 9849 | Wire Jumper. | 3198 036 90010 |
| 9851 | Wire Jumper. | 3198 036 90010 |
| 9855 | Wire Jumper. | 3198 036 90010 |
| 9856 | Wire Jumper. | 3198 036 90010 |
| 9857 | Wire Jumper. | 3198 036 90010 |
| 9858 | Wire Jumper. | 3198 036 90010 |
| 9859 | Wire Jumper. | 3198 036 90010 |
| 9860 | Wire Jumper. | 3198 036 90010 |
| 9862 | Wire Jumper. | 3198 036 90010 |
| 9863 | Wire Jumper. | 3198 036 90010 |
| 9864 | Wire Jumper. | 3198 036 90010 |
| 9865 | Wire Jumper. | 3198 036 90010 |
| 9867 | Wire Jumper. | 3198 036 90010 |
| 9868 | Wire Jumper. | 3198 036 90010 |
| 9869 | Wire Jumper. | 3198 036 90010 |
| 9870 | Wire Jumper. | 3198 036 90010 |
| 9871 | Wire Jumper. | 3198 036 90010 |
| 9873 | Wire Jumper. | 3198 036 90010 |
| 9874 | Wire Jumper. | 3198 036 90010 |
| 9875 | Wire Jumper. | 3198 036 90010 |
| 9876 | Wire Jumper. | 3198 036 90010 |
| 9877 | Wire Jumper. | 3198 036 90010 |
| 9878 | Wire Jumper. | 3198 036 90010 |
| 9901 | Wire Jumper. | 3198 036 90010 |
| 9902 | Wire Jumper. | 3198 036 90010 |

| | | |
|------|--------------------------------|----------------|
| 9903 | Wire Jumper. | 3198 036 90010 |
| 9904 | Wire Jumper. | 3198 036 90010 |
| 9911 | Wire Jumper. | 3198 036 90010 |
| 9913 | Wire Jumper. | 3198 036 90010 |
| 9914 | Wire Jumper. | 3198 036 90010 |
| 9915 | Wire Jumper. | 3198 036 90010 |
| 9923 | Wire Jumper. | 3198 036 90010 |
| 9991 | Wire Jumper. | 3198 036 90010 |
| 9993 | Wire Jumper. | 3198 036 90010 |
| 9996 | Wire Jumper. | 3198 036 90010 |
| 9997 | Wire Jumper. | 3198 036 90010 |
| 9998 | Wire Jumper. | 3198 036 90010 |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 127 27374 |
| CBA | Main Chassis Assembly. | 3139 188 04111 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

| | | |
|------|---|----------------|
| 0266 | 6 Pin Connector. | 2422 025 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 028 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 017 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic | 3198 016 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2431 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 |
| 2432 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2433 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2434 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2440 | Cap, 10u, 20%, 16v, Electrolytic | 3198 028 21090 |
| 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2450 | Cap, 10u, 20%, 16v, Electrolytic | 3198 028 21090 |
| 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 3402 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 |
| 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass | 3198 021 31820 |
| 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 021 31520 |
| 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 021 36820 |
| 3407 | Res, 1K, 5%, 1/16W, Metalized Glass | 3198 021 31020 |
| 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 3412 | Res, 510K, 5%, 1/10W, Metalized Glass | 2122 118 05951 |
| 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 3425 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 |
| 3427 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 |
| 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass | 2322 704 68202 |
| 3432 | Res, 12K, 5%, 1/16W, Metalized Glass | 3198 021 31230 |
| 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 3442 | Res, 12K, 5%, 1/16W, Metalized Glass | 3198 021 31230 |
| 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass | 3198 021 32720 |
| 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 3452 | Res, 12K, 5%, 1/16W, Metalized Glass | 3198 021 31230 |
| 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass | 3198 021 32720 |
| 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3457 | Wire Jumper. | 3198 036 90010 |
| 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 4403 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 5401 | Coil, 10u, 10% | 3198 018 31090 |
| 5407 | Coil, 33u, 5% | 3198 018 13390 |
| 5408 | Coil, 33u, 20% | 3198 018 33390 |
| 5421 | Inductor, 100 MHz, 120 ohm | 3198 018 90070 |
| 5425 | Coil, 10u, 10% | 3198 018 31090 |
| 5428 | Coil, 10u, 5% | 3198 018 11090 |
| 5429 | Coil, 10u, 10% | 3198 018 31090 |
| 5430 | Coil, 10u, 10% | 3198 018 31090 |

32LT621L/17 (continued)

| | | | | |
|------|--|------|-----|-------|
| 5440 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5442 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 5450 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5452 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 7401 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7402 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7403 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7421 | IC, TC90A53N | 9322 | 182 | 18682 |
| 7440 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7444 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

DAF Panel Parts

| | | | | |
|-----------------|--|------|-----|-------|
| DAF Panel Parts | | | | |
| 0221 | 2 Pin Connector. | 2422 | 025 | 15503 |
| 0258 | 2 Pin Connector. | 2422 | 025 | 15503 |
| 0261 | 1 Pin Connector. | 2422 | 034 | 20021 |
| 0262 | 1 Pin Connector. | 2422 | 034 | 20021 |
| 2492 | Cap, 390p, 10%, 2000v, Ceramic | 2020 | 558 | 90482 |
| 2493 | Cap, 390p, 10%, 2000v, Ceramic | 2020 | 558 | 90482 |
| 3498 | Varactor, 1MA/612V, Max 1100V. | 2322 | 592 | 14217 |
| 3499 | Varactor, 1MA/612V, Max 1100V. | 2322 | 592 | 14217 |
| 5493 | Transformer, Signal, DAF | 3128 | 138 | 34581 |
| CBA | DAF Panel Assembly | 3139 | 187 | 10081 |

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|-----------------------------|--|------|-----|-------|
| Front Interface Panel Parts | | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTSL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 187 | 28041 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

| | | | | |
|-----------------------|---|------|-----|-------|
| Side Jack Panel Parts | | | | |
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |

S = Safety Part Be sure to use exact replacement part.

| | | | | |
|------|--|------|-----|-------|
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

| | | | | |
|-------------------------|---|------|-----|-------|
| Top Control Panel Parts | | | | |
| 0215 | 3 Pin Connector. | 2422 | 025 | 09191 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3088 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 4092 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6092 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel. | 3139 | 187 | 10251 |

Cabinet & Accessory Parts

| | | | | |
|---------------------------|--|------|-----|-------|
| Cabinet & Accessory Parts | | | | |
| S AC01 | AC Cord. | 3135 | 010 | 07161 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC05 | Cabinet Back | 3139 | 124 | 45231 |
| AC07 | Canceller Coil | 2422 | 549 | 45605 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A80ERF042X14. | 9301 | 927 | 10539 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 44676 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01661 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53541 |
| AC20A | Cabinet Front. | 3139 | 177 | 51891 |
| AC20C | Light Guide. | 3139 | 124 | 30411 |
| AC20D | Nameplate. | 3104 | 300 | 11991 |
| AC20F | Power Button Cover | 3139 | 124 | 32921 |
| AC20G | Power Button Shaft | 3139 | 124 | 32791 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76521 |
| AC20J1 | Top Control Bracket. | 3139 | 124 | 33941 |
| AC20J3 | Top Control Cover. | 3139 | 124 | 31131 |
| AC20J4 | Top Control Rubber | 3139 | 124 | 30391 |
| AC32 | Yoke Wedge (2 Used). | 3135 | 013 | 00311 |

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|---|----------------|--------|---|----------------|
| | Main Chassis Parts | | | | |
| 1000 | Tuner, V+U PLL | 2422 542 90141 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 016 05610 |
| 1200 | Ceramic Filter 4.5 MHZ | 2422 549 44609 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic | 3198 019 72220 |
| S 1500 | Fuse, 4A, 250V, IEC | 2422 086 10914 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 21040 |
| S 1515 | Relay, 5 Amp, 12V | 2422 132 07444 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 |
| 1600 | Tact Switch. | 2422 128 02742 | 2401 | Cap, 2u2, 20%, 50V, Electrolytic | 3198 037 52280 |
| 1601 | Tact Switch. | 2422 128 02742 | 2402 | Cap, 470p, 10%, 500v, Ceramic | 3198 019 44710 |
| 1602 | Tact Switch. | 2422 128 02742 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 |
| 1603 | Tact Switch. | 2422 128 02742 | 2405 | Cap, 220u, 20%, 25v, Electrolytic | 3198 025 32210 |
| 1606 | Tact Switch. | 2422 128 02742 | 2415 | Cap, 330p, 5%, 50v, Ceramic | 3198 016 03310 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 243 | Connector, 6 Pin | 2422 025 04854 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | 244 | Connector, 5 Pin | 2422 025 04853 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2441 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 024 44730 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2444 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic | 3198 025 24710 | 245 | Connector, 6 Pin | 2422 025 04854 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2450 | Cap, 47u, 20%, 160v, Electrolytic | 2020 021 91139 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 | 2451 | Cap, 15n, 10%, 50v, Polyester | 3198 014 01530 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic | 3198 017 24740 | 2457 | Cap, 470n, 5%, 250v, Metalized Polypropylene | 2022 333 00086 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2458 | Cap, 2u2, 20%, 100V, Electrolytic | 3198 037 72280 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2459 | Cap, 680p, 10%, 500v, Ceramic | 3198 019 46810 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 246 | Connector, 5 Pin | 2422 025 12481 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2460 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 01010 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2463 | Cap, 1n2, 10%, 2000v, Ceramic | 2020 558 90488 |
| 211 | Connector, 2 Pin | 2422 025 16269 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene | 2222 479 90042 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2465 | Cap, 13n, 5%, 1600v, Polypropylene | 2020 301 90254 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2468 | Cap, 10n, 10%, 400v, Polyester | 2222 347 90218 |
| 212 | Connector, 2 Pin | 2422 025 16375 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester | 2222 365 75154 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester | 2222 365 75104 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2474 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2475 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2476 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 04720 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 3198 037 34790 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2481 | Cap, 470p, 10%, 500v, Ceramic | 3198 019 44710 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic | 2020 021 90856 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2486 | Cap, 470u, 20%, 16V Electrolytic | 3198 037 24710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50V Electrolytic | 3198 037 54790 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | S 2488 | Cap, 1000uF, 20%, 16V, Electrolytic | 3198 038 21020 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2489 | Cap, 470u, 20%, 16V Electrolytic | 3198 037 24710 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic | 2238 786 19852 | 2491 | Cap, 1n, 10%, 500v, Ceramic | 3198 019 41020 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene | 2022 330 00018 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 |
| 219 | Connector, 6 Pin | 2422 025 12482 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 |
| 220 | Connector, 5 Pin | 2422 025 04853 | 2503 | Cap, 47u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | S 2515 | Cap, 1n5, 20%, v, Ceramic | 2020 554 90172 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 | 2520 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 221 | Connector, 4 Pin | 2422 025 15503 | 2523 | Cap, 1n5, 10%, 2000v, Ceramic | 3198 019 71520 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 017 44740 | 2527 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 254 | SOC CRT V 9P F | 2422 500 80087 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2540 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2541 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 3198 019 66810 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 222 | Connector, 2 Pin | 2422 025 10646 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2564 | Cap, 2200uF, 20%, 25V Electrolytic | 3198 038 32220 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 31010 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 | 2568 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic | 3198 016 38210 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 223 | Socket 9 Pin | 2422 026 05236 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic | 2222 910 19856 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic | 3198 017 31520 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic | 3198 023 22240 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 | 2602 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 31010 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 32220 | 2606 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2245 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 017 44740 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 225 | Socket 10 Pin | 2422 026 04926 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic | 3198 017 21050 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 267 | Connector, 3 Pin | 2412 020 00725 |
| 229 | Connector, 3 Pin | 2412 020 00725 | 269 | Socket 3 Pin | 2422 026 05182 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester | 2222 368 90177 | 2691 | Cap, 220u, 20%, 25v, Electrolytic | 3198 025 32210 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic | 2020 558 90445 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic | 2020 012 93495 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 |

S = Safety Part Be sure to use exact replacement part.

| | | | | | |
|------|---|----------------|--------|--|----------------|
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | 3341 | Res, 2R7, 5%, 1/3W, Metal Film | 2306 204 03278 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 3342 | Res, 2R7, 5%, 1/3W, Metal Film | 2306 204 03278 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film | 3198 011 01040 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3451 | Res, 2R7, 5%, 1/3W, Metal Film | 2306 204 03278 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3452 | Res, 5K6, 1%, 1/16W, Metal Film | 3198 039 56020 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3454 | Res, 2K, 1%, 1/16W, Metal Film | 3198 039 20020 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3465 | Res, 27K, 1%, 1/16W, Metal Film | 3198 039 27030 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3470 | Res, 390K, 5%, 1/8W, Metalized Glass . . | 2322 730 61394 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3471 | Res, 3R9, 1%, 1/16W. Metal Film. | 3198 039 39080 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3472 | Res, 3R9, 1%, 1/16W. Metal Film. | 3198 039 39080 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 021 34730 | 3473 | Res, 5R6, 1%, 1/16W, Metal Film. | 3198 039 56080 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 1/16W, Metal Film. | 3198 039 22020 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 1/16W, Metal Film. | 3198 039 22020 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . . | 3198 021 52720 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3481 | Res, 15K, 1%, 1/16W, Metal Film. | 3198 039 15030 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . . | 3198 021 31520 | 3482 | Res, 6K8, 1%, 1/16W, Metal Film. | 3198 039 68020 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . . | 3198 021 31030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass . . . | 2322 734 61202 | 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3493 | Res, 2R2, 5%, 1/3W, Metal Film | 2306 204 03228 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . . | 3198 021 32230 |
| 3206 | Res, 270K, 5%, 1/16W, Metalized Glass. . | 2322 702 60274 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . . | 3198 021 51230 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . . | 3198 021 51030 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | S 3504 | Res, PTC, 3R0, Degaussing. | 2120 661 00025 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . . | 3198 021 38230 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . . | 3198 021 32220 | 3507 | Surge Protector. | 2422 549 43073 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | S 3510 | NTC, 4R7, 20%. | 2122 612 00065 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . . | 3198 021 51220 |

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 | 4122 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 | 4123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4127 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3543 | Res, 82K ohm, 1%, 1/16W, Metal Film. . | 3198 039 82030 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 021 53320 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 018 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5342 | Coil, 47u. | 3198 018 24790 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5445 | Transformer, LOT | 3128 138 21421 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5451 | Coil, 33u. | 3198 018 73390 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 018 90020 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5457 | Choke. | 3128 138 55881 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Driver. | 2422 531 02478 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5471 | Coil, 3u3. | 3198 018 73380 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5480 | Coil, 4u7, 5% | 2422 535 94213 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 021 31530 | S 5501 | Mains Filter | 2422 549 43432 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 021 31220 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5521 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 018 90010 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 018 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5562 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 018 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5564 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 018 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |

| | | | | | | | | | |
|------|---|------|-----|-------|---|--|------|-----|-------|
| 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | CBA | 2D 3 Line Comb Filter Parts. | 3139 | 177 | 26561 |
| 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | | | | | |
| 6331 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | DAF Panel Parts | | | | |
| 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | DAF Panel Parts | | | | |
| 6333 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | | | | | |
| 6335 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | DVD Eject Panel Parts | | | | |
| 6400 | Res, 1K, 1%, 1/16W. Metal Film | 3198 | 039 | 10020 | DVD Eject Panel Parts | | | | |
| 6401 | Zener Diode, 47 volt. | 3198 | 010 | 24790 | | | | | |
| 6445 | Zener Diode, 10 volt. | 3198 | 020 | 51090 | DVD Interface Panel Parts | | | | |
| 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | DVD Interface Panel Parts | | | | |
| 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | | | | | |
| 6449 | Diode, Signal, BAV99. | 3198 | 010 | 10620 | | | | | |
| 6460 | Diode, Rect, DG3-7005L. | 9336 | 436 | 10682 | Front Interface Panel Parts | | | | |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | Front Interface Panel Parts | | | | |
| 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | | | | | |
| 6465 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | ITV Front Jack Panel Parts | | | | |
| 6466 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | ITV Front Jack Panel Parts | | | | |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | | | | | |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | Net 1 Panel (part of Scan 4 Card Assembly) | | | | |
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | Net 1 Panel (part of Scan 4 Card Assembl ly) | | | | |
| 6470 | Diode, Signal, BAV99. | 3198 | 010 | 10620 | | | | | |
| 6476 | Zener Diode, 15 volt. | 3198 | 010 | 21590 | Scan 4 Card (part of Scan 4 Card Assembly) | | | | |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | Scan 4 Card (part of Scan 4 Card Assembl ly) | | | | |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | | | | | |
| 6483 | Zener Diode, 33 volt. | 3198 | 010 | 23390 | | | | | |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | Side A/V Panel | | | | |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | Side A/V Panel | | | | |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. . . . | 9322 | 138 | 08667 | 2171 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 2172 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 2173 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 6524 | Diode, Rect, 1N5062A. | 3198 | 010 | 10120 | 2174 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 | 33310 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 6526 | Zener Diode, 22 volt. | 3198 | 020 | 52290 | 2177 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 | 025 | 51090 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 6541 | Zener Diode, 10 volt. | 3198 | 020 | 51090 | 2179 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 | 025 | 51090 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 | 22250 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 | 22250 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 | 017 | 42240 |
| 6565 | Diode, Signal, BAV70. | 9331 | 849 | 10215 | 3150 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34730 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 3151 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 3152 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 34730 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 3153 | Res, 150 ohm, 5%, 1/6W, Carbon. | 3198 | 011 | 01510 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 6681 | Diode, Signal, BAT85. | 9336 | 247 | 60133 | 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 6691 | LED, LTL-10234WHCR. | 9322 | 185 | 69682 | 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 6692 | IR Receiver. | 9322 | 206 | 78667 | 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51040 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 7200 | IC, TDA9588H/N1/3I/1129. | 9352 | 731 | 49557 | 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 4820 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 7330 | IC, TDA6107JF/N3. | 9352 | 713 | 37112 | CBA | Side Jack Panel Assembly. | 3139 | 177 | 26231 |
| 7400 | Power FET, IR. | 9322 | 053 | 35687 | | | | | |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | Subwoofer Panel Parts | | | | |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 | 020 | 40110 | Subwoofer Panel Parts | | | | |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | | | | | |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 | 020 | 43530 | Top Control Panel Parts | | | | |
| 7462 | Transistor, NPN, PDTC143ZT. | 9340 | 547 | 00215 | Top Control Panel Parts | | | | |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 | 020 | 43430 | | | | | |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | Cabinet & Accessory Parts | | | | |
| 7480 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | Cabinet & Accessory Parts | | | | |
| 7482 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | AC01 | AC Cord. | 3135 | 010 | 03831 |
| 7515 | Optic Coupler, TCET1103(G). | 9322 | 140 | 14667 | AC04 | Batteries for Remote Control Transmitt | 2422 | 526 | 00163 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | AC09 | CRT A80QCF330X34(N). | 9301 | 955 | 90463 |
| 7521 | Transistor, FET, PQFP9N50. | 9322 | 187 | 16687 | AC12 | Degaussing Coil. | 2422 | 549 | 45334 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | AC17 | Owner's Manual, English. | 3121 | 235 | 22421 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 | 020 | 40030 | AC17 | Owner's Manual, Spanish. | 3121 | 235 | 22441 |
| 7541 | Transistor, NPN, PDTC114ET. | 3198 | 010 | 44110 | AC20 | Cabinet Front. | 3139 | 177 | 53591 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | AC20C | Light Guide. | 3139 | 124 | 43141 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 | AC20D | Nameplate. | 3141 | 050 | 00431 |
| 7561 | Transistor, NPN, PDTC143ZT. | 9340 | 547 | 00215 | AC20H | Speaker, 16 ohm, 5W (2 Used). | 2422 | 264 | 00411 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | CBA | Side Jack Panell. | 3139 | 177 | 26231 |
| 7602 | IC, M24C08-WBN6P. | 9322 | 154 | 38682 | CBA | Main Chassis Assy. | 3141 | 058 | 58232 |
| 7606 | Transistor, NPN, PDTC143ZT. | 9340 | 547 | 00215 | REMOTE | Remote Control Transmitter, RC1112813/1 | 3139 | 238 | 05781 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | | | | | |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 | | | | | |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | | | | | |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | | | | | |
| 7901 | IC, AN7522N PH. | 9322 | 181 | 41682 | | | | | |
| 9611 | Coil, 27u, 10%. | 3198 | 018 | 22790 | | | | | |
| 9672 | Coil, 22u, 10%. | 3198 | 018 | 22290 | | | | | |
| 9678 | Coil, 22u, 10%. | 3198 | 018 | 22290 | | | | | |
| CBA | Main Chassis Assy. | 3141 | 058 | 58232 | | | | | |

Channel One Card Parts

Channel One Card Parts

S = Safety Part Be sure to use exact replacement part.

32PT541S37G - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|---|----------------|--------|--|---------------------------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | er. 2222 368 90177 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0223 | A/V Jack | 2422 026 05236 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0269 | Jack | 2422 026 05182 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 03310 |
| S 1000 | Tuner, V+U PLL | 2422 542 90141 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| 1600 | Tact Switch. | 2422 128 02742 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 1601 | Tact Switch. | 2422 128 02742 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | ylene. 2022 333 00086 |
| 1602 | Tact Switch. | 2422 128 02742 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1603 | Tact Switch. | 2422 128 02742 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1606 | Tact Switch. | 2422 128 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | S 2463 | Cap, 1n2, 10%, 2000v, Ceramic. | 2020 558 90488 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | lene 2222 479 90042 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | S 2465 | Cap, 13n, 5%, 1600v, Polypropylene | 2020 301 90254 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2468 | Cap, 10n, 10%, 400v, Polyester | 2222 347 90218 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene 2022 330 00018 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2245 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | | | |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | | | |

S = Safety Part Be sure to use exact replacement part.

32PT541S37G (continued)

| | | | | | |
|------|---|----------------|--------|---|----------------|
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film . . . | 3198 011 01040 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3451 | Res, 2R7, 5%, 1/3W, Metal Film | 2306 204 03278 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film | 2312 915 15602 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 390K, 5%, 1/8W, Metalized Glass . | 2322 730 61394 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3473 | Res, 5R6, 1%, 3/5W, Metal Film | 2312 915 15608 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3481 | Res, 15K, 1%, 3/5W, Metal Film | 2312 915 11503 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3482 | Res, 6K8, 1%, 3/5W, Metal Film | 2312 915 16802 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 33390 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3493 | Res, 2R2, 5%, 1/3W, Metal Film | 2306 204 03228 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3206 | Res, 270K, 5%, 1/16W, Metalized Glass. | 2322 702 60274 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | S 3504 | Res, PTC, 3R0, Degaussing. | 2120 661 00025 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3507 | Surge Protector. | 2422 549 43073 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |

S = Safety Part Be sure to use exact replacement part.

32PT541S37G (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53340 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 | 204 | 03101 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55630 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51020 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film | 3198 | 012 | 13370 | 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 | 734 | 64702 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 53320 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 | 018 | 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5445 | Transformer, PSLOT | 3128 | 138 | 21421 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 | 018 | 90020 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5457 | Coil, Linear, DC12 | 3128 | 138 | 55881 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 | 5480 | Coil, 4u7, 5% | 2422 | 535 | 94213 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5560 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 | 018 | 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5562 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5564 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 | 018 | 90010 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |

S = Safety Part Be sure to use exact replacement part.

32PT541S37G (continued)

| | | | | | |
|--------|--|----------------|------|-------------------------|----------------|
| 6201 | Diode, Signal, BAS316. | 3198 010 10630 | 9171 | Wire Jumper. | 3198 036 90010 |
| 6202 | Diode, Signal, BAS316. | 3198 010 10630 | 9173 | Wire Jumper. | 3198 036 90010 |
| 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9175 | Wire Jumper. | 3198 036 90010 |
| 6331 | Diode, Signal, BAV21. | 3198 010 10070 | 9176 | Wire Jumper. | 3198 036 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | 9178 | Wire Jumper. | 3198 036 90010 |
| 6333 | Diode, Signal, BAV21. | 3198 010 10070 | 9179 | Wire Jumper. | 3198 036 90010 |
| 6335 | Diode, Signal, BAV21. | 3198 010 10070 | 9181 | Wire Jumper. | 3198 036 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 | 9182 | Wire Jumper. | 3198 036 90010 |
| 6401 | Zener Diode, 47 volt. | 3198 010 24790 | 9183 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt. | 3198 020 51090 | 9192 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99. | 3198 010 10620 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, DG3-7005L. | 9336 436 10682 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 010 10070 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 010 10070 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 001 80133 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 010 21590 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 247 60133 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 185 69682 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 728 40557 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9611 | Coil, 27u, 10%. | 3198 018 22790 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PDTCL43ZT. | 9340 547 00215 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9624 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PDTCL14ET. | 9340 310 10215 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PDTCL43ZT. | 9340 547 00215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PDTCL43ZT. | 9340 547 00215 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH. | 9322 181 41682 | 9651 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9652 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

32PT541S37G (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 58231 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

S = Safety Part. Be sure to use exact replacement part.

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4823 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9155 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 28141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 47111 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A80QCF340X34(N) | 9301 | 904 | 59463 |
| AC10 | Customer Control Buttons | 3139 | 124 | 32711 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 45334 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01661 |
| AC17 | Owner's Manual | 3121 | 235 | 21361 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 40481 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53611 |
| AC20A | Cabinet Front. | 3139 | 137 | 71501 |
| AC20C | Light Guide. | 3139 | 124 | 32681 |
| AC20D | Nameplate. | 3139 | 120 | 01301 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| REMOTE | Remote Control Transmitter, RC19335004/01. | 3139 | 228 | 86464 |

32PT543S37A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 368 90177 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2331 | er. | 2020 558 90445 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0223 | A/V Jack | 2422 026 05236 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0269 | Jack | 2422 026 05182 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| S 1000 | Tuner, V+U PLL | 2422 542 90098 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 1600 | Tact Switch. | 2422 128 02742 | 2457 | Cap, 430n, 5%, 250v, Metalized Polyprop | 2222 479 90022 |
| 1601 | Tact Switch. | 2422 128 02742 | 2458 | ylene. | 2020 021 91331 |
| 1602 | Tact Switch. | 2422 128 02742 | 2459 | Cap, 2u2, 20%, 100v, Electrolytic. | 3198 019 46810 |
| 1603 | Tact Switch. | 2422 128 02742 | 2460 | Cap, 680p, 10%, 500v, Ceramic. | 3198 016 01010 |
| 1606 | Tact Switch. | 2422 128 02742 | 2463 | Cap, 100p, 5%, 50v, Ceramic. | 2020 558 90485 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2464 | Cap, 680p, 10%, 2000v, Ceramic | 2222 479 90042 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | S 2465 | Cap, 2u2, 5%, 160v, Metalized Polypropy | 2020 301 90254 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2466 | lene. | 2020 347 90218 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2468 | Cap, 13n, 5%, 1600v, Polypropylene | 2020 347 90222 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2471 | Cap, 10n, 10%, 400v, Polyester | 2020 347 90222 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2472 | Cap, 18n, 10%, 400v, Polyester | 3198 014 01040 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2473 | Cap, 100n, 10%, 50v, Polyester | 2020 365 75154 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2474 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2020 365 75104 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2475 | Cap, 100n, 10%, 63v, Metalized Polyeste | 3198 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2476 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2480 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2481 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2482 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2483 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | 2022 330 00018 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2501 | pylene | 3198 019 52220 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2503 | Cap, 2n2, 10%, 1000v, Ceramic. | 2020 024 90647 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2505 | Cap, 470u, 20%, 200v, Electrolytic | 3198 019 52220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2507 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 017 04710 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2508 | Cap, 470p, 10%, 50v, Ceramic. | 3198 019 64710 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | | | |

S = Safety Part Be sure to use exact replacement part.

32PT543S37A (continued)

| | | | | | |
|------|---|----------------|--------|---|----------------|
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film . . . | 3198 011 01040 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film | 2312 915 15602 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 390K, 5%, 1/8W, Metalized Glass . | 2322 730 61394 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3481 | Res, 15K, 1%, 3/5W, Metal Film | 2312 915 11503 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3482 | Res, 6K8, 1%, 3/5W, Metal Film | 2312 915 16802 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 33390 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3493 | Res, 2R2, 5%, 1/3W, Metal Film | 2306 204 03228 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3507 | Surge Protector. | 2422 549 43073 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |

S = Safety Part Be sure to use exact replacement part.

32PT543S37A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53340 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 | 204 | 03101 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55630 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51020 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 | 012 | 13370 | 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 | 734 | 64702 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 | 012 | 13310 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 53320 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 | 018 | 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5445 | Transformer, PSLOT | 3128 | 138 | 21421 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 | 018 | 90020 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | S 5457 | Coil, 25u. | 2422 | 535 | 91028 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 | 5480 | Coil, 47u, 10% | 2422 | 535 | 97337 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5560 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 | 018 | 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5562 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5564 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 | 018 | 90010 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |

S = Safety Part Be sure to use exact replacement part.

32PT543S37A (continued)

| | | | | | |
|--------|--|----------------|------|-------------------------|----------------|
| 6201 | Diode, Signal, BAS316. | 3198 010 10630 | 9171 | Wire Jumper. | 3198 036 90010 |
| 6202 | Diode, Signal, BAS316. | 3198 010 10630 | 9173 | Wire Jumper. | 3198 036 90010 |
| 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9175 | Wire Jumper. | 3198 036 90010 |
| 6331 | Diode, Signal, BAV21. | 3198 010 10070 | 9176 | Wire Jumper. | 3198 036 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | 9178 | Wire Jumper. | 3198 036 90010 |
| 6333 | Diode, Signal, BAV21. | 3198 010 10070 | 9179 | Wire Jumper. | 3198 036 90010 |
| 6335 | Diode, Signal, BAV21. | 3198 010 10070 | 9181 | Wire Jumper. | 3198 036 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 | 9182 | Wire Jumper. | 3198 036 90010 |
| 6401 | Zener Diode, 47 volt. | 3198 010 24790 | 9183 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt. | 3198 020 51090 | 9192 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99. | 3198 010 10620 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, DG3-7005L. | 9336 436 10682 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 010 10070 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 010 10070 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 010 21590 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 247 60133 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 185 69682 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 728 40557 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9611 | Coil, 27u, 10%. | 3198 018 22790 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9624 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 310 10215 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH. | 9322 181 41682 | 9651 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9652 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

32PT543S37A (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9994 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 23241 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4823 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9155 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 28141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44871 |
| AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S AC09 | CRT, A80ECK272X56. | 9301 | 795 | 00428 |
| AC10 | Customer Control Buttons | 3139 | 124 | 32711 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43977 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01661 |
| AC17 | Owner's Manual | 3121 | 235 | 20681 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 40481 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53111 |
| AC20A | Cabinet Front. | 3139 | 177 | 59541 |
| AC20C | Light Guide. | 3139 | 124 | 32681 |
| AC20D | Nameplate. | 3141 | 050 | 00141 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| REMOTE | Remote Control Transmitter, RC19335004/01. | 3139 | 228 | 86463 |

32PT543S37G - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|---|----------------|--------|--|---------------------------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | er. 2222 368 90177 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0223 | A/V Jack | 2422 026 05236 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0269 | Jack | 2422 026 05182 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| S 1000 | Tuner, V+U PLL | 2422 542 90098 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 1600 | Tact Switch. | 2422 128 02742 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | ylene. 2022 333 00086 |
| 1601 | Tact Switch. | 2422 128 02742 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1602 | Tact Switch. | 2422 128 02742 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1603 | Tact Switch. | 2422 128 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1606 | Tact Switch. | 2422 128 02742 | S 2463 | Cap, 1n2, 10%, 2000v, Ceramic. | 2020 558 90488 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | lene 2222 479 90042 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | S 2465 | Cap, 13n, 5%, 1600v, Polypropylene | 2020 301 90254 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2468 | Cap, 10n, 10%, 400v, Polyester | 2222 347 90218 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene 2022 330 00018 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2245 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | | | |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | | | |

S = Safety Part Be sure to use exact replacement part.

32PT543S37G (continued)

| | | | | | |
|------|--|----------------|--------|--|-------------------------------|
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X | 34. 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | S 3341 | Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33 | 0X34 2306 204 03278 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | S 3342 | Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X | 34. 2306 204 03108 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | S 3342 | Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 | 0X34 2306 204 03278 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03310 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film | 3198 011 01040 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3451 | Res, 2R7, 5%, 1/3W, Metal Film | 2306 204 03278 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film | 2312 915 15602 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film | 3198 011 03390 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3470 | Res, 390K, 5%, 1/8W, Metalized Glass . | 2322 730 61394 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 07590 | 3472 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3473 | Res, 5R6, 1%, 3/5W, Metal Film | 2312 915 15608 |
| 3137 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3481 | Res, 15K, 1%, 3/5W, Metal Film | 2312 915 11503 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3482 | Res, 6K8, 1%, 3/5W, Metal Film | 2312 915 16802 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . . | 3198 012 33390 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | S 3493 | Res, 2R2, 5%, 1/3W, Metal Film | 2306 204 03228 |
| 3206 | Res, 270K, 5%, 1/16W, Metalized Glass. | 2322 702 60274 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | S 3504 | Res, PTC, 3R0, Degaussing. | 2120 661 00025 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 | | | |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | | | |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | | | |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | | | |

S = Safety Part Be sure to use exact replacement part.

32PT543S37G (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|---|------|-----|-------|
| 3507 | Surge Protector. | 2422 | 549 | 43073 | 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 | 013 | 02210 | 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 | 612 | 00056 | 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02710 | 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51220 | 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 04780 | 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass.. | 3198 | 021 | 53340 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 | 204 | 03101 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55630 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 | 012 | 13370 | 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 | 734 | 64702 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 | 012 | 13310 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass.. | 3198 | 021 | 52240 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass.. | 3198 | 021 | 52240 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 53320 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 5002 | Coil, 820n, 10%. | 3198 | 018 | 18270 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5201 | Coil, 6u8, 5%. | 3198 | 018 | 16880 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 | 021 | 31040 | 5242 | Coil, 10u, 5%. | 3198 | 018 | 11090 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 | 021 | 31040 | 5342 | Coil, 22u for A80QCF340X34 | 2422 | 535 | 97333 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 | 021 | 31040 | 5342 | Coil, 47u for A80QCF330X34 | 3198 | 018 | 24790 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 | 021 | 31040 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 | 021 | 31040 | S 5445 | Transformer, PSLOT | 3128 | 138 | 21421 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 | 021 | 31040 | 5457 | Coil, Linear, DC12 | 3128 | 138 | 55881 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31530 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31220 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5480 | Coil, 4u7, 5%. | 2422 | 535 | 94213 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5561 | Coil, 27u, 5%. | 2422 | 535 | 95366 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |

S = Safety Part Be sure to use exact replacement part.

32PT543S37G (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|--------------------------|------|-----|-------|
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7901 | IC, AN7522N PH | 9322 | 181 | 41682 |
| 5602 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 5603 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 9101 | Wire Jumper. | 3198 | 036 | 90010 |
| 5604 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 9102 | Wire Jumper. | 3198 | 036 | 90010 |
| 5861 | Coil, 10u, 5%. | 3198 | 018 | 11090 | 9103 | Wire Jumper. | 3198 | 036 | 90010 |
| 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9104 | Wire Jumper. | 3198 | 036 | 90010 |
| 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9123 | Wire Jumper. | 3198 | 036 | 90010 |
| 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9173 | Wire Jumper. | 3198 | 036 | 90010 |
| 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9175 | Wire Jumper. | 3198 | 036 | 90010 |
| 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9176 | Wire Jumper. | 3198 | 036 | 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9178 | Wire Jumper. | 3198 | 036 | 90010 |
| 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9179 | Wire Jumper. | 3198 | 036 | 90010 |
| 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9181 | Wire Jumper. | 3198 | 036 | 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 | 9182 | Wire Jumper. | 3198 | 036 | 90010 |
| 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 | 9183 | Wire Jumper. | 3198 | 036 | 90010 |
| 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9192 | Wire Jumper. | 3198 | 036 | 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9193 | Wire Jumper. | 3198 | 036 | 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9311 | Wire Jumper. | 3198 | 036 | 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9312 | Wire Jumper. | 3198 | 036 | 90010 |
| 6460 | Diode, Rect, DG3-7005L | 9336 | 436 | 10682 | 9406 | Wire Jumper. | 3198 | 036 | 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9407 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9408 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9409 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9410 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9414 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9423 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9424 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9426 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9463 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 | 728 | 40557 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9611 | Coil, 27u, 10%. | 3198 | 018 | 22790 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 | 157 | 37687 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9617 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 9620 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9621 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 | 310 | 10215 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9633 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9639 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 | 547 | 00215 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part Be sure to use exact replacement part.

32PT543S37G (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9651 | Wire Jumper. | 3198 | 036 | 90010 |
| 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 9656 | Wire Jumper. | 3198 | 036 | 90010 |
| 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9994 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 58231 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4823 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9155 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 28141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44871 |
| AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S AC09 | CRT, A80QCF340X34(N) | 9301 | 904 | 59463 |
| AC10 | Customer Control Buttons | 3139 | 124 | 32711 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43977 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01661 |
| AC17 | Owner's Manual | 3121 | 235 | 20681 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 40481 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53111 |

32PT543S37G (continued)

| | | | | |
|--------|--|------|-----|-------|
| AC20A | Cabinet Front. | 3139 | 177 | 59541 |
| AC20C | Light Guide. | 3139 | 124 | 32681 |
| AC20D | Nameplate. | 3141 | 050 | 00141 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| REMOTE | Remote Control Transmitter, RC19335004/ 01. | 3139 | 228 | 86463 |

32PT553S37A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|---|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2331 | er. | 2222 368 90177 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2340 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 558 90445 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2341 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2342 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2343 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 |
| 0223 | A/V Jack. | 2422 026 05236 | 2344 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2345 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 21040 |
| 0229 | 3 Pin Connector. | 2412 020 00725 | 2401 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 558 90445 |
| 0239 | 3 Pin Connector. | 2422 025 16382 | 2402 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 021 90552 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2404 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2405 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 025 54790 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2441 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2443 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| S 0254 | 9 Pin CRT Socket. | 2422 500 80076 | 2444 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 017 24730 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2450 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 0269 | Jack. | 2422 026 05182 | 2451 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 021 91139 |
| S 1000 | Tuner, V+U PLL. | 2422 542 90098 | 2455 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| 1002 | SAW Filter, 45.75MHz. | 2422 549 44518 | 2457 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 549 40807 | 2458 | Cap, 430n, 5%, 250v, Metalized Polyprop | |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2459 | ylene. | 2222 479 90022 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2460 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 021 91331 |
| 1606 | Tact Switch. | 2422 128 02742 | 2461 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 1660 | Crystal, 12MHz000. | 2422 543 01203 | 2463 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | 2464 | Cap, 680p, 10%, 2000v, Ceramic. | 2020 558 90485 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | | Cap, 2u2, 5%, 160v, Metalized Polypropy | |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | S 2465 | lene. | 2222 479 90042 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2466 | Cap, 13n, 5%, 1600v, Polypropylene. | 2020 301 90254 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 025 24710 | 2468 | Cap, 10n, 10%, 400v, Polyester. | 2222 347 90218 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2471 | Cap, 18n, 10%, 400v, Polyester. | 2222 347 90222 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 2472 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2473 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 2474 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2476 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 04720 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 347 90234 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 021 90856 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 021 90854 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 021 91049 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 021 91577 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | | pylene. | 2022 330 00018 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 024 90647 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 786 19852 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 021 91654 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 021 91353 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 025 34790 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 028 24790 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 910 19856 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 014 04740 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 023 22240 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 370 76104 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 026 21020 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 025 32210 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 025 52280 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 017 42240 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| | | | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 |

S = Safety Part Be sure to use exact replacement part.

32PT553S37A (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film | 3198 011 01040 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film | 2312 915 15602 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 390K, 5%, 1/8W, Metalized Glass . | 2322 730 61394 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3134 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3481 | Res, 15K, 1%, 3/5W, Metal Film | 2312 915 11503 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3482 | Res, 6K8, 1%, 3/5W, Metal Film | 2312 915 16802 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 33390 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3493 | Res, 2R2, 5%, 1/3W, Metal Film | 2306 204 03228 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3507 | Surge Protector. | 2422 549 43073 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |

S = Safety Part Be sure to use exact replacement part.

32PT553S37A (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 | 012 | 13370 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51030 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54720 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51520 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. | 2322 | 730 | 61274 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51530 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51030 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51230 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52220 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3685 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, PSL0T | 3128 | 138 | 21421 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5457 | Coil, 25u. | 2422 | 535 | 91028 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31530 | 5480 | Coil, 47u, 10% | 2422 | 535 | 97337 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31220 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 38220 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 |

S = Safety Part Be sure to use exact replacement part.

32PT553S37A (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, DGP30J-L7004. | 9336 436 10682 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 728 40557 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9624 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1 | 9352 673 56112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9651 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9652 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

32PT553S37A (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9994 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 21111 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

S = Safety Panel Part of Scan 4 Card Assembly part.
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4823 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9155 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 21501 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 09191 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 4092 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 20991 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 2422 | 070 | 98202 |
| AC02 | AC Cord Strain Relief. | 3139 | 124 | 26301 |
| AC03 | Anode Lead Spacer (3 Used). | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitt | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 42311 |
| AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S AC09 | CRT, A80ECK272X56. | 9301 | 795 | 00428 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43977 |
| AC15 | Holder, Degaussing Coil (4 Used). | 3135 | 013 | 01661 |
| AC16 | Jack Panel Bracket | 3139 | 124 | 42321 |
| AC17 | Owner's Manual | 3121 | 235 | 20691 |
| AC18 | Quick Use Guide. | 3121 | 233 | 43511 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 40481 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53121 |
| AC20A | Cabinet Front. | 3139 | 177 | 56061 |
| AC20C | Light Guide. | 3139 | 124 | 26361 |
| AC20D | Nameplate. | 3141 | 050 | 00141 |

32PT553S37A (continued)

| | | | | |
|--------|--|------|-----|-------|
| AC20E | Power Button | 3139 | 124 | 29441 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| AC20J | Top Control Assembly | 3139 | 137 | 95721 |
| AC20J1 | Top Control Bracket. | 3139 | 124 | 22802 |
| AC20J3 | Top Control Cover. | 3139 | 137 | 77561 |
| REMOTE | Remote Control Transmitter, RC19036001/ 01. | 3139 | 228 | 86493 |

32PT553S37G - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|--|------|-----------|--------|---|------|-----------|
| | Main Chassis Parts | | | | | | |
| 0211 | 2 Pin Connector. | 2422 | 025 16269 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2331 | er. | 2222 | 368 90177 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 | 2340 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2341 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2342 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2343 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 0223 | A/V Jack. | 2422 | 026 05236 | 2344 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2345 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 0229 | 3 Pin Connector. | 2412 | 020 00725 | 2401 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 |
| 0239 | 3 Pin Connector. | 2422 | 025 16382 | 2402 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 | 021 90552 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2404 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2405 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 | 025 54790 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2441 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 | 2443 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| S 0254 | 9 Pin CRT Socket. | 2422 | 500 80076 | 2444 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2450 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0269 | Jack. | 2422 | 026 05182 | 2451 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| S 1000 | Tuner, V+U PLL. | 2422 | 542 90098 | 2455 | Cap, 15n, 10%, 50v, Polyester. | 3198 | 014 01530 |
| 1002 | SAW Filter, 45.75MHz. | 2422 | 549 44518 | 2457 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 | 549 40807 | 2458 | Cap, 470n, 5%, 250v, Metalized Polyprop | 2022 | 333 00086 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2459 | ylene. | 2020 | 021 91331 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2460 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 1606 | Tact Switch. | 2422 | 128 02742 | S 2463 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 1660 | Crystal, 12MHz000. | 2422 | 543 01203 | 2464 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 1811 | 3 Pin Connector. | 2412 | 020 00725 | 2465 | Cap, 1n2, 10%, 2000v, Ceramic. | 2020 | 558 90488 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 | 540 98344 | 2466 | Cap, 2u2, 5%, 160v, Metalized Polypropy | 2022 | 479 90042 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | S 2465 | lene. | 2020 | 301 90254 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2466 | Cap, 13n, 5%, 1600v, Polypropylene. | 2020 | 301 90254 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2467 | Cap, 15n, 10%, 400v, Polyester. | 2222 | 347 90219 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2468 | Cap, 10n, 10%, 400v, Polyester. | 2222 | 347 90218 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 90586 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 91049 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | 2022 | 330 00018 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2501 | pylene. | 2022 | 330 00018 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2503 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2505 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90647 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2507 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2508 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | S 2515 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2520 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 | 2521 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | S 2523 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91353 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 04740 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 | 016 38210 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 | 370 76104 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2245 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 31020 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2619 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 21050 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 90020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| | | | | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| | | | | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |

S = Safety Part Be sure to use exact replacement part.

32PT553S37G (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2864 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2865 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. | 3198 011 03330 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film | 3198 011 01040 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3451 | Res, 2R7, 5%, 1/3W, Metal Film | 2306 204 03278 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film | 2312 915 15602 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3470 | Res, 390K, 5%, 1/8W, Metalized Glass . . | 2322 730 61394 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3473 | Res, 5R6, 1%, 3/5W, Metal Film | 2312 915 15608 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3481 | Res, 15K, 1%, 3/5W, Metal Film | 2312 915 11503 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3482 | Res, 6K8, 1%, 3/5W, Metal Film | 2312 915 16802 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3493 | Res, 2R2, 5%, 1/3W, Metal Film | 2306 204 03228 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3206 | Res, 270K, 5%, 1/16W, Metalized Glass. | 2322 702 60274 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . . | 2322 242 13335 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | S 3504 | Res, PTC, 3R0, Degaussing. | 2120 661 00025 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . . | 2322 242 13155 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3507 | Surge Protector. | 2422 549 43073 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03101 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |

S = Safety Part Be sure to use exact replacement part.

32PT553S37G (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 | 012 | 13370 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51030 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54720 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51520 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4613 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. | 2322 | 730 | 61274 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51530 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51030 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51230 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52220 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4812 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | 4814 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3685 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, PSL0T | 3128 | 138 | 21421 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5457 | Coil, Linear, DC12 | 3128 | 138 | 55881 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31530 | 5480 | Coil, 4u7, 5% | 2422 | 535 | 94213 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31220 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 5861 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 | 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 38220 | 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 4122 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 |
| 4127 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 |

S = Safety Part Be sure to use exact replacement part.

32PT553S37G (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, DGP30J-L7004. | 9336 436 10682 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 00133 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 00133 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1053. | 9352 728 40557 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9624 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1 | 9352 673 56112 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH | 9322 181 41682 | 9651 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9652 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9661 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9662 | Wire Jumper. | 3198 036 90010 |
| 9178 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9179 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

32PT553S37G (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9994 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 58241 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

S = Safety Panel Part of Scan 4 Card Assembly part.
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 1810 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 1811 | 3 Pin Connector. | 2412 | 020 | 00725 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2180 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2181 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 | 42240 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3816 | Res, 100K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51040 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4823 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 9150 | Wire Jumper. | 3198 | 036 | 90010 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9154 | Wire Jumper. | 3198 | 036 | 90010 |
| 9155 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 21501 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 09191 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 4092 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 20991 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 2422 | 070 | 98202 |
| AC02 | AC Cord Strain Relief. | 3139 | 124 | 26301 |
| AC03 | Anode Lead Spacer (3 Used). | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 42311 |
| AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S AC09 | CRT, A80QCF340X34(N) | 9301 | 904 | 59463 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43977 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01661 |
| AC16 | Jack Panel Bracket | 3139 | 124 | 42321 |
| AC17 | Owner's Manual | 3121 | 235 | 20691 |
| AC18 | Quick Use Guide. | 3121 | 233 | 43511 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 40481 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53121 |
| AC20A | Cabinet Front. | 3139 | 177 | 56061 |
| AC20C | Light Guide. | 3139 | 124 | 26361 |
| AC20D | Nameplate. | 3141 | 050 | 00141 |

32PT553S37G (continued)

| | | | | |
|--------|--|------|-----|-------|
| AC20E | Power Button | 3139 | 177 | 66921 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| AC20J | Top Control Assembly | 3139 | 137 | 95721 |
| AC20J1 | Top Control Bracket. | 3139 | 124 | 22802 |
| AC20J3 | Top Control Cover. | 3139 | 137 | 77561 |
| REMOTE | Remote Control Transmitter, RC19036001/ 01. | 3139 | 228 | 86493 |

32PT563R85G - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|---|------|-----------|--------|---|------|-----------|
| | Main Chassis Parts | | | | | | |
| 0127 | Socket Fuse. | 2422 | 088 00271 | 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 |
| 0129 | NTC Holder. | 3139 | 120 10151 | 2245 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 | 017 44740 |
| 0136 | IC-Spring. | 3104 | 301 22081 | 2247 | Cap, 1000u, 20%, 16v, Electrolytic. . . . | 3198 | 026 21020 |
| 0137 | Spring. | 3139 | 121 24583 | 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 0138 | IC-Spring. | 3104 | 301 22081 | 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 0139 | Spring for Bracket. | 3122 | 121 24786 | 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 0140 | Spring. | 3139 | 121 24583 | 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 0141 | IC-Spring. | 3104 | 301 22081 | 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 0152 | Cable, DIPMate, 6 Pin, 560mm. | 3139 | 121 08951 | 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 90020 |
| 0153 | Cable, 5 Pin, 560mm. | 3139 | 121 09041 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | |
| 0211 | 2 Pin Connector. | 2422 | 025 16269 | | er. | 2222 | 368 90177 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . . | 2020 | 558 90445 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 0223 | A/V Jack. | 2422 | 026 05236 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 | 023 21040 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. . . . | 2020 | 558 90445 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 | 021 90552 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2404 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 | 025 54790 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| S 0254 | 9 Pin CRT Socket. | 2422 | 500 80076 | 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 03310 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 0269 | Jack. | 2422 | 026 05182 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 |
| S 1000 | Tuner, V+U, PLL. | 2422 | 542 90108 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 1002 | SAW Filter, 45.75MHz. | 2422 | 549 44518 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 | 549 40807 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 | 014 01530 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | | |
| 1600 | Tact Switch. | 2422 | 128 02742 | | ylene. | 2022 | 333 00086 |
| 1601 | Tact Switch. | 2422 | 128 02742 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 1602 | Tact Switch. | 2422 | 128 02742 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 1603 | Tact Switch. | 2422 | 128 02742 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 1606 | Tact Switch. | 2422 | 128 02742 | S 2463 | Cap, 1n2, 10%, 2000v, Ceramic. | 2020 | 558 90488 |
| 1660 | Crystal, 12MHz000. | 2422 | 543 01203 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | | |
| 1810 | 6 Pin Connector. | 2422 | 025 16607 | | lene. | 2222 | 479 90042 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | | | S 2465 | Cap, 13n, 5%, 1600v, Polypropylene. . . . | 2020 | 301 90254 |
| | C49/U A. | 2422 | 543 00842 | 2466 | Cap, 15n, 10%, 400v, Polyester. | 2222 | 347 90219 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2468 | Cap, 10n, 10%, 400v, Polyester. | 2222 | 347 90218 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 90586 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 91049 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | | |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | | pylene. | 2022 | 330 00018 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90647 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91353 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 04740 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| | | | | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| | | | | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |

S = Safety Part Be sure to use exact replacement part.

32PT563R85G (continued)

| | | | | | |
|------|---|----------------|--------|--|----------------|
| 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . . | 3198 025 32210 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. . . . | 3198 023 22240 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . . | 3198 026 21020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01040 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2910 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2911 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3451 | Res, 2R7, 5%, 1/3W, Metal Film. | 2306 204 03278 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film. | 2312 915 15602 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3470 | Res, 390K, 5%, 1/8W, Metalized Glass . | 2322 730 61394 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 915 13908 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3472 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 915 13908 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3473 | Res, 5R6, 1%, 3/5W, Metal Film. | 2312 915 15608 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3481 | Res, 15K, 1%, 3/5W, Metal Film. | 2312 915 11503 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 3482 | Res, 6K8, 1%, 3/5W, Metal Film. | 2312 915 16802 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 33390 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3493 | Res, 2R2, 5%, 1/3W, Metal Film. | 2306 204 03228 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. | 3198 011 02230 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3206 | Res, 270K, 5%, 1/16W, Metalized Glass. . | 2322 702 60274 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |

S = Safety Part Be sure to use exact replacement part.

32PT563R85G (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| S 3504 | Res, PTC, 3 ohm, 144V. | 2122 | 663 | 00019 | 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13155 | 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 |
| 3507 | Surge Protector. | 2422 | 549 | 43073 | 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 | 013 | 02210 | 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 | 612 | 00056 | 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02710 | 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51220 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 04780 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 53340 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 | 204 | 03101 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55630 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 | 012 | 13370 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 | 734 | 64702 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 52240 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 | 021 | 51020 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 53320 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 | 021 | 31020 | S 5445 | Transformer, PSLOT | 3128 | 138 | 21421 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 | 018 | 90020 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5457 | Coil, Linear, DC12 | 3128 | 138 | 55881 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31040 | 5480 | Coil, 4u7, 5% | 2422 | 535 | 94213 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |

S = Safety Part Be sure to use exact replacement part.

32PT563R85G (continued)

| | | | | | | | | | |
|------|--|------|-----|-------|------|---|------|-----|-------|
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7606 | Transistor, NPN, PDTCL43ZT | 9340 | 547 | 00215 |
| 5602 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 5603 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7803 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 5604 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7804 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 5810 | Coil, 10u, 10%. | 3198 | 018 | 51090 | 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 | 187 | 89682 |
| 5831 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 7901 | IC, AN7522N PH | 9322 | 181 | 41682 |
| 5832 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 5833 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 9101 | Wire Jumper. | 3198 | 036 | 90010 |
| 5835 | Coil, 12u, 10%. | 3198 | 018 | 31290 | 9102 | Wire Jumper. | 3198 | 036 | 90010 |
| 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9103 | Wire Jumper. | 3198 | 036 | 90010 |
| 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9104 | Wire Jumper. | 3198 | 036 | 90010 |
| 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9123 | Wire Jumper. | 3198 | 036 | 90010 |
| 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9173 | Wire Jumper. | 3198 | 036 | 90010 |
| 6331 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9175 | Wire Jumper. | 3198 | 036 | 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9176 | Wire Jumper. | 3198 | 036 | 90010 |
| 6333 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9178 | Wire Jumper. | 3198 | 036 | 90010 |
| 6335 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9179 | Wire Jumper. | 3198 | 036 | 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 | 9181 | Wire Jumper. | 3198 | 036 | 90010 |
| 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 | 9182 | Wire Jumper. | 3198 | 036 | 90010 |
| 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9183 | Wire Jumper. | 3198 | 036 | 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9192 | Wire Jumper. | 3198 | 036 | 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9193 | Wire Jumper. | 3198 | 036 | 90010 |
| 6449 | Diode, Signal, BAV99. | 3198 | 010 | 10620 | 9311 | Wire Jumper. | 3198 | 036 | 90010 |
| 6460 | Diode, Rect, DG3-7005L | 9336 | 436 | 10682 | 9312 | Wire Jumper. | 3198 | 036 | 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9406 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9407 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9408 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9409 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9410 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 | 010 | 10620 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9414 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9423 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9424 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9426 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9463 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 | 849 | 10215 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 | 247 | 60133 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I/1298. | 9352 | 742 | 85557 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9611 | Coil, 27u, 10%. | 3198 | 018 | 22790 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 | 713 | 37112 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 | 157 | 37687 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9620 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PDTCL43ZT | 9340 | 547 | 00215 | 9621 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7515 | Optical Coupler, TCERT1103(G) | 9322 | 140 | 14667 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PDTCL14ET | 9340 | 310 | 10215 | 9633 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PDTCL43ZT | 9340 | 547 | 00215 | 9639 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part Be sure to use exact replacement part.

32PT563R85G (continued)

| | | | | | |
|------|----------------------|----------------|------|--|----------------|
| 9642 | Wire Jumper. | 3198 036 90010 | CBA | Main Chassis Assembly. | 3141 058 59431 |
| 9643 | Wire Jumper. | 3198 036 90010 | | | |
| 9648 | Wire Jumper. | 3198 036 90010 | | Channel One Card Parts | |
| 9650 | Wire Jumper. | 3198 036 90010 | | Channel One Card Parts | |
| 9651 | Wire Jumper. | 3198 036 90010 | | | |
| 9652 | Wire Jumper. | 3198 036 90010 | | 2D 3 Line Comb Filter Parts | |
| 9654 | Wire Jumper. | 3198 036 90010 | | 2D 3 Line Comb Filter Parts | |
| 9655 | Wire Jumper. | 3198 036 90010 | 0266 | 6 Pin Connector. | 2422 025 16609 |
| 9656 | Wire Jumper. | 3198 036 90010 | 2401 | Cap, 47u, 20%, 16v, Electrolytic . . . | 3198 028 24790 |
| 9657 | Wire Jumper. | 3198 036 90010 | 2402 | Cap, 4u7, 20%, 35v, Electrolytic . . . | 3198 028 44780 |
| 9658 | Wire Jumper. | 3198 036 90010 | 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9659 | Wire Jumper. | 3198 036 90010 | 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 9660 | Wire Jumper. | 3198 036 90010 | 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9661 | Wire Jumper. | 3198 036 90010 | 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 9662 | Wire Jumper. | 3198 036 90010 | 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 |
| 9663 | Wire Jumper. | 3198 036 90010 | 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 |
| 9664 | Wire Jumper. | 3198 036 90010 | 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9665 | Wire Jumper. | 3198 036 90010 | 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9666 | Wire Jumper. | 3198 036 90010 | 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9667 | Wire Jumper. | 3198 036 90010 | 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9668 | Wire Jumper. | 3198 036 90010 | 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9669 | Wire Jumper. | 3198 036 90010 | 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 |
| 9670 | Wire Jumper. | 3198 036 90010 | 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9671 | Wire Jumper. | 3198 036 90010 | 2426 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 025 34790 |
| 9672 | Coil, 22u, 10% | 3198 018 22290 | 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9674 | Wire Jumper. | 3198 036 90010 | 2428 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 |
| 9675 | Wire Jumper. | 3198 036 90010 | 2429 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 |
| 9676 | Wire Jumper. | 3198 036 90010 | 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9678 | Coil, 22u, 10% | 3198 018 22290 | 2431 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 |
| 9679 | Wire Jumper. | 3198 036 90010 | 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9680 | Wire Jumper. | 3198 036 90010 | 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9681 | Wire Jumper. | 3198 036 90010 | 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9682 | Wire Jumper. | 3198 036 90010 | 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9685 | Wire Jumper. | 3198 036 90010 | 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9686 | Wire Jumper. | 3198 036 90010 | 2440 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 028 21090 |
| 9687 | Wire Jumper. | 3198 036 90010 | 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9688 | Wire Jumper. | 3198 036 90010 | 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9689 | Wire Jumper. | 3198 036 90010 | 2450 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 028 21090 |
| 9690 | Wire Jumper. | 3198 036 90010 | 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9691 | Wire Jumper. | 3198 036 90010 | 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9694 | Wire Jumper. | 3198 036 90010 | 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9695 | Wire Jumper. | 3198 036 90010 | 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9697 | Wire Jumper. | 3198 036 90010 | 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 021 31820 |
| 9698 | Wire Jumper. | 3198 036 90010 | 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 |
| 9699 | Wire Jumper. | 3198 036 90010 | 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9821 | Wire Jumper. | 3198 036 90010 | 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 021 36820 |
| 9822 | Wire Jumper. | 3198 036 90010 | 3407 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 9825 | Wire Jumper. | 3198 036 90010 | 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9828 | Wire Jumper. | 3198 036 90010 | 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. . | 2122 118 05951 |
| 9829 | Wire Jumper. | 3198 036 90010 | 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9831 | Wire Jumper. | 3198 036 90010 | 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9832 | Wire Jumper. | 3198 036 90010 | 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9837 | Wire Jumper. | 3198 036 90010 | 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 704 68202 |
| 9838 | Wire Jumper. | 3198 036 90010 | 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9839 | Wire Jumper. | 3198 036 90010 | 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9846 | Wire Jumper. | 3198 036 90010 | 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 9847 | Wire Jumper. | 3198 036 90010 | 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9849 | Wire Jumper. | 3198 036 90010 | 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 021 32720 |
| 9851 | Wire Jumper. | 3198 036 90010 | 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9856 | Wire Jumper. | 3198 036 90010 | 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9858 | Wire Jumper. | 3198 036 90010 | 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 9859 | Wire Jumper. | 3198 036 90010 | 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9860 | Wire Jumper. | 3198 036 90010 | 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 021 32720 |
| 9862 | Wire Jumper. | 3198 036 90010 | 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9863 | Wire Jumper. | 3198 036 90010 | 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 9864 | Wire Jumper. | 3198 036 90010 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9865 | Wire Jumper. | 3198 036 90010 | 3457 | Wire Jumper. | 3198 036 90010 |
| 9867 | Wire Jumper. | 3198 036 90010 | 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 9868 | Wire Jumper. | 3198 036 90010 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9869 | Wire Jumper. | 3198 036 90010 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9870 | Wire Jumper. | 3198 036 90010 | 4403 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9871 | Wire Jumper. | 3198 036 90010 | 5401 | Coil, 10u, 10% | 3198 018 31090 |
| 9873 | Wire Jumper. | 3198 036 90010 | 5407 | Coil, 33u, 5%. | 3198 018 13390 |
| 9874 | Wire Jumper. | 3198 036 90010 | 5408 | Coil, 33u, 20% | 3198 018 33390 |
| 9875 | Wire Jumper. | 3198 036 90010 | 5421 | Inductor, 100 MHz, 120 ohm | 3198 018 90070 |
| 9876 | Wire Jumper. | 3198 036 90010 | 5425 | Coil, 10u, 10% | 3198 018 31090 |
| 9877 | Wire Jumper. | 3198 036 90010 | 5428 | Coil, 10u, 5%. | 3198 018 11090 |
| 9878 | Wire Jumper. | 3198 036 90010 | 5429 | Coil, 10u, 10%. | 3198 018 31090 |
| 9901 | Wire Jumper. | 3198 036 90010 | 5430 | Coil, 10u, 10%. | 3198 018 31090 |
| 9902 | Wire Jumper. | 3198 036 90010 | 5440 | Coil, 10u, 10%. | 3198 018 31090 |
| 9903 | Wire Jumper. | 3198 036 90010 | 5442 | Coil, 22u, 5%. | 3198 018 12290 |
| 9904 | Wire Jumper. | 3198 036 90010 | 5450 | Coil, 10u, 10%. | 3198 018 31090 |
| 9905 | Wire Jumper. | 3198 036 90010 | 5452 | Coil, 33u, 5%. | 3198 018 13390 |
| 9911 | Wire Jumper. | 3198 036 90010 | 7401 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 9913 | Wire Jumper. | 3198 036 90010 | 7402 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9914 | Wire Jumper. | 3198 036 90010 | 7403 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9915 | Wire Jumper. | 3198 036 90010 | 7421 | IC, TC90A53N | 9322 182 18682 |
| 9991 | Wire Jumper. | 3198 036 90010 | 7440 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9993 | Wire Jumper. | 3198 036 90010 | 7444 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9996 | Wire Jumper. | 3198 036 90010 | 7450 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9997 | Wire Jumper. | 3198 036 90010 | 7454 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9998 | Wire Jumper. | 3198 036 90010 | 9401 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

32PT563R85G (continued)

| | | | | |
|------|--|------|-----|-------|
| 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| S AC01 | AC Cord. | 3139 | 128 | 75281 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitt | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 43611 |
| S AC09 | CRT, A80QCF340X34(N) | 9301 | 904 | 59463 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 45334 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01661 |
| AC17 | Owner's Manual | 3121 | 235 | 21371 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53131 |
| AC20A | Cabinet Front. | 3139 | 177 | 53591 |
| AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| AC20C | Light Guide. | 3139 | 124 | 43141 |
| AC20D | Nameplate. | 3141 | 050 | 00141 |
| AC20E | Power Button | 3121 | 237 | 53341 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| AC29 | Plastic Facade | 3139 | 177 | 60071 |
| REMOTE | Remote Control Transmitter, RC19335004/ | | | |
| 01. | | 3139 | 228 | 86464 |

32PT563S37A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | |
|--------------------|--|------|-----------|
| | 2 Pin Connector. | 2422 | 025 16269 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 |
| 0223 | A/V Jack. | 2422 | 026 05236 |
| 0225 | SVHS Jack. | 2422 | 026 04926 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 |
| S 0254 | 9 Pin CRT Socket. | 2422 | 500 80076 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 |
| 0269 | Jack. | 2422 | 026 05182 |
| S 1000 | Tuner, V+U PLL. | 2422 | 542 90098 |
| 1002 | SAW Filter, 45.75MHz. | 2422 | 549 44518 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 | 549 40807 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 |
| 1600 | Tact Switch. | 2422 | 128 02742 |
| 1601 | Tact Switch. | 2422 | 128 02742 |
| 1602 | Tact Switch. | 2422 | 128 02742 |
| 1603 | Tact Switch. | 2422 | 128 02742 |
| 1606 | Tact Switch. | 2422 | 128 02742 |
| 1660 | Crystal, 12MHz000. | 2422 | 543 01203 |
| 1810 | 6 Pin Connector. | 2422 | 025 16607 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 | 543 00842 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 04740 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 | 370 76104 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 90020 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 | 368 90177 |

S = Safety Part Be sure to use exact replacement part.

| | | | |
|--------|--|------|-----------|
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 |
| 2401 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 | 021 90552 |
| 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2404 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 | 025 54790 |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 | 014 01530 |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2457 | Cap, 430n, 5%, 250v, Metalized Polypropylene. | 2222 | 479 90022 |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 2463 | Cap, 680p, 10%, 2000v, Ceramic. | 2020 | 558 90485 |
| 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 | 479 90042 |
| S 2465 | Cap, 13n, 5%, 1600v, Polypropylene. | 2020 | 301 90254 |
| 2466 | Cap, 10n, 10%, 400v, Polyester. | 2222 | 347 90218 |
| 2468 | Cap, 18n, 10%, 400v, Polyester. | 2222 | 347 90222 |
| 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 | 365 75154 |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 | 365 75104 |
| 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 90586 |
| 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 91049 |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 | 330 00018 |
| 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90647 |
| 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91353 |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 31020 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 21050 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 | 016 31080 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 | 016 31080 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 | 016 34790 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 34710 |

32PT563S37A (continued)

| | | | | | |
|------|---|----------------|--------|--|----------------|
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. | 3198 021 36840 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film . | 3198 011 08210 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film . . . | 3198 011 01040 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 2910 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2911 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | S 3451 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film | 2312 915 15602 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3124 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3126 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 3470 | Res, 390K, 5%, 1/8W, Metalized Glass . | 2322 730 61394 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3471 | Res, 4R7, 1%, 3/5W, Metal Film | 2312 915 14708 |
| 3132 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 3472 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3134 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3481 | Res, 15K, 1%, 3/5W, Metal Film | 2312 915 11503 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3482 | Res, 6K8, 1%, 3/5W, Metal Film | 2312 915 16802 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 33390 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3493 | Res, 2R2, 5%, 1/3W, Metal Film | 2306 204 03228 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3206 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3507 | Surge Protector. | 2422 549 43073 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 3524 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |

S = Safety Part Be sure to use exact replacement part.

32PT563S37A (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 021 53320 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | S 5445 | Transformer, PSL0T | 3128 138 21421 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5451 | Coil, 33u, 10% | 3198 018 73390 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5457 | Coil, 25u. | 2422 535 91028 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 531 02478 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5471 | Coil, 3u3, 20% | 3198 018 73380 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5480 | Coil, 47u, 10% | 2422 535 97337 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | S 5501 | Mains Filter | 2422 549 43432 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 5810 | Coil, 10u, 10% | 3198 018 51090 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5831 | Coil, 6u8, 5% | 3198 018 16880 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 5832 | Coil, 6u8, 5% | 3198 018 16880 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 5833 | Coil, 6u8, 5% | 3198 018 16880 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5835 | Coil, 12u, 10% | 3198 018 31290 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6150 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |

S = Safety Part Be sure to use exact replacement part.

32PT563S37A (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9173 | Wire Jumper. | 3198 036 90010 |
| 6331 | Diode, Signal, BAV21. | 3198 010 10070 | 9175 | Wire Jumper. | 3198 036 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | 9176 | Wire Jumper. | 3198 036 90010 |
| 6333 | Diode, Signal, BAV21. | 3198 010 10070 | 9178 | Wire Jumper. | 3198 036 90010 |
| 6335 | Diode, Signal, BAV21. | 3198 010 10070 | 9179 | Wire Jumper. | 3198 036 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 | 9181 | Wire Jumper. | 3198 036 90010 |
| 6401 | Zener Diode, 47 volt. | 3198 010 24790 | 9182 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt. | 3198 020 51090 | 9183 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9192 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99. | 3198 010 10620 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, DG3-7005L. | 9336 436 10682 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 010 10070 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 010 10070 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 001 80133 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt. | 3198 010 21590 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt. | 3198 010 23390 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 247 60133 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 185 69682 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1298. | 9352 742 85557 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9626 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 310 10215 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7803 | IC, HEF4053BT. | 9333 729 60653 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7804 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L. | 9322 187 89682 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH. | 9322 181 41682 | 9652 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9654 | Wire Jumper. | 3198 036 90010 |
| 9101 | Wire Jumper. | 3198 036 90010 | 9655 | Wire Jumper. | 3198 036 90010 |
| 9102 | Wire Jumper. | 3198 036 90010 | 9656 | Wire Jumper. | 3198 036 90010 |
| 9103 | Wire Jumper. | 3198 036 90010 | 9657 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9658 | Wire Jumper. | 3198 036 90010 |
| 9123 | Wire Jumper. | 3198 036 90010 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

32PT563S37A (continued)

| | | | | | |
|------|--------------------------------|----------------|------|--|----------------|
| 9661 | Wire Jumper. | 3198 036 90010 | 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 9662 | Wire Jumper. | 3198 036 90010 | 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 |
| 9663 | Wire Jumper. | 3198 036 90010 | 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 |
| 9664 | Wire Jumper. | 3198 036 90010 | 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9665 | Wire Jumper. | 3198 036 90010 | 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9666 | Wire Jumper. | 3198 036 90010 | 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9667 | Wire Jumper. | 3198 036 90010 | 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9668 | Wire Jumper. | 3198 036 90010 | 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9669 | Wire Jumper. | 3198 036 90010 | 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 |
| 9670 | Wire Jumper. | 3198 036 90010 | 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9671 | Wire Jumper. | 3198 036 90010 | 2426 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 025 34790 |
| 9672 | Coil, 22u, 10% | 3198 018 22290 | 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9674 | Wire Jumper. | 3198 036 90010 | 2428 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 |
| 9675 | Wire Jumper. | 3198 036 90010 | 2429 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 |
| 9676 | Wire Jumper. | 3198 036 90010 | 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9678 | Coil, 22u, 10% | 3198 018 22290 | 2431 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 |
| 9679 | Wire Jumper. | 3198 036 90010 | 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9680 | Wire Jumper. | 3198 036 90010 | 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9681 | Wire Jumper. | 3198 036 90010 | 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9682 | Wire Jumper. | 3198 036 90010 | 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9685 | Wire Jumper. | 3198 036 90010 | 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9686 | Wire Jumper. | 3198 036 90010 | 2440 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 028 21090 |
| 9687 | Wire Jumper. | 3198 036 90010 | 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9688 | Wire Jumper. | 3198 036 90010 | 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9689 | Wire Jumper. | 3198 036 90010 | 2450 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 028 21090 |
| 9690 | Wire Jumper. | 3198 036 90010 | 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9691 | Wire Jumper. | 3198 036 90010 | 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9694 | Wire Jumper. | 3198 036 90010 | 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9695 | Wire Jumper. | 3198 036 90010 | 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9697 | Wire Jumper. | 3198 036 90010 | 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 021 31820 |
| 9698 | Wire Jumper. | 3198 036 90010 | 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 |
| 9699 | Wire Jumper. | 3198 036 90010 | 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9821 | Wire Jumper. | 3198 036 90010 | 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 021 36820 |
| 9822 | Wire Jumper. | 3198 036 90010 | 3407 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 9825 | Wire Jumper. | 3198 036 90010 | 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9828 | Wire Jumper. | 3198 036 90010 | 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. . | 2122 118 05951 |
| 9829 | Wire Jumper. | 3198 036 90010 | 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9831 | Wire Jumper. | 3198 036 90010 | 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9832 | Wire Jumper. | 3198 036 90010 | 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9837 | Wire Jumper. | 3198 036 90010 | 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 704 68202 |
| 9838 | Wire Jumper. | 3198 036 90010 | 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9839 | Wire Jumper. | 3198 036 90010 | 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9846 | Wire Jumper. | 3198 036 90010 | 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 9847 | Wire Jumper. | 3198 036 90010 | 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9849 | Wire Jumper. | 3198 036 90010 | 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 021 32720 |
| 9851 | Wire Jumper. | 3198 036 90010 | 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9856 | Wire Jumper. | 3198 036 90010 | 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9858 | Wire Jumper. | 3198 036 90010 | 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 9859 | Wire Jumper. | 3198 036 90010 | 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9860 | Wire Jumper. | 3198 036 90010 | 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 021 32720 |
| 9862 | Wire Jumper. | 3198 036 90010 | 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9863 | Wire Jumper. | 3198 036 90010 | 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 9864 | Wire Jumper. | 3198 036 90010 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9865 | Wire Jumper. | 3198 036 90010 | 3457 | Wire Jumper. | 3198 036 90010 |
| 9867 | Wire Jumper. | 3198 036 90010 | 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 9868 | Wire Jumper. | 3198 036 90010 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9869 | Wire Jumper. | 3198 036 90010 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9870 | Wire Jumper. | 3198 036 90010 | 4403 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9871 | Wire Jumper. | 3198 036 90010 | 5401 | Coil, 10u, 10% | 3198 018 31090 |
| 9873 | Wire Jumper. | 3198 036 90010 | 5407 | Coil, 33u, 5% | 3198 018 13390 |
| 9874 | Wire Jumper. | 3198 036 90010 | 5408 | Coil, 33u, 20% | 3198 018 33390 |
| 9875 | Wire Jumper. | 3198 036 90010 | 5421 | Inductor, 100 MHz, 120 ohm | 3198 018 90070 |
| 9876 | Wire Jumper. | 3198 036 90010 | 5425 | Coil, 10u, 10% | 3198 018 31090 |
| 9877 | Wire Jumper. | 3198 036 90010 | 5428 | Coil, 10u, 5% | 3198 018 11090 |
| 9878 | Wire Jumper. | 3198 036 90010 | 5429 | Coil, 10u, 10% | 3198 018 31090 |
| 9901 | Wire Jumper. | 3198 036 90010 | 5430 | Coil, 10u, 10% | 3198 018 31090 |
| 9902 | Wire Jumper. | 3198 036 90010 | 5440 | Coil, 10u, 10% | 3198 018 31090 |
| 9903 | Wire Jumper. | 3198 036 90010 | 5442 | Coil, 22u, 5% | 3198 018 12290 |
| 9904 | Wire Jumper. | 3198 036 90010 | 5450 | Coil, 10u, 10% | 3198 018 31090 |
| 9905 | Wire Jumper. | 3198 036 90010 | 5452 | Coil, 33u, 5% | 3198 018 13390 |
| 9911 | Wire Jumper. | 3198 036 90010 | 7401 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 9913 | Wire Jumper. | 3198 036 90010 | 7402 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9914 | Wire Jumper. | 3198 036 90010 | 7403 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9915 | Wire Jumper. | 3198 036 90010 | 7421 | IC, TC90A53N | 9322 182 18682 |
| 9991 | Wire Jumper. | 3198 036 90010 | 7440 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9993 | Wire Jumper. | 3198 036 90010 | 7444 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9996 | Wire Jumper. | 3198 036 90010 | 7450 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9997 | Wire Jumper. | 3198 036 90010 | 7454 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9998 | Wire Jumper. | 3198 036 90010 | 9401 | Wire Jumper. | 3198 036 90010 |
| CBA | Main Chassis Assembly. | 3139 177 26261 | 9402 | Wire Jumper. | 3198 036 90010 |
| | | | 9403 | Wire Jumper. | 3198 036 90010 |
| | | | CBA | 2D 3 Line Comb Filter Assembly | 3139 177 26561 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

| | | | |
|-----------------------------|--|----------------|--|
| 2D 3 Line Comb Filter Parts | | | |
| 0266 | 6 Pin Connector. | 2422 025 16609 | |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic . . . | 3198 028 24790 | |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic . . . | 3198 028 44780 | |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 | |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 | |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 | |

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

32PT563S37A (continued)

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| | Side Jack Panel Parts | | | |
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

| | | | | |
|--------|--|------|-----|-------|
| | Cabinet & Accessory Parts | | | |
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC02 | AC Cord Strain Relief. | 3122 | 224 | 04623 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 43611 |
| S AC09 | CRT, A80ECK272X56. | 9301 | 795 | 00428 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43977 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01661 |
| AC17 | Owner's Manual | 3121 | 235 | 20701 |
| AC18 | Quick Use Guide. | 3121 | 233 | 43521 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53131 |
| AC20A | Cabinet Front. | 3139 | 177 | 53591 |
| AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| AC20C | Light Guide. | 3139 | 124 | 43141 |
| AC20D | Nameplate. | 3141 | 050 | 00141 |
| AC20E | Power Button | 3121 | 237 | 53341 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| AC29 | Plastic Facade | 3139 | 177 | 60071 |
| REMOTE | Remote Control Transmitter, RC19036001/01. | 3139 | 228 | 86493 |

32PT563S37G - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | |
|--------------------|--|------|-----------|
| | 2 Pin Connector. | 2422 | 025 16269 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 |
| 0223 | A/V Jack. | 2422 | 026 05236 |
| 0225 | SVHS Jack. | 2422 | 026 04926 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 |
| S 0254 | 9 Pin CRT Socket. | 2422 | 500 80076 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 |
| 0269 | Jack. | 2422 | 026 05182 |
| S 1000 | Tuner, V+U PLL. | 2422 | 542 90141 |
| 1002 | SAW Filter, 45.75MHz. | 2422 | 549 44518 |
| 1200 | Filter, Ceramic, 4MHz5. | 2422 | 549 40807 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 |
| 1600 | Tact Switch. | 2422 | 128 02742 |
| 1601 | Tact Switch. | 2422 | 128 02742 |
| 1602 | Tact Switch. | 2422 | 128 02742 |
| 1603 | Tact Switch. | 2422 | 128 02742 |
| 1606 | Tact Switch. | 2422 | 128 02742 |
| 1660 | Crystal, 12MHz000. | 2422 | 543 01203 |
| 1810 | 6 Pin Connector. | 2422 | 025 16607 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A. | 2422 | 543 00842 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 04740 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 | 370 76104 |
| 2245 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2254 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 90020 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 | 368 90177 |

S = Safety Part Be sure to use exact replacement part.

| | | | |
|--------|--|------|-----------|
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 |
| 2401 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 | 021 90552 |
| 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2404 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 | 025 54790 |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2415 | Cap, 330p, 5%, 50v, Ceramic. | 3198 | 016 03310 |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 | 014 01530 |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2457 | Cap, 470n, 5%, 250v, Metalized Polypropylene. | 2022 | 333 00086 |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| S 2463 | Cap, 1n2, 10%, 2000v, Ceramic. | 2020 | 558 90488 |
| 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 | 479 90042 |
| S 2465 | Cap, 13n, 5%, 1600v, Polypropylene. | 2020 | 301 90254 |
| 2466 | Cap, 15n, 10%, 400v, Polyester. | 2222 | 347 90219 |
| 2468 | Cap, 10n, 10%, 400v, Polyester. | 2222 | 347 90218 |
| 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyester. | 2222 | 365 75154 |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyester. | 2222 | 365 75104 |
| 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 90586 |
| 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2482 | Cap, 68n, 10%, 250v, Polyester. | 2222 | 347 90234 |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 91049 |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 | 330 00018 |
| 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90647 |
| 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91353 |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 | 016 33390 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 | 016 36890 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 31020 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 | 017 21050 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 |
| 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 | 016 31080 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 | 016 31080 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 | 016 34790 |

32PT563S37G (continued)

| | | | | | |
|------|---|----------------|--------|---|----------------|
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | S 3341 | Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X | |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 34 | 34. | 2306 204 03108 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | S 3341 | Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33 | |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 0X34 | 0X34. | 2306 204 03278 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | S 3342 | Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X | |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 | 34 | 34. | 2306 204 03108 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | S 3342 | Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 | |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 0X34 | 0X34. | 2306 204 03278 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2910 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2911 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film . . . | 3198 011 01040 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3451 | Res, 2R7, 5%, 1/3W, Metal Film | 2306 204 03278 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film | 2312 915 15602 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3470 | Res, 390K, 5%, 1/8W, Metalized Glass . | 2322 730 61394 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3472 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 | 3473 | Res, 5R6, 1%, 3/5W, Metal Film | 2312 915 15608 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . | 2322 734 61202 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3481 | Res, 15K, 1%, 3/5W, Metal Film | 2312 915 11503 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3482 | Res, 6K8, 1%, 3/5W, Metal Film | 2312 915 16802 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 33390 |
| 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3206 | Res, 270K, 5%, 1/16W, Metalized Glass. | 2322 702 60274 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | S 3493 | Res, 2R2, 5%, 1/3W, Metal Film | 2306 204 03228 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3504 | Res, PTC, 3R0, Degaussing. | 2120 661 00025 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3507 | Surge Protector. | 2422 549 43073 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |

S = Safety Part Be sure to use exact replacement part.

32PT563S37G (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|--|------|-----|-------|
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51220 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 04780 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 38220 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53340 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 | 204 | 03101 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55630 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass . . | 3198 | 021 | 51020 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3526 | Res, OR1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 3527 | Res, OR33, 5%, 3/5W, Metal Film. . . . | 3198 | 012 | 13370 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 18203 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 | 734 | 64702 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 | 730 | 61274 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51530 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51230 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 | 012 | 13310 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52220 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 55620 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54730 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 02220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 04710 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 01020 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 06820 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 | 011 | 08220 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 53320 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 | 018 | 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34720 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 | 018 | 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 | 018 | 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 5342 | Coil, 22u for A80QCF340X34 | 2422 | 535 | 97333 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5342 | Coil, 47u for A80QCF330X34 | 3198 | 018 | 24790 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, PSLOT | 3128 | 138 | 21421 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . | 3198 | 018 | 90020 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5457 | Coil, Linear, DC12 | 3128 | 138 | 55881 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5480 | Coil, 4u7, 5% | 2422 | 535 | 94213 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5521 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 | 018 | 90010 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5560 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 | 018 | 90010 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 01010 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32220 | 5562 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 | 018 | 90010 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 | 5564 | Fixed, Inductor, 100MHz, 50R. . . . | 3198 | 018 | 90010 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5602 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5603 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 | 5604 | Coil, 5u6, 5% | 3198 | 018 | 15680 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 | 5810 | Coil, 10u, 10% | 3198 | 018 | 51090 |

S = Safety Part Be sure to use exact replacement part.

32PT563S37G (continued)

| | | | | | |
|--------|--|----------------|------|--------------------------|----------------|
| 5831 | Coil, 6u8, 5% | 3198 018 16880 | 7901 | IC, AN7522N PH | 9322 181 41682 |
| 5832 | Coil, 6u8, 5% | 3198 018 16880 | 9001 | Wire Jumper. | 3198 036 90010 |
| 5833 | Coil, 6u8, 5% | 3198 018 16880 | 9101 | Wire Jumper. | 3198 036 90010 |
| 5835 | Coil, 12u, 10% | 3198 018 31290 | 9102 | Wire Jumper. | 3198 036 90010 |
| 6001 | Zener Diode, 33 volt | 3198 010 23390 | 9103 | Wire Jumper. | 3198 036 90010 |
| 6150 | Diode, Signal, BAS316. | 3198 010 10630 | 9104 | Wire Jumper. | 3198 036 90010 |
| 6201 | Diode, Signal, BAS316. | 3198 010 10630 | 9123 | Wire Jumper. | 3198 036 90010 |
| 6202 | Diode, Signal, BAS316. | 3198 010 10630 | 9171 | Wire Jumper. | 3198 036 90010 |
| 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9173 | Wire Jumper. | 3198 036 90010 |
| 6331 | Diode, Signal, BAV21. | 3198 010 10070 | 9175 | Wire Jumper. | 3198 036 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | 9176 | Wire Jumper. | 3198 036 90010 |
| 6333 | Diode, Signal, BAV21. | 3198 010 10070 | 9178 | Wire Jumper. | 3198 036 90010 |
| 6335 | Diode, Signal, BAV21. | 3198 010 10070 | 9179 | Wire Jumper. | 3198 036 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 | 9181 | Wire Jumper. | 3198 036 90010 |
| 6401 | Zener Diode, 47 volt | 3198 010 24790 | 9182 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9183 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9192 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99. | 3198 010 10620 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, DG3-7005L. | 9336 436 10682 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 010 10070 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 010 10070 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 001 80133 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 247 60133 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 185 69682 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9520 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9521 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9522 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9524 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1298. | 9352 742 85557 | 9528 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9530 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9611 | Coil, 27u, 10% | 3198 018 22790 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9620 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9626 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET. | 9340 310 10215 | 9633 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT. | 9340 547 00215 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7803 | IC, HEF4053BT. | 9333 729 60653 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7804 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L. | 9322 187 89682 | 9651 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

32PT563S37G (continued)

| | | | | | | | | | |
|------|--------------------------------|------|-----|-------|------|--|------|-----|-------|
| 9652 | Wire Jumper. | 3198 | 036 | 90010 | 0266 | 6 Pin Connector. | 2422 | 025 | 16609 |
| 9654 | Wire Jumper. | 3198 | 036 | 90010 | 2401 | Cap, 47u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 24790 |
| 9655 | Wire Jumper. | 3198 | 036 | 90010 | 2402 | Cap, 4u7, 20%, 35v, Electrolytic . . . | 3198 | 028 | 44780 |
| 9656 | Wire Jumper. | 3198 | 036 | 90010 | 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 9657 | Wire Jumper. | 3198 | 036 | 90010 | 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 9658 | Wire Jumper. | 3198 | 036 | 90010 | 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 9659 | Wire Jumper. | 3198 | 036 | 90010 | 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 9660 | Wire Jumper. | 3198 | 036 | 90010 | 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 | 017 | 44740 |
| 9661 | Wire Jumper. | 3198 | 036 | 90010 | 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 | 34720 |
| 9662 | Wire Jumper. | 3198 | 036 | 90010 | 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9663 | Wire Jumper. | 3198 | 036 | 90010 | 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9664 | Wire Jumper. | 3198 | 036 | 90010 | 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9665 | Wire Jumper. | 3198 | 036 | 90010 | 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9666 | Wire Jumper. | 3198 | 036 | 90010 | 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9667 | Wire Jumper. | 3198 | 036 | 90010 | 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 | 31810 |
| 9668 | Wire Jumper. | 3198 | 036 | 90010 | 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9669 | Wire Jumper. | 3198 | 036 | 90010 | 2426 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 | 025 | 34790 |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 | 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 | 2428 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 | 2429 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 | 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 | 2431 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 31010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 | 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 | 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 | 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 | 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 | 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 9682 | Wire Jumper. | 3198 | 036 | 90010 | 2440 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 21090 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 | 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 | 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 | 2450 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 21090 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 | 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 | 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 | 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 | 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 | 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31820 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 | 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 | 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 | 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 36820 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 | 3407 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 | 31020 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 | 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 | 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. . | 2122 | 118 | 05951 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 | 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 | 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 | 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 | 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 | 704 | 68202 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 | 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 | 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 | 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 | 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 | 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 | 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9863 | Wire Jumper. | 3198 | 036 | 90010 | 3457 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | 4403 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 | 5401 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9870 | Wire Jumper. | 3198 | 036 | 90010 | 5407 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 9871 | Wire Jumper. | 3198 | 036 | 90010 | 5408 | Coil, 33u, 20% | 3198 | 018 | 33390 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | 5421 | Inductor, 100 MHz, 120 ohm | 3198 | 018 | 90070 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | 5425 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | 5428 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 | 5429 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | 5430 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9878 | Wire Jumper. | 3198 | 036 | 90010 | 5440 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | 5442 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | 5450 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | 5452 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | 7401 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 | 7402 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | 7403 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | 7421 | IC, TC90A53N | 9322 | 182 | 18682 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | 7440 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | 7444 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 | 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 | 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 58251 | CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

32PT563S37G (continued)

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)
ly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | | |
|--------|-------|--|------|-----|-------|
| S | AC01 | AC Cord. | 3135 | 010 | 03831 |
| | AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| | AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| | AC05 | Cabinet Back | 3139 | 124 | 43611 |
| S | AC09 | CRT, A80QCF340X34(N) | 9301 | 904 | 59463 |
| S | AC12 | Degaussing Coil. | 2422 | 549 | 45334 |
| | AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01661 |
| | AC17 | Owner's Manual | 3121 | 235 | 20701 |
| | AC18 | Quick Use Guide. | 3121 | 233 | 43521 |
| | AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| | AC20 | Cabinet Front Assembly | 3121 | 237 | 53131 |
| | AC20A | Cabinet Front. | 3139 | 177 | 53591 |
| | AC20B | Chassis Guide (2 Used) | 3139 | 124 | 31381 |
| | AC20C | Light Guide. | 3139 | 124 | 43141 |
| | AC20D | Nameplate. | 3141 | 050 | 00141 |
| | AC20E | Power Button | 3121 | 237 | 53341 |
| | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00411 |
| | AC29 | Plastic Facade | 3139 | 177 | 60071 |
| REMOTE | | Remote Control Transmitter, RC19036001/01. | 3139 | 228 | 86493 |

32PT633R37D - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | Main Chassis Parts | | | |
|--------------------|--|------|-----------|--------------------|--|------|-----------|
| 0211 | 2 Pin Connector. | 2422 | 025 16374 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 |
| 0212 | 2 Pin Connector. | 2422 | 025 16375 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | | |
| 0214 | 5 Pin Connector. | 2422 | 025 12481 | | er. | 2222 | 368 90177 |
| 0219 | 6 Pin Connector. | 2422 | 025 12482 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. | 2020 | 558 90445 |
| 0220 | 5 Pin Connector. | 2422 | 025 04853 | 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 | 012 93495 |
| 0221 | 2 Pin Connector. | 2422 | 025 15503 | 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 | 019 43320 |
| 0222 | 2 Pin Connector. | 2422 | 025 10646 | 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 | 558 90559 |
| 0225 | SVHS Jack. | 2422 | 026 04926 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 21040 |
| 0239 | 3 Pin Connector. | 2422 | 025 16382 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic. | 2020 | 558 90445 |
| 0243 | 6 Pin Connector. | 2422 | 025 04854 | 2360 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 0244 | 5 Pin Connector. | 2422 | 025 04853 | 2362 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 32210 |
| 0245 | 6 Pin Connector. | 2422 | 025 04854 | 2364 | Cap, 27p, 5%, 50v, Ceramic. | 3198 | 016 32790 |
| 0246 | 5 Pin Connector. | 2422 | 025 12481 | 2365 | Cap, 27p, 5%, 50v, Ceramic. | 3198 | 016 32790 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80058 | 2366 | Cap, 27p, 5%, 50v, Ceramic. | 3198 | 016 32790 |
| S 0256 | 10 Pin CRT Socket. | 2422 | 500 80063 | 2367 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 0267 | 3 Pin Connector. | 2412 | 020 00725 | 2368 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 0268 | 3 Pin Connector. | 2412 | 020 00725 | 2369 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 |
| 0269 | Jack | 2422 | 026 05182 | 2372 | Cap, 10u, 20%, 160v, Electrolytic. | 2020 | 012 93318 |
| 0278 | 3 Pin Connector. | 2412 | 020 00725 | 2373 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| S 1000 | Tuner, V+U PLL | 2422 | 542 90098 | 2375 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2378 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 019 02210 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2379 | Cap, 10u, 20%, 100v, Electrolytic. | 3198 | 025 71090 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 | 086 10914 | 2380 | Cap, 560p, 5%, 50v, Ceramic. | 3198 | 016 05610 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 | 132 07444 | 2381 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic. | 2020 | 021 90552 |
| 1810 | 6 Pin Connector. | 2422 | 025 16607 | 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | | | 2404 | Cap, 47u, 20%, 50v, Electrolytic. | 3198 | 025 54790 |
| | C49/U A. | 2422 | 543 00842 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 32210 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 | 024 44730 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic. | 3198 | 017 24730 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 24710 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. | 2020 | 021 91139 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 | 2451 | Cap, 22n, 10%, 50v, Polyester. | 3198 | 014 02230 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 | 017 24740 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | | |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | | ylene. | 2022 | 333 00086 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. | 2020 | 021 91331 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 | 019 46810 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 01010 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 | S 2463 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | | |
| 2112 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | | lene | 2222 | 479 90042 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene | 2020 | 301 90255 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2468 | Cap, 33n, 10%, 400v, Polyester. | 2222 | 347 90227 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2471 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 04720 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 | 021 90586 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 | 019 44710 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | 2482 | Cap, 120n, 5%, 250v, Metalized Polyprop | | |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 | 016 32290 | | ylene. | 2222 | 479 90051 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 | 017 33310 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. | 2020 | 021 90856 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic. | 2238 | 786 19852 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 | 021 90854 |
| 2172 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. | 2020 | 021 91049 |
| 2173 | Cap, 220p, 5%, 50v, Ceramic. | 3198 | 016 32210 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. | 2020 | 021 91577 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 | 019 41020 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 | 017 22250 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | | |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | | pylene | 2022 | 330 00018 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. | 2020 | 024 90647 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 | 019 52220 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 41040 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 | 025 54780 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 | 019 64710 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 | 554 90172 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 | 017 01040 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 | 558 90489 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 | 017 04710 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 02220 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 017 01020 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 | 014 04740 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 01030 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 | 017 31520 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 | 558 90472 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 | 017 41050 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. | 2020 | 021 91654 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 | 017 32220 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 | 019 11020 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester. | 2222 | 370 76104 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 | 014 01040 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. | 3198 | 017 42240 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. | 2020 | 021 91374 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. | 3198 | 026 21020 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. | 3198 | 025 34790 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 025 51080 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 | 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. | 3198 | 028 24790 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. | 3198 | 025 52280 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 | 025 52290 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. | 2222 | 910 19856 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 | 016 31020 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. | 3198 | 023 22240 |
| | | | | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 31010 |
| | | | | 2604 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 | 025 51090 |

S = Safety Part Be sure to use exact replacement part.

32PT633R37D (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glass | 3198 021 34710 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. . . . | 3198 023 22240 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. | 3198 017 22250 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic. | 3198 025 54780 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. . | 3198 021 36840 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. | 3198 013 01020 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. | 2306 207 03109 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. | 2306 204 03108 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. | 2306 204 03108 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. | 3198 013 01520 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic. . . . | 3198 026 31020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 3360 | Res, 39K, 5%, 1/16W, Metalized Glass. . | 3198 021 33930 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3361 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. | 3198 017 24740 | 3362 | Res, 39K, 5%, 1/16W, Metalized Glass. . | 3198 021 33930 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3363 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3367 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3368 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3369 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3373 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3374 | Res, 2R2, 5%, 1/6W, Carbon Film. | 3198 011 02280 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3375 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3376 | Res, 68K, 5%, 1/6W, Carbon Film. | 3198 011 06830 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 06890 | 3377 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 04710 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3378 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3380 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3381 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3383 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3384 | Res, 2R2, 5%, 1/6W, Carbon Film. | 3198 011 02280 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3385 | Res, 10K, 5%, 5W, Metal Film. | 2322 257 41103 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3386 | Res, 10 ohm, 5%, 1/3W, Metal Film. | 2306 204 03109 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03310 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. | 3198 011 03330 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film. | 3198 011 01040 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | S 3451 | Res, 3R9, 5%, 1/3W, Metal Film. | 2306 204 03398 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3452 | Res, 5K1, 1%, 3/5W, Metal Film. | 2312 915 15102 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3454 | Res, 1K8, 1%, 3/5W, Metal Film. | 2312 915 11802 |
| 3172 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 011 06820 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. | 3198 012 26880 |
| 3180 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3181 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. | 3198 012 21530 |
| 3190 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3468 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |

S = Safety Part Be sure to use exact replacement part.

32PT633R37D (continued)

| | | | | | |
|--------|--|----------------|------|---|----------------|
| 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3472 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 | 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3473 | Res, 2R2, 1%, 3/5W, Metal Film | 2312 915 12208 | 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 | 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 | 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 | 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 32290 | 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3831 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 |
| 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3491 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 | 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 | 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass. . | 3198 021 36820 |
| 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3903 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 |
| 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3905 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 |
| 3498 | Res, 12K, 5%, 1/16W, Metalized Glass. . | 3198 021 31230 | 3909 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | 3910 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 31155 | 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3507 | Surge Protector. | 2422 549 43073 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. . | 3198 013 02210 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. . | 3198 021 51220 | 4311 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | 4312 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 | 4313 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3523 | Res, 47 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03479 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. . | 3198 021 55630 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3527 | Res, 0R15, 5%, 3/5W, Metal Film. . . . | 3198 012 11570 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. . | 3198 021 51030 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. . | 3198 021 54720 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. . | 3198 021 51520 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3545 | Res, 33K, 5%, 1/10W, Metalized Glass. . | 3198 021 53330 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. . | 3198 021 51530 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass. . | 3198 021 54720 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. . | 3198 021 51230 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 8K2, 5%, 1/10W, Metalized Glass. . | 3198 021 58220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass. . | 3198 021 52220 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass. . | 3198 021 55620 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass. . | 3198 021 54730 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3614 | Res, 4K7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04720 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3615 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. . . . | 3198 018 90020 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass. . | 3198 021 34720 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5242 | Coil, 10u, 5% | 3198 018 11090 |

S = Safety Part Be sure to use exact replacement part.

32PT633R37D (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 5341 | Coil, 22u. | 2422 | 535 | 97333 | 7366 | Transistor, PNP, 2SA965. | 9322 | 167 | 18676 |
| 5342 | Coil, 22u. | 2422 | 535 | 97333 | 7369 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5376 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7373 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 |
| 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 | 7380 | Transistor, NPN, 2SC2235 | 9322 | 167 | 19676 |
| S 5445 | Transformer, LOT | 2422 | 531 | 02573 | 7382 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 |
| 5451 | Coil, 22u, 10% | 3198 | 018 | 72290 | 7400 | Power FET, STP3NC60FP. | 9322 | 157 | 37687 |
| 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 | 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| S 5457 | Coil, 33u. | 2422 | 535 | 91021 | 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 |
| 5461 | Transformer, Signal Driver, SC10015-00 | 2422 | 531 | 02465 | 7460 | Transistor, NPN, BU4522AX. | 9340 | 547 | 93127 |
| 5463 | Coil, Choke. | 3128 | 138 | 37021 | 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 |
| 5471 | Coil, 6u8, 20% | 3198 | 018 | 76880 | 7462 | Transistor, NPN, PDTCT143ZT | 9340 | 547 | 00215 |
| 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 | 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 |
| 5480 | Coil, 22u. | 2422 | 535 | 97333 | 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 |
| S 5501 | Mains Filter | 2422 | 549 | 43432 | 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 |
| S 5520 | Transformer, SS42204-00 B. | 2422 | 531 | 02563 | 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 |
| 5561 | Coil, 27u, 5%. | 2422 | 535 | 95366 | 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 |
| 5602 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7541 | Transistor, NPN, PDTCT114ET | 9340 | 310 | 10215 |
| 5603 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5604 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 |
| 5810 | Coil, 10u, 10% | 3198 | 018 | 51090 | 7561 | Transistor, NPN, PDTCT143ZT | 9340 | 547 | 00215 |
| 5831 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5832 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 7602 | IC, M24C08-WB6. | 9322 | 154 | 38682 |
| 5833 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 7606 | Transistor, NPN, PDTCT143ZT | 9340 | 547 | 00215 |
| 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 | 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 7803 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 6150 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7804 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 | 187 | 89682 |
| 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 7901 | IC, AN7580 | 9322 | 166 | 29682 |
| 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 7903 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 6331 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9101 | Wire Jumper. | 3198 | 036 | 90010 |
| 6333 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9102 | Wire Jumper. | 3198 | 036 | 90010 |
| 6335 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9103 | Wire Jumper. | 3198 | 036 | 90010 |
| 6365 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9104 | Wire Jumper. | 3198 | 036 | 90010 |
| 6366 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9123 | Wire Jumper. | 3198 | 036 | 90010 |
| 6367 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9160 | Wire Jumper. | 3198 | 036 | 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 | 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 | 9173 | Wire Jumper. | 3198 | 036 | 90010 |
| 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9175 | Wire Jumper. | 3198 | 036 | 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9176 | Wire Jumper. | 3198 | 036 | 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9178 | Wire Jumper. | 3198 | 036 | 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9179 | Wire Jumper. | 3198 | 036 | 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 | 559 | 50112 | 9181 | Wire Jumper. | 3198 | 036 | 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9182 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 9.1 volt | 9331 | 177 | 80133 | 9183 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9192 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 | 010 | 10070 | 9193 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9311 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9312 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 | 9313 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9314 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9406 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9407 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9408 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 | 9409 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9410 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6490 | Diode, Rect, BYD33J. | 9337 | 234 | 20133 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 | 132 | 55667 | 9414 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 | 234 | 00133 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9420 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9424 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9426 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 | 175 | 70667 | 9463 | Wire Jumper. | 3198 | 036 | 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 7000 | IC, TDA8941P/N1. | 9352 | 628 | 51112 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I/1298. | 9352 | 742 | 85557 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 7360 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part Be sure to use exact replacement part.

32PT633R37D (continued)

| | | | | |
|------|----------------|------|-----|-------|
| 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 9620 | Wire Jumper. | 3198 | 036 | 90010 |
| 9621 | Wire Jumper. | 3198 | 036 | 90010 |
| 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 9633 | Wire Jumper. | 3198 | 036 | 90010 |
| 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 9639 | Wire Jumper. | 3198 | 036 | 90010 |
| 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 9651 | Wire Jumper. | 3198 | 036 | 90010 |
| 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 9656 | Wire Jumper. | 3198 | 036 | 90010 |
| 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9682 | Wire Jumper. | 3198 | 036 | 90010 |
| 9683 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9848 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9855 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |

| | | | | |
|------|------------------------|------|-----|-------|
| 9857 | Wire Jumper. | 3198 | 036 | 90010 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9863 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 |
| 9870 | Wire Jumper. | 3198 | 036 | 90010 |
| 9871 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9878 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9923 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3139 | 187 | 14441 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

| | | | | |
|-----------------------------|---|------|-----|-------|
| 2D 3 Line Comb Filter Parts | | | | |
| 0266 | 6 Pin Connector. | 2422 | 025 | 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 | 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 028 | 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 | 017 | 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 | 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 | 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 | 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 | 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 | 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 | 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic | 3198 | 016 | 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 | 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 | 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 | 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic | 3198 | 025 | 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic | 3198 | 025 | 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2431 | Cap, 100u, 20%, 25v, Electrolytic | 3198 | 025 | 31010 |
| 2432 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 | 31030 |
| 2433 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 | 31030 |
| 2434 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 | 31030 |
| 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2440 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 |
| 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2450 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 |
| 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3402 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31820 |
| 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36820 |
| 3407 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 |
| 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. | 2122 | 118 | 05951 |
| 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3425 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3427 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass | 2322 | 704 | 68202 |
| 3432 | Res, 12K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31230 |
| 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3442 | Res, 12K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31230 |
| 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32720 |
| 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |

32PT633R37D (continued)

| | | | | |
|------|--|------|-----|-------|
| 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3457 | Wire Jumper. | 3198 | 036 | 90010 |
| 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4403 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 5401 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5407 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 5408 | Coil, 33u, 20% | 3198 | 018 | 33390 |
| 5421 | Inductor, 100 MHz, 120 ohm | 3198 | 018 | 90070 |
| 5425 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5428 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 5429 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5430 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5440 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5442 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 5450 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5452 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 7401 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7402 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7403 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7421 | IC, TC90A53N | 9322 | 182 | 18682 |
| 7440 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7444 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

DAF Panel Parts

| | | | | |
|-----------------|--|------|-----|-------|
| DAF Panel Parts | | | | |
| 0221 | 2 Pin Connector. | 2422 | 025 | 15503 |
| 0258 | 2 Pin Connector. | 2422 | 025 | 15503 |
| 0261 | 1 Pin Connector. | 2422 | 034 | 20021 |
| 0262 | 1 Pin Connector. | 2422 | 034 | 20021 |
| 2492 | Cap, 390p, 10%, 2000v, Ceramic | 2020 | 558 | 90482 |
| 2493 | Cap, 390p, 10%, 2000v, Ceramic | 2020 | 558 | 90482 |
| 3498 | Varactor, 1MA/612V, Max 1100V. | 2322 | 592 | 14217 |
| 3499 | Varactor, 1MA/612V, Max 1100V. | 2322 | 592 | 14217 |
| 5493 | Transformer, Signal, DAF | 3128 | 138 | 34581 |
| CBA | DAF Panel Assembly | 3139 | 187 | 10081 |

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|-----------------------------|--|------|-----|-------|
| Front Interface Panel Parts | | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 187 | 28041 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

S = Safety Part Be sure to use exact replacement part.

| | | | | |
|------|--|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

| | | | | |
|-------------------------|--|------|-----|-------|
| Top Control Panel Parts | | | | |
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

| | | | | |
|---------------------------|--|------|-----|-------|
| Cabinet & Accessory Parts | | | | |
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44171 |
| AC06 | Cabinet Back Screw Cover (2 Used). | 3139 | 124 | 39241 |
| AC07 | Canceller Coil | 3128 | 138 | 60581 |
| AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S AC09 | CRT, A80AJZ90X05 | 9322 | 188 | 82682 |
| AC11 | DAF Panel Bracket. | 3139 | 124 | 25402 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 44676 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01661 |
| AC17 | Owner's Manual | 3121 | 235 | 20711 |
| AC18 | Quick Use Guide. | 3121 | 233 | 43531 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53141 |
| AC20A | Cabinet Front. | 3139 | 138 | 10961 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00141 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76081 |
| AC20J | Top Control Assembly | 3139 | 138 | 11451 |
| AC20J1 | Top Control Bracket. | 3139 | 124 | 39802 |
| AC20J2 | Top Control Buttons. | 3139 | 124 | 39812 |
| REMOTE | Remote Control Transmitter, RC19036002/01. | 3139 | 228 | 88003 |

32PT663R37A - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | Main Chassis Parts | | |
|--------------------|--|----------------|--------------------|--|----------------|
| 0211 | 2 Pin Connector | 2422 025 16374 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 368 90177 |
| 0212 | 2 Pin Connector | 2422 025 16375 | 2331 | er. | 2020 558 90445 |
| 0214 | 5 Pin Connector | 2422 025 12481 | 2340 | Cap, 10u, 20%, 250v, Electrolytic | 2020 012 93495 |
| 0219 | 6 Pin Connector | 2422 025 12482 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0220 | 5 Pin Connector | 2422 025 04853 | 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 016 05610 |
| 0221 | 2 Pin Connector | 2422 025 15503 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic | 2020 558 90559 |
| 0222 | 2 Pin Connector | 2422 025 10646 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 21040 |
| 0223 | A/V Jack | 2422 026 05236 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 |
| 0225 | SVHS Jack | 2422 026 04926 | 2360 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 |
| 0239 | 3 Pin Connector | 2422 025 16382 | 2362 | Cap, 220p, 5%, 50v, Ceramic | 3198 016 32210 |
| 0243 | 6 Pin Connector | 2422 025 04854 | 2364 | Cap, 27p, 5%, 50v, Ceramic | 3198 016 32790 |
| 0244 | 5 Pin Connector | 2422 025 04853 | 2365 | Cap, 27p, 5%, 50v, Ceramic | 3198 016 32790 |
| 0245 | 6 Pin Connector | 2422 025 04854 | 2366 | Cap, 27p, 5%, 50v, Ceramic | 3198 016 32790 |
| 0246 | 5 Pin Connector | 2422 025 12481 | 2367 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80058 | 2368 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 0267 | 3 Pin Connector | 2412 020 00725 | 2369 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 |
| 0268 | 3 Pin Connector | 2412 020 00725 | 2372 | Cap, 10u, 20%, 160v, Electrolytic | 2020 012 93318 |
| 0269 | Jack | 2422 026 05182 | 2373 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 |
| 0278 | 3 Pin Connector | 2412 020 00725 | 2375 | Cap, 560p, 5%, 50v, Ceramic | 3198 016 05610 |
| S 1000 | Tuner, V+U PLL | 2422 542 90098 | 2378 | Cap, 220p, 5%, 50v, Ceramic | 3198 019 02210 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2379 | Cap, 10u, 20%, 100v, Electrolytic | 3198 025 71090 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2380 | Cap, 560p, 5%, 50v, Ceramic | 3198 016 05610 |
| S 1500 | Fuse, 4A, 250V, IEC | 2422 086 10914 | 2381 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2402 | Cap, 470p, 10%, 500v, Ceramic | 3198 019 44710 |
| 1810 | 6 Pin Connector | 2422 025 16607 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | | 2405 | Cap, 220u, 20%, 25v, Electrolytic | 3198 025 32210 |
| | C49/U A. | 2422 543 00842 | 2441 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 024 44730 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2444 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic | 3198 025 24710 | S 2448 | Cap, 100p, 10%, 500v, Ceramic | 3198 019 41010 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2450 | Cap, 47u, 20%, 160v, Electrolytic | 2020 021 91139 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 | 2451 | Cap, 22n, 10%, 50v, Polyester | 3198 014 02230 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic | 3198 017 24740 | 2457 | Cap, 390n, 5%, 250v, Metalized Polyprop | |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | | ylene. | 2022 333 00085 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic | 2020 021 91331 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2459 | Cap, 680p, 10%, 500v, Ceramic | 3198 019 46810 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2460 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 01010 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | S 2463 | Cap, 470p, 10%, 2000v, Ceramic | 2020 558 90483 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | | lene | 2222 479 90042 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | S 2465 | Cap, 13n, 5%, 1600v, Polypropylene | 2222 375 90157 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2468 | Cap, 18n, 10%, 400v, Polyester | 2222 347 90222 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2474 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2475 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2476 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 04720 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2481 | Cap, 470p, 10%, 500v, Ceramic | 3198 019 44710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic | 2020 021 90856 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2486 | Cap, 470u, 20%, 16v, Electrolytic | 2020 021 91577 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic | 2238 786 19852 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 |
| 2172 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 31010 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 |
| 2173 | Cap, 220p, 5%, 50v, Ceramic | 3198 016 32210 | 2489 | Cap, 470u, 20%, 16v, Electrolytic | 2020 021 91577 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2491 | Cap, 1n, 10%, 500v, Ceramic | 3198 019 41020 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | | pylene | 2022 330 00018 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2209 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic | 2020 554 90172 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 017 44740 | 2520 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 558 90489 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2527 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2540 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2541 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic | 3198 017 31520 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 32220 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91374 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2568 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic | 2222 910 19856 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic | 3198 023 22240 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2602 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 31010 |
| | | | 2604 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 |

S = Safety Part Be sure to use exact replacement part.

32PT663R37A (continued)

| | | | | | |
|------|---|----------------|--------|---|----------------|
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3206 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3207 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glass | 3198 021 34710 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. . . . | 3198 023 22240 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 05610 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic. . . . | 3198 025 54780 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. . | 3198 021 36840 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3250 | Res, 4K7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04720 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3258 | Res, 180K, 5%, 1/10W, Metalized Glass. . | 2120 108 91721 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03108 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic. . . . | 3198 026 31020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3360 | Res, 39K, 5%, 1/16W, Metalized Glass. . | 3198 021 33930 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3361 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3362 | Res, 39K, 5%, 1/16W, Metalized Glass. . | 3198 021 33930 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3363 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3367 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3368 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 02210 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3369 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 3002 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 | 3373 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3374 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02280 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3375 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3376 | Res, 68K, 5%, 1/6W, Carbon Film. . . . | 3198 011 06830 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3377 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 04710 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3378 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3380 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3381 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3383 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3384 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02280 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3385 | Res, 10K, 5%, 5W, Metal Film. | 2322 257 41103 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | S 3386 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03310 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3403 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 915 18203 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 | 3442 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 07590 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 3156 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | S 3451 | Res, 3R9, 5%, 1/3W, Metal Film. | 2306 204 03398 |
| 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3452 | Res, 47K, 1%, 3/5W, Metal Film. | 2312 915 14703 |
| 3158 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 | 3454 | Res, 15K, 1%, 3/5W, Metal Film. | 2312 915 11503 |
| 3172 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 011 06820 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3180 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 | 3456 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 3181 | Res, 150K, 5%, 1/16W, Metalized Glass. . | 3198 021 31540 | 3457 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90030 |
| 3190 | Res, 68K, 5%, 1/16W, Metalized Glass. . | 3198 021 36830 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03910 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . . | 3198 011 03390 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |

S = Safety Part Be sure to use exact replacement part.

32PT663R37A (continued)

| | | | | | |
|--------|--|----------------|------|--|----------------|
| 3468 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 |
| 3469 | Res, 100K, 5%, 1/6W, Carbon Film | 3198 011 01040 | 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 3470 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 | 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 021 31020 |
| 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 | 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3473 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 | 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 021 31020 |
| 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 021 31020 |
| 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 | 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01510 | 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01510 | 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass | 3198 021 52720 | 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 | 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 | 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 | 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. | 3198 012 32290 | 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3831 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 021 34730 |
| 3490 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 |
| 3491 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 | 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 |
| 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 021 51020 | 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 |
| 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 | 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 |
| 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 021 32220 |
| 3495 | Res, 22K, 5%, 1/16W, Metalized Glass | 3198 021 32230 | 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 021 36820 |
| 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3903 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 021 34730 |
| 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3905 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 021 34730 |
| 3498 | Res, 12K, 5%, 1/16W, Metalized Glass | 3198 021 31230 | 3909 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 021 32730 |
| S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | 3910 | Res, 27K, 5%, 1/16W, Metalized Glass | 3198 021 32730 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. | 2322 242 13155 | 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. | 3198 011 08210 |
| 3507 | Surge Protector. | 2422 549 43073 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film | 3198 013 02210 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. | 3198 011 02710 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass | 3198 021 51220 | 4311 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 | 4312 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 | 4313 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film | 2306 204 03101 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass | 3198 021 55630 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 021 51020 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 012 13370 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 021 54730 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 021 51030 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 021 54720 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 021 51520 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 734 64702 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 730 61274 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 021 51530 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 021 54720 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 021 51020 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 021 51230 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 021 55620 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3565 | Res, 220 ohm, 5%, 1W, Metal Film | 3198 012 12210 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 021 52220 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 021 55620 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 021 54730 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. | 2306 204 03109 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 011 04710 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3614 | Res, 4K7, 5%, 1/6W, Carbon Film. | 3198 011 04720 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3615 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 011 06820 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 021 34720 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 021 32220 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 021 51020 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 5241 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

32PT663R37A (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 5242 | Coil, 10u, 5% | 3198 018 11090 | 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5341 | Coil, 22u. | 2422 535 97333 | 7330 | IC, TDA6107JF/N3 | 9352 713 37112 |
| 5342 | Coil, 27u, 10% | 3198 018 22790 | 7360 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5376 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 7366 | Transistor, PNP, 2SA965. | 9322 167 18676 |
| 5401 | Coil, 1mH, 10% | 3198 018 71020 | 7369 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| S 5445 | Transformer, LOT | 2422 531 02602 | 7373 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 |
| 5451 | Coil, 22u, 10% | 3198 018 72290 | 7380 | Transistor, NPN, 2SC2235 | 9322 167 19676 |
| 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7382 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 |
| S 5457 | Coil, 25u. | 2422 535 91028 | 7400 | Power FET, STP3NC60FP. | 9322 157 37687 |
| 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 | 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5463 | Coil, Choke. | 3128 138 37021 | 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 |
| 5471 | Coil, 6u8, 20% | 3198 018 76880 | 7450 | Transistor, PNP, PDTA114ET | 3198 010 44010 |
| 5472 | Coil, 3u3, 10% | 3198 018 23380 | 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 |
| 5480 | Coil, 18u. | 2422 535 97332 | 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 |
| S 5501 | Mains Filter | 2422 549 43432 | 7462 | Transistor, NPN, PDTA114ET | 9340 547 00215 |
| S 5520 | Transformer, SS42202-00 B. | 2422 531 02562 | 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 7471 | IC, TDA8359J/N2. | 9352 701 64112 |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 7480 | Transistor, NPN, BD135 | 3198 020 41010 |
| 5561 | Coil, 27u, 5% | 2422 535 95366 | 7482 | Transistor, NPN, BD135 | 3198 020 41010 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 7520 | IC, TEA1507P/N1. | 9352 673 56112 |
| 5602 | Coil, 5u6, 5% | 3198 018 15680 | 7521 | Power FET, FQPF9N50. | 9322 187 16687 |
| 5603 | Coil, 5u6, 5% | 3198 018 15680 | 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5604 | Coil, 5u6, 5% | 3198 018 15680 | 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 |
| 5810 | Coil, 10u, 10% | 3198 018 51090 | 7541 | Transistor, NPN, PDTA114ET | 9340 310 10215 |
| 5831 | Coil, 6u8, 5% | 3198 018 16880 | 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5832 | Coil, 6u8, 5% | 3198 018 16880 | 7560 | IC, L78L33ACZ. | 9322 134 92676 |
| 5833 | Coil, 6u8, 5% | 3198 018 16880 | 7561 | Transistor, NPN, PDTA114ET | 9340 547 00215 |
| 5835 | Coil, 12u, 10% | 3198 018 31290 | 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 6001 | Zener Diode, 33 volt | 3198 010 23390 | 7602 | IC, M24C08-WBN6. | 9322 154 38682 |
| 6150 | Diode, Signal, BAS316. | 3198 010 10630 | 7606 | Transistor, NPN, PDTA114ET | 9340 547 00215 |
| 6201 | Diode, Signal, BAS316. | 3198 010 10630 | 7802 | IC, HEF4053BT. | 9333 729 60653 |
| 6202 | Diode, Signal, BAS316. | 3198 010 10630 | 7803 | IC, HEF4053BT. | 9333 729 60653 |
| 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 | 7804 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 6331 | Diode, Signal, BAV21. | 3198 010 10070 | 7831 | IC MSP3425G-PO-B8-V3 (MTAS) L | 9322 187 89682 |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | 7901 | IC, AN7580 | 9322 166 29682 |
| 6333 | Diode, Signal, BAV21. | 3198 010 10070 | 7903 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 6335 | Diode, Signal, BAV21. | 3198 010 10070 | 9001 | Wire Jumper. | 3198 036 90010 |
| 6365 | Diode, Signal, BAT85 | 9336 247 60133 | 9101 | Wire Jumper. | 3198 036 90010 |
| 6366 | Diode, Signal, BAT85 | 9336 247 60133 | 9102 | Wire Jumper. | 3198 036 90010 |
| 6367 | Diode, Signal, BAV99 | 3198 010 10620 | 9103 | Wire Jumper. | 3198 036 90010 |
| 6400 | Res, 1K, 1%, 3/SW, Metal Film. | 2312 915 11002 | 9104 | Wire Jumper. | 3198 036 90010 |
| 6401 | Zener Diode, 47 volt | 3198 010 24790 | 9123 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9160 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9171 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9173 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9175 | Wire Jumper. | 3198 036 90010 |
| 6453 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9176 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, BY228/24. | 9340 559 50112 | 9178 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP307-L7004. | 9338 617 60682 | 9179 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9181 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 010 10070 | 9182 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 010 10070 | 9183 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9192 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYD33J. | 9337 234 20133 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 18 volt | 3198 010 21890 | 9313 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9314 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYD33J. | 9337 234 20133 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYD33D. | 9337 234 20133 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6490 | Diode, Rect, BYD33J. | 9337 234 20133 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 132 55667 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYD33D. | 9337 234 20133 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9420 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 849 10215 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6582 | Diode, Rect, STPS10L60D. | 9322 175 70667 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9501 | Wire Jumper. | 3198 036 90010 |
| 7000 | IC, TDA8941P/N1. | 9352 628 51112 | 9503 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9506 | Wire Jumper. | 3198 036 90010 |
| 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9507 | Wire Jumper. | 3198 036 90010 |
| 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9511 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1298. | 9352 742 85557 | 9512 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9513 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9514 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

32PT663R37A (continued)

| | | | | |
|------|--------------------------|------|-----|-------|
| 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 9620 | Wire Jumper. | 3198 | 036 | 90010 |
| 9621 | Wire Jumper. | 3198 | 036 | 90010 |
| 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 9633 | Wire Jumper. | 3198 | 036 | 90010 |
| 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 9639 | Wire Jumper. | 3198 | 036 | 90010 |
| 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 9651 | Wire Jumper. | 3198 | 036 | 90010 |
| 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 9656 | Wire Jumper. | 3198 | 036 | 90010 |
| 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9661 | Wire Jumper. | 3198 | 036 | 90010 |
| 9662 | Wire Jumper. | 3198 | 036 | 90010 |
| 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9682 | Wire Jumper. | 3198 | 036 | 90010 |
| 9683 | Wire Jumper. | 3198 | 036 | 90010 |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9848 | Wire Jumper. | 3198 | 036 | 90010 |

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9855 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9857 | Wire Jumper. | 3198 | 036 | 90010 |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9863 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 |
| 9870 | Wire Jumper. | 3198 | 036 | 90010 |
| 9871 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9878 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9923 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3139 | 188 | 02181 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

| | | | | |
|-----------------------------|--|------|-----|-------|
| 2D 3 Line Comb Filter Parts | | | | |
| 0266 | 6 Pin Connector. | 2422 | 025 | 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 | 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 028 | 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 | 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 | 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 | 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 | 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2431 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 |
| 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2440 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 |
| 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2450 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 |
| 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3402 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31820 |
| 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36820 |
| 3407 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 |
| 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. | 2122 | 118 | 05951 |
| 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3425 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3427 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass | 2322 | 704 | 68202 |
| 3432 | Res, 12K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31230 |
| 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |

32PT663R37A (continued)

| | | | | |
|------|--|------|-----|-------|
| 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3457 | Wire Jumper. | 3198 | 036 | 90010 |
| 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4403 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 5401 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5407 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 5408 | Coil, 33u, 20% | 3198 | 018 | 33390 |
| 5421 | Inductor, 100 MHz, 120 ohm | 3198 | 018 | 90070 |
| 5425 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5428 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 5429 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5430 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5440 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5442 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 5450 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5452 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 7401 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7402 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7403 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7421 | IC, TC90A53N | 9322 | 182 | 18682 |
| 7440 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7444 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

DAF Panel Parts

| | | | | |
|-----------------|--|------|-----|-------|
| DAF Panel Parts | | | | |
| 0221 | 2 Pin Connector. | 2422 | 025 | 15503 |
| 0258 | 2 Pin Connector. | 2422 | 025 | 15503 |
| 0261 | 1 Pin Connector. | 2422 | 034 | 20021 |
| 0262 | 1 Pin Connector. | 2422 | 034 | 20021 |
| 2492 | Cap, 390p, 10%, 2000v, Ceramic | 2020 | 558 | 90482 |
| 2493 | Cap, 390p, 10%, 2000v, Ceramic | 2020 | 558 | 90482 |
| 3498 | Varactor, 1MA/612V, Max 1100V. | 2322 | 592 | 14217 |
| 3499 | Varactor, 1MA/612V, Max 1100V. | 2322 | 592 | 14217 |
| 5493 | Transformer, Signal, DAF | 3128 | 138 | 34581 |
| CBA | DAF Panel Assembly | 3139 | 187 | 10081 |

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|-----------------------------|--|------|-----|-------|
| Front Interface Panel Parts | | | | |
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 187 | 28041 |

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)
ly)

S = Safety Part Be sure to use exact replacement part.

Side Jack Panel Parts

| | | | | |
|-----------------------|--|------|-----|-------|
| Side Jack Panel Parts | | | | |
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

| | | | | |
|-------------------------|--|------|-----|-------|
| Top Control Panel Parts | | | | |
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

| | | | | |
|---------------------------|--|------|-----|-------|
| Cabinet & Accessory Parts | | | | |
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitt | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44171 |
| AC06 | Cabinet Back Screw Cover (2 Used). | 3139 | 124 | 39241 |
| AC07 | Canceller Coil | 3128 | 138 | 60581 |
| AC08 | Chassis Tray | 3139 | 124 | 31324 |
| S AC09 | CRT, A80ERF042X14. | 9301 | 927 | 10539 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 44676 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01661 |
| AC17 | Owner's Manual | 3121 | 235 | 20711 |
| AC18 | Quick Use Guide. | 3121 | 233 | 43531 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53321 |
| AC20A | Cabinet Front. | 3139 | 177 | 65811 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00141 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20J | Top Control Assembly | 3139 | 138 | 11451 |
| AC20J1 | Top Control Bracket. | 3139 | 124 | 39802 |
| AC20J2 | Top Control Buttons. | 3139 | 124 | 39812 |
| REMOTE | Remote Control Transmitter, RC19036002/01. | 3139 | 228 | 88003 |

32PW633R85C - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|---|------|-----|-------|--------|--|----------------|
| | Socket Fuse | 2422 | 088 | 00271 | 2242 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 |
| 0127 | NTC Holder | 3139 | 120 | 10151 | 2243 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 0136 | IC-Spring | 3104 | 301 | 22081 | 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 |
| 0137 | Spring | 3139 | 121 | 24583 | 2245 | Cap, 470n, +80/-20%, 10v, Ceramic . . . | 3198 017 44740 |
| 0138 | IC-Spring | 3104 | 301 | 22081 | 2247 | Cap, 2u2, 20%, 10v, Electrolytic | 2020 012 93728 |
| 0139 | Spring for Bracket | 3122 | 121 | 24786 | 2248 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 |
| 0140 | Spring | 3139 | 121 | 24583 | 2249 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 |
| 0141 | IC-Spring | 3104 | 301 | 22081 | 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 |
| 0152 | Cable, DIPMate, 6 Pin, 560mm | 3139 | 121 | 08951 | 2252 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 |
| 0153 | Cable, 5 Pin, 560mm | 3139 | 121 | 09041 | 2253 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 |
| 0211 | 2 Pin Connector | 2422 | 025 | 16374 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 0212 | 2 Pin Connector | 2422 | 025 | 16375 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 368 90177 |
| 0214 | 5 Pin Connector | 2422 | 025 | 12481 | 2331 | er | 2020 558 90445 |
| 0219 | 6 Pin Connector | 2422 | 025 | 12482 | 2340 | Cap, 10u, 20%, 250v, Electrolytic | 2020 012 93495 |
| 0220 | 5 Pin Connector | 2422 | 025 | 04853 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 |
| 0221 | 2 Pin Connector | 2422 | 025 | 15503 | 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 016 05610 |
| 0222 | 2 Pin Connector | 2422 | 025 | 10646 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 023 21040 |
| 0223 | A/V Jack | 2422 | 026 | 05236 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . . | 2020 558 90445 |
| 0225 | SVHS Jack | 2422 | 026 | 04926 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . . | 2020 558 90445 |
| 0239 | 3 Pin Connector | 2422 | 025 | 16382 | S 2346 | Cap, 470p, 10%, 2000v, Ceramic | 2020 558 90483 |
| 0243 | 6 Pin Connector | 2422 | 025 | 04854 | 2360 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 |
| 0244 | 5 Pin Connector | 2422 | 025 | 04853 | 2362 | Cap, 220p, 5%, 50v, Ceramic | 3198 016 32210 |
| 0245 | 6 Pin Connector | 2422 | 025 | 04854 | 2364 | Cap, 27p, 5%, 50v, Ceramic | 3198 016 32790 |
| 0246 | 5 Pin Connector | 2422 | 025 | 12481 | 2365 | Cap, 27p, 5%, 50v, Ceramic | 3198 016 32790 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 | 80076 | 2366 | Cap, 27p, 5%, 50v, Ceramic | 3198 016 32790 |
| 0267 | 3 Pin Connector | 2412 | 020 | 00725 | 2367 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 |
| 0268 | 3 Pin Connector | 2412 | 020 | 00725 | 2368 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 0269 | Jack | 2422 | 026 | 05182 | 2369 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 |
| 0278 | 3 Pin Connector | 2412 | 020 | 00725 | 2372 | Cap, 10u, 20%, 160v, Electrolytic | 2020 012 93318 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 | 90108 | 2373 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 | 44518 | 2375 | Cap, 560p, 5%, 50v, Ceramic | 3198 016 05610 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 | 40807 | 2378 | Cap, 220p, 5%, 50v, Ceramic | 3198 019 02210 |
| S 1400 | Relay, 5 Amp, 12V | 2422 | 132 | 07543 | 2379 | Cap, 10u, 20%, 100v, Electrolytic | 3198 025 71090 |
| S 1500 | Fuse, 4A, 250V, IEC | 2422 | 086 | 10914 | 2380 | Cap, 560p, 5%, 50v, Ceramic | 3198 016 05610 |
| S 1515 | Relay, 5 Amp, 12V | 2422 | 132 | 07444 | 2381 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 | 01203 | 2401 | Cap, 2u2, 20%, 100v, Electrolytic | 2020 021 91331 |
| 1810 | 6 Pin Connector | 2422 | 025 | 16607 | 2402 | Cap, 470p, 10%, 500v, Ceramic | 3198 019 44710 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | | | | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 |
| | C49/U A | 2422 | 543 | 00842 | 2405 | Cap, 220u, 20%, 25v, Electrolytic | 3198 025 32210 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 | 024 | 44730 | 2415 | Cap, 330p, 5%, 50v, Ceramic | 3198 016 03310 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2420 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic | 3198 | 025 | 24710 | 2421 | Cap, 470p, 5%, 50v, Ceramic | 3198 016 34710 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 | 41040 | 2441 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic | 3198 | 025 | 31010 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 | 32230 | 2444 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic | 3198 | 017 | 24740 | 2450 | Cap, 47u, 20%, 160v, Electrolytic | 2020 021 91139 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2451 | Cap, 22n, 10%, 50v, Polyester | 3198 014 02230 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2454 | Cap, 68n, 5%, 250v, Metalized Polypropy | 2222 479 90133 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | | lene | 3198 025 34790 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 2022 333 00086 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | 2022 333 00086 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | | ylene | 3198 019 46810 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2459 | Cap, 680p, 10%, 500v, Ceramic | 3198 016 01010 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2460 | Cap, 100p, 5%, 50v, Ceramic | 2020 558 90482 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | S 2463 | Cap, 390p, 10%, 2000v, Ceramic | 2020 301 90254 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | S 2465 | Cap, 13n, 5%, 1600v, Polypropylene . . . | 2222 375 90424 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2467 | Cap, 9n1, 5%, 1000v, Polypropylene . . . | 2222 375 90424 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2468 | Cap, 9n1, 5%, 1000v, Polypropylene . . . | 2222 375 90424 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2469 | Cap, 430n, 5%, 250v, Metalized Polyprop | 2022 333 00164 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | | ylene | 3198 014 01040 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2471 | Cap, 100n, 10%, 50v, Polyester | 2222 365 75154 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75104 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 3198 017 02220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2474 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 32290 | 2475 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 04720 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 | 2476 | Cap, 4n7, 10%, 50v, Ceramic | 2020 021 90586 |
| 2143 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 | 41040 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 3198 019 44710 |
| 2150 | Cap, 150n, +80/-20%, 16v, Ceramic | 2238 | 786 | 19852 | 2481 | Cap, 470p, 10%, 500v, Ceramic | 2222 347 90213 |
| 2172 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 | 31010 | 2482 | Cap, 33n, 10%, 250v, Polyester | 2020 021 90856 |
| 2173 | Cap, 220p, 5%, 50v, Ceramic | 3198 | 016 | 32210 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic | 2020 021 91577 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2486 | Cap, 470u, 20%, 16v, Electrolytic | 2020 021 90854 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 | 22250 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 91049 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 | 41040 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91577 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 | 41040 | 2489 | Cap, 470u, 20%, 16v, Electrolytic | 2020 021 91331 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 | 41040 | 2490 | Cap, 2u2, 20%, 100v, Electrolytic | 3198 019 41020 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 | 41040 | 2491 | Cap, 1n, 10%, 500v, Ceramic | 2022 330 00018 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 | 42240 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | 3198 019 52220 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 | 41040 | | ylene | 3198 019 52220 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic | 2020 024 90647 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 | 41050 | 2502 | Cap, 470u, 20%, 200v, Electrolytic | 3198 019 52220 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 | 017 | 44740 | 2503 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 017 04710 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 | 32230 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 019 64710 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 | 32230 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 2020 554 90172 |
| 2215 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 | 32230 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic | 3198 017 01030 |
| 2216 | Cap, 2u2, 20%, 10v, Electrolytic | 2020 | 012 | 93728 | 2520 | Cap, 10n, 10%, 50v, Ceramic | 3198 025 52290 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 | 32230 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 017 01040 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 | 42240 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 2020 558 90489 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 | 04740 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic | 3198 017 04710 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 | 32230 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 02220 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic | 3198 | 017 | 31520 | 2527 | Cap, 2n2, 10%, 50v, Ceramic | |

S = Safety Part Be sure to use exact replacement part.

32PW633R85C (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 | 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | 3149 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 | 3150 | Res, 150K, 5%, 1/16W, Metalized Glass. | 3198 021 31540 |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 | 3154 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic . . . | 2020 021 91654 | 3156 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 | 3157 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 |
| 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 | 3158 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91374 | 3159 | Res, 1K2, 1%, 1/8W, Metalized Glass. . . | 2322 734 61202 |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 | 3172 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3180 | Res, 68K, 5%, 1/16W, Metalized Glass . | 3198 021 36830 |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 | 3181 | Res, 120K, 5%, Metalized Glass | 2322 702 60124 |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 | 3190 | Res, 68K, 5%, 1/16W, Metalized Glass . | 3198 021 36830 |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. . . . | 2222 910 19856 | 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . . | 3198 023 22240 | 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2604 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | 3205 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 3206 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 | 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 | 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 2807 | Cap, 220n, +80/-20%, 25v, Ceramic. . . . | 3198 023 22240 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3250 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3341 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3342 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2902 | Cap, 1000u, 20%, 25v, Electrolytic . . . | 3198 026 31020 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3360 | Res, 39K, 5%, 1/16W, Metalized Glass . | 3198 021 33930 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3361 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3362 | Res, 39K, 5%, 1/16W, Metalized Glass . | 3198 021 33930 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3363 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3367 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 3368 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02210 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3369 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3373 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3374 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02280 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3375 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3376 | Res, 68K, 5%, 1/6W, Carbon Film. . . . | 3198 011 06830 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3377 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3378 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3380 | Res, 68K, 5%, 1/16W, Metalized Glass . | 3198 021 36830 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3381 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3383 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3384 | Res, 2R2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02280 |
| 3111 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3385 | Res, 10K, 5%, 5W, Metal Film | 2322 257 41103 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3386 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . | 2306 204 03109 |
| 3113 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3401 | Res, 82K, 5%, 1/6W, Carbon Film. . . . | 3198 011 08230 |
| 3115 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film . . . | 3198 011 01040 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3407 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3408 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |

S = Safety Part Be sure to use exact replacement part.

32PW633R85C (continued)

| | | | | | |
|--------|---|----------------|------|--|----------------|
| 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | 3614 | Res, 4K7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04720 |
| 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 | 3615 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3617 | Res, 4K7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04720 |
| 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 |
| 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | 3619 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3451 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 | 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| S 3452 | Res, 5K6, 1%, 3/5W, Metal Film. | 2312 915 15602 | 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 | 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 | 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3457 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 | 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | 3634 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 | 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3468 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 | 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 | 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3470 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3471 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 915 13908 | 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 | 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 |
| 3473 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 915 13908 | 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 | 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 | 3811 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 | 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 | 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3481 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 | 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3482 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 | 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| S 3486 | Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 32290 | 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 | 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3489 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 | 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 |
| 3491 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 021 53320 | 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 |
| 3492 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| S 3493 | Res, 2R2, 5%, 1/3W, Metal Film. | 2306 204 03228 | 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 | 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3901 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 021 36820 |
| 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 | 3903 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 |
| S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | 3905 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 | 3909 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 3507 | Surge Protector. | 2422 549 43073 | 3910 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 | 3912 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 | 4311 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3523 | Res, 47 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03479 | 4312 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 | 4313 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 012 11070 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3527 | Res, 0R15, 5%, 3/5W, Metal Film. | 3198 012 11570 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film. | 2306 204 03222 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 915 18203 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . . | 2322 734 64702 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 33K, 5%, 1/10W, Metalized Glass . | 3198 021 53330 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3552 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 8K2, 5%, 1/10W, Metalized Glass . | 3198 021 58220 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3565 | Res, 330 ohm, 5%, 1W, Metal Film. | 3198 012 13310 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4837 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4838 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3591 | Res, 10 ohm, 5%, 1/3W, Metal Film. . . . | 2306 204 03109 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 04710 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |

S = Safety Part Be sure to use exact replacement part.

32PW633R85C (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6526 | Zener Diode, 22 volt | 3198 020 52290 |
| 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6541 | Zener Diode, 10 volt | 3198 020 51090 |
| 4884 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 |
| 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6563 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6565 | Diode, Signal, BAV70 | 9331 849 10215 |
| 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6566 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6569 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6580 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6582 | Diode, Rect, STPS10L60D. | 9322 175 70667 |
| 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6831 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 5001 | Coil, 27u, 10% | 3198 018 22790 | 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 5002 | Coil, 820n, 10% | 3198 018 18270 | 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 5201 | Coil, 6u8, 5% | 3198 018 16880 | 7000 | IC, TDA8941P/N1. | 9352 628 51112 |
| 5202 | Wire Jumper. | 3198 036 90010 | 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7102 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7103 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7200 | IC, TDA9588H/N1/3I/1298. | 9352 742 85557 |
| 5241 | Wire Jumper. | 3198 036 90010 | 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5242 | Coil, 10u, 5% | 3198 018 11090 | 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5341 | Coil, 22u. | 2422 535 97333 | 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5342 | Coil, 27u, 10% | 3198 018 22790 | 7330 | IC, TDA6107JF/N3 | 9352 713 37112 |
| 5376 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 7360 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5400 | Coil, 11u7 | 2422 535 91027 | 7366 | Transistor, PNP, 2SA965. | 9322 167 18676 |
| S 5445 | Transformer, LOT | 2422 531 02612 | 7369 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5451 | Coil, 22u, 10% | 3198 018 72290 | 7373 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 |
| 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 | 7380 | Transistor, NPN, 2SC2235 | 9322 167 19676 |
| 5453 | Coil, 22u, 5% | 3198 018 12290 | 7382 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 |
| S 5457 | Coil, 42u. | 2422 535 94865 | 7400 | Power FET, STP3NC60FP. | 9322 157 37687 |
| S 5461 | Transformer, SD10207-00 B. | 2422 531 02568 | 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5464 | Coil, Bridge, C946-01 Y. | 2422 531 02419 | 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 |
| 5471 | Coil, 6u8, 20% | 3198 018 76880 | 7444 | Transistor, NPN, BC547B(COL) | 3198 020 40030 |
| 5472 | Coil, 3u3, 10% | 3198 018 23380 | 7450 | Transistor, PNP, PDTA114ET | 3198 010 44010 |
| 5480 | Coil, 10u, 10% | 2422 535 97328 | 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 |
| S 5501 | Mains Filter | 2422 549 43432 | 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 |
| S 5520 | Transformer, SS42204-00 B. | 2422 531 02563 | 7462 | Transistor, NPN, PDTCL143ZT | 9340 547 00215 |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 7471 | IC, TDA8359J/N2. | 9352 701 64112 |
| 5561 | Coil, 27u, 5% | 2422 535 95366 | 7480 | Transistor, NPN, BD135 | 3198 020 41010 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 7482 | Transistor, NPN, BD135 | 3198 020 41010 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 |
| 5602 | Coil, 5u6, 5% | 3198 018 15680 | 7520 | IC, TEA1507P/N1. | 9352 673 56112 |
| 5603 | Coil, 5u6, 5% | 3198 018 15680 | 7521 | Power FET, FQPF9N50. | 9322 187 16687 |
| 5604 | Coil, 5u6, 5% | 3198 018 15680 | 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5810 | Coil, 10u, 10% | 3198 018 51090 | 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 |
| 5831 | Coil, 6u8, 5% | 3198 018 16880 | 7541 | Transistor, NPN, PDTCL14ET | 9340 310 10215 |
| 5832 | Coil, 6u8, 5% | 3198 018 16880 | 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 5833 | Coil, 6u8, 5% | 3198 018 16880 | 7560 | IC, L78L33ACZ. | 9322 134 92676 |
| 5835 | Coil, 12u, 10% | 3198 018 31290 | 7561 | Transistor, NPN, PDTCL143ZT | 9340 547 00215 |
| 6001 | Zener Diode, 33 volt | 3198 010 23390 | 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 6150 | Diode, Signal, BAS316. | 3198 010 10630 | 7602 | IC, M24C08-WBN6. | 9322 154 38682 |
| 6201 | Diode, Signal, BAS316. | 3198 010 10630 | 7606 | Transistor, NPN, PDTCL143ZT | 9340 547 00215 |
| 6202 | Diode, Signal, BAS316. | 3198 010 10630 | 7802 | IC, HEF4053BT. | 9333 729 60653 |
| 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 | 7803 | IC, HEF4053BT. | 9333 729 60653 |
| 6331 | Diode, Signal, BAV21 | 3198 010 10070 | 7804 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | 7831 | IC MSP3425G-PO-B8-V3 (MTAS) L | 9322 187 89682 |
| 6333 | Diode, Signal, BAV21 | 3198 010 10070 | 7901 | IC, AN7580 | 9322 166 29682 |
| 6335 | Diode, Signal, BAV21 | 3198 010 10070 | 7903 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 6365 | Diode, Signal, BAT85 | 9336 247 60133 | 9001 | Wire Jumper. | 3198 036 90010 |
| 6366 | Diode, Signal, BAT85 | 9336 247 60133 | 9101 | Wire Jumper. | 3198 036 90010 |
| 6367 | Diode, Signal, BAV99 | 3198 010 10620 | 9102 | Wire Jumper. | 3198 036 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 | 9103 | Wire Jumper. | 3198 036 90010 |
| 6401 | Zener Diode, 68 volt | 3198 010 26890 | 9104 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9123 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9160 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt | 9331 668 30133 | 9171 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 010 10620 | 9173 | Wire Jumper. | 3198 036 90010 |
| 6452 | Diode, Signal, BAS316. | 3198 010 10630 | 9175 | Wire Jumper. | 3198 036 90010 |
| 6453 | Zener Diode, 5.6 volt. | 3198 020 55680 | 9176 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, DG3-7005L | 9336 436 10682 | 9178 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 | 9179 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 12 volt | 3198 010 21290 | 9181 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 010 10070 | 9182 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 010 10070 | 9183 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9192 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 010 10620 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9313 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt | 9331 177 80133 | 9314 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6490 | Diode, Rect, BYV95C. | 9335 001 80133 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU4JL-7002. | 9322 132 55667 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9416 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

32PW633R85C (continued)

| | | | | | |
|------|----------------|----------------|------|------------------------|----------------|
| 9417 | Wire Jumper. | 3198 036 90010 | 9689 | Wire Jumper. | 3198 036 90010 |
| 9418 | Wire Jumper. | 3198 036 90010 | 9690 | Wire Jumper. | 3198 036 90010 |
| 9419 | Wire Jumper. | 3198 036 90010 | 9691 | Wire Jumper. | 3198 036 90010 |
| 9420 | Wire Jumper. | 3198 036 90010 | 9694 | Wire Jumper. | 3198 036 90010 |
| 9421 | Wire Jumper. | 3198 036 90010 | 9695 | Wire Jumper. | 3198 036 90010 |
| 9422 | Wire Jumper. | 3198 036 90010 | 9697 | Wire Jumper. | 3198 036 90010 |
| 9425 | Wire Jumper. | 3198 036 90010 | 9698 | Wire Jumper. | 3198 036 90010 |
| 9427 | Wire Jumper. | 3198 036 90010 | 9699 | Wire Jumper. | 3198 036 90010 |
| 9453 | Wire Jumper. | 3198 036 90010 | 9821 | Wire Jumper. | 3198 036 90010 |
| 9462 | Wire Jumper. | 3198 036 90010 | 9822 | Wire Jumper. | 3198 036 90010 |
| 9464 | Wire Jumper. | 3198 036 90010 | 9825 | Wire Jumper. | 3198 036 90010 |
| 9500 | Wire Jumper. | 3198 036 90010 | 9828 | Wire Jumper. | 3198 036 90010 |
| 9501 | Wire Jumper. | 3198 036 90010 | 9829 | Wire Jumper. | 3198 036 90010 |
| 9503 | Wire Jumper. | 3198 036 90010 | 9831 | Wire Jumper. | 3198 036 90010 |
| 9506 | Wire Jumper. | 3198 036 90010 | 9832 | Wire Jumper. | 3198 036 90010 |
| 9507 | Wire Jumper. | 3198 036 90010 | 9837 | Wire Jumper. | 3198 036 90010 |
| 9511 | Wire Jumper. | 3198 036 90010 | 9838 | Wire Jumper. | 3198 036 90010 |
| 9512 | Wire Jumper. | 3198 036 90010 | 9839 | Wire Jumper. | 3198 036 90010 |
| 9513 | Wire Jumper. | 3198 036 90010 | 9846 | Wire Jumper. | 3198 036 90010 |
| 9514 | Wire Jumper. | 3198 036 90010 | 9847 | Wire Jumper. | 3198 036 90010 |
| 9515 | Wire Jumper. | 3198 036 90010 | 9848 | Wire Jumper. | 3198 036 90010 |
| 9516 | Wire Jumper. | 3198 036 90010 | 9849 | Wire Jumper. | 3198 036 90010 |
| 9518 | Wire Jumper. | 3198 036 90010 | 9851 | Wire Jumper. | 3198 036 90010 |
| 9520 | Wire Jumper. | 3198 036 90010 | 9855 | Wire Jumper. | 3198 036 90010 |
| 9521 | Wire Jumper. | 3198 036 90010 | 9856 | Wire Jumper. | 3198 036 90010 |
| 9522 | Wire Jumper. | 3198 036 90010 | 9857 | Wire Jumper. | 3198 036 90010 |
| 9524 | Wire Jumper. | 3198 036 90010 | 9858 | Wire Jumper. | 3198 036 90010 |
| 9528 | Wire Jumper. | 3198 036 90010 | 9859 | Wire Jumper. | 3198 036 90010 |
| 9530 | Wire Jumper. | 3198 036 90010 | 9860 | Wire Jumper. | 3198 036 90010 |
| 9611 | Coil, 27u, 10% | 3198 018 22790 | 9862 | Wire Jumper. | 3198 036 90010 |
| 9612 | Wire Jumper. | 3198 036 90010 | 9863 | Wire Jumper. | 3198 036 90010 |
| 9613 | Wire Jumper. | 3198 036 90010 | 9864 | Wire Jumper. | 3198 036 90010 |
| 9614 | Wire Jumper. | 3198 036 90010 | 9865 | Wire Jumper. | 3198 036 90010 |
| 9615 | Wire Jumper. | 3198 036 90010 | 9867 | Wire Jumper. | 3198 036 90010 |
| 9618 | Wire Jumper. | 3198 036 90010 | 9868 | Wire Jumper. | 3198 036 90010 |
| 9619 | Wire Jumper. | 3198 036 90010 | 9869 | Wire Jumper. | 3198 036 90010 |
| 9620 | Wire Jumper. | 3198 036 90010 | 9870 | Wire Jumper. | 3198 036 90010 |
| 9621 | Wire Jumper. | 3198 036 90010 | 9871 | Wire Jumper. | 3198 036 90010 |
| 9622 | Wire Jumper. | 3198 036 90010 | 9873 | Wire Jumper. | 3198 036 90010 |
| 9623 | Wire Jumper. | 3198 036 90010 | 9874 | Wire Jumper. | 3198 036 90010 |
| 9624 | Wire Jumper. | 3198 036 90010 | 9875 | Wire Jumper. | 3198 036 90010 |
| 9626 | Wire Jumper. | 3198 036 90010 | 9876 | Wire Jumper. | 3198 036 90010 |
| 9627 | Wire Jumper. | 3198 036 90010 | 9877 | Wire Jumper. | 3198 036 90010 |
| 9628 | Wire Jumper. | 3198 036 90010 | 9878 | Wire Jumper. | 3198 036 90010 |
| 9629 | Wire Jumper. | 3198 036 90010 | 9901 | Wire Jumper. | 3198 036 90010 |
| 9631 | Wire Jumper. | 3198 036 90010 | 9902 | Wire Jumper. | 3198 036 90010 |
| 9632 | Wire Jumper. | 3198 036 90010 | 9903 | Wire Jumper. | 3198 036 90010 |
| 9633 | Wire Jumper. | 3198 036 90010 | 9904 | Wire Jumper. | 3198 036 90010 |
| 9635 | Wire Jumper. | 3198 036 90010 | 9911 | Wire Jumper. | 3198 036 90010 |
| 9636 | Wire Jumper. | 3198 036 90010 | 9913 | Wire Jumper. | 3198 036 90010 |
| 9637 | Wire Jumper. | 3198 036 90010 | 9914 | Wire Jumper. | 3198 036 90010 |
| 9638 | Wire Jumper. | 3198 036 90010 | 9915 | Wire Jumper. | 3198 036 90010 |
| 9640 | Wire Jumper. | 3198 036 90010 | 9923 | Wire Jumper. | 3198 036 90010 |
| 9641 | Wire Jumper. | 3198 036 90010 | 9991 | Wire Jumper. | 3198 036 90010 |
| 9642 | Wire Jumper. | 3198 036 90010 | 9996 | Wire Jumper. | 3198 036 90010 |
| 9643 | Wire Jumper. | 3198 036 90010 | 9998 | Wire Jumper. | 3198 036 90010 |
| 9648 | Wire Jumper. | 3198 036 90010 | CBA | Main Chassis Assembly. | 3141 058 59081 |
| 9650 | Wire Jumper. | 3198 036 90010 | | | |
| 9651 | Wire Jumper. | 3198 036 90010 | | | |
| 9652 | Wire Jumper. | 3198 036 90010 | | | |
| 9654 | Wire Jumper. | 3198 036 90010 | | | |
| 9655 | Wire Jumper. | 3198 036 90010 | | | |
| 9656 | Wire Jumper. | 3198 036 90010 | | | |
| 9657 | Wire Jumper. | 3198 036 90010 | | | |
| 9658 | Wire Jumper. | 3198 036 90010 | | | |
| 9659 | Wire Jumper. | 3198 036 90010 | | | |
| 9660 | Wire Jumper. | 3198 036 90010 | | | |
| 9661 | Wire Jumper. | 3198 036 90010 | | | |
| 9662 | Wire Jumper. | 3198 036 90010 | | | |
| 9663 | Wire Jumper. | 3198 036 90010 | | | |
| 9664 | Wire Jumper. | 3198 036 90010 | | | |
| 9665 | Wire Jumper. | 3198 036 90010 | | | |
| 9666 | Wire Jumper. | 3198 036 90010 | | | |
| 9667 | Wire Jumper. | 3198 036 90010 | | | |
| 9668 | Wire Jumper. | 3198 036 90010 | | | |
| 9669 | Wire Jumper. | 3198 036 90010 | | | |
| 9670 | Wire Jumper. | 3198 036 90010 | | | |
| 9671 | Wire Jumper. | 3198 036 90010 | | | |
| 9672 | Coil, 22u, 10% | 3198 018 22290 | | | |
| 9674 | Wire Jumper. | 3198 036 90010 | | | |
| 9675 | Wire Jumper. | 3198 036 90010 | | | |
| 9676 | Wire Jumper. | 3198 036 90010 | | | |
| 9678 | Coil, 22u, 10% | 3198 018 22290 | | | |
| 9679 | Wire Jumper. | 3198 036 90010 | | | |
| 9680 | Wire Jumper. | 3198 036 90010 | | | |
| 9681 | Wire Jumper. | 3198 036 90010 | | | |
| 9682 | Wire Jumper. | 3198 036 90010 | | | |
| 9683 | Wire Jumper. | 3198 036 90010 | | | |
| 9685 | Wire Jumper. | 3198 036 90010 | | | |
| 9686 | Wire Jumper. | 3198 036 90010 | | | |
| 9687 | Wire Jumper. | 3198 036 90010 | | | |
| 9688 | Wire Jumper. | 3198 036 90010 | | | |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

| | | |
|------|-----------------------------------|----------------|
| 0266 | 6 Pin Connector. | 2422 025 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 028 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 017 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic | 3198 016 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2431 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 |
| 2432 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2433 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2434 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 31030 |
| 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2440 | Cap, 10u, 20%, 16v, Electrolytic | 3198 028 21090 |
| 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |

32PW633R85C (continued)

| | | | | |
|------|--|------|-----|-------|
| 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2450 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 | 028 | 21090 |
| 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31820 |
| 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 36820 |
| 3407 | Res, 1K, 5%, 1/16W, Metalized Glass . . | 3198 | 021 | 31020 |
| 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3412 | Res, 510K, 5%, 1/10W, Metalized Glass . | 2122 | 118 | 05951 |
| 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31030 |
| 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . . | 2322 | 704 | 68202 |
| 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31230 |
| 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 32720 |
| 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3457 | Wire Jumper. | 3198 | 036 | 90010 |
| 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4403 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 5401 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5407 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 5408 | Coil, 33u, 20% | 3198 | 018 | 33390 |
| 5421 | Inductor, 100 MHz, 120 ohm | 3198 | 018 | 90070 |
| 5425 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5428 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 5429 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5430 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5440 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5442 | Coil, 22u, 5% | 3198 | 018 | 12290 |
| 5450 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5452 | Coil, 33u, 5% | 3198 | 018 | 13390 |
| 7401 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 7402 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7403 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7421 | IC, TC90A53N | 9322 | 182 | 18682 |
| 7440 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7444 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3139 | 187 | 15141 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0215 | 3 Pin Connector. | 2422 | 025 | 16601 |
| 1091 | Tact Switch. | 2422 | 128 | 02742 |
| 1092 | Tact Switch. | 2422 | 128 | 02742 |
| 1093 | Tact Switch. | 2422 | 128 | 02742 |
| 1094 | Tact Switch. | 2422 | 128 | 02742 |
| 3091 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3092 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3093 | Res, 560 ohm, 5%, Metalized Glass. . . | 3198 | 021 | 35610 |
| 3094 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3095 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 33320 |
| 3096 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 31520 |
| 4085 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4089 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4090 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6091 | Diode, Signal. | 9340 | 453 | 90115 |
| CBA | Top Control Panel Assembly | 3139 | 187 | 15841 |

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | |
|--------|---|------|-----|-------|
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitt | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 46431 |
| AC06 | Cabinet Back Screw Cover (2 Used). . . | 3139 | 124 | 45431 |
| AC07 | Canceller Coil | 3128 | 138 | 60581 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, W76ERF022X013 | 9301 | 888 | 30314 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 45797 |
| AC13 | Front Interface Panel Bracket. | 3139 | 124 | 32891 |
| AC15 | Holder, Degaussing Coil (4 Used) . . . | 3135 | 013 | 01661 |
| AC17 | Owner's Manual | 3121 | 235 | 21391 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 37061 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53521 |
| AC20A | Cabinet Front. | 3139 | 124 | 43361 |
| AC20C | Light Guide. | 3139 | 124 | 39701 |
| AC20D | Nameplate. | 3141 | 050 | 00161 |
| AC20E | Power Button | 3139 | 138 | 10881 |
| AC20H | Speaker, 8 ohm, 10W (2 Used) | 3139 | 128 | 76081 |
| AC20J | Top Control Assembly | 3139 | 177 | 56381 |
| AC32 | Yoke Wedge (2 Used). | 3135 | 013 | 00311 |
| REMOTE | Remote Control Transmitter, RC19036002/01A. | 3139 | 238 | 04313 |

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

| | | | | |
|--------|--|------|-----|-------|
| S 0211 | 2 Pin Connector. | 2422 | 025 | 16268 |
| S 0212 | 2 Pin Connector. | 2422 | 025 | 16559 |
| 0214 | 5 Pin Connector. | 2422 | 025 | 06353 |
| 1606 | Tact Switch. | 2422 | 128 | 02742 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 | 025 | 32210 |
| 2692 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2693 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2694 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2695 | Cap, 47n, 10%, 25v, Ceramic. | 3198 | 023 | 04730 |
| 2698 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 | 01040 |
| S 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| S 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 | 242 | 13335 |
| 3685 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 05610 |
| 3691 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 03310 |
| 3693 | Res, 220 ohm, 5%, 1/6W, Carbon Film. . | 3198 | 011 | 02210 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 |
| 6692 | IR Receiver, TSOP1836UH3V. | 9322 | 127 | 54667 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 9002 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Front Interface Panel Assembly | 3139 | 177 | 26211 |

ITV Front Jack Panel Parts

S = Safety Part, Exact replacement part.

32ST220P/17 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|--|------|-----------|--------|--|------|-----------|
| | Main Chassis Parts | | | | | | |
| 0127 | Socket Fuse | 2422 | 088 00271 | 2217 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 |
| 0129 | NTC Holder | 3139 | 120 10151 | 2219 | Cap, 220n, +80/-20%, 16v, Ceramic . . . | 3198 | 017 42240 |
| 0136 | IC-Spring | 3104 | 301 22081 | 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 |
| 0137 | Spring | 3139 | 121 24583 | 2221 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 |
| 0138 | IC-Spring | 3104 | 301 22081 | 2241 | Cap, 1n5, 10%, 50v, Ceramic | 3198 | 017 31520 |
| 0139 | Spring for Bracket | 3122 | 121 24786 | 2242 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 |
| 0140 | Spring | 3139 | 121 24583 | 2243 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 32220 |
| 0141 | IC-Spring | 3104 | 301 22081 | 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 |
| 0152 | Cable, DIPMate, 6 Pin, 560mm | 3104 | 301 08411 | 2245 | Cap, 470n, +80/-20%, 10v, Ceramic . . . | 3198 | 017 44740 |
| 0153 | Cable, 5 Pin, 560mm | 3139 | 121 09041 | 2247 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 | 026 21020 |
| 0211 | 2 Pin Connector | 2422 | 025 16269 | 2248 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 |
| 0212 | 2 Pin Connector | 2422 | 025 16375 | 2249 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 |
| 0213 | 2 Pin Connector | 2422 | 025 16374 | 2252 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 |
| 0217 | 6 Pin Connector | 2422 | 025 12482 | 2253 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 |
| 0218 | A/V Jack | 2422 | 026 04742 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 |
| 0220 | 5 Pin Connector | 2422 | 025 04853 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | 2222 | 368 90177 |
| 0221 | 2 Pin Connector | 2422 | 025 15503 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic . . . | 2020 | 558 90445 |
| 0222 | 2 Pin Connector | 2422 | 025 10646 | 2340 | Cap, 10u, 20%, 250v, Electrolytic | 2020 | 012 93495 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 |
| 0225 | SVHS Jack | 2422 | 026 04926 | 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 | 016 05610 |
| 0227 | 6 Pin Connector | 2422 | 025 15849 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic | 2020 | 558 90559 |
| 0229 | 3 Pin Connector | 2412 | 020 00725 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic . . . | 3198 | 023 21040 |
| 0240 | 7 Pin Connector | 2422 | 025 11244 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . . | 2020 | 558 90445 |
| 0242 | 7 Pin Connector | 2422 | 025 17042 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 | 021 90552 |
| 0243 | 6 Pin Connector | 2422 | 025 04854 | 2402 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 0244 | 5 Pin Connector | 2422 | 025 04853 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 | 025 54790 |
| 0245 | 6 Pin Connector | 2422 | 025 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic | 3198 | 025 32210 |
| 0251 | 3 Pin Connector | 2412 | 020 00725 | 2415 | Cap, 330p, 5%, 50v, Ceramic | 3198 | 016 03310 |
| S 0254 | 9 Pin CRT Socket | 2422 | 500 80076 | 2441 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 0259 | 5 Pin Connector | 2422 | 025 15848 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| 0262 | 3 Pin Connector | 2422 | 025 16937 | 2444 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 0267 | 3 Pin Connector | 2412 | 020 00725 | 2450 | Cap, 47u, 20%, 160v, Electrolytic | 2020 | 021 91139 |
| 0280 | 4 Pin Connector | 2422 | 025 15847 | 2451 | Cap, 15n, 10%, 50v, Polyester | 3198 | 014 01530 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop | 2022 | 333 00086 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic | 2020 | 021 91331 |
| S 1500 | Fuse, 4A, 250V, IEC | 2422 | 086 10914 | 2459 | Cap, 680p, 10%, 500v, Ceramic | 3198 | 019 46810 |
| S 1515 | Relay, 5 Amp, 12V | 2422 | 132 07444 | 2460 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 01010 |
| 1600 | Tact Switch | 2422 | 128 02742 | S 2463 | Cap, 1n2, 10%, 2000v, Ceramic | 2020 | 558 90488 |
| 1601 | Tact Switch | 2422 | 128 02742 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | 2222 | 479 90042 |
| 1602 | Tact Switch | 2422 | 128 02742 | S 2465 | Cap, 13n, 5%, 1600v, Polypropylene . . . | 2020 | 301 90254 |
| 1603 | Tact Switch | 2422 | 128 02742 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 | 347 90219 |
| 1606 | Tact Switch | 2422 | 128 02742 | 2468 | Cap, 10n, 10%, 400v, Polyester | 2222 | 347 90218 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 1810 | 6 Pin Connector | 2422 | 025 16607 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | | | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| | C49/U A | 2422 | 543 00842 | 2474 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 | 024 44730 | 2475 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2476 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 04720 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic | 3198 | 025 24710 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2481 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic | 3198 | 025 31010 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 | 347 90234 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic | 2020 | 021 90856 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic | 3198 | 017 24740 | 2486 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 | 021 90854 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91049 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2491 | Cap, 1n, 10%, 500v, Ceramic | 3198 | 019 41020 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | 2022 | 330 00018 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 | 024 90647 |
| 2123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2125 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2127 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 57590 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 2128 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 57590 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic | 2020 | 554 90172 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 | 558 90489 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2527 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2540 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2541 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 | 021 91654 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91353 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2568 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic | 3198 | 023 22240 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 | 017 44740 | 2602 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 31010 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2606 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | | | | |
| 2215 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | | | | |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | | | | |

S = Safety Part Be sure to use exact replacement part.

32ST220P/17 (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 2607 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. | 3198 021 33340 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic | 3198 016 36890 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3223 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . . | 3198 025 32210 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 |
| 2807 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 3232 704 63903 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic | 3198 016 31080 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. | 3198 021 34740 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic | 3198 016 33390 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic | 3198 016 34790 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03310 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film | 3198 011 01040 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01010 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 31020 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 2910 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 2911 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 08210 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 06890 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3451 | Res, 2R7, 5%, 1/3W, Metal Film | 2306 204 03278 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film | 2312 915 15602 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film | 3198 012 26880 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film | 3198 012 21530 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. | 3198 021 32240 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01810 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3470 | Res, 390K, 5%, 1/8W, Metalized Glass . | 2322 730 61394 |
| 3122 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3123 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3472 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3125 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3473 | Res, 5R6, 1%, 3/5W, Metal Film | 2312 915 15608 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 01510 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3182 | Wire Jumper. | 3198 036 90010 | 3481 | Res, 15K, 1%, 3/5W, Metal Film | 2312 915 11503 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3482 | Res, 6K8, 1%, 3/5W, Metal Film | 2312 915 16802 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3493 | Res, 2R2, 5%, 1/3W, Metal Film | 2306 204 03228 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3206 | Res, 270K, 5%, 1/16W, Metalized Glass. | 2322 702 60274 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |

S = Safety Part Be sure to use exact replacement part.

32ST220P/17 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|--------|--|------|-----|-------|
| 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 | 3904 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| S 3504 | Res, PTC, 3 ohm, 144V. | 2122 | 663 | 00019 | 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13155 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3507 | Surge Protector. | 2422 | 549 | 43073 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 38220 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film | 3198 | 013 | 02210 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 | 612 | 00056 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02710 | 4101 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51220 | 4102 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04780 | 4104 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53340 | 4126 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film | 2306 | 204 | 03101 | 4128 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55630 | 4181 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3526 | Res, OR1, 5%, 3/5W, Metal Film | 3198 | 012 | 11070 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| S 3527 | Res, OR33, 5%, 3/5W, Metal Film. | 3198 | 012 | 13370 | 4341 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 | 204 | 03222 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4604 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 | 915 | 8203 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass | 2322 | 730 | 61274 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51530 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| S 3558 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 | 012 | 13310 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51230 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass | 3198 | 021 | 52220 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass | 3198 | 021 | 55620 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54730 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass | 3198 | 021 | 53320 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51520 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5001 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5002 | Coil, 820n, 10% | 3198 | 018 | 18270 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5201 | Coil, 6u8, 5% | 3198 | 018 | 16880 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 | 011 | 01020 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5242 | Coil, 10u, 5% | 3198 | 018 | 11090 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 22u. | 2422 | 535 | 97333 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5401 | Coil, 1mH, 10% | 3198 | 018 | 71020 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, PSLOT | 3128 | 138 | 21421 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10% | 3198 | 018 | 73390 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 | 018 | 90020 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5457 | Coil, Linear, DC12 | 3128 | 138 | 55881 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 | 5471 | Coil, 3u3, 20% | 3198 | 018 | 73380 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5480 | Coil, 4u7, 5% | 2422 | 535 | 94213 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | S 5501 | Mains Filter | 2422 | 549 | 43432 |
| 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 |
| 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32220 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 5561 | Coil, 27u, 5% | 2422 | 535 | 95366 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass | 3198 | 021 | 33320 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 |

S = Safety Part Be sure to use exact replacement part.

32ST220P/17 (continued)

| | | | | | |
|--------|--|----------------|------|---|----------------|
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 | 7804 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 5602 | Coil, 5u6, 5%. | 3198 018 15680 | 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 187 89682 |
| 5603 | Coil, 5u6, 5%. | 3198 018 15680 | 7901 | IC, AN7522N PH | 9322 181 41682 |
| 5604 | Coil, 5u6, 5%. | 3198 018 15680 | 9001 | Wire Jumper. | 3198 036 90010 |
| 5810 | Coil, 10u, 10%. | 3198 018 51090 | 9104 | Wire Jumper. | 3198 036 90010 |
| 5831 | Coil, 6u8, 5%. | 3198 018 16880 | 9171 | Wire Jumper. | 3198 036 90010 |
| 5832 | Coil, 6u8, 5%. | 3198 018 16880 | 9173 | Wire Jumper. | 3198 036 90010 |
| 5833 | Coil, 6u8, 5%. | 3198 018 16880 | 9175 | Wire Jumper. | 3198 036 90010 |
| 5835 | Coil, 12u, 10%. | 3198 018 31290 | 9181 | Wire Jumper. | 3198 036 90010 |
| 6001 | Zener Diode, 33 volt | 3198 010 23390 | 9182 | Wire Jumper. | 3198 036 90010 |
| 6201 | Diode, Signal, BAS316. | 3198 010 10630 | 9183 | Wire Jumper. | 3198 036 90010 |
| 6202 | Diode, Signal, BAS316. | 3198 010 10630 | 9192 | Wire Jumper. | 3198 036 90010 |
| 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9193 | Wire Jumper. | 3198 036 90010 |
| 6331 | Diode, Signal, BAV21. | 3198 010 10070 | 9311 | Wire Jumper. | 3198 036 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 010 10630 | 9312 | Wire Jumper. | 3198 036 90010 |
| 6333 | Diode, Signal, BAV21. | 3198 010 10070 | 9406 | Wire Jumper. | 3198 036 90010 |
| 6335 | Diode, Signal, BAV21. | 3198 010 10070 | 9407 | Wire Jumper. | 3198 036 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 | 9408 | Wire Jumper. | 3198 036 90010 |
| 6401 | Zener Diode, 47 volt | 3198 010 24790 | 9409 | Wire Jumper. | 3198 036 90010 |
| 6445 | Zener Diode, 10 volt | 3198 020 51090 | 9410 | Wire Jumper. | 3198 036 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 010 10010 | 9411 | Wire Jumper. | 3198 036 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9412 | Wire Jumper. | 3198 036 90010 |
| 6449 | Diode, Signal, BAV99. | 3198 010 10620 | 9413 | Wire Jumper. | 3198 036 90010 |
| 6460 | Diode, Rect, DG3-7005L | 9336 436 10682 | 9414 | Wire Jumper. | 3198 036 90010 |
| 6461 | Diode, Rect, RGP307-L7004. | 9338 617 60682 | 9415 | Wire Jumper. | 3198 036 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9416 | Wire Jumper. | 3198 036 90010 |
| 6465 | Diode, Signal, BAV21. | 3198 010 10070 | 9417 | Wire Jumper. | 3198 036 90010 |
| 6466 | Diode, Signal, BAV21. | 3198 010 10070 | 9418 | Wire Jumper. | 3198 036 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 010 10630 | 9419 | Wire Jumper. | 3198 036 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 010 10630 | 9421 | Wire Jumper. | 3198 036 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 001 80133 | 9422 | Wire Jumper. | 3198 036 90010 |
| 6470 | Diode, Signal, BAV99. | 3198 010 10620 | 9423 | Wire Jumper. | 3198 036 90010 |
| 6476 | Zener Diode, 15 volt | 3198 010 21590 | 9424 | Wire Jumper. | 3198 036 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 | 9425 | Wire Jumper. | 3198 036 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 | 9426 | Wire Jumper. | 3198 036 90010 |
| 6483 | Zener Diode, 33 volt | 3198 010 23390 | 9427 | Wire Jumper. | 3198 036 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 001 80133 | 9453 | Wire Jumper. | 3198 036 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9460 | Wire Jumper. | 3198 036 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 000 90133 | 9463 | Wire Jumper. | 3198 036 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9500 | Wire Jumper. | 3198 036 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 000 90133 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt | 3198 020 52290 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt | 3198 020 51090 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6561 | Diode, Rect, SB340L-7010. | 9322 128 18682 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9522 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 247 60133 | 9528 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 185 69682 | 9530 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9611 | Coil, 27u, 10%. | 3198 018 22790 |
| 6831 | Diode, Signal, 1N4148. | 3198 010 10010 | 9612 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9613 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9615 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I | 4835 310 57626 | 9616 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 713 37112 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 157 37687 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 020 40110 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 020 43530 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 020 43430 | 9632 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9634 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 020 41010 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 020 41010 | 9638 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 140 14667 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 010 42030 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 020 40030 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PPTC114ET | 9340 310 10215 | 9647 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, LE33CZ | 9322 106 11676 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL) | 3198 010 42150 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C16-WBN6. | 9322 147 25682 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PPTC143ZT | 9340 547 00215 | 9655 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9656 | Wire Jumper. | 3198 036 90010 |
| 7803 | IC, HEF4053BT. | 9333 729 60653 | 9657 | Wire Jumper. | 3198 036 90010 |

S = Safety Part Be sure to use exact replacement part.

32ST220P/17 (continued)

| | | | | | |
|------|--|----------------|------|--|----------------|
| 9658 | Wire Jumper. | 3198 036 90010 | 0266 | 6 Pin Connector. | 2422 025 16609 |
| 9659 | Wire Jumper. | 3198 036 90010 | 2401 | Cap, 47u, 20%, 16v, Electrolytic . . . | 3198 028 24790 |
| 9660 | Wire Jumper. | 3198 036 90010 | 2402 | Cap, 4u7, 20%, 35v, Electrolytic . . . | 3198 028 44780 |
| 9661 | Wire Jumper. | 3198 036 90010 | 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9662 | Wire Jumper. | 3198 036 90010 | 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 9663 | Wire Jumper. | 3198 036 90010 | 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9664 | Wire Jumper. | 3198 036 90010 | 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 9665 | Wire Jumper. | 3198 036 90010 | 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 |
| 9666 | Wire Jumper. | 3198 036 90010 | 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 |
| 9667 | Wire Jumper. | 3198 036 90010 | 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9668 | Wire Jumper. | 3198 036 90010 | 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9669 | Wire Jumper. | 3198 036 90010 | 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9670 | Wire Jumper. | 3198 036 90010 | 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9671 | Wire Jumper. | 3198 036 90010 | 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9672 | Coil, 22u, 10% | 3198 018 22290 | 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 |
| 9674 | Wire Jumper. | 3198 036 90010 | 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9675 | Wire Jumper. | 3198 036 90010 | 2426 | Cap, 47u, 20%, 25v, Electrolytic . . . | 3198 025 34790 |
| 9676 | Wire Jumper. | 3198 036 90010 | 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9678 | Coil, 22u, 10% | 3198 018 22290 | 2428 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 |
| 9679 | Wire Jumper. | 3198 036 90010 | 2429 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 |
| 9680 | Wire Jumper. | 3198 036 90010 | 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9681 | Wire Jumper. | 3198 036 90010 | 2431 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 |
| 9682 | Wire Jumper. | 3198 036 90010 | 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9685 | Wire Jumper. | 3198 036 90010 | 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9686 | Wire Jumper. | 3198 036 90010 | 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 9687 | Wire Jumper. | 3198 036 90010 | 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9688 | Wire Jumper. | 3198 036 90010 | 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 9689 | Wire Jumper. | 3198 036 90010 | 2440 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 028 21090 |
| 9690 | Wire Jumper. | 3198 036 90010 | 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9691 | Wire Jumper. | 3198 036 90010 | 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9694 | Wire Jumper. | 3198 036 90010 | 2450 | Cap, 10u, 20%, 16v, Electrolytic . . . | 3198 028 21090 |
| 9695 | Wire Jumper. | 3198 036 90010 | 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9697 | Wire Jumper. | 3198 036 90010 | 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 9698 | Wire Jumper. | 3198 036 90010 | 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9699 | Wire Jumper. | 3198 036 90010 | 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9821 | Wire Jumper. | 3198 036 90010 | 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 021 31820 |
| 9822 | Wire Jumper. | 3198 036 90010 | 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 |
| 9825 | Wire Jumper. | 3198 036 90010 | 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9828 | Wire Jumper. | 3198 036 90010 | 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 021 36820 |
| 9829 | Wire Jumper. | 3198 036 90010 | 3407 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 9831 | Wire Jumper. | 3198 036 90010 | 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9832 | Wire Jumper. | 3198 036 90010 | 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. . | 2122 118 05951 |
| 9837 | Wire Jumper. | 3198 036 90010 | 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9838 | Wire Jumper. | 3198 036 90010 | 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9839 | Wire Jumper. | 3198 036 90010 | 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 9846 | Wire Jumper. | 3198 036 90010 | 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 704 68202 |
| 9847 | Wire Jumper. | 3198 036 90010 | 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9849 | Wire Jumper. | 3198 036 90010 | 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9851 | Wire Jumper. | 3198 036 90010 | 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 9856 | Wire Jumper. | 3198 036 90010 | 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9858 | Wire Jumper. | 3198 036 90010 | 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 021 32720 |
| 9859 | Wire Jumper. | 3198 036 90010 | 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9860 | Wire Jumper. | 3198 036 90010 | 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 9862 | Wire Jumper. | 3198 036 90010 | 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 9863 | Wire Jumper. | 3198 036 90010 | 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 9864 | Wire Jumper. | 3198 036 90010 | 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 021 32720 |
| 9865 | Wire Jumper. | 3198 036 90010 | 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 9867 | Wire Jumper. | 3198 036 90010 | 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 9868 | Wire Jumper. | 3198 036 90010 | 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9869 | Wire Jumper. | 3198 036 90010 | 3457 | Wire Jumper. | 3198 036 90010 |
| 9870 | Wire Jumper. | 3198 036 90010 | 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 9871 | Wire Jumper. | 3198 036 90010 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9873 | Wire Jumper. | 3198 036 90010 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9874 | Wire Jumper. | 3198 036 90010 | 4403 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 9875 | Wire Jumper. | 3198 036 90010 | 5401 | Coil, 10u, 10% | 3198 018 31090 |
| 9876 | Wire Jumper. | 3198 036 90010 | 5407 | Coil, 33u, 5% | 3198 018 13390 |
| 9877 | Wire Jumper. | 3198 036 90010 | 5408 | Coil, 33u, 20% | 3198 018 33390 |
| 9878 | Wire Jumper. | 3198 036 90010 | 5421 | Inductor, 100 MHz, 120 ohm | 3198 018 90070 |
| 9901 | Wire Jumper. | 3198 036 90010 | 5425 | Coil, 10u, 10% | 3198 018 31090 |
| 9902 | Wire Jumper. | 3198 036 90010 | 5428 | Coil, 10u, 5% | 3198 018 11090 |
| 9903 | Wire Jumper. | 3198 036 90010 | 5429 | Coil, 10u, 10% | 3198 018 31090 |
| 9904 | Wire Jumper. | 3198 036 90010 | 5430 | Coil, 10u, 10% | 3198 018 31090 |
| 9905 | Wire Jumper. | 3198 036 90010 | 5440 | Coil, 10u, 10% | 3198 018 31090 |
| 9911 | Wire Jumper. | 3198 036 90010 | 5442 | Coil, 22u, 5% | 3198 018 12290 |
| 9913 | Wire Jumper. | 3198 036 90010 | 5450 | Coil, 10u, 10% | 3198 018 31090 |
| 9914 | Wire Jumper. | 3198 036 90010 | 5452 | Coil, 33u, 5% | 3198 018 13390 |
| 9915 | Wire Jumper. | 3198 036 90010 | 7401 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 9919 | Wire Jumper. | 3198 036 90010 | 7402 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9920 | Wire Jumper. | 3198 036 90010 | 7403 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9991 | Wire Jumper. | 3198 036 90010 | 7421 | IC, TC90A53N | 9322 182 18682 |
| 9993 | Wire Jumper. | 3198 036 90010 | 7440 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9996 | Wire Jumper. | 3198 036 90010 | 7444 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9997 | Wire Jumper. | 3198 036 90010 | 7450 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 9998 | Wire Jumper. | 3198 036 90010 | 7454 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| CBA | SP/LS Module (Vertical) (ITV). | 3139 127 27374 | 9401 | Wire Jumper. | 3198 036 90010 |
| CBA | EPS Module (ITV) | 3139 137 22961 | 9402 | Wire Jumper. | 3198 036 90010 |
| CBA | Main Chassis Assembly. | 3139 188 04091 | 9403 | Wire Jumper. | 3198 036 90010 |
| CBA | Interface Panel (ITV). | 3139 188 04541 | CBA | 2D 3 Line Comb Filter Assembly | 3139 177 26561 |

Channel One Card Parts

Channel One Card Parts

DAF Panel Parts

DAF Panel Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

32ST220P/17 (continued)

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

| | | | | | |
|---|-------|--|------|-----|-------|
| S | AC01 | AC Cord. | 3135 | 010 | 04323 |
| | AC02 | AC Cord Strain Relief. | 3135 | 010 | 02841 |
| | AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| | AC05 | Cabinet Back | 3139 | 124 | 45221 |
| | AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S | AC09 | CRT, A80QCF340X34(N) | 9301 | 904 | 59463 |
| | AC10 | Customer Control Buttons | 3139 | 124 | 26472 |
| S | AC12 | Degaussing Coil. | 2422 | 549 | 45334 |
| | AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01661 |
| | AC16 | Jack Panel Bracket | 3139 | 124 | 45161 |
| | AC17 | ITV Safety/Warranty Instructions | 3135 | 125 | 21431 |
| | AC20 | Cabinet Front Assembly | 3121 | 237 | 53561 |
| | AC20A | Cabinet Front. | 3135 | 127 | 50031 |
| | AC20C | Light Guide. | 3139 | 124 | 26461 |
| | AC20D | Nameplate. | 3135 | 015 | 03571 |
| | AC20E | Power Button | 3139 | 124 | 26444 |
| | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| | AC26 | EPS Bracket. | 3135 | 014 | 09221 |
| | AC28 | ITV Card Slot Cover. | 3139 | 124 | 30571 |

32ST230P/35 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | |
|--------------------|---|----------------|--|
| 0127 | Socket Fuse | 2422 088 00271 | |
| 0129 | NTC Holder | 3139 120 10151 | |
| 0136 | IC-Spring | 3104 301 22081 | |
| 0137 | Spring | 3139 121 24583 | |
| 0138 | IC-Spring | 3104 301 22081 | |
| 0139 | Spring for Bracket | 3122 121 24786 | |
| 0140 | Spring | 3139 121 24583 | |
| 0141 | IC-Spring | 3104 301 22081 | |
| 0152 | Cable, DIPMate, 6 Pin, 560mm | 3104 301 08411 | |
| 0153 | Cable, 5 Pin, 560mm | 3139 121 09041 | |
| 0211 | 2 Pin Connector | 2422 025 16269 | |
| 0212 | 2 Pin Connector | 2422 025 16375 | |
| 0213 | 2 Pin Connector | 2422 025 16374 | |
| 0217 | 6 Pin Connector | 2422 025 12482 | |
| 0218 | A/V Jack | 2422 026 04742 | |
| 0220 | 5 Pin Connector | 2422 025 04853 | |
| 0221 | 2 Pin Connector | 2422 025 15503 | |
| 0222 | 2 Pin Connector | 2422 025 10646 | |
| 0223 | A/V Jack | 2422 026 05236 | |
| 0225 | SVHS Jack | 2422 026 04926 | |
| 0227 | 6 Pin Connector | 2422 025 15849 | |
| 0229 | 3 Pin Connector | 2412 020 00725 | |
| 0240 | 7 Pin Connector | 2422 025 11244 | |
| 0242 | 7 Pin Connector | 2422 025 17042 | |
| 0243 | 6 Pin Connector | 2422 025 04854 | |
| 0244 | 5 Pin Connector | 2422 025 04853 | |
| 0245 | 6 Pin Connector | 2422 025 04854 | |
| 0251 | 3 Pin Connector | 2412 020 00725 | |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | |
| 0259 | 5 Pin Connector | 2422 025 15848 | |
| 0262 | 3 Pin Connector | 2422 025 16937 | |
| 0267 | 3 Pin Connector | 2412 020 00725 | |
| 0280 | 4 Pin Connector | 2422 025 15847 | |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | |
| S 1500 | Fuse, 4A, 250V, IEC | 2422 086 10914 | |
| S 1515 | Relay, 5 Amp, 12V | 2422 132 07444 | |
| 1600 | Tact Switch | 2422 128 02742 | |
| 1601 | Tact Switch | 2422 128 02742 | |
| 1602 | Tact Switch | 2422 128 02742 | |
| 1603 | Tact Switch | 2422 128 02742 | |
| 1606 | Tact Switch | 2422 128 02742 | |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | |
| 1810 | 6 Pin Connector | 2422 025 16607 | |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A | 2422 543 00842 | |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 024 44730 | |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic | 3198 025 24710 | |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 | |
| 2009 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic | 3198 017 24740 | |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | |
| 2125 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | |
| 2127 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | |
| 2128 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2181 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2182 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2183 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 | |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 | |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 017 44740 | |
| 2213 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2214 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2215 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | |
| 2217 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 | |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | |
| 2221 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic | 3198 017 31520 | |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 | |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 32220 | |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | |
| 2245 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 017 44740 | |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | |
| 2248 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2249 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | |
| 2252 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 | |
| 2253 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 | |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyest er | 2222 368 90177 | |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic | 2020 558 90445 | |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic | 2020 012 93495 | |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 | |
| 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 016 05610 | |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic | 2020 558 90559 | |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 21040 | |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 | |
| 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 | |
| 2402 | Cap, 470p, 10%, 500v, Ceramic | 3198 019 44710 | |
| 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 | |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic | 3198 025 32210 | |
| 2415 | Cap, 330p, 5%, 50v, Ceramic | 3198 016 03310 | |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 | |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic | 2020 021 91139 | |
| 2451 | Cap, 15n, 10%, 50v, Polyester | 3198 014 01530 | |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 | |
| 2457 | Cap, 470n, 5%, 250v, Metalized Polyprop ylene | 2022 333 00086 | |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic | 2020 021 91331 | |
| 2459 | Cap, 680p, 10%, 500v, Ceramic | 3198 019 46810 | |
| 2460 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 01010 | |
| S 2463 | Cap, 1n2, 10%, 2000v, Ceramic | 2020 558 90488 | |
| 2464 | Cap, 2u2, 5%, 160v, Metalized Polyprop ylene | 2222 479 90042 | |
| S 2465 | Cap, 13n, 5%, 1600v, Polypropylene | 2020 301 90254 | |
| 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 | |
| 2468 | Cap, 10n, 10%, 400v, Polyester | 2222 347 90218 | |
| 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 | |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 | |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 | |
| 2474 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 | |
| 2475 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 | |
| 2476 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 04720 | |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 | |
| 2481 | Cap, 470p, 10%, 500v, Ceramic | 3198 019 44710 | |
| 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 | |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic | 2020 021 90856 | |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic | 2020 021 91577 | |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 | |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 | |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic | 2020 021 91577 | |
| 2491 | Cap, 1n, 10%, 500v, Ceramic | 3198 019 41020 | |
| S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro pylene | 2022 330 00018 | |
| 2501 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 | |
| 2502 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 | |
| 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 | |
| 2505 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 | |
| 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 | |
| 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 | |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic | 2020 554 90172 | |
| 2520 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 | |
| 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 | |
| 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | |
| S 2523 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 558 90489 | |
| 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 | |
| 2527 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 | |
| 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 | |
| 2540 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 | |
| 2541 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 | |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 | |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 | |
| 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 | |
| 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 | |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 | |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 | |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 | |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 | |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic | 2222 910 19856 | |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic | 3198 023 22240 | |
| 2602 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 31010 | |

S = Safety Part Be sure to use exact replacement part.

32ST230P/35 (continued)

| | | | | | | |
|------|--|----------------|--------|--|----------------|----------------|
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | |
| 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 | |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 | |
| 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | |
| 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3223 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 025 32210 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 | |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 | |
| 2807 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 | |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 | |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 | |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 | |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 | |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic. . . . | 3198 025 54780 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 | |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 | |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3341 | Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X | 34. | 2306 204 03108 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3342 | Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X | 34. | 2306 204 03108 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3342 | Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 | 0X34 | 2306 204 03278 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 | |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 | |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 | |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 | |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01040 | |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 | |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 | |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 | |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 | |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | |
| 2910 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 | |
| 2911 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 | |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 | |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 | |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3451 | Res, 2R7, 5%, 1/3W, Metal Film. | 2306 204 03278 | |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film. | 2312 915 15602 | |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 | |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 | |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 | |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 | |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 | |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 | |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 | |
| 3122 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3470 | Res, 390K, 5%, 1/8W, Metalized Glass. . | 2322 730 61394 | |
| 3123 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 915 13908 | |
| 3125 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3472 | Res, 3R9, 1%, 3/5W, Metal Film. | 2312 915 13908 | |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3473 | Res, 5R6, 1%, 3/5W, Metal Film. | 2312 915 15608 | |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 | |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 | |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 | |
| 3182 | Wire Jumper. | 3198 036 90010 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 | |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3481 | Res, 15K, 1%, 3/5W, Metal Film. | 2312 915 11503 | |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3482 | Res, 6K8, 1%, 3/5W, Metal Film. | 2312 915 16802 | |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 | |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 | |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 | |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3493 | Res, 2R2, 5%, 1/3W, Metal Film. | 2306 204 03228 | |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 | |
| 3206 | Res, 270K, 5%, 1/16W, Metalized Glass. . | 2322 702 60274 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 | |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | | | | |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | | | | |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | | | | |

S = Safety Part Be sure to use exact replacement part.

32ST230P/35 (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|--------|--|------|-----|-------|
| 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 |
| 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32220 |
| 3498 | Res, 12K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51230 | 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 |
| 3499 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51030 | 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 |
| 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 | 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 |
| 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13335 | 3904 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 |
| S 3504 | Res, PTC, 3 ohm, 144V. | 2122 | 663 | 00019 | 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 33320 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. | 2322 | 242 | 13155 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 |
| 3507 | Surge Protector. | 2422 | 549 | 43073 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 38220 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film. | 3198 | 013 | 02210 | 4001 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| S 3510 | Res, NTC, 4R7, 20%, 3W. | 2122 | 612 | 00056 | 4002 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02710 | 4101 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51220 | 4102 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04780 | 4104 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53340 | 4126 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film. | 2306 | 204 | 03101 | 4128 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55630 | 4181 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4209 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3526 | Res, 0R1, 5%, 3/5W, Metal Film. | 3198 | 012 | 11070 | 4216 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. | 3198 | 012 | 13370 | 4341 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 4388 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | 4401 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51030 | 4402 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54720 | 4430 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film. | 2306 | 204 | 03222 | 4431 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 54710 | 4604 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51520 | 4608 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film. | 2312 | 915 | 18203 | 4609 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. | 2322 | 734 | 64702 | 4614 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass. | 2322 | 730 | 61274 | 4615 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51530 | 4616 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51030 | 4617 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| S 3558 | Res, 330 ohm, 5%, 1W, Metal Film. | 3198 | 012 | 13310 | 4619 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4622 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51230 | 4623 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4691 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52220 | 4692 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 55620 | 4693 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 54730 | 4696 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53310 | 4824 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4826 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 52240 | 4830 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4831 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4835 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4839 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4840 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 02220 | 4865 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 04710 | 4866 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 4867 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4869 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31010 | 4870 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 | 011 | 06820 | 4871 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 | 4872 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4873 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4874 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 4875 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4876 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34720 | 4879 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31030 | 4880 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 32220 | 4881 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 | 4882 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51020 | 4883 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 4884 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 | 4885 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 | 011 | 08220 | 4892 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4901 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 53320 | 4903 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90030 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 4906 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4924 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 4925 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51520 | 4982 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33310 | 5001 | Coil, 27u, 10%. | 3198 | 018 | 22790 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5002 | Coil, 820n, 10%. | 3198 | 018 | 18270 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 32210 | 5201 | Coil, 6u8, 5%. | 3198 | 018 | 16880 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5202 | Wire Jumper. | 3198 | 036 | 90010 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5204 | Fixed, Inductor, 100MHZ, 80 ohm. | 3198 | 018 | 90020 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01020 | 5205 | Fixed, Inductor, 100MHZ, 80 ohm. | 3198 | 018 | 90020 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5206 | Fixed, Inductor, 100MHZ, 80 ohm. | 3198 | 018 | 90020 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 | 5241 | Wire Jumper. | 3198 | 036 | 90010 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5242 | Coil, 10u, 5%. | 3198 | 018 | 11090 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 22u for A80QCF340X34. | 2422 | 535 | 97333 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5342 | Coil, 47u for A80QCF330X34. | 3198 | 018 | 24790 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5401 | Coil, 1mH, 10%. | 3198 | 018 | 71020 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | S 5445 | Transformer, PSLOT. | 3128 | 138 | 21421 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5451 | Coil, 33u, 10%. | 3198 | 018 | 73390 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5452 | Fixed, Inductor, 100MHZ, 80 ohm. | 3198 | 018 | 90020 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31040 | 5457 | Coil, Linear, DC12. | 3128 | 138 | 55881 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 | 021 | 37590 | 5461 | Transformer, Signal Driver, SC10027-00 | 2422 | 531 | 02478 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 34730 | 5463 | Coil, Choke. | 3128 | 138 | 37021 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5471 | Coil, 3u3, 20%. | 3198 | 018 | 73380 |
| 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5472 | Coil, 3u3, 10%. | 3198 | 018 | 23380 |
| 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 | 011 | 01010 | 5480 | Coil, 4u7, 5%. | 2422 | 535 | 94213 |

S = Safety Part Be sure to use exact replacement part.

32ST230P/35 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|---|------|-----|-------|
| S 5501 | Mains Filter | 2422 | 549 | 43432 | 7561 | Transistor, NPN, PDTCL43ZT | 9340 | 547 | 00215 |
| S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 | 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7602 | IC, M24C16-WBN6. | 9322 | 147 | 25682 |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7606 | Transistor, NPN, PDTCL43ZT | 9340 | 547 | 00215 |
| 5561 | Coil, 27u, 5%. | 2422 | 535 | 95366 | 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7803 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7804 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 5602 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 | 187 | 89682 |
| 5603 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7901 | IC, AN7522N PH | 9322 | 181 | 41682 |
| 5604 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 5810 | Coil, 10u, 10%. | 3198 | 018 | 51090 | 9104 | Wire Jumper. | 3198 | 036 | 90010 |
| 5831 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| 5832 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 9173 | Wire Jumper. | 3198 | 036 | 90010 |
| 5833 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 9175 | Wire Jumper. | 3198 | 036 | 90010 |
| 5835 | Coil, 12u, 10%. | 3198 | 018 | 31290 | 9181 | Wire Jumper. | 3198 | 036 | 90010 |
| 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9182 | Wire Jumper. | 3198 | 036 | 90010 |
| 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9183 | Wire Jumper. | 3198 | 036 | 90010 |
| 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9192 | Wire Jumper. | 3198 | 036 | 90010 |
| 6206 | Zener Diode, 6.8 volt | 3198 | 020 | 56880 | 9193 | Wire Jumper. | 3198 | 036 | 90010 |
| 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9311 | Wire Jumper. | 3198 | 036 | 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9312 | Wire Jumper. | 3198 | 036 | 90010 |
| 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9406 | Wire Jumper. | 3198 | 036 | 90010 |
| 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9407 | Wire Jumper. | 3198 | 036 | 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 | 9408 | Wire Jumper. | 3198 | 036 | 90010 |
| 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 | 9409 | Wire Jumper. | 3198 | 036 | 90010 |
| 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9410 | Wire Jumper. | 3198 | 036 | 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6460 | Diode, Rect, DG3-7005L | 9336 | 436 | 10682 | 9414 | Wire Jumper. | 3198 | 036 | 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9423 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9424 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9426 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9463 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6561 | Diode, Rect, SB340L-7010 | 9322 | 128 | 18682 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9611 | Coil, 27u, 10%. | 3198 | 018 | 22790 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I | 4835 | 310 | 57626 | 9616 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7400 | Power FET, STP3NC60FP. | 9322 | 157 | 37687 | 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PDTCL43ZT | 9340 | 547 | 00215 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, NPN, BC327-25(COL) | 3198 | 020 | 43430 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9634 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 9639 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1 | 9352 | 673 | 56112 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, QFPF9N50. | 9322 | 187 | 16687 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PDTCL14ET | 9340 | 310 | 10215 | 9647 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, LE33CZ | 9322 | 106 | 11676 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part Be sure to use exact replacement part.

| | | |
|------|-------------------------------|----------------|
| 9651 | Wire Jumper. | 3198 036 90010 |
| 9652 | Wire Jumper. | 3198 036 90010 |
| 9654 | Wire Jumper. | 3198 036 90010 |
| 9655 | Wire Jumper. | 3198 036 90010 |
| 9656 | Wire Jumper. | 3198 036 90010 |
| 9657 | Wire Jumper. | 3198 036 90010 |
| 9658 | Wire Jumper. | 3198 036 90010 |
| 9659 | Wire Jumper. | 3198 036 90010 |
| 9660 | Wire Jumper. | 3198 036 90010 |
| 9661 | Wire Jumper. | 3198 036 90010 |
| 9662 | Wire Jumper. | 3198 036 90010 |
| 9663 | Wire Jumper. | 3198 036 90010 |
| 9664 | Wire Jumper. | 3198 036 90010 |
| 9665 | Wire Jumper. | 3198 036 90010 |
| 9666 | Wire Jumper. | 3198 036 90010 |
| 9667 | Wire Jumper. | 3198 036 90010 |
| 9668 | Wire Jumper. | 3198 036 90010 |
| 9669 | Wire Jumper. | 3198 036 90010 |
| 9670 | Wire Jumper. | 3198 036 90010 |
| 9671 | Wire Jumper. | 3198 036 90010 |
| 9672 | Coil, 22u, 10% | 3198 018 22290 |
| 9674 | Wire Jumper. | 3198 036 90010 |
| 9675 | Wire Jumper. | 3198 036 90010 |
| 9676 | Wire Jumper. | 3198 036 90010 |
| 9678 | Coil, 22u, 10% | 3198 018 22290 |
| 9679 | Wire Jumper. | 3198 036 90010 |
| 9680 | Wire Jumper. | 3198 036 90010 |
| 9681 | Wire Jumper. | 3198 036 90010 |
| 9682 | Wire Jumper. | 3198 036 90010 |
| 9685 | Wire Jumper. | 3198 036 90010 |
| 9686 | Wire Jumper. | 3198 036 90010 |
| 9687 | Wire Jumper. | 3198 036 90010 |
| 9688 | Wire Jumper. | 3198 036 90010 |
| 9689 | Wire Jumper. | 3198 036 90010 |
| 9690 | Wire Jumper. | 3198 036 90010 |
| 9691 | Wire Jumper. | 3198 036 90010 |
| 9694 | Wire Jumper. | 3198 036 90010 |
| 9695 | Wire Jumper. | 3198 036 90010 |
| 9697 | Wire Jumper. | 3198 036 90010 |
| 9698 | Wire Jumper. | 3198 036 90010 |
| 9699 | Wire Jumper. | 3198 036 90010 |
| 9821 | Wire Jumper. | 3198 036 90010 |
| 9822 | Wire Jumper. | 3198 036 90010 |
| 9825 | Wire Jumper. | 3198 036 90010 |
| 9828 | Wire Jumper. | 3198 036 90010 |
| 9829 | Wire Jumper. | 3198 036 90010 |
| 9831 | Wire Jumper. | 3198 036 90010 |
| 9832 | Wire Jumper. | 3198 036 90010 |
| 9837 | Wire Jumper. | 3198 036 90010 |
| 9838 | Wire Jumper. | 3198 036 90010 |
| 9839 | Wire Jumper. | 3198 036 90010 |
| 9846 | Wire Jumper. | 3198 036 90010 |
| 9847 | Wire Jumper. | 3198 036 90010 |
| 9849 | Wire Jumper. | 3198 036 90010 |
| 9851 | Wire Jumper. | 3198 036 90010 |
| 9856 | Wire Jumper. | 3198 036 90010 |
| 9858 | Wire Jumper. | 3198 036 90010 |
| 9859 | Wire Jumper. | 3198 036 90010 |
| 9860 | Wire Jumper. | 3198 036 90010 |
| 9862 | Wire Jumper. | 3198 036 90010 |
| 9863 | Wire Jumper. | 3198 036 90010 |
| 9864 | Wire Jumper. | 3198 036 90010 |
| 9865 | Wire Jumper. | 3198 036 90010 |
| 9867 | Wire Jumper. | 3198 036 90010 |
| 9868 | Wire Jumper. | 3198 036 90010 |
| 9869 | Wire Jumper. | 3198 036 90010 |
| 9870 | Wire Jumper. | 3198 036 90010 |
| 9871 | Wire Jumper. | 3198 036 90010 |
| 9873 | Wire Jumper. | 3198 036 90010 |
| 9874 | Wire Jumper. | 3198 036 90010 |
| 9875 | Wire Jumper. | 3198 036 90010 |
| 9876 | Wire Jumper. | 3198 036 90010 |
| 9877 | Wire Jumper. | 3198 036 90010 |
| 9878 | Wire Jumper. | 3198 036 90010 |
| 9901 | Wire Jumper. | 3198 036 90010 |
| 9902 | Wire Jumper. | 3198 036 90010 |
| 9903 | Wire Jumper. | 3198 036 90010 |
| 9904 | Wire Jumper. | 3198 036 90010 |
| 9905 | Wire Jumper. | 3198 036 90010 |
| 9911 | Wire Jumper. | 3198 036 90010 |
| 9913 | Wire Jumper. | 3198 036 90010 |
| 9914 | Wire Jumper. | 3198 036 90010 |
| 9915 | Wire Jumper. | 3198 036 90010 |
| 9919 | Wire Jumper. | 3198 036 90010 |
| 9920 | Wire Jumper. | 3198 036 90010 |
| 9991 | Wire Jumper. | 3198 036 90010 |
| 9993 | Wire Jumper. | 3198 036 90010 |
| 9996 | Wire Jumper. | 3198 036 90010 |
| 9997 | Wire Jumper. | 3198 036 90010 |
| 9998 | Wire Jumper. | 3198 036 90010 |
| CBA | Scan 4 Card Assembly | 3121 237 53761 |
| CBA | SP/LS Module (Vertical) (ITV) | 3139 127 27371 |

Channel One Card Parts

0266 6 Pin Connector.

| | | | |
|-----------------------------|--|------|-----------|
| 2D 3 Line Comb Filter Parts | | | |
| 0266 | 6 Pin Connector. | 2422 | 025 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 028 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 31040 |
| 2431 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 31010 |
| 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 31030 |
| 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 31040 |
| 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 31040 |
| 2440 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 21090 |
| 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 35690 |
| 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 35690 |
| 2450 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 21090 |
| 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 35690 |
| 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 35690 |
| 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 35610 |
| 3402 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 31030 |
| 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 31820 |
| 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 | 021 31520 |
| 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 38210 |
| 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass . | 3198 | 021 36820 |
| 3407 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 | 021 31020 |
| 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 38210 |
| 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. | 2122 | 118 05951 |
| 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 38210 |
| 3425 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 31030 |
| 3427 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 | 021 31030 |
| 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass . | 2322 | 704 68202 |
| 3432 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 31230 |
| 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 38210 |
| 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 34710 |
| 3442 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 31230 |
| 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 32720 |
| 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 35610 |
| 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 38210 |
| 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 34710 |
| 3452 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 | 021 31230 |
| 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass . | 3198 | 021 32720 |
| 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 35610 |
| 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 33910 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90030 |
| 3457 | Wire Jumper. | 3198 | 036 90010 |
| 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 33910 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90030 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90030 |
| 4403 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90030 |
| 5401 | Coil, 10u, 10% | 3198 | 018 31090 |
| 5407 | Coil, 33u, 5%. | 3198 | 018 13390 |
| 5408 | Coil, 33u, 20% | 3198 | 018 33390 |
| 5421 | Inductor, 100 MHz, 120 ohm | 3198 | 018 90070 |
| 5425 | Coil, 10u, 10% | 3198 | 018 31090 |
| 5428 | Coil, 10u, 5%. | 3198 | 018 11090 |
| 5429 | Coil, 10u, 10% | 3198 | 018 31090 |
| 5430 | Coil, 10u, 10% | 3198 | 018 31090 |
| 5440 | Coil, 10u, 10% | 3198 | 018 31090 |
| 5442 | Coil, 22u, 5%. | 3198 | 018 12290 |
| 5450 | Coil, 10u, 10% | 3198 | 018 31090 |
| 5452 | Coil, 33u, 5%. | 3198 | 018 13390 |
| 7401 | Transistor, PNP, BC857B(COL) | 3198 | 010 42150 |
| 7402 | Transistor, NPN, BC847B(COL) | 3198 | 010 42030 |
| 7403 | Transistor, NPN, BC847B(COL) | 3198 | 010 42030 |
| 7421 | IC, TC90A53N | 9322 | 182 18682 |
| 7440 | Transistor, NPN, BC847B(COL) | 3198 | 010 42030 |
| 7444 | Transistor, NPN, BC847B(COL) | 3198 | 010 42030 |
| 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 42030 |

32ST230P/35 (continued)

| | | | | |
|------|--|------|-----|-------|
| 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

| | | | | |
|------|---|------|-----|-------|
| | Net 1 Panel (part of Scan 4 Card Assembly) | | | |
| 1000 | F-Connector. | 2422 | 031 | 10792 |
| 1001 | Socket, Cinch, 1 Pin | 2422 | 026 | 05003 |
| 1002 | 5 Pin Connector. | 2422 | 025 | 12708 |
| 2000 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 21040 |
| 2001 | Cap, 39p, 5%, 50v, Ceramic | 3198 | 016 | 03990 |
| 2002 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 02290 |
| 2003 | Cap, 39p, 5%, 50v, Ceramic | 3198 | 016 | 03990 |
| 2004 | Cap, 100n, 10%, 25v, Ceramic | 2238 | 910 | 15649 |
| 2005 | Cap, 270p, 5%, 50v, Ceramic | 3198 | 016 | 02710 |
| 2006 | Cap, 390p, 5%, 50v, Ceramic | 3198 | 016 | 03910 |
| 2007 | Cap, 33p, 5%, 50v, Ceramic | 3198 | 016 | 03390 |
| 2008 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 | 01010 |
| 2009 | Cap, 10p, 5%, 50v, Ceramic | 3198 | 016 | 01090 |
| 2010 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 21040 |
| 2011 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 01030 |
| 2012 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 01030 |
| 2013 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 21040 |
| 2014 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 21040 |
| 2015 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 3000 | Res, 10k, 5% | 3198 | 021 | 51030 |
| 3001 | Res, 10k, 5% | 3198 | 021 | 51030 |
| 3002 | Res, 47 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54790 |
| 3003 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 |
| 3004 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 |
| 3005 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 |
| 3006 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 |
| 3007 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 |
| 3008 | Res, 4K7, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54720 |
| 3009 | Res, 47k, 5% | 3198 | 021 | 54730 |
| 3011 | Res, 10k, 5% | 3198 | 021 | 51030 |
| 3012 | Res, 47 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 | 54790 |
| 5000 | Fixed Inductor, 0.15uH, 10%. | 3198 | 018 | 31570 |
| 5001 | Fixed Inductor, 0.15uH, 10%. | 3198 | 018 | 31570 |
| 5002 | Fixed Inductor, 0.68uH, 10%. | 3198 | 018 | 36870 |
| 5003 | Fixed Inductor, 2.2uH, 5%. | 2422 | 535 | 96509 |
| 5004 | Fixed Inductor, 10uH, 10%. | 3198 | 018 | 31090 |
| 5005 | Inductor, Fixed 22U, 20% | 3198 | 018 | 32290 |
| 5006 | Fixed Inductor, 4.7uH., 10%. | 3198 | 018 | 34780 |
| 6000 | Diode, Signal, BAS216. | 9340 | 255 | 30115 |
| 6001 | Diode, Signal, BAS216. | 9340 | 255 | 30115 |
| 6002 | Diode, Signal, BAS216. | 9340 | 255 | 30115 |
| 7000 | IC, NE592/N8 | 9337 | 334 | 80602 |
| 7001 | Transistor, Signal, BC847B | 9335 | 895 | 90215 |
| CBA | Net 1 Panel (part of Scan 4 Card Assembly). | 3135 | 127 | 10151 |

Scan 4 Card (part of Scan 4 Card Assembly)

| | | | | |
|------|--|------|-----|-------|
| | Scan 4 Card (part of Scan 4 Card Assembly) | | | |
| 1000 | Connector, 15 Pin. | 2422 | 025 | 16857 |
| 1001 | Crystal, Resonator, 20M140 | 2422 | 543 | 01196 |
| 1002 | SOC MDIN H 4P F YKF51 B | 2422 | 026 | 05133 |
| 1003 | SOC CINCH H 4P F WHRD B | 2422 | 026 | 04402 |
| 1005 | Resonator Crystal, 14M31818, 20P | 2422 | 543 | 00904 |
| 1010 | Connector, 32 Pin. | 3135 | 010 | 03541 |
| 1011 | Crystal, Resonator, 12MHz, 20 Pin. | 2422 | 543 | 00488 |
| 1012 | Connector, 5 Pin | 2422 | 025 | 12708 |
| 2000 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 030 | 81080 |
| 2001 | Cap, 82p, 5%, 50v, Ceramic | 3198 | 016 | 08290 |
| 2002 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 2003 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 01590 |
| 2004 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 21040 |
| 2005 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 030 | 81080 |
| 2006 | Cap, 82p, 5%, 50v, Ceramic | 3198 | 016 | 08290 |
| 2007 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 2008 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 2009 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 | 01510 |
| 2010 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 030 | 81080 |

| | | | | |
|------|--|------|-----|-------|
| 2011 | Cap, 270p, 5%, 50v, Ceramic. | 3198 | 016 | 02710 |
| 2012 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 01590 |
| 2013 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 2014 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 | 01510 |
| 2015 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 | 01010 |
| 2016 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 02290 |
| 2017 | Cap, 10u, 20%, 25V, Electrolytic | 2020 | 004 | 90288 |
| 2018 | Cap, 270p, 5%, 50v, Ceramic. | 3198 | 016 | 02710 |
| 2019 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 01590 |
| 2020 | Cap, 100n, +80/-20%, 25v, Ceramic. | 3198 | 023 | 21040 |
| 2021 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 2022 | Cap, 150p, 5%, 50v, Ceramic. | 3198 | 016 | 01510 |
| 2023 | Cap, 270p, 5%, 50v, Ceramic. | 3198 | 016 | 02710 |
| 2024 | Cap, 82p, 5%, 50v, Ceramic | 3198 | 016 | 08290 |
| 2025 | Cap, 47p, 5%, 50v, Ceramic | 3198 | 016 | 04790 |
| 2026 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 02290 |
| 2059 | Cap, 100p, 5%, 50v, Ceramic. | 3198 | 016 | 01010 |
| 2060 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2061 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2062 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2063 | Cap, 4u7, +80/-20%, 10v, Ceramic | 2020 | 552 | 96305 |
| 2064 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2065 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2066 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2067 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2068 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 02290 |
| 2070 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 02290 |
| 2071 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2072 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2073 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2074 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 030 | 74780 |
| 2075 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2076 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 030 | 74780 |
| 2077 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2078 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 030 | 74780 |
| 2079 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 01020 |
| 2080 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2081 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2082 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2083 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2084 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2085 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 030 | 74780 |
| 2086 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 01020 |
| 2087 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2088 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2089 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2090 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2091 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 030 | 74780 |
| 2092 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 | 01020 |
| 2093 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2094 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2095 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2096 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2097 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2098 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2099 | Cap, 470u, 20%, 16v, Electrolytic. | 3198 | 025 | 24710 |
| 2100 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 | 34790 |
| 2101 | Cap, 1u, 20%, 35v, Electrolytic. | 2020 | 004 | 90282 |
| 2102 | Cap, 1u, 20%, 35v, Electrolytic. | 2020 | 004 | 90282 |
| 2106 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 030 | 81080 |
| 2107 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 030 | 81080 |
| 2111 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 030 | 81080 |
| 2112 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 030 | 81080 |
| 2113 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 | 030 | 81080 |
| 2114 | Cap, 470u, 20%, 25v, Electrolytic. | 2020 | 012 | 93457 |
| 2115 | Cap, 10u, 20%, 10v, Electrolytic | 3198 | 032 | 34130 |
| 2116 | Cap, 10u, 20%, 10v, Electrolytic | 3198 | 032 | 34130 |
| 2118 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 02290 |
| 2119 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 | 02290 |
| 2120 | Cap, 680p, 10%, 50v, Ceramic | 3198 | 017 | 06810 |
| 2121 | Cap, 680p, 10%, 50v, Ceramic | 3198 | 017 | 06810 |
| 2122 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2123 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2124 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2125 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2126 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2127 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2129 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2130 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2131 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2132 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2134 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2135 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 01040 |
| 2136 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 | 01010 |
| 2137 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 | 01010 |
| 2139 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 01030 |
| 2140 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 01030 |
| 2141 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 | 01810 |
| 2142 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 | 01810 |
| 3001 | Res, 10K, 5%, 1/10W, Metalized Glass | 3198 | 021 | 51030 |
| 3002 | Res, 220 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 52210 |
| 3003 | Res, 1M, 5%, 1/10W, Metalized Glass. | 3198 | 021 | 51050 |

S = Safety Part Be sure to use exact replacement part.

32ST230P/35 (continued)

| | | | | | | | | | |
|------|---|------|-----|-------|--------------------------------------|---|------|-----|-------|
| 3004 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | 5001 | Coil, 820n | 3198 | 018 | 38270 |
| 3005 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 | 57590 | 5002 | Coil, 1u2. | 3198 | 018 | 31280 |
| 3006 | Res, 1K8, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51820 | 5003 | Coil, 1u2. | 3198 | 018 | 31280 |
| 3007 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 5004 | Coil, 1u2. | 3198 | 018 | 31280 |
| 3008 | Res, 150K, 5%, 1/10W, Metalized Glass.. | 3198 | 021 | 51540 | 5010 | Coil, 820n | 3198 | 018 | 38270 |
| 3009 | Res, 13K, 5%, 1/8W, Metalized Glass. . | 2322 | 730 | 61133 | 5012 | Coil, 820n | 3198 | 018 | 38270 |
| 3010 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 5014 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 | 57590 |
| 3011 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | 5015 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 | 018 | 90060 |
| 3012 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5016 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 | 018 | 90060 |
| 3013 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 5017 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 | 018 | 90060 |
| 3014 | Res, 150K, 5%, 1/10W, Metalized Glass.. | 3198 | 021 | 51540 | 5018 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 | 018 | 90060 |
| 3015 | Res, 13K, 5%, 1/8W, Metalized Glass. . | 2322 | 730 | 61133 | 5019 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 | 018 | 90060 |
| 3016 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 5020 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 | 018 | 90060 |
| 3017 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 5021 | Coil, 82u. | 2422 | 535 | 95408 |
| 3018 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | 5023 | Inductor, Fixed, 100MHz, 30 ohm. . . . | 3198 | 018 | 90060 |
| 3019 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | 5024 | Coil, 1u8. | 3198 | 018 | 31880 |
| 3020 | Res, 150K, 5%, 1/10W, Metalized Glass.. | 3198 | 021 | 51540 | 6001 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 3021 | Res, 13K, 5%, 1/8W, Metalized Glass. . | 2322 | 730 | 61133 | 6002 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 3022 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 6003 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 3023 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 55610 | 6004 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 3024 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | 6005 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 3025 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52230 | 6006 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 3026 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52230 | 6009 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 3027 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52230 | 6010 | Diode, Signal, BAV99 | 3198 | 010 | 10620 |
| 3028 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 6011 | Diode, Signal, BAS16WS | 9322 | 031 | 99685 |
| 3029 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52230 | 6012 | Diode, Signal, BAS16WS | 9322 | 031 | 99685 |
| 3030 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52230 | 6013 | Diode, Signal, BAS16WS | 9322 | 031 | 99685 |
| 3031 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52230 | 6014 | Diode, Signal, BAS16WS | 9322 | 031 | 99685 |
| 3033 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | 6015 | Diode, Signal, BAS16WS | 9322 | 031 | 99685 |
| 3049 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 | 57590 | 6016 | Diode, Signal, BAS16WS | 9322 | 031 | 99685 |
| 3052 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | 6017 | Diode, Rect, MBR5140. | 9322 | 070 | 26668 |
| 3053 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | 6018 | Zener Diode, 6.8 volt. | 9340 | 386 | 40115 |
| 3056 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | 6019 | Diode, Signal, BAS316. | 3198 | 010 | 10630 |
| 3057 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 | 57590 | 7000 | F.E.T. Signal, BSN20 | 9340 | 125 | 00235 |
| 3058 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 53910 | 7001 | IC, LM393D | 9339 | 575 | 30668 |
| 3059 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | 7002 | IC, LM393D | 9339 | 575 | 30668 |
| 3060 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 7003 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 3061 | Res, 1M, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51050 | 7004 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 3062 | Res, 220 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 52210 | 7005 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 3063 | Res, 820 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 58210 | 7006 | Transistor, PNP, BC857B. | 3198 | 010 | 42150 |
| 3064 | Res, 220 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 52210 | 7007 | FET Signal, BSN20. | 9340 | 125 | 00235 |
| 3065 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 | 035 | 10339 | 7010 | FET Signal, BSN20. | 9340 | 125 | 00235 |
| 3066 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 | 035 | 10339 | 7011 | IC, FS401AC. | 9322 | 107 | 99671 |
| 3073 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 | 035 | 10339 | 7012 | IC, HY57V161610DTC-10. | 9322 | 161 | 58668 |
| 3074 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 | 035 | 10339 | 7013 | FET Signal, BSN20. | 9340 | 125 | 00235 |
| 3082 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 | 035 | 10339 | 7014 | IC SM P87C51RD+4A SCAN 4 | 3135 | 120 | 50111 |
| 3085 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 | 035 | 10339 | 7016 | IC, 74HC4066D. | 9337 | 144 | 20653 |
| 3089 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 7018 | IC, M24C04-WMN6. | 9322 | 122 | 33668 |
| 3090 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 | 035 | 10339 | 7020 | Transistor, PNP, BC857B. | 3198 | 010 | 42150 |
| 3091 | Res, Network, 33 ohm X 4, 5%, SM AVR24 | 2350 | 035 | 10339 | 7021 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 3097 | Res, 150 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51510 | 7022 | IC, MC33269D-3.3 | 9322 | 106 | 88668 |
| 3099 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 7023 | IC, MC33269D-3.3 | 9322 | 106 | 88668 |
| 3100 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 7024 | IC, LM2596S-ADJ. | 9322 | 130 | 86685 |
| 3101 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51030 | 7028 | FET Signal, BSH103 | 9340 | 547 | 13215 |
| 3102 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 | 57590 | 7036 | FET Signal, BSH103 | 9340 | 547 | 13215 |
| 3103 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | 7037 | Transistor, NPN, BC847B. | 3198 | 010 | 42030 |
| 3104 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | CBA | Scan 4 Card (part of Scan 4 Card Assemb ly). | 3135 | 127 | 10281 |
| 3105 | Res, 150 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51510 | Side Jack Panel Parts | | | | |
| 3106 | Res, 270 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 52710 | Side Jack Panel Parts | | | | |
| 3108 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | Subwoofer Panel Parts | | | | |
| 3109 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | Subwoofer Panel Parts | | | | |
| 3110 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | Top Control Panel Parts | | | | |
| 3111 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | Top Control Panel Parts | | | | |
| 3112 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 54720 | Cabinet & Accessory Parts | | | | |
| 3113 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52230 | Cabinet & Accessory Parts | | | | |
| 3114 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52720 | S AC01 | AC Cord. | 3135 | 010 | 04323 |
| 3116 | Res, 1K8, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51820 | AC02 | AC Cord Strain Relief. | 3135 | 010 | 02841 |
| 3117 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52230 | AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| 3118 | Res, 6K8, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 56820 | AC04 | Batteries for Remote Control Transmitt | 9299 | 000 | 65263 |
| 3119 | Res, 100K, 5%, 1/10W, Metalized Glass.. | 3198 | 021 | 51040 | AC05 | Cabinet Back | 3139 | 124 | 45221 |
| 3120 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | AC08 | Chassis Tray | 3139 | 124 | 31325 |
| 3121 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | S AC09 | CRT, A80QCF340X34(N) | 9301 | 904 | 59463 |
| 3122 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | AC10 | Customer Control Buttons | 3139 | 124 | 26472 |
| 3124 | Res, 910 ohm, 1%, 1/8W, Metalized Glass | 2322 | 734 | 69101 | S AC12 | Degaussing Coil. | 2422 | 549 | 45334 |
| 3129 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | AC15 | Holder, Degaussing Coil (4 Used) . . . | 3135 | 013 | 01661 |
| 3130 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | AC16 | Jack Panel Bracket | 3139 | 124 | 45161 |
| 3132 | Res, 100K, 5%, 1/10W, Metalized Glass.. | 3198 | 021 | 51040 | AC17 | Owner's Manual, Scan 4 Card. | 3135 | 125 | 21341 |
| 3133 | Res, 100K, 5%, 1/10W, Metalized Glass.. | 3198 | 021 | 51040 | AC17 | ITV Safety/Warranty Instructions . . . | 3135 | 125 | 21431 |
| 3135 | Res, 22K, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 52230 | AC20 | Cabinet Front Assembly | 3121 | 237 | 53561 |
| 3136 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | AC20A | Cabinet Front. | 3135 | 127 | 50031 |
| 3137 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | AC20C | Light Guide. | 3139 | 124 | 26461 |
| 3138 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | AC20D | Nameplate. | 3135 | 015 | 03571 |
| 3139 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | AC20E | Power Button | 3139 | 124 | 26444 |
| 3140 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| 3141 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 | 021 | 51020 | AC26 | EPS Bracket. | 3135 | 014 | 09221 |
| 3142 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 | 021 | 51520 | AC30 | Scan 3 VGA Adapter | 3135 | 017 | 07401 |
| 3143 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 | 021 | 51010 | AC31 | Scan 4 Card Cover. | 3139 | 124 | 47461 |
| 4004 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90020 | | | | | |
| 4005 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90020 | | | | | |
| 4006 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90020 | | | | | |
| 4007 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90020 | | | | | |
| 4008 | Res, Zero ohm, 'Chip' Jumper | 3198 | 021 | 90020 | | | | | |

S = Safety Part Be sure to use exact replacement part.

32ST230P/35 (continued)

REMOTE Remote Control Transmitter, RC2572/01. 3139 228 88691

36ST220P/35 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | |
|--------------------|---|----------------|--|
| 0127 | Socket Fuse | 2422 088 00271 | |
| 0129 | NTC Holder | 3139 120 10151 | |
| 0136 | IC-Spring | 3104 301 22081 | |
| 0137 | Spring | 3139 121 24583 | |
| 0138 | IC-Spring | 3104 301 22081 | |
| 0139 | Spring for Bracket | 3122 121 24786 | |
| 0140 | Spring | 3139 121 24583 | |
| 0141 | IC-Spring | 3104 301 22081 | |
| 0152 | Cable, DIPMate, 6 Pin, 560mm | 3104 301 08411 | |
| 0153 | Cable, 5 Pin, 560mm | 3139 121 09041 | |
| 0211 | 2 Pin Connector | 2422 025 16269 | |
| 0212 | 2 Pin Connector | 2422 025 16375 | |
| 0213 | 2 Pin Connector | 2422 025 16374 | |
| 0217 | 6 Pin Connector | 2422 025 12482 | |
| 0218 | A/V Jack | 2422 026 04742 | |
| 0220 | 5 Pin Connector | 2422 025 04853 | |
| 0221 | 2 Pin Connector | 2422 025 15503 | |
| 0222 | 2 Pin Connector | 2422 025 10646 | |
| 0223 | A/V Jack | 2422 026 05236 | |
| 0225 | SVHS Jack | 2422 026 04926 | |
| 0227 | 6 Pin Connector | 2422 025 15849 | |
| 0229 | 3 Pin Connector | 2412 020 00725 | |
| 0240 | 7 Pin Connector | 2422 025 11244 | |
| 0242 | 7 Pin Connector | 2422 025 17042 | |
| 0243 | 6 Pin Connector | 2422 025 04854 | |
| 0244 | 5 Pin Connector | 2422 025 04853 | |
| 0245 | 6 Pin Connector | 2422 025 04854 | |
| 0251 | 3 Pin Connector | 2412 020 00725 | |
| S 0254 | 10 Pin CRT Socket | 2422 500 80079 | |
| 0259 | 5 Pin Connector | 2422 025 15848 | |
| 0262 | 3 Pin Connector | 2422 025 16937 | |
| 0267 | 3 Pin Connector | 2412 020 00725 | |
| 0280 | 4 Pin Connector | 2422 025 15847 | |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | |
| S 1500 | Fuse, 4A, 250V, IEC | 2422 086 10914 | |
| S 1515 | Relay, 5 Amp, 12V | 2422 132 07444 | |
| 1600 | Tact Switch | 2422 128 02742 | |
| 1601 | Tact Switch | 2422 128 02742 | |
| 1602 | Tact Switch | 2422 128 02742 | |
| 1603 | Tact Switch | 2422 128 02742 | |
| 1606 | Tact Switch | 2422 128 02742 | |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | |
| 1810 | 6 Pin Connector | 2422 025 16607 | |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A | 2422 543 00842 | |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 024 44730 | |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic | 3198 025 24710 | |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic | 3198 025 31010 | |
| 2009 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic | 3198 017 24740 | |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2123 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | |
| 2125 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | |
| 2127 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | |
| 2128 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 021 57590 | |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2181 | Cap, 22p, 5%, 50v, Ceramic | 3198 016 32290 | |
| 2182 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2183 | Cap, 330p, 10%, 50v, Ceramic | 3198 017 33310 | |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 | |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 41040 | |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 | |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 017 44740 | |
| 2213 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2214 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2215 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | |
| 2217 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 | |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | |
| 2221 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic | 3198 017 31520 | |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 017 41050 | |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 32220 | |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 017 42240 | |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | |
| 2248 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2249 | Cap, 22n, 10%, 25v, Ceramic | 3198 017 32230 | |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | |
| 2252 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 | |
| 2253 | Cap, 1n, 5%, 25v, Ceramic | 3198 016 31020 | |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyest er | 2222 368 90177 | |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic | 2020 558 90445 | |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic | 2020 012 93495 | |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 019 43320 | |
| 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 016 05610 | |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic | 2020 558 90559 | |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 023 21040 | |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 558 90445 | |
| 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 | |
| 2402 | Cap, 470p, 10%, 500v, Ceramic | 3198 019 44710 | |
| 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 | |
| 2405 | Cap, 220u, 20%, 25v, Electrolytic | 3198 025 32210 | |
| 2441 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | |
| 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 017 24730 | |
| 2444 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | |
| 2450 | Cap, 47u, 20%, 160v, Electrolytic | 2020 021 91139 | |
| 2451 | Cap, 15n, 10%, 50v, Polyester | 3198 014 01530 | |
| 2452 | Cap, 180p, 5%, 50v, Ceramic | 3198 016 01810 | |
| 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 | |
| 2456 | Cap, 560n, 5%, 250v, Metalized Polyprop ylene | 2022 333 00088 | |
| 2458 | Cap, 2u2, 20%, 100v, Electrolytic | 2020 021 91331 | |
| 2459 | Cap, 680p, 10%, 500v, Ceramic | 3198 019 46810 | |
| 2460 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 01010 | |
| S 2463 | Cap, 390p, 10%, 2000v, Ceramic | 2020 558 90482 | |
| 2464 | Cap, 2u2, 5%, 160v, Metalized Polyprop ylene | 2222 479 90042 | |
| S 2465 | Cap, 15n, 5%, 1600v, Polypropylene | 2020 301 90255 | |
| 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 | |
| 2468 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 | |
| 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 | |
| 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 365 75154 | |
| 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 365 75104 | |
| 2474 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 | |
| 2475 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 | |
| 2476 | Cap, 4n7, 10%, 50v, Ceramic | 3198 017 04720 | |
| 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 021 90586 | |
| 2481 | Cap, 470p, 10%, 500v, Ceramic | 3198 019 44710 | |
| 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 | |
| 2485 | Cap, 4u7, 20%, 250v, Electrolytic | 2020 021 90856 | |
| 2486 | Cap, 470u, 20%, 16v, Electrolytic | 2020 021 91577 | |
| 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 021 90854 | |
| 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 021 91049 | |
| 2489 | Cap, 470u, 20%, 16v, Electrolytic | 2020 021 91577 | |
| 2491 | Cap, 1n, 10%, 500v, Ceramic | 3198 019 41020 | |
| S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro pylene | 2022 330 00018 | |
| 2501 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 | |
| 2502 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 | |
| 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 024 90647 | |
| 2505 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 019 52220 | |
| 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 | |
| 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 019 64710 | |
| S 2515 | Cap, 1n5, 20%, 50v, Ceramic | 2020 554 90172 | |
| 2520 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 | |
| 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 | |
| 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 01040 | |
| S 2523 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 558 90489 | |
| 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 017 04710 | |
| 2527 | Cap, 2n2, 10%, 50v, Ceramic | 3198 017 02220 | |
| 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 017 01020 | |
| 2540 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 | |
| 2541 | Cap, 10n, 10%, 50v, Ceramic | 3198 017 01030 | |
| 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 558 90472 | |
| 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 021 91654 | |
| 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 019 11020 | |
| 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 | |
| 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 | |
| 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 | |
| 2568 | Cap, 1u, 20%, 50v, Electrolytic | 3198 025 51080 | |
| 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 | |
| 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 | |
| 2590 | Cap, 330n, +80/-20%, 25v, Ceramic | 2222 910 19856 | |
| 2601 | Cap, 220n, +80/-20%, 25v, Ceramic | 3198 023 22240 | |
| 2602 | Cap, 100p, 5%, 50v, Ceramic | 3198 016 31010 | |

S = Safety Part Be sure to use exact replacement part.

36ST220P/35 (continued)

| | | | | | |
|------|---|----------------|--------|--|----------------|
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3223 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 025 32210 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 2807 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. . | 3198 021 36840 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic. . . . | 3198 025 54780 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3341 | Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X | 2306 204 03108 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3341 | Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33 | 2306 204 03278 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3342 | Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X | 2306 204 03108 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | S 3342 | Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 | 2306 204 03278 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01040 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. | 3198 025 51090 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2910 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2911 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . . | 3198 021 31050 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. | 3198 011 01530 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. | 3198 011 05620 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3451 | Res, 8R2, 5%, Metal Film. | 2306 204 03828 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film. | 2312 915 15602 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . . | 3198 021 31020 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3122 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3123 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3470 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 730 61274 |
| 3125 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3473 | Res, 5R6, 1%, 3/5W, Metal Film. | 2312 915 15608 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3182 | Wire Jumper. | 3198 036 90010 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3482 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3206 | Res, 270K, 5%, 1/16W, Metalized Glass. . | 2322 702 60274 | | | |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | | | |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | | | |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | | | |

S = Safety Part Be sure to use exact replacement part.

36ST220P/35 (continued)

| | | | | | |
|--------|---|----------------|--------|--|----------------|
| 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 | 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 |
| 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 | 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 |
| 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 | 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 3507 | Surge Protector | 2422 549 43073 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 | 4101 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 | 4102 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | 4104 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 | 4126 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 | 4128 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 | 4181 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3526 | Res, OR1, 5%, 3/5W, Metal Film | 3198 012 11070 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3527 | Res, OR33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4604 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3558 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 021 53320 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5341 | Coil, 22u. | 2422 535 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5342 | Coil, 22u for A80QCF340X34 | 2422 535 97333 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5342 | Coil, 47u for A80QCF330X34 | 3198 018 24790 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | S 5445 | Transformer, PSLOT | 3128 138 21421 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5451 | Coil, 33u, 10% | 3198 018 73390 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5457 | Coil, Linear, DC12 | 3128 138 55881 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5461 | Transformer, Signal Driver, SCI0015-00 | 2422 531 02465 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5471 | Coil, 4u7, 20% | 3198 018 74780 |

S = Safety Part Be sure to use exact replacement part.

36ST220P/35 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|---|------|-----|-------|
| 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 | 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 | 7560 | IC, LE33CZ | 9322 | 106 | 11676 |
| S 5501 | Mains Filter | 2422 | 549 | 43432 | 7561 | Transistor, NPN, PDMC143ZT | 9340 | 547 | 00215 |
| S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 | 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7602 | IC, M24C16-WBN6. | 9322 | 147 | 25682 |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7606 | Transistor, NPN, PDMC143ZT | 9340 | 547 | 00215 |
| 5561 | Coil, 27u, 5%. | 2422 | 535 | 95366 | 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7803 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7804 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 5602 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 | 187 | 89682 |
| 5603 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7901 | IC, AN7522N PH | 9322 | 181 | 41682 |
| 5604 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 5810 | Coil, 10u, 10% | 3198 | 018 | 51090 | 9104 | Wire Jumper. | 3198 | 036 | 90010 |
| 5831 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| 5832 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 9173 | Wire Jumper. | 3198 | 036 | 90010 |
| 5833 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 9175 | Wire Jumper. | 3198 | 036 | 90010 |
| 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 | 9181 | Wire Jumper. | 3198 | 036 | 90010 |
| 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9182 | Wire Jumper. | 3198 | 036 | 90010 |
| 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9183 | Wire Jumper. | 3198 | 036 | 90010 |
| 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9192 | Wire Jumper. | 3198 | 036 | 90010 |
| 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9193 | Wire Jumper. | 3198 | 036 | 90010 |
| 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9311 | Wire Jumper. | 3198 | 036 | 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9312 | Wire Jumper. | 3198 | 036 | 90010 |
| 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9406 | Wire Jumper. | 3198 | 036 | 90010 |
| 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9407 | Wire Jumper. | 3198 | 036 | 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 | 9408 | Wire Jumper. | 3198 | 036 | 90010 |
| 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 | 9409 | Wire Jumper. | 3198 | 036 | 90010 |
| 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9410 | Wire Jumper. | 3198 | 036 | 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6460 | Diode, Rect, DGS-7005L | 9336 | 436 | 10682 | 9414 | Wire Jumper. | 3198 | 036 | 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9423 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9424 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9426 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9463 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6561 | Diode, Rect, SB340L-7010 | 9322 | 128 | 18682 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I | 4835 | 310 | 57626 | 9616 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7400 | Power FET, IR. | 9322 | 053 | 35687 | 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PDMC143ZT | 9340 | 547 | 00215 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9634 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 9639 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PDMC114ET | 9340 | 310 | 10215 | 9647 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part Be sure to use exact replacement part.

36ST220P/35 (continued)

| | | | | | | | | | |
|------|--------------------------|------|-----|-------|-----|--|------|-----|-------|
| 9648 | Wire Jumper. | 3198 | 036 | 90010 | CBA | SP/LS Module (Vertical) (ITV). | 3139 | 127 | 27374 |
| 9650 | Wire Jumper. | 3198 | 036 | 90010 | CBA | EPS Module (ITV) | 3139 | 137 | 22961 |
| 9651 | Wire Jumper. | 3198 | 036 | 90010 | CBA | Main Chassis Assembly. | 3139 | 187 | 26761 |
| 9652 | Wire Jumper. | 3198 | 036 | 90010 | CBA | Interface Panel (ITV). | 3139 | 188 | 04541 |
| 9654 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9655 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9656 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9657 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9658 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9659 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9660 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9661 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9662 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9663 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9664 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9665 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9666 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9667 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9668 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9669 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9670 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9671 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9672 | Coil, 22u, 10% | 3198 | 018 | 22290 | | | | | |
| 9674 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9675 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9676 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9678 | Coil, 22u, 10% | 3198 | 018 | 22290 | | | | | |
| 9679 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9680 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9681 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9682 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9685 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9686 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9687 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9688 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9689 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9690 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9691 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9694 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9695 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9697 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9698 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9699 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9821 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9822 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9825 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9828 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9829 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9831 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9832 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9837 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9838 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9839 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9846 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9858 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9859 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9863 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9867 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9869 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9870 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9871 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9876 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9878 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9919 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9920 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

| | | | | |
|------|--|------|-----|-------|
| 0266 | 6 Pin Connector. | 2422 | 025 | 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 | 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 | 028 | 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 | 016 | 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 | 017 | 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 | 017 | 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 | 016 | 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 | 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2431 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 | 025 | 31010 |
| 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 | 017 | 31030 |
| 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 | 31040 |
| 2440 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 |
| 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2450 | Cap, 10u, 20%, 16v, Electrolytic | 3198 | 028 | 21090 |
| 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 | 016 | 35690 |
| 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3402 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31820 |
| 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31520 |
| 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 | 021 | 36820 |
| 3407 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 | 021 | 31020 |
| 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. | 2122 | 118 | 05951 |
| 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3425 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3427 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31030 |
| 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass | 2322 | 704 | 68202 |
| 3432 | Res, 12K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31230 |
| 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3442 | Res, 12K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31230 |
| 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32720 |
| 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 38210 |
| 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 34710 |
| 3452 | Res, 12K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 31230 |
| 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass | 3198 | 021 | 32720 |
| 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 35610 |
| 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 3457 | Wire Jumper. | 3198 | 036 | 90010 |
| 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 33910 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4403 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 5401 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5407 | Coil, 33u, 5%. | 3198 | 018 | 13390 |
| 5408 | Coil, 33u, 20% | 3198 | 018 | 33390 |
| 5421 | Inductor, 100 MHz, 120 ohm | 3198 | 018 | 90070 |
| 5425 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5428 | Coil, 10u, 5%. | 3198 | 018 | 11090 |
| 5429 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5430 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5440 | Coil, 10u, 10% | 3198 | 018 | 31090 |
| 5442 | Coil, 22u, 5%. | 3198 | 018 | 12 |

36ST220P/35 (continued)

| | | | | |
|------|--|------|-----|-------|
| 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

| | | | | |
|--------|---|------|-----|-------|
| | Cabinet & Accessory Parts | | | |
| S AC01 | AC Cord. | 3135 | 010 | 04323 |
| AC02 | AC Cord Strain Relief. | 3135 | 010 | 02841 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC05 | Cabinet Back | 3139 | 124 | 45211 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A90AKB50X07(V). | 9322 | 186 | 37682 |
| AC10 | Customer Control Buttons | 3139 | 124 | 26472 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43972 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01651 |
| AC16 | Jack Panel Bracket | 3139 | 124 | 45161 |
| AC17 | ITV Safety/Warranty Instructions | 3135 | 125 | 21431 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 52412 |
| AC20A | Cabinet Front. | 3135 | 127 | 50041 |
| AC20C | Light Guide. | 3139 | 124 | 26461 |
| AC20D | Nameplate. | 3135 | 015 | 03571 |
| AC20E | Power Button | 3139 | 124 | 26444 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| AC26 | EPS Bracket. | 3135 | 014 | 09221 |
| AC28 | ITV Card Slot Cover. | 3139 | 124 | 30571 |
| ITV | Institutional Interconnect Device (Model 1 36ST230P/35 Only). | 00SC | N4N | FN/35 |

36ST230P/35 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | | | |
|--------------------|--|------|-----------|--------|---|------------------|----------------|
| | Main Chassis Parts | | | | | | |
| 0127 | Socket Fuse | 2422 | 088 00271 | 2217 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 |
| 0129 | NTC Holder | 3139 | 120 10151 | 2219 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 |
| 0136 | IC-Spring | 3104 | 301 22081 | 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 | 014 04740 |
| 0137 | Spring | 3139 | 121 24583 | 2221 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 |
| 0138 | IC-Spring | 3104 | 301 22081 | 2241 | Cap, 1n5, 10%, 50v, Ceramic | 3198 | 017 31520 |
| 0139 | Spring for Bracket | 3122 | 121 24786 | 2242 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 |
| 0140 | Spring | 3139 | 121 24583 | 2243 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 32220 |
| 0141 | IC-Spring | 3104 | 301 22081 | 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 | 370 76104 |
| 0152 | Cable, DIPMate, 6 Pin, 560mm | 3104 | 301 08411 | 2245 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 |
| 0153 | Cable, 5 Pin, 560mm | 3139 | 121 09041 | 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 |
| 0211 | 2 Pin Connector | 2422 | 025 16269 | 2248 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 |
| 0212 | 2 Pin Connector | 2422 | 025 16375 | 2249 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 | 025 52280 |
| 0213 | 2 Pin Connector | 2422 | 025 16374 | 2252 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 |
| 0217 | 6 Pin Connector | 2422 | 025 12482 | 2253 | Cap, 1n, 5%, 25v, Ceramic | 3198 | 016 31020 |
| 0218 | A/V Jack | 2422 | 026 04742 | 2254 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 |
| 0220 | 5 Pin Connector | 2422 | 025 04853 | 2330 | Cap, 100n, 10%, 250v, Metalized Polyest | er | 2222 368 90177 |
| 0221 | 2 Pin Connector | 2422 | 025 15503 | 2331 | Cap, 10n, +80/-20% 1000v, Ceramic | 2020 | 558 90445 |
| 0222 | 2 Pin Connector | 2422 | 025 10646 | 2340 | Cap, 10u, 20%, 250v, Electrolytic | 2020 | 012 93495 |
| 0223 | A/V Jack | 2422 | 026 05236 | 2341 | Cap, 3n3, 10%, 500v, Ceramic | 3198 | 019 43320 |
| 0225 | SVHS Jack | 2422 | 026 04926 | 2342 | Cap, 560p, 5%, 50v, Ceramic | 3198 | 016 05610 |
| 0227 | 6 Pin Connector | 2422 | 025 15849 | 2343 | Cap, 2n2, 10%, 2000v, Ceramic | 2020 | 558 90559 |
| 0229 | 3 Pin Connector | 2412 | 020 00725 | 2344 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 21040 |
| 0240 | 7 Pin Connector | 2422 | 025 11244 | 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic | 2020 | 558 90445 |
| 0242 | 7 Pin Connector | 2422 | 025 17042 | 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 | 021 90552 |
| 0243 | 6 Pin Connector | 2422 | 025 04854 | 2402 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 0244 | 5 Pin Connector | 2422 | 025 04853 | 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 | 025 54790 |
| 0245 | 6 Pin Connector | 2422 | 025 04854 | 2405 | Cap, 220u, 20%, 25v, Electrolytic | 3198 | 025 32210 |
| 0251 | 3 Pin Connector | 2412 | 020 00725 | 2441 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| S 0254 | 10 Pin CRT Socket | 2422 | 500 80079 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic | 3198 | 017 24730 |
| 0259 | 5 Pin Connector | 2422 | 025 15848 | 2444 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 0262 | 3 Pin Connector | 2422 | 025 16937 | 2450 | Cap, 47u, 20%, 160v, Electrolytic | 2020 | 021 91139 |
| 0267 | 3 Pin Connector | 2412 | 020 00725 | 2451 | Cap, 15n, 10%, 50v, Polyester | 3198 | 014 01530 |
| 0280 | 4 Pin Connector | 2422 | 025 15847 | 2452 | Cap, 180p, 5%, 50v, Ceramic | 3198 | 016 01810 |
| S 1000 | Tuner, V+U, PLL | 2422 | 542 90108 | 2455 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 1002 | SAW Filter, 45.75MHz | 2422 | 549 44518 | 2456 | Cap, 560n, 5%, 250v, Metalized Polyprop | ylene | 2022 333 00088 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 | 549 40807 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic | 2020 | 021 91331 |
| S 1500 | Fuse, 4A, 250V, IEC | 2422 | 086 10914 | 2459 | Cap, 680p, 10%, 500v, Ceramic | 3198 | 019 46810 |
| S 1515 | Relay, 5 Amp, 12V | 2422 | 132 07444 | 2460 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 01010 |
| 1600 | Tact Switch | 2422 | 128 02742 | S 2463 | Cap, 390p, 10%, 2000v, Ceramic | 2020 | 558 90482 |
| 1601 | Tact Switch | 2422 | 128 02742 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropy | lene | 2222 479 90042 |
| 1602 | Tact Switch | 2422 | 128 02742 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene | 2020 | 301 90255 |
| 1603 | Tact Switch | 2422 | 128 02742 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 | 347 90219 |
| 1606 | Tact Switch | 2422 | 128 02742 | 2468 | Cap, 15n, 10%, 400v, Polyester | 2222 | 347 90219 |
| 1660 | Crystal, 12MHz000 | 2422 | 543 01203 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 1810 | 6 Pin Connector | 2422 | 025 16607 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyeste | 2222 | 365 75154 |
| 1831 | Crystal, Resonator, 18MHz432, 12 Pin, H | | | 2473 | Cap, 100n, 10%, 63v, Metalized Polyeste | 2222 | 365 75104 |
| | C49/U A | 2422 | 543 00842 | 2474 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic | 3198 | 024 44730 | 2475 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2476 | Cap, 4n7, 10%, 50v, Ceramic | 3198 | 017 04720 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic | 3198 | 025 24710 | 2480 | Cap, 47u, 20%, 25v, Electrolytic | 2020 | 021 90586 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2481 | Cap, 470p, 10%, 500v, Ceramic | 3198 | 019 44710 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic | 3198 | 025 31010 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 | 347 90234 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic | 2020 | 021 90856 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic | 3198 | 017 24740 | 2486 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2487 | Cap, 47u, 20%, 50v, Electrolytic | 2020 | 021 90854 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic | 2020 | 021 91049 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2489 | Cap, 470u, 20%, 16v, Electrolytic | 2020 | 021 91577 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2491 | Cap, 1n, 10%, 500v, Ceramic | 3198 | 019 41020 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypro | pylene | 2022 330 00018 |
| 2111 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2112 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2113 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2503 | Cap, 470u, 20%, 200v, Electrolytic | 2020 | 024 90647 |
| 2123 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic | 3198 | 019 52220 |
| 2125 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 90020 | 2507 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2127 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 57590 | 2508 | Cap, 470p, 10%, 1000v, Ceramic | 3198 | 019 64710 |
| 2128 | Res, 75 ohm, 5%, 1/10W, Metalized Glass | 3198 | 021 57590 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic | 2020 | 554 90172 |
| 2131 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2132 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2521 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2133 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic | 3198 | 017 01040 |
| 2134 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic | 2020 | 558 90489 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2525 | Cap, 470p, 10%, 50v, Ceramic | 3198 | 017 04710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2527 | Cap, 2n2, 10%, 50v, Ceramic | 3198 | 017 02220 |
| 2181 | Cap, 22p, 5%, 50v, Ceramic | 3198 | 016 32290 | 2528 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 017 01020 |
| 2182 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2540 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2183 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 33310 | 2541 | Cap, 10n, 10%, 50v, Ceramic | 3198 | 017 01030 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2560 | Cap, 680p, 10%, 1000v, Ceramic | 2020 | 558 90472 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 | 017 22250 | 2561 | Cap, 100u, 20%, 160v, Electrolytic | 2020 | 021 91654 |
| 2201 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic | 3198 | 019 11020 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 | 014 01040 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 | 021 91353 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 | 025 34790 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic | 3198 | 017 42240 | 2568 | Cap, 1u, 20%, 50v, Electrolytic | 3198 | 025 51080 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic | 3198 | 023 41040 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 | 028 24790 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 51090 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 | 025 52290 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic | 3198 | 017 41050 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic | 2222 | 910 19856 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic | 3198 | 017 44740 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic | 3198 | 023 22240 |
| 2213 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic | 3198 | 016 31010 |
| 2214 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | | | | |
| 2215 | Cap, 22n, 10%, 25v, Ceramic | 3198 | 017 32230 | | | | |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 | 026 21020 | | | | |

S = Safety Part Be sure to use exact replacement part.

36ST230P/35 (continued)

| | | | | | |
|------|--|----------------|--------|--|-------------------------------|
| 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 |
| 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | 3218 | Res, 82K, 5%, 1/16W, Metalized Glass. . | 3198 021 38230 |
| 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass. . | 3198 021 32220 |
| 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 | 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 |
| 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2616 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3223 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 | 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 025 32210 | 3241 | Res, 22K, 5%, 1/16W, Metalized Glass. . | 3198 021 32230 |
| 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3242 | Res, 27K, 5%, 1/16W, Metalized Glass. . | 3198 021 32730 |
| 2807 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3245 | Res, 39K, 1%, 1/16W, Metalized Glass. . | 2322 704 63903 |
| 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 | 3246 | Res, 10K, 5%, 1/16W, Metalized Glass. . | 3198 021 31030 |
| 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 3247 | Res, 680K, 5%, 1/16W, Metalized Glass. . | 3198 021 36840 |
| 2831 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3248 | Res, 33K, 5%, 1/16W, Metalized Glass. . | 3198 021 33330 |
| 2832 | Cap, 1p, 25%, 50v, Ceramic. | 3198 016 31080 | 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2833 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 2834 | Cap, 470p, 5%, 50v, Ceramic. | 3198 016 34710 | 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2835 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 2836 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 3257 | Res, 10M, 5%, 1/16W, Metalized Glass. . | 3198 021 31060 |
| 2837 | Cap, 4u7, 20%, 50v, Electrolytic. . . . | 3198 025 54780 | 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 2840 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 |
| 2841 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2842 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2843 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2844 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2845 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2846 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 |
| 2849 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 |
| 2850 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3341 | Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X | 34. 2306 204 03108 |
| 2852 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3341 | Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33 | 0X34 2306 204 03278 |
| 2854 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | S 3342 | Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X | 34. 2306 204 03108 |
| 2855 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 | S 3342 | Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33 | 0X34 2306 204 03278 |
| 2856 | Cap, 47p, 5%, 50v, Ceramic. | 3198 016 34790 | 3343 | Res, 1K5, 20%, 1/2W, Carbon Film. . . . | 3198 013 01520 |
| 2857 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 | 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2860 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 | S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 |
| 2894 | Cap, 220p, 5%, 50v, Ceramic. | 3198 016 32210 | 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 2895 | Cap, 560p, 5%, 25v, Ceramic. | 3198 016 35610 | 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 |
| 2897 | Cap, 390p, 5%, 50v, Ceramic. | 3198 016 33910 | 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 |
| 2898 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01040 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2904 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. | 3198 011 04780 |
| 2905 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2906 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. | 3198 011 01030 |
| 2907 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film. | 2306 204 03478 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2910 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2911 | Cap, 3n3, 10%, 50v, Ceramic. | 3198 017 33320 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass. . | 3198 021 38220 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3451 | Res, 8R2, 5%, Metal Film. | 2306 204 03828 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 06890 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film. | 2312 915 15602 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film. . . . | 3198 012 26880 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film. . . . | 3198 012 21530 |
| 3112 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3114 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 03390 |
| 3116 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3465 | Res, 27K, 1%, 3/5W, Metal Film. | 2312 915 12703 |
| 3121 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3122 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. | 3198 011 03320 |
| 3123 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3470 | Res, 270K, 5%, 1/8W, Metalized Glass. . | 2322 730 61274 |
| 3125 | Res, 680 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 06810 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3131 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film. | 2312 915 13308 |
| 3132 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3473 | Res, 5R6, 1%, 3/5W, Metal Film. | 2312 915 15608 |
| 3133 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3134 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film. | 2312 915 12202 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film. . . | 3198 011 07590 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3182 | Wire Jumper. | 3198 036 90010 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass. . | 3198 021 52720 |
| 3184 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. | 2122 101 02083 |
| 3185 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3481 | Res, 12K, 1%, 3/5W, Metal Film. | 2312 915 11203 |
| 3186 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3482 | Res, 10K, 1%, 3/5W, Metal Film. | 2312 915 11003 |
| 3187 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. | 3198 011 03920 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . | 3198 012 33390 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film. | 2306 207 03478 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . . | 3198 021 51020 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film. | 2306 204 03688 |
| 3206 | Res, 270K, 5%, 1/16W, Metalized Glass. . | 2322 702 60274 | | | |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | | | |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | | | |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | | | |

S = Safety Part Be sure to use exact replacement part.

36ST230P/35 (continued)

| | | | | | |
|--------|---|----------------|--------|--|----------------|
| 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 | 3833 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3837 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3839 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 3843 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 |
| 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 | 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 |
| 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 |
| 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 | 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 |
| 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 | 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 | 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 |
| 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 | 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 |
| 3507 | Surge Protector | 2422 549 43073 | 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 |
| 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 | 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 | 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 | 4101 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 | 4102 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | 4104 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. | 3198 021 53340 | 4126 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 | 4128 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 | 4181 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4209 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3526 | Res, OR1, 5%, 3/5W, Metal Film | 3198 012 11070 | 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3527 | Res, OR33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 | 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 | 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 | 4604 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 | 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 | 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 | 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 | 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 | 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 | 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| S 3558 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 | 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 | 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 | 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 | 4696 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 | 4824 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 | 4826 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. | 3198 021 52240 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4835 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4839 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4840 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4872 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4874 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4875 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 4882 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4884 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3638 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 021 53320 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3811 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3812 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3813 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5341 | Coil, 22u. | 2422 535 97333 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5342 | Coil, 22u for A80QCF340X34 | 2422 535 97333 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5342 | Coil, 47u for A80QCF330X34 | 3198 018 24790 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | S 5445 | Transformer, PSLOT | 3128 138 21421 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5451 | Coil, 33u, 10% | 3198 018 73390 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5457 | Coil, Linear, DC12 | 3128 138 55881 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5461 | Transformer, Signal Driver, SCI0015-00 | 2422 531 02465 |
| 3831 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3832 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 5471 | Coil, 4u7, 20% | 3198 018 74780 |

S = Safety Part Be sure to use exact replacement part.

36ST230P/35 (continued)

| | | | | | | | | | |
|--------|--|------|-----|-------|------|---|------|-----|-------|
| 5472 | Coil, 3u3, 10% | 3198 | 018 | 23380 | 7542 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5480 | Coil, 39u, 10% | 2422 | 535 | 97336 | 7560 | IC, LE33CZ | 9322 | 106 | 11676 |
| S 5501 | Mains Filter | 2422 | 549 | 43432 | 7561 | Transistor, NPN, PDMC143ZT | 9340 | 547 | 00215 |
| S 5520 | Transformer, SS39009-04. | 2422 | 531 | 02459 | 7580 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 |
| 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7602 | IC, M24C16-WBN6. | 9322 | 147 | 25682 |
| 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7606 | Transistor, NPN, PDMC143ZT | 9340 | 547 | 00215 |
| 5561 | Coil, 27u, 5%. | 2422 | 535 | 95366 | 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7803 | IC, HEF4053BT. | 9333 | 729 | 60653 |
| 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 | 018 | 90010 | 7804 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 5602 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7831 | IC MSP3425G-PO-B8-V3 (MIAS) L | 9322 | 187 | 89682 |
| 5603 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 7901 | IC, AN7522N PH | 9322 | 181 | 41682 |
| 5604 | Coil, 5u6, 5%. | 3198 | 018 | 15680 | 9001 | Wire Jumper. | 3198 | 036 | 90010 |
| 5810 | Coil, 10u, 10% | 3198 | 018 | 51090 | 9104 | Wire Jumper. | 3198 | 036 | 90010 |
| 5831 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 9171 | Wire Jumper. | 3198 | 036 | 90010 |
| 5832 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 9173 | Wire Jumper. | 3198 | 036 | 90010 |
| 5833 | Coil, 6u8, 5%. | 3198 | 018 | 16880 | 9175 | Wire Jumper. | 3198 | 036 | 90010 |
| 5835 | Coil, 12u, 10% | 3198 | 018 | 31290 | 9181 | Wire Jumper. | 3198 | 036 | 90010 |
| 6001 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9182 | Wire Jumper. | 3198 | 036 | 90010 |
| 6201 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9183 | Wire Jumper. | 3198 | 036 | 90010 |
| 6202 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9192 | Wire Jumper. | 3198 | 036 | 90010 |
| 6206 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9193 | Wire Jumper. | 3198 | 036 | 90010 |
| 6331 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9311 | Wire Jumper. | 3198 | 036 | 90010 |
| 6332 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9312 | Wire Jumper. | 3198 | 036 | 90010 |
| 6333 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9406 | Wire Jumper. | 3198 | 036 | 90010 |
| 6335 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9407 | Wire Jumper. | 3198 | 036 | 90010 |
| 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 | 915 | 11002 | 9408 | Wire Jumper. | 3198 | 036 | 90010 |
| 6401 | Zener Diode, 47 volt | 3198 | 010 | 24790 | 9409 | Wire Jumper. | 3198 | 036 | 90010 |
| 6445 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9410 | Wire Jumper. | 3198 | 036 | 90010 |
| 6447 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9411 | Wire Jumper. | 3198 | 036 | 90010 |
| 6448 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9412 | Wire Jumper. | 3198 | 036 | 90010 |
| 6449 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9413 | Wire Jumper. | 3198 | 036 | 90010 |
| 6460 | Diode, Rect, DGS-7005L | 9336 | 436 | 10682 | 9414 | Wire Jumper. | 3198 | 036 | 90010 |
| 6461 | Diode, Rect, RGP30J-L7004. | 9338 | 617 | 60682 | 9415 | Wire Jumper. | 3198 | 036 | 90010 |
| 6462 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9416 | Wire Jumper. | 3198 | 036 | 90010 |
| 6465 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9417 | Wire Jumper. | 3198 | 036 | 90010 |
| 6466 | Diode, Signal, BAV21 | 3198 | 010 | 10070 | 9418 | Wire Jumper. | 3198 | 036 | 90010 |
| 6467 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9419 | Wire Jumper. | 3198 | 036 | 90010 |
| 6468 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9421 | Wire Jumper. | 3198 | 036 | 90010 |
| 6469 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9422 | Wire Jumper. | 3198 | 036 | 90010 |
| 6470 | Diode, Signal, BAV99 | 3198 | 010 | 10620 | 9423 | Wire Jumper. | 3198 | 036 | 90010 |
| 6476 | Zener Diode, 15 volt | 3198 | 010 | 21590 | 9424 | Wire Jumper. | 3198 | 036 | 90010 |
| 6481 | Zener Diode, 5.6 volt. | 3198 | 010 | 25680 | 9425 | Wire Jumper. | 3198 | 036 | 90010 |
| 6482 | Zener Diode, 9.1 volt. | 9331 | 177 | 80133 | 9426 | Wire Jumper. | 3198 | 036 | 90010 |
| 6483 | Zener Diode, 33 volt | 3198 | 010 | 23390 | 9427 | Wire Jumper. | 3198 | 036 | 90010 |
| 6485 | Diode, Rect, BYV95C. | 9335 | 001 | 80133 | 9453 | Wire Jumper. | 3198 | 036 | 90010 |
| 6486 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9460 | Wire Jumper. | 3198 | 036 | 90010 |
| 6487 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9463 | Wire Jumper. | 3198 | 036 | 90010 |
| 6488 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9500 | Wire Jumper. | 3198 | 036 | 90010 |
| 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 | 138 | 08667 | 9501 | Wire Jumper. | 3198 | 036 | 90010 |
| 6520 | Diode, Rect, BYV95A. | 9335 | 000 | 90133 | 9503 | Wire Jumper. | 3198 | 036 | 90010 |
| 6523 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9506 | Wire Jumper. | 3198 | 036 | 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9507 | Wire Jumper. | 3198 | 036 | 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 | 010 | 10120 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6526 | Zener Diode, 22 volt | 3198 | 020 | 52290 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt | 3198 | 020 | 51090 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6561 | Diode, Rect, SB340L-7010 | 9322 | 128 | 18682 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70 | 9331 | 849 | 10215 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85 | 9336 | 247 | 60133 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR | 9322 | 185 | 69682 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9611 | Coil, 27u, 10% | 3198 | 018 | 22790 |
| 6831 | Diode, Signal, 1N4148. | 3198 | 010 | 10010 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 7101 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9615 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I | 4835 | 310 | 57626 | 9616 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3 | 9352 | 713 | 37112 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7400 | Power FET, IR. | 9322 | 053 | 35687 | 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL) | 3198 | 010 | 42150 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL) | 3198 | 020 | 40110 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL) | 3198 | 020 | 43530 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PDMC143ZT | 9340 | 547 | 00215 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL) | 3198 | 020 | 43430 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9634 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135 | 3198 | 020 | 41010 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G) | 9322 | 140 | 14667 | 9639 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL) | 3198 | 020 | 40030 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PDMC114ET | 9340 | 310 | 10215 | 9647 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part Be sure to use exact replacement part.

36ST230P/35 (continued)

| | | | | | |
|------|--------------------------|----------------|-----|--|----------------|
| 9648 | Wire Jumper. | 3198 036 90010 | CBA | SP/LS Module (Vertical) (ITV). | 3139 127 27374 |
| 9650 | Wire Jumper. | 3198 036 90010 | CBA | EPS Module (ITV) | 3139 137 22961 |
| 9651 | Wire Jumper. | 3198 036 90010 | CBA | Main Chassis Assembly. | 3139 187 26761 |
| 9652 | Wire Jumper. | 3198 036 90010 | CBA | Interface Panel (ITV). | 3139 188 04541 |
| 9654 | Wire Jumper. | 3198 036 90010 | | | |
| 9655 | Wire Jumper. | 3198 036 90010 | | | |
| 9656 | Wire Jumper. | 3198 036 90010 | | | |
| 9657 | Wire Jumper. | 3198 036 90010 | | | |
| 9658 | Wire Jumper. | 3198 036 90010 | | | |
| 9659 | Wire Jumper. | 3198 036 90010 | | | |
| 9660 | Wire Jumper. | 3198 036 90010 | | | |
| 9661 | Wire Jumper. | 3198 036 90010 | | | |
| 9662 | Wire Jumper. | 3198 036 90010 | | | |
| 9663 | Wire Jumper. | 3198 036 90010 | | | |
| 9664 | Wire Jumper. | 3198 036 90010 | | | |
| 9665 | Wire Jumper. | 3198 036 90010 | | | |
| 9666 | Wire Jumper. | 3198 036 90010 | | | |
| 9667 | Wire Jumper. | 3198 036 90010 | | | |
| 9668 | Wire Jumper. | 3198 036 90010 | | | |
| 9669 | Wire Jumper. | 3198 036 90010 | | | |
| 9670 | Wire Jumper. | 3198 036 90010 | | | |
| 9671 | Wire Jumper. | 3198 036 90010 | | | |
| 9672 | Coil, 22u, 10% | 3198 018 22290 | | | |
| 9674 | Wire Jumper. | 3198 036 90010 | | | |
| 9675 | Wire Jumper. | 3198 036 90010 | | | |
| 9676 | Wire Jumper. | 3198 036 90010 | | | |
| 9678 | Coil, 22u, 10% | 3198 018 22290 | | | |
| 9679 | Wire Jumper. | 3198 036 90010 | | | |
| 9680 | Wire Jumper. | 3198 036 90010 | | | |
| 9681 | Wire Jumper. | 3198 036 90010 | | | |
| 9682 | Wire Jumper. | 3198 036 90010 | | | |
| 9685 | Wire Jumper. | 3198 036 90010 | | | |
| 9686 | Wire Jumper. | 3198 036 90010 | | | |
| 9687 | Wire Jumper. | 3198 036 90010 | | | |
| 9688 | Wire Jumper. | 3198 036 90010 | | | |
| 9689 | Wire Jumper. | 3198 036 90010 | | | |
| 9690 | Wire Jumper. | 3198 036 90010 | | | |
| 9691 | Wire Jumper. | 3198 036 90010 | | | |
| 9694 | Wire Jumper. | 3198 036 90010 | | | |
| 9695 | Wire Jumper. | 3198 036 90010 | | | |
| 9697 | Wire Jumper. | 3198 036 90010 | | | |
| 9698 | Wire Jumper. | 3198 036 90010 | | | |
| 9699 | Wire Jumper. | 3198 036 90010 | | | |
| 9821 | Wire Jumper. | 3198 036 90010 | | | |
| 9822 | Wire Jumper. | 3198 036 90010 | | | |
| 9825 | Wire Jumper. | 3198 036 90010 | | | |
| 9828 | Wire Jumper. | 3198 036 90010 | | | |
| 9829 | Wire Jumper. | 3198 036 90010 | | | |
| 9831 | Wire Jumper. | 3198 036 90010 | | | |
| 9832 | Wire Jumper. | 3198 036 90010 | | | |
| 9837 | Wire Jumper. | 3198 036 90010 | | | |
| 9838 | Wire Jumper. | 3198 036 90010 | | | |
| 9839 | Wire Jumper. | 3198 036 90010 | | | |
| 9846 | Wire Jumper. | 3198 036 90010 | | | |
| 9847 | Wire Jumper. | 3198 036 90010 | | | |
| 9849 | Wire Jumper. | 3198 036 90010 | | | |
| 9851 | Wire Jumper. | 3198 036 90010 | | | |
| 9856 | Wire Jumper. | 3198 036 90010 | | | |
| 9858 | Wire Jumper. | 3198 036 90010 | | | |
| 9859 | Wire Jumper. | 3198 036 90010 | | | |
| 9860 | Wire Jumper. | 3198 036 90010 | | | |
| 9862 | Wire Jumper. | 3198 036 90010 | | | |
| 9863 | Wire Jumper. | 3198 036 90010 | | | |
| 9864 | Wire Jumper. | 3198 036 90010 | | | |
| 9865 | Wire Jumper. | 3198 036 90010 | | | |
| 9867 | Wire Jumper. | 3198 036 90010 | | | |
| 9868 | Wire Jumper. | 3198 036 90010 | | | |
| 9869 | Wire Jumper. | 3198 036 90010 | | | |
| 9870 | Wire Jumper. | 3198 036 90010 | | | |
| 9871 | Wire Jumper. | 3198 036 90010 | | | |
| 9873 | Wire Jumper. | 3198 036 90010 | | | |
| 9874 | Wire Jumper. | 3198 036 90010 | | | |
| 9875 | Wire Jumper. | 3198 036 90010 | | | |
| 9876 | Wire Jumper. | 3198 036 90010 | | | |
| 9877 | Wire Jumper. | 3198 036 90010 | | | |
| 9878 | Wire Jumper. | 3198 036 90010 | | | |
| 9901 | Wire Jumper. | 3198 036 90010 | | | |
| 9902 | Wire Jumper. | 3198 036 90010 | | | |
| 9903 | Wire Jumper. | 3198 036 90010 | | | |
| 9904 | Wire Jumper. | 3198 036 90010 | | | |
| 9905 | Wire Jumper. | 3198 036 90010 | | | |
| 9911 | Wire Jumper. | 3198 036 90010 | | | |
| 9913 | Wire Jumper. | 3198 036 90010 | | | |
| 9914 | Wire Jumper. | 3198 036 90010 | | | |
| 9915 | Wire Jumper. | 3198 036 90010 | | | |
| 9919 | Wire Jumper. | 3198 036 90010 | | | |
| 9920 | Wire Jumper. | 3198 036 90010 | | | |
| 9991 | Wire Jumper. | 3198 036 90010 | | | |
| 9993 | Wire Jumper. | 3198 036 90010 | | | |
| 9996 | Wire Jumper. | 3198 036 90010 | | | |
| 9997 | Wire Jumper. | 3198 036 90010 | | | |
| 9998 | Wire Jumper. | 3198 036 90010 | | | |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

| | | |
|------|--|----------------|
| 0266 | 6 Pin Connector. | 2422 025 16609 |
| 2401 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2402 | Cap, 4u7, 20%, 35v, Electrolytic | 3198 028 44780 |
| 2403 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2407 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2408 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2409 | Cap, 15p, 5%, 50v, Ceramic | 3198 016 31590 |
| 2411 | Cap, 470n, +80/-20%, 10v, Ceramic. | 3198 017 44740 |
| 2412 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 |
| 2413 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2414 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2415 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2416 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2419 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2420 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 31810 |
| 2425 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2426 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2427 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2428 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 |
| 2429 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 |
| 2430 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2431 | Cap, 100u, 20%, 25v, Electrolytic. | 3198 025 31010 |
| 2432 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2433 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2434 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 |
| 2435 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2436 | Cap, 100n, 10%, 16v, Ceramic | 3198 017 31040 |
| 2440 | Cap, 10u, 20%, 16v, Electrolytic | 3198 028 21090 |
| 2442 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2443 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2450 | Cap, 10u, 20%, 16v, Electrolytic | 3198 028 21090 |
| 2452 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 2453 | Cap, 56p, 5%, 50v, Ceramic | 3198 016 35690 |
| 3401 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 3402 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 |
| 3403 | Res, 1K8, 5%, 1/16W, Metalized Glass | 3198 021 31820 |
| 3404 | Res, 1K5, 5%, 1/16W, Metalized Glass | 3198 021 31520 |
| 3405 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 3406 | Res, 6K8, 5%, 1/16W, Metalized Glass | 3198 021 36820 |
| 3407 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 021 31020 |
| 3408 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 3412 | Res, 510K, 5%, 1/10W, Metalized Glass. | 2122 118 05951 |
| 3419 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 3425 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 |
| 3427 | Res, 10K, 5%, 1/16W, Metalized Glass | 3198 021 31030 |
| 3431 | Res, 8K2, 1%, 1/16W, Metalized Glass | 2322 704 68202 |
| 3432 | Res, 12K, 5%, 1/16W, Metalized Glass | 3198 021 31230 |
| 3440 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 3441 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 3442 | Res, 12K, 5%, 1/16W, Metalized Glass | 3198 021 31230 |
| 3443 | Res, 2K7, 5%, 1/16W, Metalized Glass | 3198 021 32720 |
| 3444 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 3450 | Res, 820 ohm, 5%, 1/16W, Metalized Glas | 3198 021 38210 |
| 3451 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 |
| 3452 | Res, 12K, 5%, 1/16W, Metalized Glass | 3198 021 31230 |
| 3453 | Res, 2K7, 5%, 1/16W, Metalized Glass | 3198 021 32720 |
| 3454 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 |
| 3455 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 3456 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3457 | Wire Jumper. | 3198 036 90010 |
| 3458 | Res, 390 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33910 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 4403 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 5401 | Coil, 10u, 10% | 3198 018 31090 |
| 5407 | Coil, 33u, 5%. | 3198 018 13390 |
| 5408 | Coil, 33u, 20% | 3198 018 33390 |
| 5421 | Inductor, 100 MHz, 120 ohm | 3198 018 90070 |
| 5425 | Coil, 10u, 10% | 3198 018 31090 |
| 5428 | Coil, 10u, 5%. | 3198 018 11090 |
| 5429 | Coil, 10u, 10%. | 3198 018 31090 |
| 5430 | Coil, 10u, 10%. | 3198 018 31090 |
| 5440 | Coil, 10u, 10%. | 3198 018 31090 |
| 5442 | Coil, 22u, 5%. | 3198 018 12290 |
| 5450 | Coil, 10u, 10%. | 3198 018 31090 |
| 5452 | Coil, 33u, 5%. | 3198 018 13390 |
| 7401 | Transistor, PNP, BC857B(COL) | 3198 010 42150 |
| 7402 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 7403 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 7421 | IC, TC90A53N | 9322 182 18682 |
| 7440 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |
| 7444 | Transistor, NPN, BC847B(COL) | 3198 010 42030 |

36ST230P/35 (continued)

| | | | | |
|------|--|------|-----|-------|
| 7450 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 7454 | Transistor, NPN, BC847B(COL) | 3198 | 010 | 42030 |
| 9401 | Wire Jumper. | 3198 | 036 | 90010 |
| 9402 | Wire Jumper. | 3198 | 036 | 90010 |
| 9403 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | 2D 3 Line Comb Filter Assembly | 3139 | 177 | 26561 |

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

| | | | | |
|--------|---|------|-----|-------|
| | Cabinet & Accessory Parts | | | |
| S AC01 | AC Cord. | 3135 | 010 | 04323 |
| AC02 | AC Cord Strain Relief. | 3135 | 010 | 02841 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC05 | Cabinet Back | 3139 | 124 | 45211 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A90AKB50X07(V). | 9322 | 186 | 37682 |
| AC10 | Customer Control Buttons | 3139 | 124 | 26472 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43972 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01651 |
| AC16 | Jack Panel Bracket | 3139 | 124 | 45161 |
| AC17 | ITV Safety/Warranty Instructions | 3135 | 125 | 21431 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 52412 |
| AC20A | Cabinet Front. | 3135 | 127 | 50041 |
| AC20C | Light Guide. | 3139 | 124 | 26461 |
| AC20D | Nameplate. | 3135 | 015 | 03571 |
| AC20E | Power Button | 3139 | 124 | 26444 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00401 |
| AC26 | EPS Bracket. | 3135 | 014 | 09221 |
| AC28 | ITV Card Slot Cover. | 3139 | 124 | 30571 |
| ITV | Institutional Interconnect Device (Model 1 36ST230P/35 Only). | 00SC | N4N | FN/35 |

MS3252S431 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 025 32210 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic . . . | 3198 017 24730 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. . . | 2020 021 91139 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| 0223 | 6 Pin Cinch Jack | 2422 026 05184 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. . . . | 3198 025 34790 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2457 | Cap, 470n, 5%, 250v, Metalized Polypropylene. | 2022 333 00086 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. . . . | 2020 021 91331 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | S 2463 | Cap, 1n2, 10%, 2000v, Ceramic. | 2020 558 90488 |
| S 0254 | 9 Pin CRT Socket | 2422 500 80076 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 479 90042 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | S 2465 | Cap, 13n, 5%, 1600v, Polypropylene . . . | 2020 301 90254 |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | 2468 | Cap, 10n, 10%, 400v, Polyester | 2222 347 90218 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester | 2222 365 75154 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester | 2222 365 75104 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 1600 | Tact Switch. | 2422 128 02742 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 1601 | Tact Switch. | 2422 128 02742 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 1602 | Tact Switch. | 2422 128 02742 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. | 2020 021 90586 |
| 1603 | Tact Switch. | 2422 128 02742 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 1606 | Tact Switch. | 2422 128 02742 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. . . . | 2020 021 90856 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 021 91577 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. | 2020 021 90854 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 2020 021 91049 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 021 91577 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 330 00018 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. . . . | 3198 017 24740 | 2503 | Cap, 470u, 20%, 200v, Electrolytic . . . | 2020 024 90647 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. | 3198 025 52290 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 | 2561 | Cap, 100u, 20%, 160v, Electrolytic . . . | 2020 021 91654 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2563 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic | 2020 021 91353 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 2567 | Cap, 47u, 20%, 25v, Electrolytic | 3198 025 34790 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 41040 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2580 | Cap, 47u, 20%, 16v, Electrolytic | 3198 028 24790 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2581 | Cap, 22u, 20%, 50v, Electrolytic | 3198 025 52290 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. . . . | 2222 910 19856 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . . | 3198 023 22240 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2220 | Cap, 470n, 10%, 50v, Polyester | 3198 014 04740 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. | 3198 017 41050 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. | 3198 017 21050 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . . | 3198 025 32210 |
| 2245 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic | 3198 026 21020 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. . . . | 3198 017 42240 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . . | 3198 017 44740 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2864 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2865 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 368 90177 | 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . . | 2020 558 90445 | 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. | 2020 012 93495 | 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 | 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 | 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 | 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . . | 3198 023 21040 | 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . . | 2020 558 90445 | 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic | 3198 017 22250 |
| 2401 | Cap, 2u2, 20%, 50v, Electrolytic | 2020 021 90552 | 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 |
| 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 | 2875 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 |
| 2404 | Cap, 47u, 20%, 50v, Electrolytic | 3198 025 54790 | 2876 | Cap, 4u7, 20%, 50v, Electrolytic | 3198 025 54780 |

S = Safety Part Be sure to use exact replacement part.

MS3252S431 (continued)

| | | | | | |
|--------|--|----------------|--------|--|----------------|
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01030 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film | 2306 204 03478 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glass | 3198 021 51010 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 3198 025 24710 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic | 3198 025 52280 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01530 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . . | 3198 011 05620 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . . | 3198 026 21020 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3451 | Res, 2R7, 5%, 1/3W, Metal Film | 2306 204 03278 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film | 2312 915 15020 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic | 3198 025 51090 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass . | 3198 021 31520 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3470 | Res, 390K, 5%, 1/8W, Metalized Glass . | 2322 730 61394 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3471 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3472 | Res, 3R9, 1%, 3/5W, Metal Film | 2312 915 13908 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3473 | Res, 5R6, 1%, 3/5W, Metal Film | 2312 915 15608 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass. . | 3198 021 32240 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3481 | Res, 15K, 1%, 3/5W, Metal Film | 2312 915 11503 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3482 | Res, 6K8, 1%, 3/5W, Metal Film | 2312 915 16802 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 33390 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3493 | Res, 2R2, 5%, 1/3W, Metal Film | 2306 204 03228 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3206 | Res, 270K, 5%, 1/16W, Metalized Glass. . | 2322 702 60274 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3498 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass. . | 3198 021 33340 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3507 | Surge Protector. | 2422 549 43073 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | S 3510 | Res, NTC, 4R7, 20%, 3W. | 2122 612 00056 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass. . | 3198 021 53340 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 3524 | Res, 56K, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |
| 3247 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 |
| 3258 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 3259 | Res, 470K, 5%, 1/16W, Metalized Glass. . | 3198 021 34740 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 |
| 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 |
| 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . . | 2306 207 03109 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 |
| S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 | S 3565 | Res, 330 ohm, 5%, 1W, Metal Film | 3198 012 13310 |
| S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film | 2306 204 03108 | 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 |
| 3343 | Res, 1K5, 20%, 1/2W, Carbon Film | 3198 013 01520 | 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 |
| 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . . | 3198 011 03390 | 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 | 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 |
| 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | 3595 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 |
| 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 | 3596 | Res, 220K, 5%, 1/10W, Metalized Glass. . | 3198 021 52240 |
| 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 | 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3403 | Res, 100K, 5%, 1/6W, Carbon Film . . . | 3198 011 01040 | 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3404 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 |
| 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 | 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 |

S = Safety Part Be sure to use exact replacement part.

MS3252S431 (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 02220 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 04710 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. . . . | 3198 011 01020 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. . . . | 3198 011 06820 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass . | 3198 021 53320 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass . | 3198 021 34720 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | S 5445 | Transformer, PSLOT | 3128 138 21421 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5451 | Coil, 33u, 10% | 3198 018 73390 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. . . . | 3198 018 90020 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5457 | Coil, Linear, DC12 | 3128 138 55881 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5461 | Transformer, Signal Driver, SCI0027-00 | 2422 531 02478 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. . | 3198 021 31040 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass . | 3198 021 31530 | 5471 | Coil, 3u3, 20% | 3198 018 73380 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass . | 3198 021 31220 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5480 | Coil, 4u7, 5% | 2422 535 94213 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 5501 | Mains Filter | 2422 549 43432 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass . | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6331 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4121 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6401 | Zener Diode, 47 volt | 3198 010 24790 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4341 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6448 | Zener Diode, 6.2 volt | 9331 668 30133 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6449 | Diode, Signal, BAV99. | 3198 010 10620 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6460 | Diode, Rect, DG3-7005L. | 9336 436 10682 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6465 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6466 | Diode, Signal, BAV21. | 3198 010 10070 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6467 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6468 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6469 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6470 | Diode, Signal, BAV99. | 3198 010 10620 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6476 | Zener Diode, 15 volt | 3198 010 21590 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6485 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6487 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4696 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6500 | Diode, Bridge Rect, GBU6JL-7002. . . . | 9322 138 08667 |
| 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6520 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6523 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6524 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6525 | Diode, Rect, 1N5062. | 3198 010 10120 |
| 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6526 | Zener Diode, 22 volt | 3198 020 52290 |

S = Safety Part Be sure to use exact replacement part.

MS3252S431 (continued)

| | | | | | | | | | |
|--------|---|------|-----|-------|------|-------------------------|------|-----|-------|
| 6540 | Zener Diode, 6.2 volt. | 9331 | 668 | 30133 | 9510 | Wire Jumper. | 3198 | 036 | 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 | 020 | 51090 | 9511 | Wire Jumper. | 3198 | 036 | 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 | 555 | 59127 | 9512 | Wire Jumper. | 3198 | 036 | 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 | 164 | 42682 | 9513 | Wire Jumper. | 3198 | 036 | 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9514 | Wire Jumper. | 3198 | 036 | 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 | 849 | 10215 | 9515 | Wire Jumper. | 3198 | 036 | 90010 |
| 6566 | Diode, Signal, BAS316. | 3198 | 010 | 10010 | 9516 | Wire Jumper. | 3198 | 036 | 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9518 | Wire Jumper. | 3198 | 036 | 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 | 020 | 56880 | 9520 | Wire Jumper. | 3198 | 036 | 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 | 010 | 10630 | 9521 | Wire Jumper. | 3198 | 036 | 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 | 247 | 60133 | 9522 | Wire Jumper. | 3198 | 036 | 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 | 185 | 69682 | 9524 | Wire Jumper. | 3198 | 036 | 90010 |
| 6692 | IR Receiver. | 9322 | 127 | 54667 | 9528 | Wire Jumper. | 3198 | 036 | 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 9530 | Wire Jumper. | 3198 | 036 | 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 | 021 | 90020 | 9611 | Coil, 27u, 10%. | 3198 | 018 | 22790 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9612 | Wire Jumper. | 3198 | 036 | 90010 |
| 7200 | IC, TDA9588H/N1/3I/1133. | 9352 | 731 | 54557 | 9613 | Wire Jumper. | 3198 | 036 | 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9614 | Wire Jumper. | 3198 | 036 | 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9617 | Wire Jumper. | 3198 | 036 | 90010 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9618 | Wire Jumper. | 3198 | 036 | 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 | 713 | 37112 | 9619 | Wire Jumper. | 3198 | 036 | 90010 |
| 7400 | Power FET, IR. | 9322 | 053 | 35687 | 9621 | Wire Jumper. | 3198 | 036 | 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9622 | Wire Jumper. | 3198 | 036 | 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 | 020 | 40110 | 9623 | Wire Jumper. | 3198 | 036 | 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 | 550 | 92127 | 9624 | Wire Jumper. | 3198 | 036 | 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 | 020 | 43530 | 9626 | Wire Jumper. | 3198 | 036 | 90010 |
| 7462 | Transistor, NPN, PDTCL143ZT. | 9340 | 547 | 00215 | 9627 | Wire Jumper. | 3198 | 036 | 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 | 020 | 43430 | 9628 | Wire Jumper. | 3198 | 036 | 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 | 701 | 64112 | 9629 | Wire Jumper. | 3198 | 036 | 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | 9631 | Wire Jumper. | 3198 | 036 | 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 | 020 | 41010 | 9632 | Wire Jumper. | 3198 | 036 | 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 | 140 | 14667 | 9637 | Wire Jumper. | 3198 | 036 | 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 | 673 | 56112 | 9638 | Wire Jumper. | 3198 | 036 | 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 | 187 | 16687 | 9639 | Wire Jumper. | 3198 | 036 | 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9640 | Wire Jumper. | 3198 | 036 | 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 | 020 | 40030 | 9641 | Wire Jumper. | 3198 | 036 | 90010 |
| 7541 | Transistor, NPN, PDTCL14ET. | 9340 | 310 | 10215 | 9642 | Wire Jumper. | 3198 | 036 | 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9643 | Wire Jumper. | 3198 | 036 | 90010 |
| 7560 | IC, L78L33ACZ. | 9322 | 134 | 92676 | 9648 | Wire Jumper. | 3198 | 036 | 90010 |
| 7561 | Transistor, NPN, PDTCL143ZT. | 9340 | 547 | 00215 | 9650 | Wire Jumper. | 3198 | 036 | 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 | 010 | 42150 | 9651 | Wire Jumper. | 3198 | 036 | 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 | 154 | 38682 | 9652 | Wire Jumper. | 3198 | 036 | 90010 |
| 7606 | Transistor, NPN, PDTCL143ZT. | 9340 | 547 | 00215 | 9654 | Wire Jumper. | 3198 | 036 | 90010 |
| 7802 | IC, HEF4053BT. | 9333 | 729 | 60653 | 9655 | Wire Jumper. | 3198 | 036 | 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 | 671 | 19557 | 9656 | Wire Jumper. | 3198 | 036 | 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9657 | Wire Jumper. | 3198 | 036 | 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 | 010 | 42030 | 9658 | Wire Jumper. | 3198 | 036 | 90010 |
| 7901 | IC, AN7522N PH. | 9322 | 181 | 41682 | 9659 | Wire Jumper. | 3198 | 036 | 90010 |
| 9001 | Wire Jumper. | 3198 | 036 | 90010 | 9660 | Wire Jumper. | 3198 | 036 | 90010 |
| 9104 | Wire Jumper. | 3198 | 036 | 90010 | 9663 | Wire Jumper. | 3198 | 036 | 90010 |
| 9121 | Wire Jumper. | 3198 | 036 | 90010 | 9664 | Wire Jumper. | 3198 | 036 | 90010 |
| 9122 | Wire Jumper. | 3198 | 036 | 90010 | 9665 | Wire Jumper. | 3198 | 036 | 90010 |
| 9171 | Wire Jumper. | 3198 | 036 | 90010 | 9666 | Wire Jumper. | 3198 | 036 | 90010 |
| 9173 | Wire Jumper. | 3198 | 036 | 90010 | 9667 | Wire Jumper. | 3198 | 036 | 90010 |
| 9175 | Wire Jumper. | 3198 | 036 | 90010 | 9668 | Wire Jumper. | 3198 | 036 | 90010 |
| 9176 | Wire Jumper. | 3198 | 036 | 90010 | 9669 | Wire Jumper. | 3198 | 036 | 90010 |
| 9181 | Wire Jumper. | 3198 | 036 | 90010 | 9670 | Wire Jumper. | 3198 | 036 | 90010 |
| 9182 | Wire Jumper. | 3198 | 036 | 90010 | 9671 | Wire Jumper. | 3198 | 036 | 90010 |
| 9183 | Wire Jumper. | 3198 | 036 | 90010 | 9672 | Coil, 22u, 10%. | 3198 | 018 | 22290 |
| 9192 | Wire Jumper. | 3198 | 036 | 90010 | 9674 | Wire Jumper. | 3198 | 036 | 90010 |
| 9193 | Wire Jumper. | 3198 | 036 | 90010 | 9675 | Wire Jumper. | 3198 | 036 | 90010 |
| 9311 | Wire Jumper. | 3198 | 036 | 90010 | 9676 | Wire Jumper. | 3198 | 036 | 90010 |
| 9312 | Wire Jumper. | 3198 | 036 | 90010 | 9678 | Coil, 22u, 10%. | 3198 | 018 | 22290 |
| 9406 | Wire Jumper. | 3198 | 036 | 90010 | 9679 | Wire Jumper. | 3198 | 036 | 90010 |
| 9407 | Wire Jumper. | 3198 | 036 | 90010 | 9680 | Wire Jumper. | 3198 | 036 | 90010 |
| 9408 | Wire Jumper. | 3198 | 036 | 90010 | 9681 | Wire Jumper. | 3198 | 036 | 90010 |
| 9409 | Wire Jumper. | 3198 | 036 | 90010 | 9685 | Wire Jumper. | 3198 | 036 | 90010 |
| 9410 | Wire Jumper. | 3198 | 036 | 90010 | 9686 | Wire Jumper. | 3198 | 036 | 90010 |
| 9411 | Wire Jumper. | 3198 | 036 | 90010 | 9687 | Wire Jumper. | 3198 | 036 | 90010 |
| 9412 | Wire Jumper. | 3198 | 036 | 90010 | 9688 | Wire Jumper. | 3198 | 036 | 90010 |
| 9413 | Wire Jumper. | 3198 | 036 | 90010 | 9689 | Wire Jumper. | 3198 | 036 | 90010 |
| 9414 | Wire Jumper. | 3198 | 036 | 90010 | 9690 | Wire Jumper. | 3198 | 036 | 90010 |
| 9415 | Wire Jumper. | 3198 | 036 | 90010 | 9691 | Wire Jumper. | 3198 | 036 | 90010 |
| 9416 | Wire Jumper. | 3198 | 036 | 90010 | 9694 | Wire Jumper. | 3198 | 036 | 90010 |
| 9417 | Wire Jumper. | 3198 | 036 | 90010 | 9695 | Wire Jumper. | 3198 | 036 | 90010 |
| 9418 | Wire Jumper. | 3198 | 036 | 90010 | 9697 | Wire Jumper. | 3198 | 036 | 90010 |
| 9419 | Wire Jumper. | 3198 | 036 | 90010 | 9698 | Wire Jumper. | 3198 | 036 | 90010 |
| 9421 | Wire Jumper. | 3198 | 036 | 90010 | 9699 | Wire Jumper. | 3198 | 036 | 90010 |
| 9422 | Wire Jumper. | 3198 | 036 | 90010 | 9821 | Wire Jumper. | 3198 | 036 | 90010 |
| 9423 | Wire Jumper. | 3198 | 036 | 90010 | 9822 | Wire Jumper. | 3198 | 036 | 90010 |
| 9424 | Wire Jumper. | 3198 | 036 | 90010 | 9825 | Wire Jumper. | 3198 | 036 | 90010 |
| 9425 | Wire Jumper. | 3198 | 036 | 90010 | 9828 | Wire Jumper. | 3198 | 036 | 90010 |
| 9426 | Wire Jumper. | 3198 | 036 | 90010 | 9829 | Wire Jumper. | 3198 | 036 | 90010 |
| 9427 | Wire Jumper. | 3198 | 036 | 90010 | 9831 | Wire Jumper. | 3198 | 036 | 90010 |
| 9453 | Wire Jumper. | 3198 | 036 | 90010 | 9832 | Wire Jumper. | 3198 | 036 | 90010 |
| 9460 | Wire Jumper. | 3198 | 036 | 90010 | 9837 | Wire Jumper. | 3198 | 036 | 90010 |
| 9463 | Wire Jumper. | 3198 | 036 | 90010 | 9838 | Wire Jumper. | 3198 | 036 | 90010 |
| 9500 | Wire Jumper. | 3198 | 036 | 90010 | 9839 | Wire Jumper. | 3198 | 036 | 90010 |
| 9501 | Wire Jumper. | 3198 | 036 | 90010 | 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9503 | Wire Jumper. | 3198 | 036 | 90010 | 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9506 | Wire Jumper. | 3198 | 036 | 90010 | 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9507 | Wire Jumper. | 3198 | 036 | 90010 | 9850 | Wire Jumper. | 3198 | 036 | 90010 |

MS3252S431 (continued)

| | | | | | | | | | |
|------|--------------------------------|------|-----|-------|--------------------------------------|--|------|-----|-------|
| 9851 | Wire Jumper. | 3198 | 036 | 90010 | 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 | 9155 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 | 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 | CBA | Side Jack Panel Assembly | 3141 | 058 | 59161 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 | Subwoofer Panel Parts | | | | |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 | Subwoofer Panel Parts | | | | |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 | Top Control Panel Parts | | | | |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 | Top Control Panel Parts | | | | |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 | Cabinet & Accessory Parts | | | | |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 | Cabinet & Accessory Parts | | | | |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 | S AC01 | AC Cord. | 3135 | 010 | 03831 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 | AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 | AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 | AC05 | Cabinet Back | 3139 | 124 | 46461 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 | AC08 | Chassis Tray | 3139 | 124 | 31325 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 | S AC09 | CRT, A80QCF340X34(N) | 9301 | 904 | 59463 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 | AC10 | Customer Control Buttons | 3139 | 124 | 32711 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 | S AC12 | Degaussing Coil. | 2422 | 549 | 45334 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 | AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01661 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 | AC17 | Owner's Manual | 3121 | 235 | 21161 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 | AC18 | Quick Use Guide. | 3121 | 233 | 44561 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 | AC19 | Side Jack Panel Bracket. | 3139 | 124 | 40481 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 | AC20 | Cabinet Front Assembly | 3121 | 237 | 53361 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 | AC20A | Cabinet Front. | 3139 | 177 | 70361 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 | AC20C | Light Guide. | 3139 | 124 | 32681 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 | AC20D | Nameplate. | 3135 | 015 | 03561 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 | AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00371 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 | REMOTE | Remote Control Transmitter, RC2524/17. | 3139 | 228 | 87491 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 | | | | | |
| CBA | Main Chassis Assembly. | 3141 | 058 | 59111 | | | | | |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|--|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4823 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |

S = Safety Part Be sure to use exact replacement part.

MS3652S427 - Manual no. 7638

Main Chassis Parts

| Main Chassis Parts | | | | | |
|--------------------|--|----------------|--------|--|----------------|
| | Main Chassis Parts | | | | |
| 0211 | 2 Pin Connector. | 2422 025 16269 | 2405 | Cap, 220u, 20%, 25v, Electrolytic. . . | 3198 025 32210 |
| 0212 | 2 Pin Connector. | 2422 025 16375 | 2441 | Cap, 1u, 20%, 50v, Electrolytic. . . | 3198 025 51080 |
| 0219 | 6 Pin Connector. | 2422 025 12482 | 2443 | Cap, 47n, +80/-20%, 50v, Ceramic . . . | 3198 017 24730 |
| 0220 | 5 Pin Connector. | 2422 025 04853 | 2444 | Cap, 1u, 20%, 50v, Electrolytic. . . | 3198 025 51080 |
| 0221 | 2 Pin Connector. | 2422 025 15503 | 2450 | Cap, 47u, 20%, 160v, Electrolytic. . . | 2020 021 91139 |
| 0222 | 2 Pin Connector. | 2422 025 10646 | 2451 | Cap, 15n, 10%, 50v, Polyester. | 3198 014 01530 |
| 0223 | 6 Pin Cinch Jack | 2422 026 05184 | 2452 | Cap, 180p, 5%, 50v, Ceramic. | 3198 016 01810 |
| 0225 | SVHS Jack. | 2422 026 04926 | 2455 | Cap, 47u, 20%, 25v, Electrolytic. . . | 3198 025 34790 |
| 0243 | 6 Pin Connector. | 2422 025 04854 | 2456 | Cap, 560n, 5%, 250v, Metalized Polypropylene. | 2022 333 00088 |
| 0244 | 5 Pin Connector. | 2422 025 04853 | 2458 | Cap, 2u2, 20%, 100v, Electrolytic. . . | 2020 021 91331 |
| 0245 | 6 Pin Connector. | 2422 025 04854 | 2459 | Cap, 680p, 10%, 500v, Ceramic. | 3198 019 46810 |
| 0246 | 5 Pin Connector. | 2422 025 12481 | 2460 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 01010 |
| S 0254 | 10 Pin CRT Socket. | 2422 500 80079 | S 2463 | Cap, 390p, 10%, 2000v, Ceramic | 2020 558 90482 |
| 0267 | 3 Pin Connector. | 2412 020 00725 | 2464 | Cap, 2u2, 5%, 160v, Metalized Polypropylene. | 2222 479 90042 |
| S 1000 | Tuner, V+U, PLL | 2422 542 90108 | S 2465 | Cap, 15n, 5%, 1600v, Polypropylene . . | 2020 301 90255 |
| 1002 | SAW Filter, 45.75MHz | 2422 549 44518 | 2466 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 |
| 1200 | Filter, Ceramic, 4MHz5 | 2422 549 40807 | 2468 | Cap, 15n, 10%, 400v, Polyester | 2222 347 90219 |
| S 1500 | Fuse, 4A, 250V, IEC. | 2422 086 10914 | 2471 | Cap, 100n, 10%, 50v, Polyester | 3198 014 01040 |
| S 1515 | Relay, 5 Amp, 12V. | 2422 132 07444 | 2472 | Cap, 150n, 10%, 63v, Metalized Polyester | 2222 365 75154 |
| 1600 | Tact Switch. | 2422 128 02742 | 2473 | Cap, 100n, 10%, 63v, Metalized Polyester | 2222 365 75104 |
| 1601 | Tact Switch. | 2422 128 02742 | 2474 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 1602 | Tact Switch. | 2422 128 02742 | 2475 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 1603 | Tact Switch. | 2422 128 02742 | 2476 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 04720 |
| 1606 | Tact Switch. | 2422 128 02742 | 2480 | Cap, 47u, 20%, 25v, Electrolytic. . . . | 2020 021 90586 |
| 1660 | Crystal, 12MHz000 | 2422 543 01203 | 2481 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 |
| 1811 | 3 Pin Connector. | 2412 020 00725 | 2482 | Cap, 68n, 10%, 250v, Polyester | 2222 347 90234 |
| 1861 | Ceramic Resonator, 514KHz5, CSB503F58. | 2422 540 98344 | 2485 | Cap, 4u7, 20%, 250v, Electrolytic. . . . | 2020 021 90856 |
| 2004 | Cap, 47n, 10%, 50v, Ceramic. | 3198 024 44730 | 2486 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 021 91577 |
| 2005 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 2487 | Cap, 47u, 20%, 50v, Electrolytic. . . . | 2020 021 90854 |
| 2006 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 2488 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 2020 021 91049 |
| 2007 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2489 | Cap, 470u, 20%, 16v, Electrolytic. . . . | 2020 021 91577 |
| 2008 | Cap, 100u, 20%, 25v, Electrolytic. . . | 3198 025 31010 | 2491 | Cap, 1n, 10%, 500v, Ceramic. | 3198 019 41020 |
| 2009 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | S 2500 | Cap, 470n, 20%, 275v, Metalized Polypropylene. | 2022 330 00018 |
| 2101 | Cap, 470n, +80/-20%, 16v, Ceramic. . . | 3198 017 24740 | 2501 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2102 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2502 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2103 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2503 | Cap, 470u, 20%, 200v, Electrolytic. . . | 2020 024 90647 |
| 2104 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2505 | Cap, 2n2, 10%, 1000v, Ceramic. | 3198 019 52220 |
| 2105 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 2507 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2106 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 2508 | Cap, 470p, 10%, 1000v, Ceramic. | 3198 019 64710 |
| 2121 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | S 2515 | Cap, 1n5, 20%, 50v, Ceramic. | 2020 554 90172 |
| 2122 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2520 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2123 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 2521 | Cap, 22u, 20%, 50v, Electrolytic. . . . | 3198 025 52290 |
| 2124 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2522 | Cap, 100n, 10%, 16v, Ceramic. | 3198 017 01040 |
| 2125 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | S 2523 | Cap, 1n5, 10%, 2000v, Ceramic. | 2020 558 90489 |
| 2135 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2525 | Cap, 470p, 10%, 50v, Ceramic. | 3198 017 04710 |
| 2136 | Cap, 22p, 5%, 50v, Ceramic. | 3198 016 32290 | 2527 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 02220 |
| 2141 | Cap, 330p, 10%, 50v, Ceramic. | 3198 017 33310 | 2528 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 01020 |
| 2184 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 2540 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2187 | Cap, 2u2, +80/-20%, 10v, Ceramic . . . | 3198 017 22250 | 2541 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 01030 |
| 2202 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2560 | Cap, 680p, 10%, 1000v, Ceramic. | 2020 558 90472 |
| 2203 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2561 | Cap, 100u, 20%, 160v, Electrolytic. . . | 2020 021 91654 |
| 2204 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2562 | Cap, 1n, 10%, 50v, Ceramic. | 3198 019 11020 |
| 2205 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 2563 | Cap, 100n, 10%, 50v, Polyester. | 3198 014 01040 |
| 2208 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 2564 | Cap, 2u2, 20%, 25v, Electrolytic. . . . | 2020 021 91353 |
| 2209 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 2567 | Cap, 47u, 20%, 25v, Electrolytic. . . . | 3198 025 34790 |
| 2210 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 2568 | Cap, 1u, 20%, 50v, Electrolytic. | 3198 025 51080 |
| 2211 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 | 2580 | Cap, 47u, 20%, 16v, Electrolytic. . . . | 3198 028 24790 |
| 2216 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | 2581 | Cap, 22u, 20%, 50v, Electrolytic. . . . | 3198 025 52290 |
| 2217 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2590 | Cap, 330n, +80/-20%, 25v, Ceramic. . . | 2222 910 19856 |
| 2219 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 2601 | Cap, 220n, +80/-20%, 25v, Ceramic. . . | 3198 023 22240 |
| 2220 | Cap, 470n, 10%, 50v, Polyester. | 3198 014 04740 | 2602 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 |
| 2221 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2606 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 |
| 2226 | Cap, 100p, 5%, 50v, Ceramic. | 3198 016 31010 | 2607 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2227 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 2608 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 |
| 2228 | Cap, 820p, 5%, 25v, Ceramic. | 3198 016 38210 | 2609 | Cap, 33p, 5%, 50v, Ceramic. | 3198 016 33390 |
| 2229 | Cap, 10u, 20%, 50v, Electrolytic. . . . | 3198 025 51090 | 2611 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 |
| 2241 | Cap, 1n5, 10%, 50v, Ceramic. | 3198 017 31520 | 2612 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2242 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 | 2613 | Cap, 68p, 5%, 50v, Ceramic. | 3198 016 36890 |
| 2243 | Cap, 2n2, 10%, 50v, Ceramic. | 3198 017 32220 | 2615 | Cap, 1n, 10%, 50v, Ceramic. | 3198 017 31020 |
| 2244 | Cap, 100n, 5%, 63v, Metalized Polyester | 2222 370 76104 | 2618 | Cap, 1u, +80/-20%, 10v, Ceramic. . . . | 3198 017 41050 |
| 2245 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 2619 | Cap, 1u, +80/-20%, 16v, Ceramic. . . . | 3198 017 21050 |
| 2247 | Cap, 1000u, 20%, 16v, Electrolytic. . . | 3198 026 21020 | 2691 | Cap, 220u, 20%, 25v, Electrolytic. . . . | 3198 025 32210 |
| 2248 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2802 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 |
| 2249 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 2803 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 |
| 2250 | Cap, 2u2, 20%, 50v, Electrolytic. . . . | 3198 025 52280 | 2810 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 |
| 2252 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2813 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 |
| 2253 | Cap, 1n, 5%, 25v, Ceramic. | 3198 016 31020 | 2816 | Cap, 470n, +80/-20%, 10v, Ceramic. . . | 3198 017 44740 |
| 2254 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 2862 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 |
| 2330 | Cap, 100n, 10%, 250v, Metalized Polyester. | 2222 368 90177 | 2864 | Cap, 2u2, 20%, 50v, Electrolytic. . . . | 3198 025 52280 |
| 2331 | Cap, 10n, +80/-20% 1000v, Ceramic. . . | 2020 558 90445 | 2865 | Cap, 2u2, 20%, 50v, Electrolytic. . . . | 3198 025 52280 |
| 2340 | Cap, 10u, 20%, 250v, Electrolytic. . . . | 2020 012 93495 | 2866 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 |
| 2341 | Cap, 3n3, 10%, 500v, Ceramic. | 3198 019 43320 | 2867 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 |
| 2342 | Cap, 560p, 5%, 50v, Ceramic. | 3198 016 05610 | 2868 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 |
| 2343 | Cap, 2n2, 10%, 2000v, Ceramic. | 2020 558 90559 | 2869 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 |
| 2344 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 21040 | 2870 | Cap, 68n, 10%, 50v, Polyester. | 3198 014 06830 |
| 2345 | Cap, 10n, +80/-20%, 1000v, Ceramic . . | 2020 558 90445 | 2871 | Cap, 150p, 5%, 50v, Ceramic. | 3198 016 31510 |
| 2401 | Cap, 2u2, 20%, 50v, Electrolytic. . . . | 2020 021 90552 | 2872 | Cap, 1n8, 10%, 50v, Ceramic. | 2238 586 15626 |
| 2402 | Cap, 470p, 10%, 500v, Ceramic. | 3198 019 44710 | 2873 | Cap, 2u2, +80/-20%, 10v, Ceramic. . . . | 3198 017 22250 |
| 2404 | Cap, 47u, 20%, 50v, Electrolytic. . . . | 3198 025 54790 | 2874 | Cap, 100u, 20%, 25v, Electrolytic. . . . | 3198 025 31010 |

S = Safety Part Be sure to use exact replacement part.

MS3652S427 (continued)

| | | | | | |
|--------|---|----------------|--------|---|----------------|
| 2875 | Cap, 100u, 20%, 25v, Electrolytic . . . | 3198 025 31010 | 3403 | Res, 100K, 5%, 1/6W, Carbon Film . . . | 3198 011 01040 |
| 2876 | Cap, 4u7, 20%, 50v, Electrolytic . . . | 3198 025 54780 | 3404 | Res, 1K, 5%, 1/6W, Carbon Film . . . | 3198 011 01020 |
| 2877 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3405 | Res, 4R7, 5%, 1/6W, Carbon Film. . . | 3198 011 04780 |
| 2878 | Cap, 1u, 20%, 50v, Electrolytic. . . | 3198 025 51080 | 3406 | Res, 4R7, 5%, 1/6W, Carbon Film. . . | 3198 011 04780 |
| 2879 | Cap, 4n7, 10%, 50v, Ceramic. | 3198 017 34720 | 3408 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| 2880 | Cap, 22n, 10%, 25v, Ceramic. | 3198 017 32230 | 3410 | Res, 10K, 5%, 1/6W, Carbon Film. . . | 3198 011 01030 |
| 2883 | Cap, 470u, 20%, 16v, Electrolytic. . . | 3198 025 24710 | 3411 | Res, 4R7, 5%, 1/3W, Metal Film . . . | 2306 204 03478 |
| 2884 | Cap, 2u2, 20%, 50v, Electrolytic . . . | 3198 025 52280 | 3441 | Res, 100 ohm, 5%, 1/10W, Metalized Glas | 3198 021 51010 |
| 2885 | Cap, 220n, 10%, 50v, Polyester | 3198 014 02240 | 3442 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 2886 | Cap, 220n, +80/-20%, 16v, Ceramic. . . | 3198 017 42240 | 3443 | Res, 1M, 5%, 1/16W, Metalized Glass. . | 3198 021 31050 |
| 2892 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3445 | Res, 15K, 5%, 1/6W, Carbon Film. . . | 3198 011 01530 |
| 2893 | Cap, 100n, +80/-20%, 25v, Ceramic. . . | 3198 023 41040 | 3446 | Res, 5K6, 5%, 1/6W, Carbon Film. . . | 3198 011 05620 |
| 2902 | Cap, 1000u, 20%, 16v, Electrolytic . . | 3198 026 21020 | 3447 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 2903 | Cap, 1u, 20%, 50v, Electrolytic. . . . | 3198 025 51080 | 3448 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 |
| 2904 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | 3449 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 |
| 2905 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | 3450 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 2906 | Cap, 27n, 10%, 50v, Ceramic. | 2238 580 15642 | S 3451 | Res, 8R2, 5%, Metal Film | 2306 204 03828 |
| 2907 | Cap, 1n2, 10%, 50v, Ceramic. | 2238 586 15624 | S 3452 | Res, 5K6, 1%, 3/5W, Metal Film | 2312 915 15602 |
| 2908 | Cap, 10u, 20%, 50v, Electrolytic . . . | 3198 025 51090 | 3453 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 2910 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | 3454 | Res, 2K, 1%, 3/5W, Metal Film. | 2312 915 12002 |
| 2911 | Cap, 10n, 10%, 50v, Ceramic. | 3198 017 31030 | S 3455 | Res, 6R8, 5%, 1 1/3W, Metal Film . . . | 3198 012 26880 |
| 2950 | Cap, 330p, 5%, 50v, Ceramic. | 3198 016 33310 | 3458 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 |
| 3000 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | S 3459 | Res, 15K, 5%, 1 1/3W, Metal Film . . . | 3198 012 21530 |
| 3001 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3460 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 3463 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 |
| 3003 | Res, 1K5, 5%, 1/16W, Metalized Glass. . | 3198 021 31520 | 3465 | Res, 27K, 1%, 3/5W, Metal Film | 2312 915 12703 |
| 3004 | Res, 8K2, 5%, 1/16W, Metalized Glass . | 3198 021 38220 | 3468 | Res, 180 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01810 |
| 3005 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3469 | Res, 3K3, 5%, 1/6W, Carbon Film. . . . | 3198 011 03320 |
| 3101 | Res, 68 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 06890 | 3470 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3102 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3471 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3103 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3472 | Res, 3R3, 1%, 3/5W, Metal Film | 2312 915 13308 |
| 3104 | Res, 220K, 5%, 1/16W, Metalized Glass.. | 3198 021 32240 | 3473 | Res, 5R6, 1%, 3/5W, Metal Film | 2312 915 15608 |
| 3105 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3474 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3106 | Res, 220K, 5%, 1/16W, Metalized Glass.. | 3198 021 32240 | 3475 | Res, 2K2, 1%, 3/5W, Metal Film | 2312 915 12202 |
| 3123 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3477 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3124 | Res, 47K, 5%, 1/16W, Metalized Glass. . | 3198 021 34730 | 3478 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 |
| 3125 | Res, 150 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01510 | 3479 | Res, 2K7, 5%, 1/10W, Metalized Glass . | 3198 021 52720 |
| 3126 | Res, 47K, 5%, 1/16W, Metalized Glass . | 3198 021 34730 | 3480 | Res, 1R5, 5%, 1/4W, Carbon Film. . . . | 2122 101 02083 |
| 3135 | Res, 75 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 07590 | 3481 | Res, 12K, 1%, 3/5W, Metal Film | 2312 915 11203 |
| 3136 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3482 | Res, 10K, 1%, 3/5W, Metal Film | 2312 915 11003 |
| 3141 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3484 | Res, 3K9, 5%, 1/6W, Carbon Film. . . . | 3198 011 03920 |
| 3200 | Res, 390 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03910 | S 3486 | Res, 33 ohm, 5%, 2 1/2W, Metal Film. . | 3198 012 33390 |
| 3201 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3488 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3202 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3490 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |
| 3203 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3492 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3204 | Res, 22K, 5%, 1/6W, Carbon Film. . . . | 3198 011 02230 | 3493 | Res, 6R8, 5%, 1/3W, Metal Film | 2306 204 03688 |
| 3206 | Res, 270K, 5%, 1/16W, Metalized Glass.. | 2322 702 60274 | 3494 | Res, 4R7, 5%, 1/2W, Metal Film | 2306 207 03478 |
| 3207 | Res, 1K, 5%, 1/6W, Carbon Film | 3198 011 01020 | 3495 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 |
| 3208 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 3496 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 021 31040 |
| 3209 | Res, 68 ohm, 5%, 1/16W, Metalized Glass | 3198 021 36890 | 3497 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 021 31040 |
| 3212 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 3498 | Res, 12K, 5%, 1/16W, Metalized Glass . | 3198 021 31230 |
| 3213 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3499 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3217 | Res, 330K, 5%, 1/16W, Metalized Glass.. | 3198 021 33340 | 3500 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3218 | Res, 82K, 5%, 1/16W, Metalized Glass . | 3198 021 38230 | 3501 | Res, 3M3, 5%, 1/2W, Metalized Glass. . | 2322 242 13335 |
| 3219 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | S 3504 | Res, PTC, 3 ohm, 144V. | 2122 663 00019 |
| 3220 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3506 | Res, 1M5, 5%, 1/2W, Metalized Glass. . | 2322 242 13155 |
| 3221 | Res, 560 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 05610 | 3507 | Surge Protector. | 2422 549 43073 |
| 3222 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3508 | Res, 220 ohm, 20%, 1/2W, Carbon Film . | 3198 013 02210 |
| 3226 | Res, 560 ohm, 5%, 1/16W, Metalized Glas | 3198 021 35610 | S 3510 | Res, NTC, 4R7, 20%, 3W1. | 2122 612 00056 |
| 3232 | Res, 2K2, 5%, 1/16W, Metalized Glass . | 3198 021 32220 | 3519 | Res, 270 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 02710 |
| 3235 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3520 | Res, 1K2, 5%, 1/10W, Metalized Glass . | 3198 021 51220 |
| 3241 | Res, 22K, 5%, 1/16W, Metalized Glass . | 3198 021 32230 | 3521 | Res, 4R7, 5%, 1/6W, Carbon Film. . . . | 3198 011 04780 |
| 3242 | Res, 27K, 5%, 1/16W, Metalized Glass . | 3198 021 32730 | 3522 | Res, 330K, 5%, 1/10W, Metalized Glass.. | 3198 021 53340 |
| 3244 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3523 | Res, 100 ohm, 5%, 1/3W, Metal Film . . | 2306 204 03101 |
| 3245 | Res, 39K, 1%, 1/16W, Metalized Glass . | 2322 704 63903 | 3524 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55630 |
| 3246 | Res, 10K, 5%, 1/16W, Metalized Glass . | 3198 021 31030 | 3525 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3247 | Res, 680K, 5%, 1/16W, Metalized Glass.. | 3198 021 36840 | 3526 | Res, 0R1, 5%, 3/5W, Metal Film | 3198 012 11070 |
| 3248 | Res, 33K, 5%, 1/16W, Metalized Glass . | 3198 021 33330 | S 3527 | Res, 0R33, 5%, 3/5W, Metal Film. . . . | 3198 012 13370 |
| 3249 | Res, 820 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 08210 | 3528 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3250 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 | 3529 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3251 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3530 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3256 | Res, 1K, 5%, 1/16W, Metalized Glass. . | 3198 021 31020 | 3531 | Res, 4K7, 5%, 1/10W, Metalized Glass . | 3198 021 54720 |
| 3257 | Res, 10M, 5%, 1/16W, Metalized Glass . | 3198 021 31060 | 3532 | Res, 2K2, 5%, 1/3W, Metal Film | 2306 204 03222 |
| 3258 | Res, 100K, 5%, 1/16W, Metalized Glass.. | 3198 021 31040 | 3541 | Res, 470 ohm, 5%, 1/10W, Metalized Glas | 3198 021 54710 |
| 3259 | Res, 470K, 5%, 1/16W, Metalized Glass.. | 3198 021 34740 | 3542 | Res, 1K5, 5%, 1/10W, Metalized Glass . | 3198 021 51520 |
| 3331 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3543 | Res, 82K, 1%, 3/5W, Metal Film | 2312 915 18203 |
| 3332 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3544 | Res, 4K7, 1%, 1/8W, Metalized Glass. . | 2322 734 64702 |
| 3333 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3545 | Res, 270K, 5%, 1/8W, Metalized Glass . | 2322 730 61274 |
| 3334 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3548 | Res, 15K, 5%, 1/10W, Metalized Glass . | 3198 021 51530 |
| 3335 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 | 3552 | Res, 10K, 5%, 1/10W, Metalized Glass . | 3198 021 51030 |
| 3336 | Res, 1K, 20%, 1/2W, Carbon Film. . . . | 3198 013 01020 | 3557 | Res, 1K, 5%, 1/10W, Metalized Glass. . | 3198 021 51020 |
| 3340 | Res, 10 ohm, 5%, 1/2W, Metal Film. . . | 2306 207 03109 | 3561 | Res, 100 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 01010 |
| S 3341 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 | 3562 | Res, 12K, 5%, 1/10W, Metalized Glass . | 3198 021 51230 |
| S 3341 | Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33 0X34 | 2306 204 03278 | 3563 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 |
| S 3342 | Res, 1 ohm, 5%, 1/3W, Metal Film . . . | 2306 204 03108 | S 3565 | Res, 330 ohm, 5%, 1W, Metal Film . . . | 3198 012 13310 |
| 3343 | Res, 1K5, 20%, 1/2W, Carbon Film . . . | 3198 013 01520 | 3566 | Res, 2K2, 5%, 1/10W, Metalized Glass . | 3198 021 52220 |
| 3344 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | 3569 | Res, 5K6, 5%, 1/10W, Metalized Glass . | 3198 021 55620 |
| S 3345 | Varactor, 1MA/50V, Max 115V. | 2322 593 13507 | 3580 | Res, 47K, 5%, 1/10W, Metalized Glass . | 3198 021 54730 |
| 3346 | Res, 33 ohm, 5%, 1/6W, Carbon Film . . | 3198 011 03390 | 3594 | Res, 330 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53310 |
| 3400 | Res, 330 ohm, 5%, 1/6W, Carbon Film. . | 3198 011 03310 | 3595 | Res, 220K, 5%, 1/10W, Metalized Glass.. | 3198 021 52240 |
| 3401 | Res, 33K, 5%, 1/6W, Carbon Film. . . . | 3198 011 03330 | 3596 | Res, 220K, 5%, 1/10W, Metalized Glass.. | 3198 021 52240 |
| | | | 3601 | Res, 8K2, 5%, 1/6W, Carbon Film. . . . | 3198 011 08220 |

S = Safety Part Be sure to use exact replacement part.

MS3652S427 (continued)

| | | | | | |
|------|--|----------------|--------|--|----------------|
| 3603 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4820 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3604 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4825 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3605 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 021 34720 | 4827 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3606 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4830 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3607 | Res, 2K2, 5%, 1/6W, Carbon Film. | 3198 011 02220 | 4831 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3608 | Res, 470 ohm, 5%, 1/6W, Carbon Film. | 3198 011 04710 | 4861 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3609 | Res, 1K, 5%, 1/6W, Carbon Film. | 3198 011 01020 | 4863 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3610 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4865 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3611 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 4866 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3618 | Res, 6K8, 5%, 1/6W, Carbon Film. | 3198 011 06820 | 4867 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3622 | Res, 470 ohm, 5%, 1/16W, Metalized Glas | 3198 021 34710 | 4869 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3623 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 021 34720 | 4870 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3624 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4871 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3625 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4873 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3626 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 021 34720 | 4876 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3627 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 021 34720 | 4879 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3628 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 021 31030 | 4880 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3630 | Res, 2K2, 5%, 1/16W, Metalized Glass. | 3198 021 32220 | 4881 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3632 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4883 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3635 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | 4885 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3636 | Res, 1K, 5%, 1/10W, Metalized Glass. | 3198 021 51020 | 4892 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3639 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 4901 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3640 | Res, 8K2, 5%, 1/6W, Carbon Film. | 3198 011 08220 | 4903 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 |
| 3681 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4906 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3682 | Res, 3K3, 5%, 1/10W, Metalized Glass. | 3198 021 53320 | 4924 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3683 | Res, 390 ohm, 5%, 1/10W, Metalized Glas | 3198 021 53910 | 4925 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3684 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 4982 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 |
| 3685 | Res, 560 ohm, 5%, 1/10W, Metalized Glas | 3198 021 55610 | 5001 | Coil, 27u, 10% | 3198 018 22790 |
| 3686 | Res, 1K5, 5%, 1/10W, Metalized Glass. | 3198 021 51520 | 5002 | Coil, 820n, 10% | 3198 018 18270 |
| 3691 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5201 | Coil, 6u8, 5% | 3198 018 16880 |
| 3693 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5202 | Wire Jumper. | 3198 036 90010 |
| 3694 | Res, 4K7, 5%, 1/16W, Metalized Glass. | 3198 021 34720 | 5204 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3801 | Res, 220 ohm, 5%, 1/16W, Metalized Glas | 3198 021 32210 | 5205 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3802 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 021 31020 | 5206 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3810 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5241 | Wire Jumper. | 3198 036 90010 |
| 3814 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5242 | Coil, 10u, 5% | 3198 018 11090 |
| 3815 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5341 | Coil, 22u. | 2422 535 97333 |
| 3816 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5342 | Coil, 22u. | 2422 535 97333 |
| 3817 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5401 | Coil, 1mH, 10% | 3198 018 71020 |
| 3818 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | S 5445 | Transformer, PSL0T | 3128 138 21421 |
| 3819 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5451 | Coil, 33u, 10% | 3198 018 73390 |
| 3820 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5452 | Fixed, Inductor, 100MHz, 80 ohm. | 3198 018 90020 |
| 3821 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5457 | Coil, Linear, DC12 | 3128 138 55881 |
| 3822 | Res, 75 ohm, 5%, 1/16W, Metalized Glass | 3198 021 37590 | 5461 | Transformer, Signal Driver, SC10015-00 | 2422 531 02465 |
| 3861 | Res, 100K, 5%, 1/16W, Metalized Glass. | 3198 021 31040 | 5463 | Coil, Choke. | 3128 138 37021 |
| 3862 | Res, 15K, 5%, 1/16W, Metalized Glass. | 3198 021 31530 | 5471 | Coil, 4u7, 20% | 3198 018 74780 |
| 3863 | Res, 1K2, 5%, 1/16W, Metalized Glass. | 3198 021 31220 | 5472 | Coil, 3u3, 10% | 3198 018 23380 |
| 3864 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5480 | Coil, 39u, 10% | 2422 535 97336 |
| 3865 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | S 5501 | Mains Filter | 2422 549 43432 |
| 3866 | Res, 100 ohm, 5%, 1/6W, Carbon Film. | 3198 011 01010 | S 5520 | Transformer, SS39009-04. | 2422 531 02459 |
| 3867 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 021 33320 | 5521 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3891 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5560 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3893 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5561 | Coil, 27u, 5% | 2422 535 95366 |
| 3894 | Res, 100 ohm, 5%, 1/16W, Metalized Glas | 3198 021 31010 | 5562 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3896 | Res, 330 ohm, 5%, 1/16W, Metalized Glas | 3198 021 33310 | 5564 | Fixed, Inductor, 100MHz, 50R. | 3198 018 90010 |
| 3901 | Res, 1K, 5%, 1/16W, Metalized Glass. | 3198 021 31020 | 5602 | Coil, 5u6, 5% | 3198 018 15680 |
| 3902 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 021 33320 | 5603 | Coil, 5u6, 5% | 3198 018 15680 |
| 3903 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 021 33320 | 5604 | Coil, 5u6, 5% | 3198 018 15680 |
| 3904 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 021 31030 | 5861 | Coil, 10u, 5% | 3198 018 11090 |
| 3905 | Res, 3K3, 5%, 1/16W, Metalized Glass. | 3198 021 33320 | 6001 | Zener Diode, 33 volt | 3198 010 23390 |
| 3906 | Res, 10K, 5%, 1/16W, Metalized Glass. | 3198 021 31030 | 6201 | Diode, Signal, BAS316. | 3198 010 10630 |
| 3907 | Res, 8K2, 5%, 1/16W, Metalized Glass. | 3198 021 38220 | 6202 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4001 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6206 | Zener Diode, 6.8 volt. | 3198 020 56880 |
| 4002 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6331 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4101 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6332 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4102 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6333 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4104 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6335 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4121 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6400 | Res, 1K, 1%, 3/5W, Metal Film. | 2312 915 11002 |
| 4214 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6401 | Zener Diode, 47 volt | 3198 010 24790 |
| 4216 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6445 | Zener Diode, 10 volt | 3198 020 51090 |
| 4388 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6447 | Diode, Signal, 1N4148. | 3198 010 10010 |
| 4401 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6448 | Zener Diode, 6.2 volt. | 9331 668 30133 |
| 4402 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6449 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4430 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6460 | Diode, Rect, DG3-7005L | 9336 436 10682 |
| 4431 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6461 | Diode, Rect, RGP30J-L7004. | 9338 617 60682 |
| 4601 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6462 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4608 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6465 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4609 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6466 | Diode, Signal, BAV21 | 3198 010 10070 |
| 4613 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6467 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4614 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6468 | Diode, Signal, BAS316. | 3198 010 10630 |
| 4615 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6469 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4616 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6470 | Diode, Signal, BAV99 | 3198 010 10620 |
| 4617 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6476 | Zener Diode, 15 volt | 3198 010 21590 |
| 4619 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6481 | Zener Diode, 5.6 volt. | 3198 010 25680 |
| 4622 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6482 | Zener Diode, 9.1 volt. | 9331 177 80133 |
| 4623 | Res, Zero ohm, "Chip" Jumper | 3198 021 90020 | 6483 | Zener Diode, 33 volt | 3198 010 23390 |
| 4691 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6485 | Diode, Rect, BYV95C. | 9335 001 80133 |
| 4692 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6486 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4693 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6487 | Diode, Rect, BYV95A. | 9335 000 90133 |
| 4696 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6488 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 |
| 4812 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6500 | Diode, Bridge Rect, GBU6JL-7002. | 9322 138 08667 |
| 4814 | Res, Zero ohm, "Chip" Jumper | 3198 021 90030 | 6520 | Diode, Rect, BYV95A. | 9335 000 90133 |

S = Safety Part Be sure to use exact replacement part.

MS3652S427 (continued)

| | | | | | |
|--------|---|----------------|------|-------------------------|----------------|
| 6523 | Diode, Signal, 1N4148. | 3198 010 10010 | 9501 | Wire Jumper. | 3198 036 90010 |
| 6524 | Diode, Rect, 1N5062. | 3198 010 10120 | 9503 | Wire Jumper. | 3198 036 90010 |
| 6525 | Diode, Rect, 1N5062. | 3198 010 10120 | 9506 | Wire Jumper. | 3198 036 90010 |
| 6526 | Zener Diode, 22 volt. | 3198 020 52290 | 9507 | Wire Jumper. | 3198 036 90010 |
| 6540 | Zener Diode, 6.2 volt. | 9331 668 30133 | 9510 | Wire Jumper. | 3198 036 90010 |
| 6541 | Zener Diode, 10 volt. | 3198 020 51090 | 9511 | Wire Jumper. | 3198 036 90010 |
| 6560 | Diode, Rect, BYV29X-500. | 9340 555 59127 | 9512 | Wire Jumper. | 3198 036 90010 |
| 6562 | Diode, Rect, EGP20DL-5100. | 9322 164 42682 | 9513 | Wire Jumper. | 3198 036 90010 |
| 6563 | Diode, Signal, BAS316. | 3198 010 10630 | 9514 | Wire Jumper. | 3198 036 90010 |
| 6565 | Diode, Signal, BAV70. | 9331 849 10215 | 9515 | Wire Jumper. | 3198 036 90010 |
| 6566 | Diode, Signal, 1N4148. | 3198 010 10010 | 9516 | Wire Jumper. | 3198 036 90010 |
| 6569 | Diode, Signal, BAS316. | 3198 010 10630 | 9518 | Wire Jumper. | 3198 036 90010 |
| 6570 | Zener Diode, 6.8 volt. | 3198 020 56880 | 9520 | Wire Jumper. | 3198 036 90010 |
| 6580 | Diode, Signal, BAS316. | 3198 010 10630 | 9521 | Wire Jumper. | 3198 036 90010 |
| 6681 | Diode, Signal, BAT85. | 9336 247 60133 | 9522 | Wire Jumper. | 3198 036 90010 |
| 6691 | LED, LTL-10234WHCR. | 9322 185 69682 | 9524 | Wire Jumper. | 3198 036 90010 |
| 6692 | IR Receiver. | 9322 127 54667 | 9528 | Wire Jumper. | 3198 036 90010 |
| 6901 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9530 | Wire Jumper. | 3198 036 90010 |
| 6904 | Res, Zero ohm, "Chip" Jumper. | 3198 021 90020 | 9611 | Coil, 27u, 10%. | 3198 018 22790 |
| 7101 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9612 | Wire Jumper. | 3198 036 90010 |
| 7200 | IC, TDA9588H/N1/3I/1133. | 9352 731 54557 | 9613 | Wire Jumper. | 3198 036 90010 |
| 7201 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9614 | Wire Jumper. | 3198 036 90010 |
| 7204 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9617 | Wire Jumper. | 3198 036 90010 |
| 7205 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9618 | Wire Jumper. | 3198 036 90010 |
| 7330 | IC, TDA6107JF/N3. | 9352 713 37112 | 9619 | Wire Jumper. | 3198 036 90010 |
| 7400 | Power FET, IR. | 9322 053 35687 | 9621 | Wire Jumper. | 3198 036 90010 |
| 7441 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9622 | Wire Jumper. | 3198 036 90010 |
| 7443 | Transistor, PNP, BC557B(COL). | 3198 020 40110 | 9623 | Wire Jumper. | 3198 036 90010 |
| 7460 | Transistor, NPN, BU4508DX. | 9340 550 92127 | 9624 | Wire Jumper. | 3198 036 90010 |
| 7461 | Transistor, NPN, BC337-25(COL). | 3198 020 43530 | 9626 | Wire Jumper. | 3198 036 90010 |
| 7462 | Transistor, NPN, PDT143ZT. | 9340 547 00215 | 9627 | Wire Jumper. | 3198 036 90010 |
| 7463 | Transistor, PNP, BC327-25(COL). | 3198 020 43430 | 9628 | Wire Jumper. | 3198 036 90010 |
| 7471 | IC, TDA8359J/N2. | 9352 701 64112 | 9629 | Wire Jumper. | 3198 036 90010 |
| 7480 | Transistor, NPN, BD135. | 3198 020 41010 | 9631 | Wire Jumper. | 3198 036 90010 |
| 7482 | Transistor, NPN, BD135. | 3198 020 41010 | 9632 | Wire Jumper. | 3198 036 90010 |
| S 7515 | Optical Coupler, TCET1103(G). | 9322 140 14667 | 9637 | Wire Jumper. | 3198 036 90010 |
| 7520 | IC, TEA1507P/N1. | 9352 673 56112 | 9638 | Wire Jumper. | 3198 036 90010 |
| 7521 | Power FET, FQPF9N50. | 9322 187 16687 | 9639 | Wire Jumper. | 3198 036 90010 |
| 7522 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9640 | Wire Jumper. | 3198 036 90010 |
| 7540 | Transistor, NPN, BC547B(COL). | 3198 020 40030 | 9641 | Wire Jumper. | 3198 036 90010 |
| 7541 | Transistor, NPN, PDT114ET. | 9340 310 10215 | 9642 | Wire Jumper. | 3198 036 90010 |
| 7542 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9643 | Wire Jumper. | 3198 036 90010 |
| 7560 | IC, L78L33ACZ. | 9322 134 92676 | 9648 | Wire Jumper. | 3198 036 90010 |
| 7561 | Transistor, NPN, PDT143ZT. | 9340 547 00215 | 9650 | Wire Jumper. | 3198 036 90010 |
| 7580 | Transistor, PNP, BC857B(COL). | 3198 010 42150 | 9651 | Wire Jumper. | 3198 036 90010 |
| 7602 | IC, M24C08-WBN6. | 9322 154 38682 | 9652 | Wire Jumper. | 3198 036 90010 |
| 7606 | Transistor, NPN, PDT143ZT. | 9340 547 00215 | 9654 | Wire Jumper. | 3198 036 90010 |
| 7802 | IC, HEF4053BT. | 9333 729 60653 | 9655 | Wire Jumper. | 3198 036 90010 |
| 7861 | IC, TDA9853H/V1. | 9352 671 19557 | 9656 | Wire Jumper. | 3198 036 90010 |
| 7891 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9657 | Wire Jumper. | 3198 036 90010 |
| 7892 | Transistor, NPN, BC847B(COL). | 3198 010 42030 | 9658 | Wire Jumper. | 3198 036 90010 |
| 7901 | IC, AN7522N PH. | 9322 181 41682 | 9659 | Wire Jumper. | 3198 036 90010 |
| 9001 | Wire Jumper. | 3198 036 90010 | 9660 | Wire Jumper. | 3198 036 90010 |
| 9104 | Wire Jumper. | 3198 036 90010 | 9663 | Wire Jumper. | 3198 036 90010 |
| 9121 | Wire Jumper. | 3198 036 90010 | 9664 | Wire Jumper. | 3198 036 90010 |
| 9122 | Wire Jumper. | 3198 036 90010 | 9665 | Wire Jumper. | 3198 036 90010 |
| 9171 | Wire Jumper. | 3198 036 90010 | 9666 | Wire Jumper. | 3198 036 90010 |
| 9173 | Wire Jumper. | 3198 036 90010 | 9667 | Wire Jumper. | 3198 036 90010 |
| 9175 | Wire Jumper. | 3198 036 90010 | 9668 | Wire Jumper. | 3198 036 90010 |
| 9176 | Wire Jumper. | 3198 036 90010 | 9669 | Wire Jumper. | 3198 036 90010 |
| 9181 | Wire Jumper. | 3198 036 90010 | 9670 | Wire Jumper. | 3198 036 90010 |
| 9182 | Wire Jumper. | 3198 036 90010 | 9671 | Wire Jumper. | 3198 036 90010 |
| 9183 | Wire Jumper. | 3198 036 90010 | 9672 | Coil, 22u, 10%. | 3198 018 22290 |
| 9192 | Wire Jumper. | 3198 036 90010 | 9674 | Wire Jumper. | 3198 036 90010 |
| 9193 | Wire Jumper. | 3198 036 90010 | 9675 | Wire Jumper. | 3198 036 90010 |
| 9311 | Wire Jumper. | 3198 036 90010 | 9676 | Wire Jumper. | 3198 036 90010 |
| 9312 | Wire Jumper. | 3198 036 90010 | 9678 | Coil, 22u, 10%. | 3198 018 22290 |
| 9406 | Wire Jumper. | 3198 036 90010 | 9679 | Wire Jumper. | 3198 036 90010 |
| 9407 | Wire Jumper. | 3198 036 90010 | 9680 | Wire Jumper. | 3198 036 90010 |
| 9408 | Wire Jumper. | 3198 036 90010 | 9681 | Wire Jumper. | 3198 036 90010 |
| 9409 | Wire Jumper. | 3198 036 90010 | 9685 | Wire Jumper. | 3198 036 90010 |
| 9410 | Wire Jumper. | 3198 036 90010 | 9686 | Wire Jumper. | 3198 036 90010 |
| 9411 | Wire Jumper. | 3198 036 90010 | 9687 | Wire Jumper. | 3198 036 90010 |
| 9412 | Wire Jumper. | 3198 036 90010 | 9688 | Wire Jumper. | 3198 036 90010 |
| 9413 | Wire Jumper. | 3198 036 90010 | 9689 | Wire Jumper. | 3198 036 90010 |
| 9414 | Wire Jumper. | 3198 036 90010 | 9690 | Wire Jumper. | 3198 036 90010 |
| 9415 | Wire Jumper. | 3198 036 90010 | 9691 | Wire Jumper. | 3198 036 90010 |
| 9416 | Wire Jumper. | 3198 036 90010 | 9694 | Wire Jumper. | 3198 036 90010 |
| 9417 | Wire Jumper. | 3198 036 90010 | 9695 | Wire Jumper. | 3198 036 90010 |
| 9418 | Wire Jumper. | 3198 036 90010 | 9697 | Wire Jumper. | 3198 036 90010 |
| 9419 | Wire Jumper. | 3198 036 90010 | 9698 | Wire Jumper. | 3198 036 90010 |
| 9421 | Wire Jumper. | 3198 036 90010 | 9699 | Wire Jumper. | 3198 036 90010 |
| 9422 | Wire Jumper. | 3198 036 90010 | 9821 | Wire Jumper. | 3198 036 90010 |
| 9423 | Wire Jumper. | 3198 036 90010 | 9822 | Wire Jumper. | 3198 036 90010 |
| 9424 | Wire Jumper. | 3198 036 90010 | 9825 | Wire Jumper. | 3198 036 90010 |
| 9425 | Wire Jumper. | 3198 036 90010 | 9828 | Wire Jumper. | 3198 036 90010 |
| 9426 | Wire Jumper. | 3198 036 90010 | 9829 | Wire Jumper. | 3198 036 90010 |
| 9427 | Wire Jumper. | 3198 036 90010 | 9831 | Wire Jumper. | 3198 036 90010 |
| 9453 | Wire Jumper. | 3198 036 90010 | 9832 | Wire Jumper. | 3198 036 90010 |
| 9460 | Wire Jumper. | 3198 036 90010 | 9837 | Wire Jumper. | 3198 036 90010 |
| 9463 | Wire Jumper. | 3198 036 90010 | 9838 | Wire Jumper. | 3198 036 90010 |
| 9500 | Wire Jumper. | 3198 036 90010 | 9839 | Wire Jumper. | 3198 036 90010 |

S = Safety Part. Be sure to use exact replacement part.

MS3652S427 (continued)

| | | | | |
|------|--------------------------------|------|-----|-------|
| 9846 | Wire Jumper. | 3198 | 036 | 90010 |
| 9847 | Wire Jumper. | 3198 | 036 | 90010 |
| 9849 | Wire Jumper. | 3198 | 036 | 90010 |
| 9850 | Wire Jumper. | 3198 | 036 | 90010 |
| 9851 | Wire Jumper. | 3198 | 036 | 90010 |
| 9852 | Wire Jumper. | 3198 | 036 | 90010 |
| 9853 | Wire Jumper. | 3198 | 036 | 90010 |
| 9856 | Wire Jumper. | 3198 | 036 | 90010 |
| 9860 | Wire Jumper. | 3198 | 036 | 90010 |
| 9861 | Wire Jumper. | 3198 | 036 | 90010 |
| 9862 | Wire Jumper. | 3198 | 036 | 90010 |
| 9864 | Wire Jumper. | 3198 | 036 | 90010 |
| 9865 | Wire Jumper. | 3198 | 036 | 90010 |
| 9868 | Wire Jumper. | 3198 | 036 | 90010 |
| 9873 | Wire Jumper. | 3198 | 036 | 90010 |
| 9874 | Wire Jumper. | 3198 | 036 | 90010 |
| 9875 | Wire Jumper. | 3198 | 036 | 90010 |
| 9877 | Wire Jumper. | 3198 | 036 | 90010 |
| 9891 | Wire Jumper. | 3198 | 036 | 90010 |
| 9892 | Wire Jumper. | 3198 | 036 | 90010 |
| 9901 | Wire Jumper. | 3198 | 036 | 90010 |
| 9902 | Wire Jumper. | 3198 | 036 | 90010 |
| 9903 | Wire Jumper. | 3198 | 036 | 90010 |
| 9904 | Wire Jumper. | 3198 | 036 | 90010 |
| 9905 | Wire Jumper. | 3198 | 036 | 90010 |
| 9911 | Wire Jumper. | 3198 | 036 | 90010 |
| 9913 | Wire Jumper. | 3198 | 036 | 90010 |
| 9914 | Wire Jumper. | 3198 | 036 | 90010 |
| 9915 | Wire Jumper. | 3198 | 036 | 90010 |
| 9918 | Wire Jumper. | 3198 | 036 | 90010 |
| 9991 | Wire Jumper. | 3198 | 036 | 90010 |
| 9993 | Wire Jumper. | 3198 | 036 | 90010 |
| 9996 | Wire Jumper. | 3198 | 036 | 90010 |
| 9997 | Wire Jumper. | 3198 | 036 | 90010 |
| 9998 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Main Chassis Assembly. | 3141 | 058 | 59101 |

| | | | | |
|------|--|------|-----|-------|
| 4824 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 6161 | Zener Diode, 6.8 volt. | 3198 | 010 | 26880 |
| 9151 | Wire Jumper. | 3198 | 036 | 90010 |
| 9152 | Wire Jumper. | 3198 | 036 | 90010 |
| 9153 | Wire Jumper. | 3198 | 036 | 90010 |
| 9155 | Wire Jumper. | 3198 | 036 | 90010 |
| 9170 | Wire Jumper. | 3198 | 036 | 90010 |
| CBA | Side Jack Panel Assembly | 3141 | 058 | 59161 |

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

| | | | | |
|---------------------------|--|------|-----|-------|
| Cabinet & Accessory Parts | | | | |
| S AC01 | AC Cord. | 3135 | 010 | 03831 |
| AC03 | Anode Lead Spacer (3 Used) | 3135 | 014 | 04471 |
| AC04 | Batteries for Remote Control Transmitter | 9299 | 000 | 65263 |
| AC05 | Cabinet Back | 3139 | 124 | 44411 |
| AC08 | Chassis Tray | 3139 | 124 | 31325 |
| S AC09 | CRT, A90AKB50X07(V). | 9322 | 186 | 37682 |
| AC10 | Customer Control Buttons | 3139 | 124 | 32721 |
| S AC12 | Degaussing Coil. | 2422 | 549 | 43972 |
| AC15 | Holder, Degaussing Coil (4 Used) | 3135 | 013 | 01651 |
| AC17 | Owner's Manual | 3121 | 235 | 21161 |
| AC18 | Quick Use Guide. | 3121 | 233 | 44561 |
| AC19 | Side Jack Panel Bracket. | 3139 | 124 | 40481 |
| AC20 | Cabinet Front Assembly | 3121 | 237 | 53151 |
| AC20A | Cabinet Front. | 3139 | 177 | 57161 |
| AC20C | Light Guide. | 3139 | 124 | 32691 |
| AC20D | Nameplate. | 3135 | 015 | 03561 |
| AC20H | Speaker, 16 ohm, 5W (2 Used) | 2422 | 264 | 00371 |
| REMOTE | Remote Control Transmitter, RC2524/17. | 3139 | 228 | 87491 |

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

| | | | | |
|------|---|------|-----|-------|
| 0232 | Headphone Jack | 2422 | 026 | 04747 |
| 0250 | A/V Jack | 2422 | 026 | 04815 |
| 0251 | 6 Pin Connector. | 2422 | 025 | 12482 |
| 0254 | 5 Pin Connector. | 2422 | 025 | 12481 |
| 0255 | 4 Pin Connector. | 2422 | 025 | 12479 |
| 2171 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2172 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2173 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2174 | Cap, 330p, 10%, 50v, Ceramic | 3198 | 017 | 33310 |
| 2176 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2177 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 2178 | Cap, 470p, 5%, 50v, Ceramic. | 3198 | 016 | 34710 |
| 2179 | Cap, 10u, 20%, 50v, Electrolytic | 3198 | 025 | 51090 |
| 3150 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3151 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3152 | Res, 47K, 5%, 1/16W, Metalized Glass | 3198 | 021 | 34730 |
| 3153 | Res, 150 ohm, 5%, 1/6W, Carbon | 3198 | 011 | 01510 |
| 3156 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 3157 | Res, 120 ohm, 5%, 1/16W, Metalized Glas | 3198 | 021 | 31210 |
| 4817 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4819 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |
| 4821 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4822 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90020 |
| 4823 | Res, Zero ohm, "Chip" Jumper | 3198 | 021 | 90030 |

S = Safety Part Be sure to use exact replacement part.

TO CORRECT REGION CODE PROBLEMS IN 20DV693R01, 27DV693, AND 30DV693 WITH SD5.12 DVD

USE CUSTOMER'S REMOTE

1) Power the TV from an isolation transformer. By remote turn on TV, and press eject button on the remote. This will switch the TV to DVD operation and show the DVD background display. With the DVD tray open and empty, press DVD Menu on the remote.

2) There will be a system status display. Count the lines up from the bottom. The 4th line from the bottom should read 11100400. If not proceed to step 3. If the line is 1110040 go to step 6.

3) Close the empty tray and turn off the TV by remote. Turn on by remote. After TV operation is started press TV/DVD on remote. After the DVD logo is displayed press PLAY 1 5 9.

4) There are now 8 dashes in the lower left of the screen. Enter 1 1 1 0 0 4 0 0. The numbers will appear as entered. After the last number press PLAY on the remote. WAIT! In about 30 seconds the display will go dark and return. This indicates the information entered is accepted.

5) Confirm the correct setup by repeating steps 1 and 2.

6) Play a Region One disc to confirm correct operation.

TO CORRECT REGION CODE PROBLEMS IN 20DV693R02 WITH SD3.1 DVD

USE CUSTOMER'S REMOTE

1) Power the TV. Turn on TV, and switch operation to DVD. Open and close DVD tray to confirm it is empty. This will switch the TV to DVD operation and show the DVD background display. THERE MAY BE NO COLOR! The next steps will correct.

2) Press SYST MENU on remote to display the DVD system menu. It will appear with the cursor at the top left corner of the menu.

3) Press the remote down arrow 4 times. Press right arrow one time. Press down arrow 5 times.

4) On the last press down a hidden display line will appear. It will appear as:

(C) PHILIPS '00-'01 5580 4.17.11 02100810 P140 5.1.14

In this display the number right after the P is the system. If the number is 140 (example: P140) then the system is set already and no action is needed. Skip to step 7.

If the number after P is not 140 but some other number perform the following system setting.

5) Exit the DVD system menu by pressing SYST MENU on the remote. With no disc in the tray (tray closed) press PLAY159 on the remote. A row of lines will appear. Make the following entry with the remote:

1 4 0 0 0 0 0 0 0 0 0 0 0 0 PLAY

It may be necessary to repeat this sequence several times to get the following result.

6) In about 3 seconds the DVD background display will become very bright, turn solid blue or black and return to normal blue logo. Wait 10 seconds and repeat steps 2-3-4 to confirm the letter P is followed by the number 140. Power off the TV and unplug.

7) Play a Region One disc to confirm correct operation.